



Laxmi Charitable Trust's
Sheth L.U.J College of Arts & Sir
M.V. College
Of Science & Commerce

Department of Information Technology (Bsc.IT Semester III)
SCALA FOR D.S PRACTICAL 25

Roll No. : F051	Name: RAHUL YADAV
Class : SYIT	Batch : 1
Date of Assignment :02/09/2026	Date/Time of Submission :02/09/2026

PRACTICAL 25

Question:

Handle missing values in a dataset. Replace missing values with the column mean.


CODE:

```

1  ▶ object Demo extends App {
2
3      val sales: List[java.lang.Double] =
4          List(100.0, 200.0, null, 300.0, null)
5
6      val v = sales.filter(_ != null)
7
8      val mean = v.map(_toDouble).sum / v.length
9
10     println("Mean Sales: " + mean)
11
12     val n = sales.map { value =>
13         if (value == null) mean
14         else value
15     }
16
17     println("Original Data:")
18     println(sales.mkString(", "))
19
20     println("After Replacing Missing Values:")
21     println(n.mkString(", "))
22     println("Rahul_51")
23 }
24

```

OUTPUT:

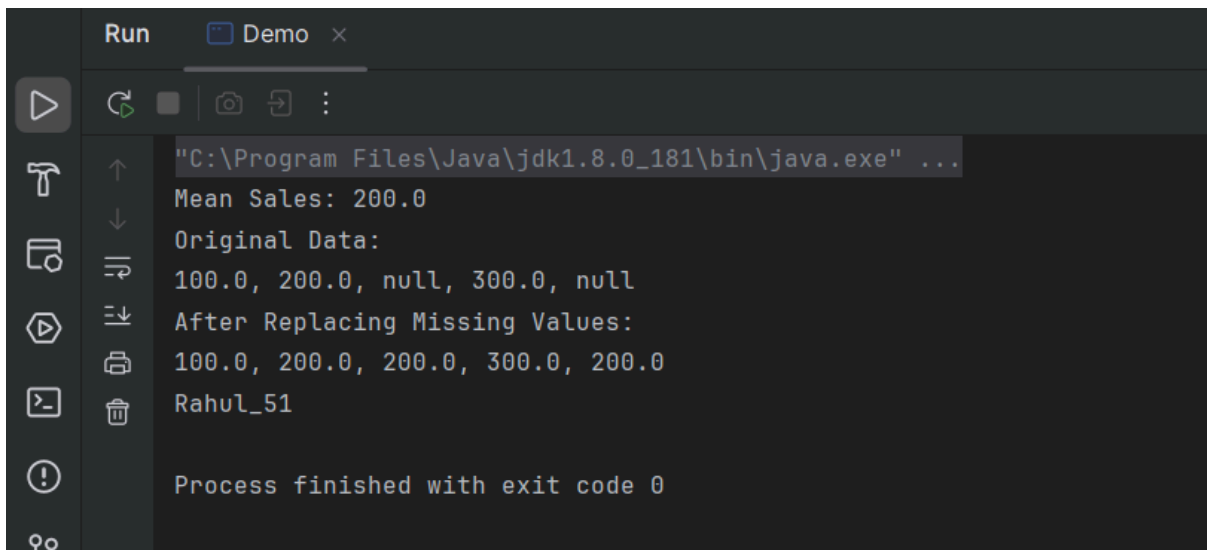

The image shows a screenshot of an IDE's Run console window. The window has a title bar with 'Run' and a tab labeled 'Demo'. On the left side, there is a vertical toolbar with icons for running, debugging, and other actions. The main area of the console displays the output of a Java program. The output includes the command path to the Java executable, the calculated mean sales, the original data array with null values, the data after replacing missing values, the user's name, and a confirmation that the process finished successfully.

```
Run Demo ×  
"C:\Program Files\Java\jdk1.8.0_181\bin\java.exe" ...  
Mean Sales: 200.0  
Original Data:  
100.0, 200.0, null, 300.0, null  
After Replacing Missing Values:  
100.0, 200.0, 200.0, 300.0, 200.0  
Rahul_51  
Process finished with exit code 0
```