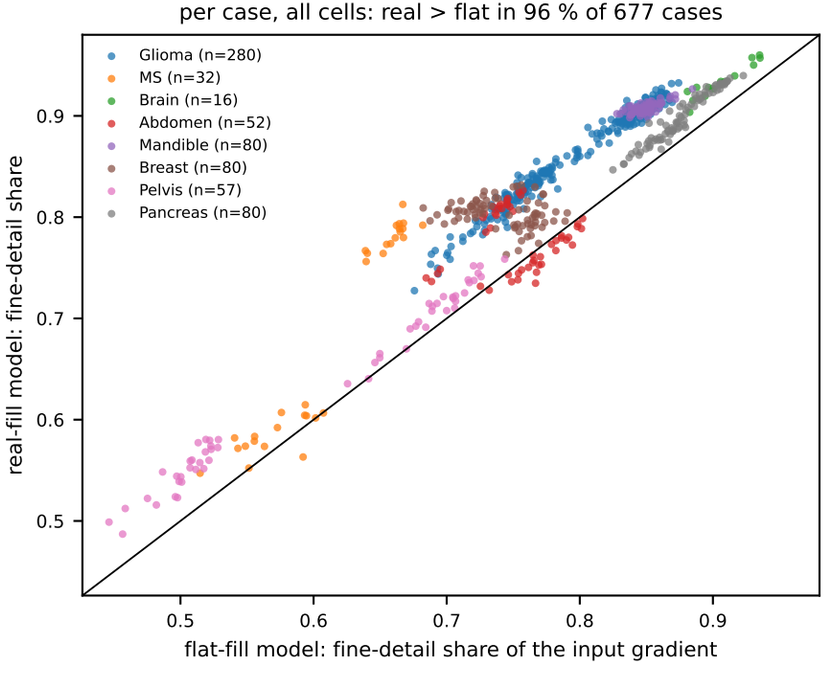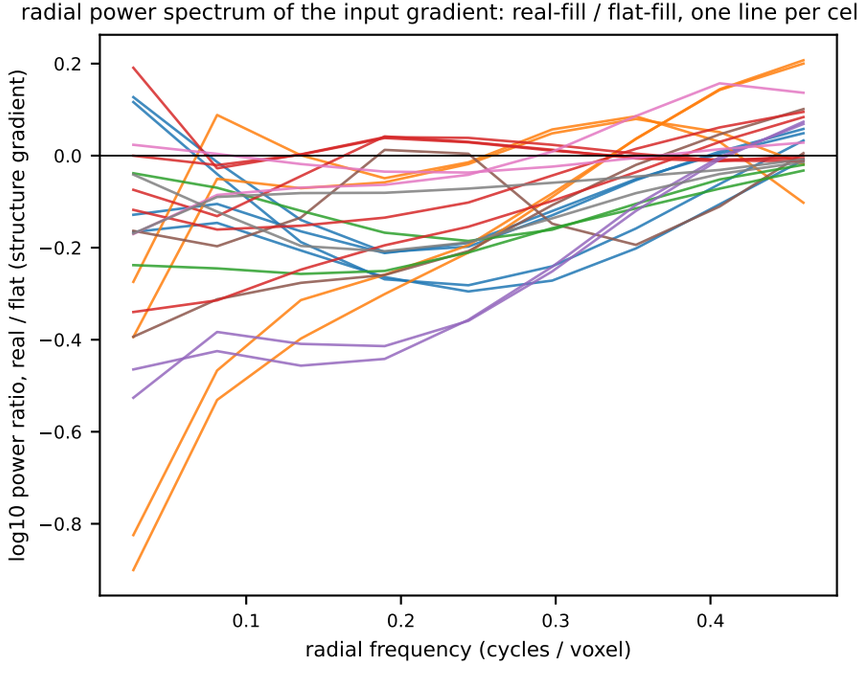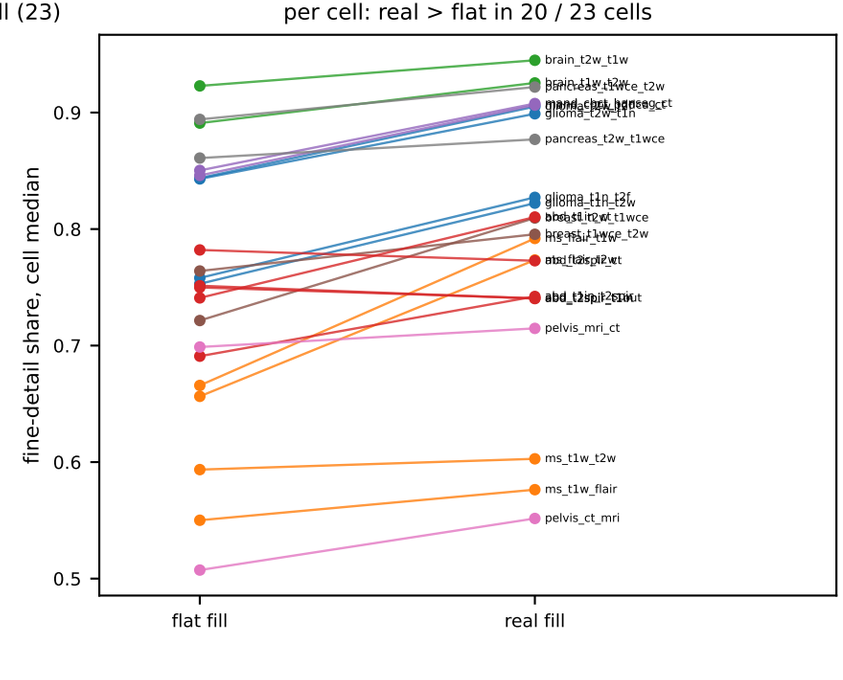Real-fill models are more sensitive to fine-scale image detail than flat-fill models (input gradient dJ/dx of the structure's decision; fine-detail share = energy of G - gaussian(G, 1) / energy of G; every held-out cell of every task, noise-fill arm omitted)