


Data Import Pipeline

Two entry points — file upload and the catalog-driven external importers — share batching and deferred cascades

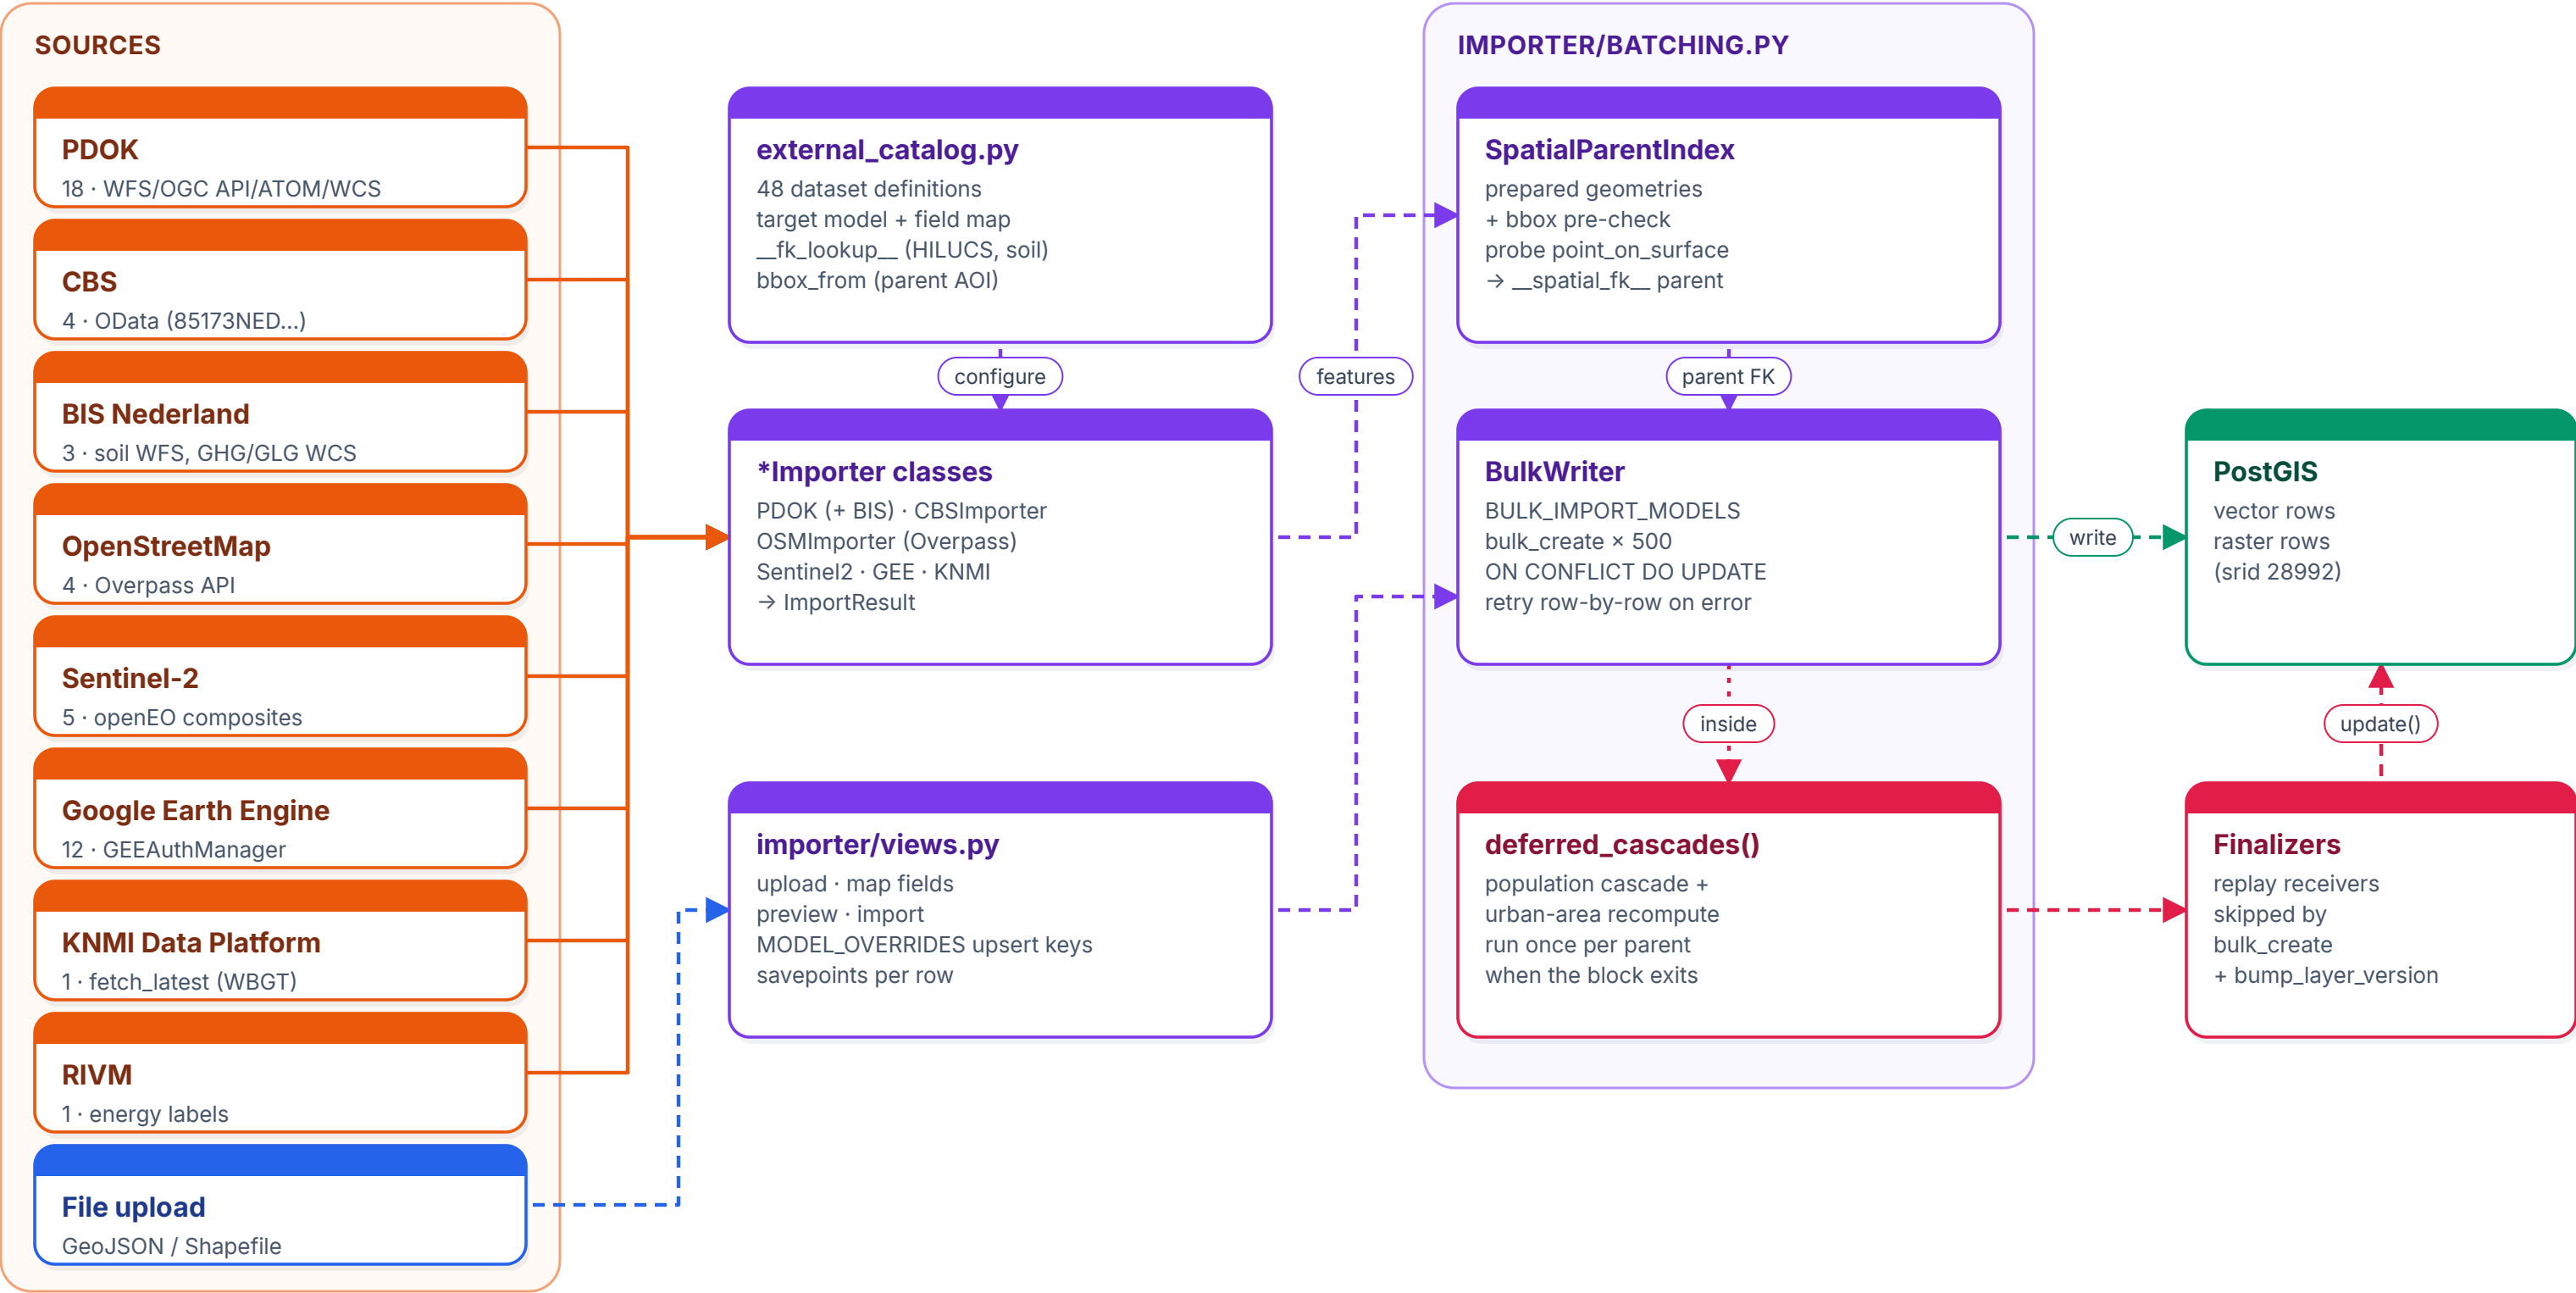

A model may be in BULK_IMPORT_MODELS only if it has no save() override (BulkImportRegistryTests) — e.g. LandCoverVector, Street, Facility, SoilArea, the nature layers, Tree; a new post_save receiver on one needs its finalizer too. Known gap: _generic_import (file upload) maps geometry/raster fields only — attribute columns are not imported.