
# Data Import Pipeline

Two entry points — file upload and the catalog-driven external importers — share batching and deferred cascades



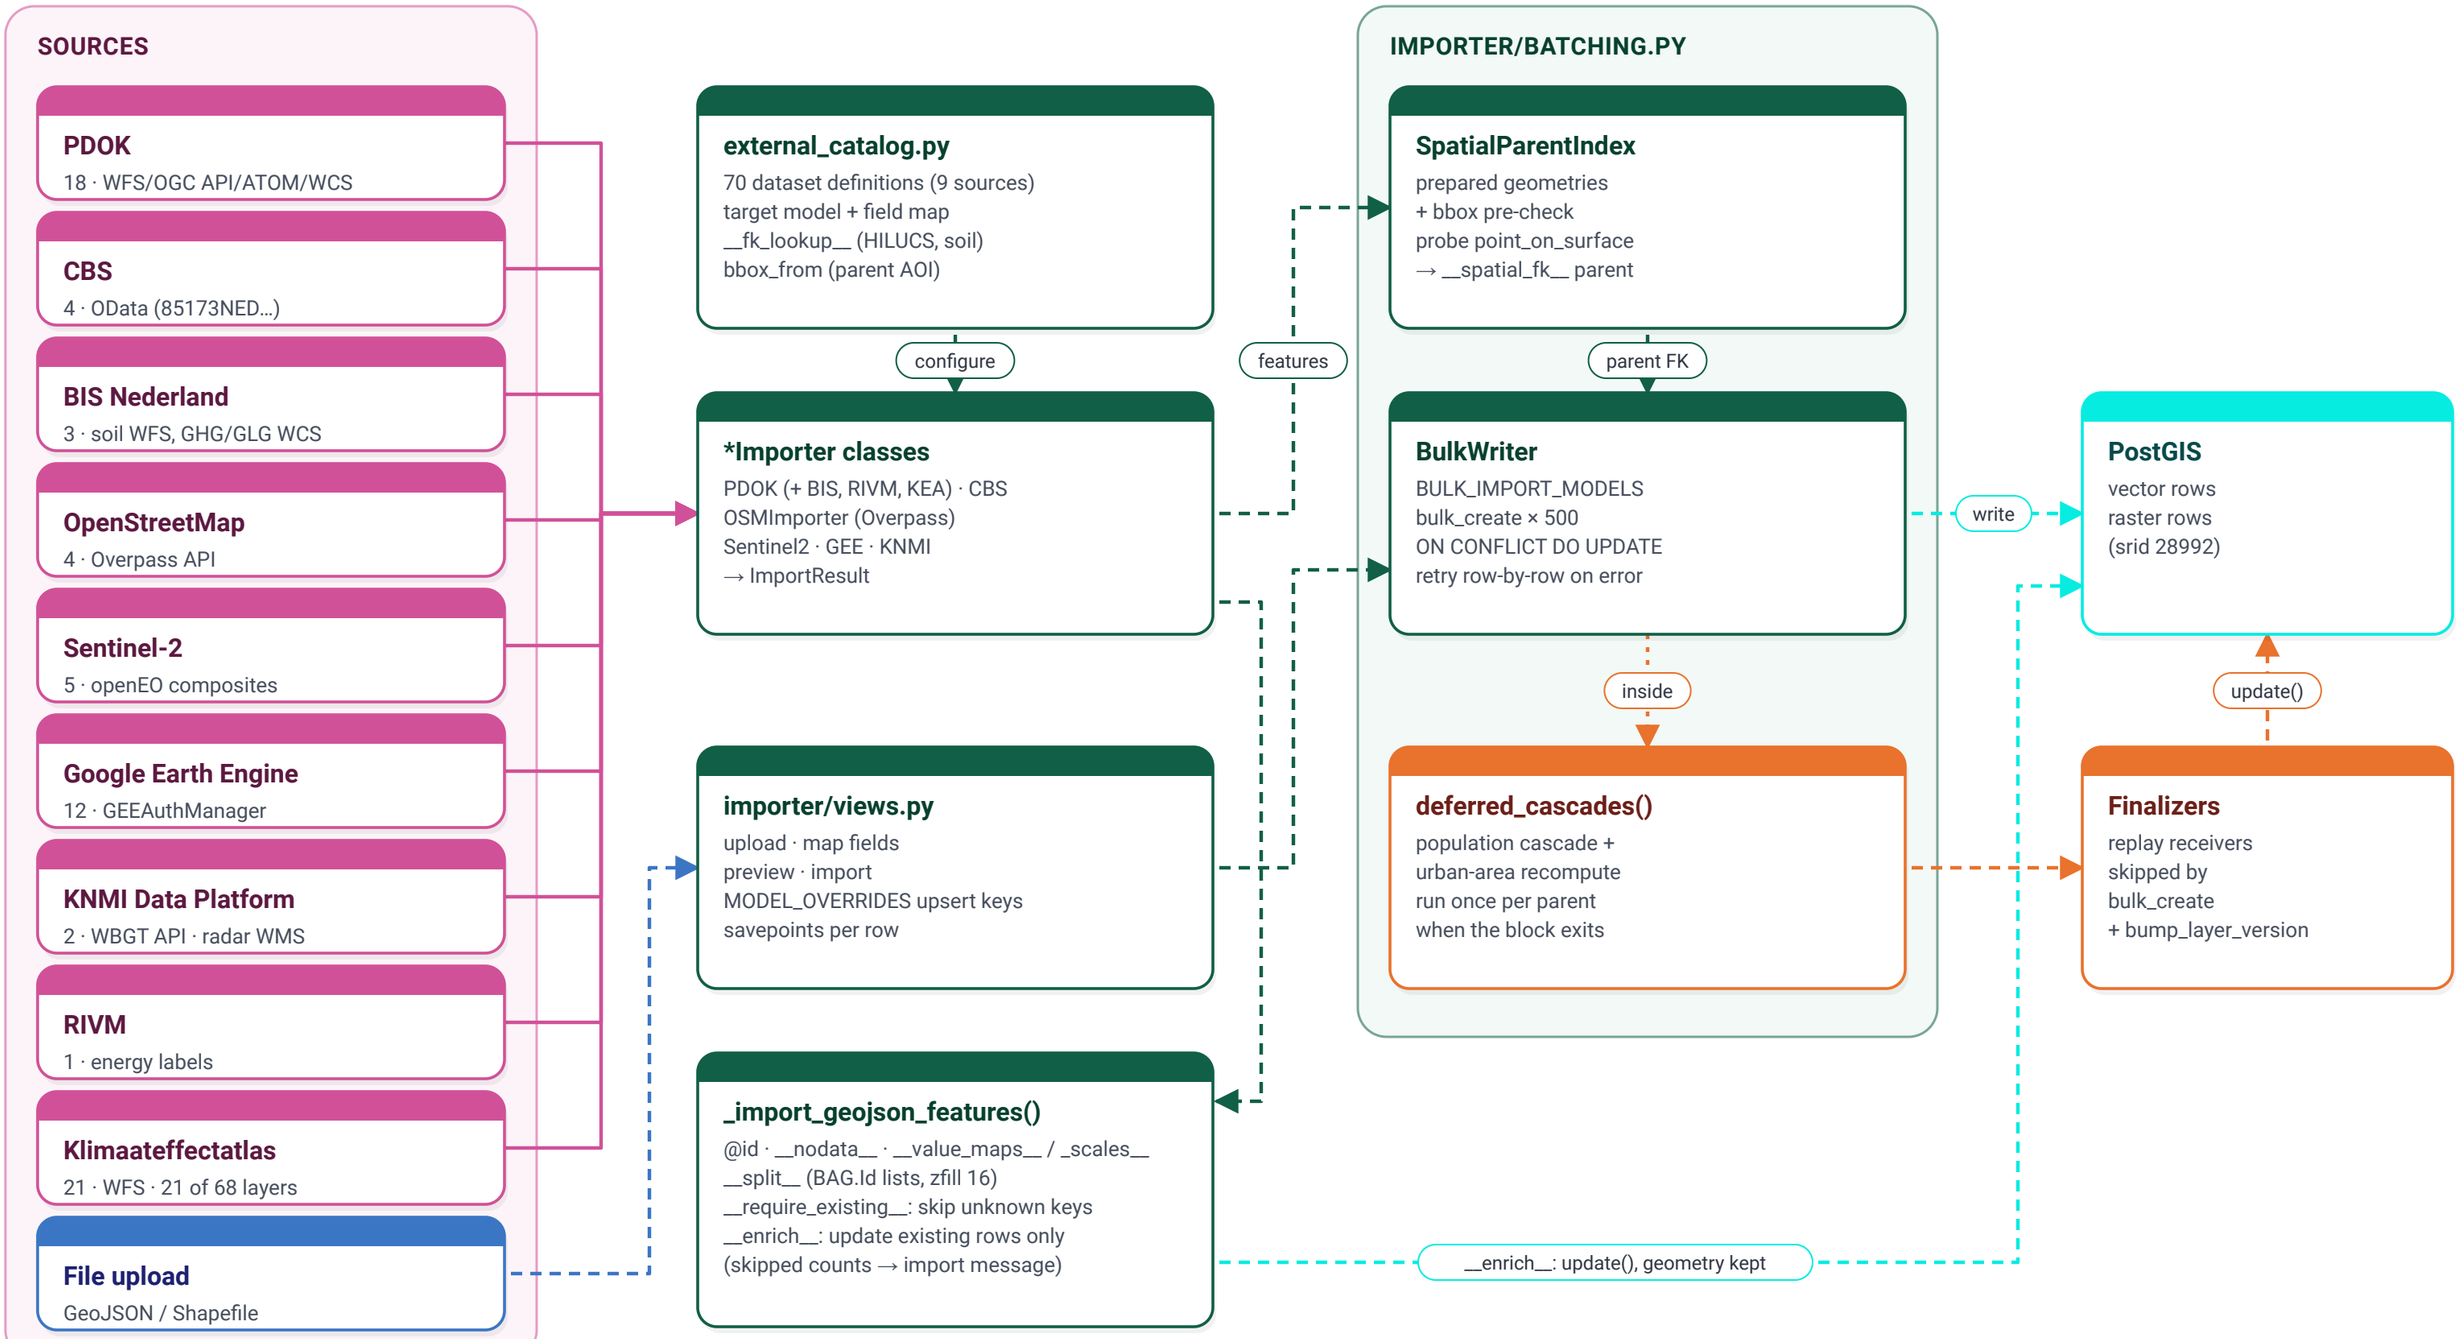


*A model may be in BULK_IMPORT_MODELS only if it has no save() override (BulkImportRegistryTests) —*
*e.g. LandCoverVector, Street, Facility, SoilArea, the nature layers, Tree; a new post_save receiver on one needs its finalizer too.*
*Known gap: _generic_import (file upload) maps geometry/raster fields only — attribute columns are not imported.*
*__enrich__ layers (KEA per building) write attributes onto existing rows with update(), never the geometry, and bump the cache of every registry model on that table.*

External source · User upload · Importer code · Cascades · Storage