


Data Import Pipeline

Two entry points — file upload and the catalog-driven external importers — share batching and deferred cascades

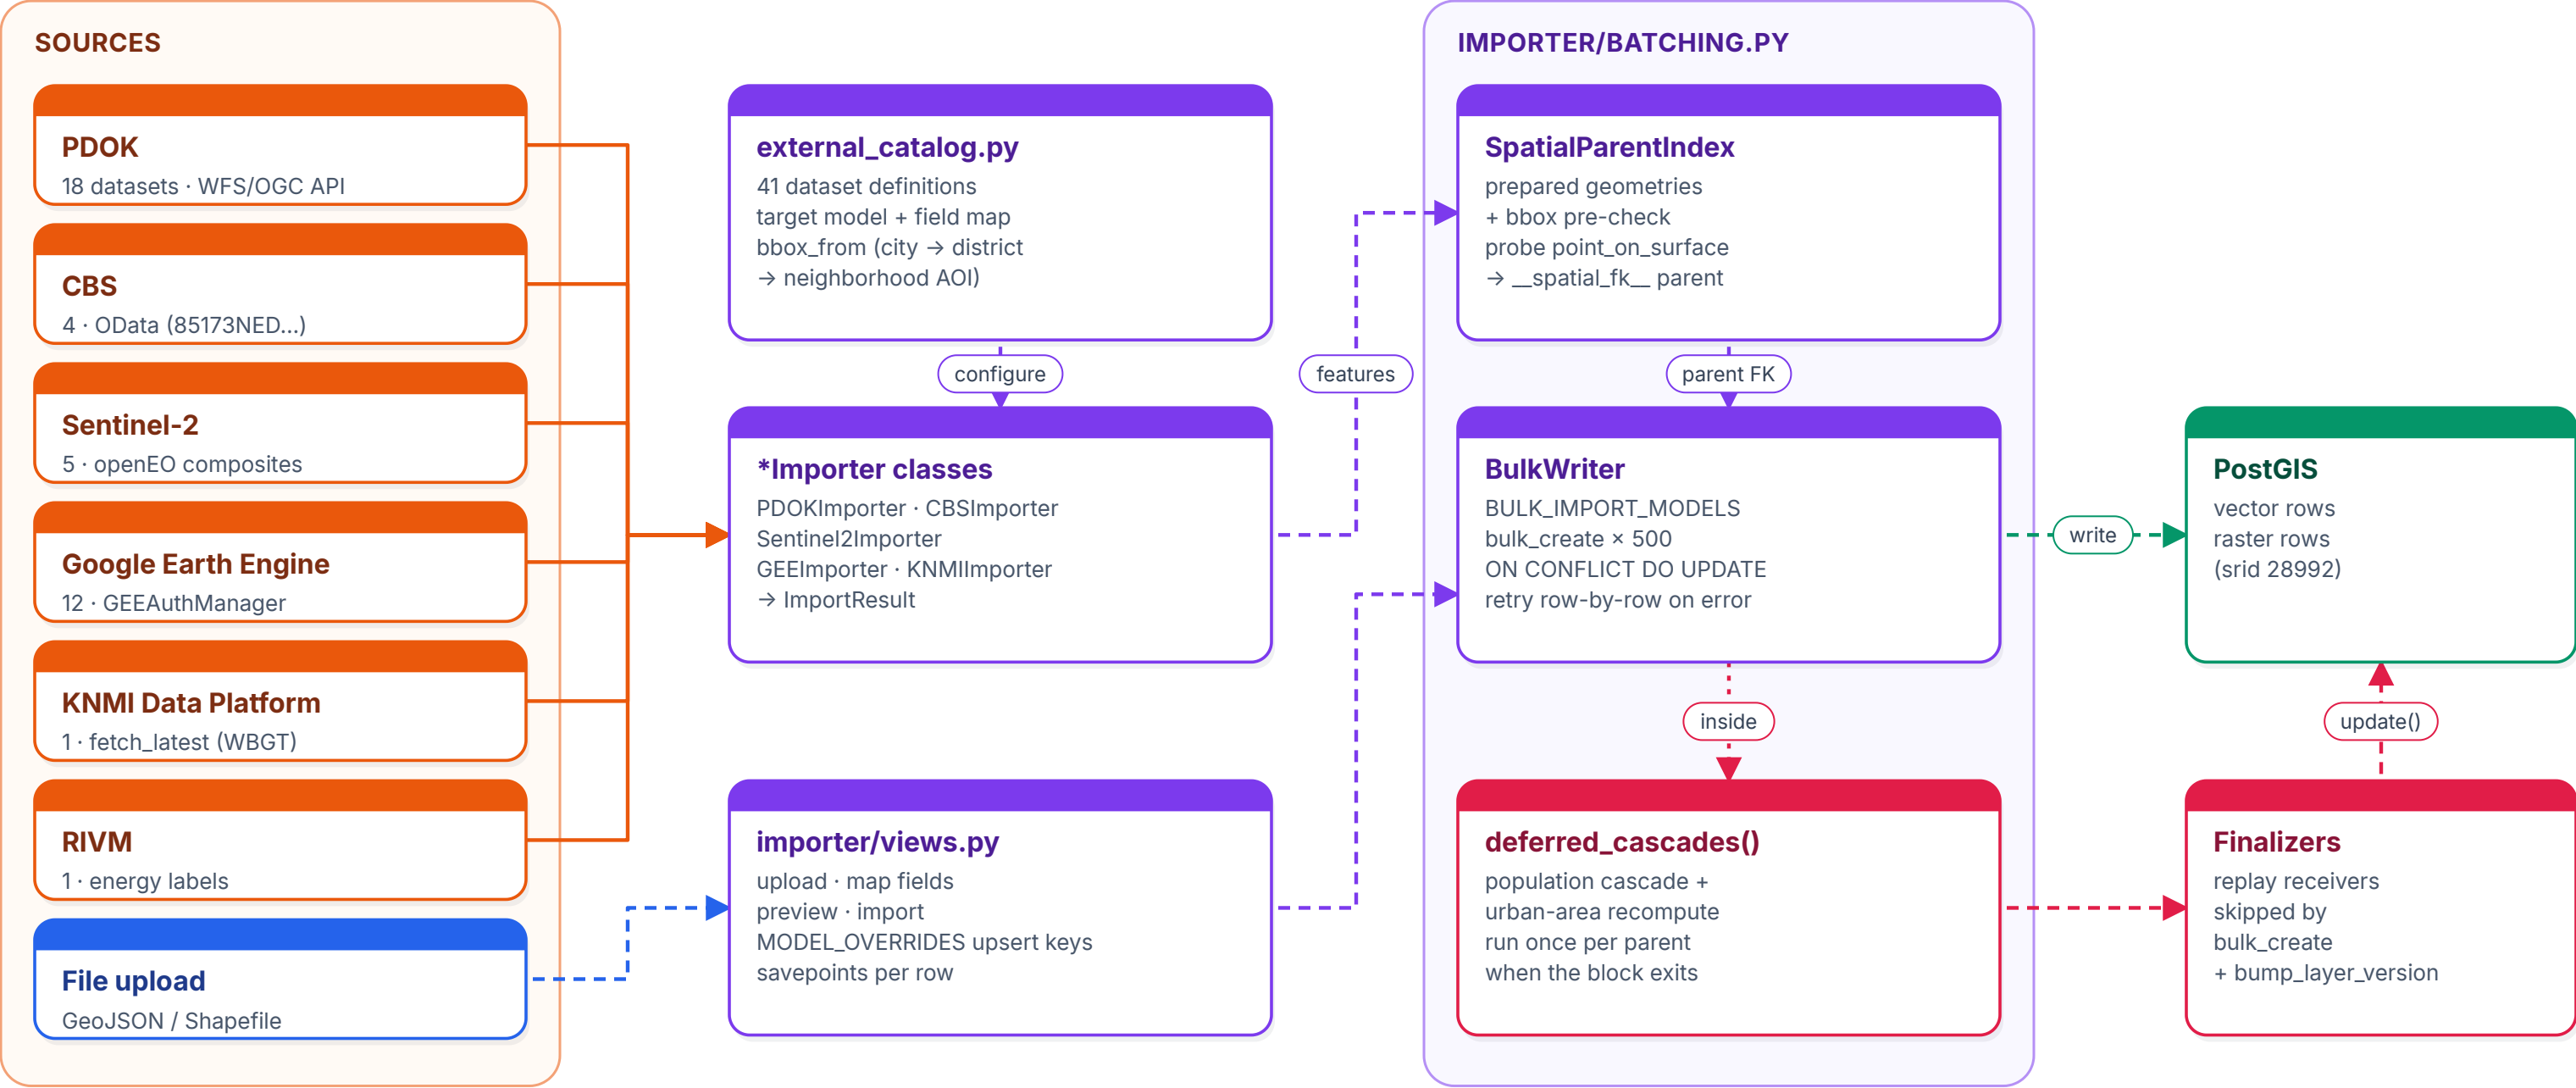

A model may be in BULK_IMPORT_MODELS only if it has no save() override (BulkImportRegistryTests);
adding a post_save receiver to one means adding it to its finalizer too.
Known gap: _generic_import (file upload) maps geometry/raster fields only — attribute columns are not imported.