Check Point MIBs

Check Point®
SOFTWARE TECHNOLOGIES LTD.
We Secure the Internet.

May 2007

© 2003-2007 Check Point Software Technologies Ltd.

All rights reserved. This product and related documentation are protected by copyright and distributed under licensing restricting their use, copying, distribution, and decompilation. No part of this product or related documentation may be reproduced in any form or by any means without prior written authorization of Check Point. While every precaution has been taken in the preparation of this book, Check Point assumes no responsibility for errors or omissions. This publication and features described herein are subject to change without notice.

RESTRICTED RIGHTS LEGEND:

Use, duplication, or disclosure by the government is subject to restrictions as set forth in subparagraph (c)(1)(ii) of the Rights in Technical Data and Computer Software clause at DFARS 252.227-7013 and FAR 52.227-19.

TRADEMARKS:

©2003–2007 Check Point Software Technologies Ltd. All rights reserved. Check Point, AlertAdvisor, Application Intelligence, Check Point Express, Check Point Express CI, the Check Point logo, ClusterXL, Confidence Indexing, ConnectControl, Connectra, Connectra Accelerator Card, Cooperative Enforcement, Cooperative Security Alliance, CoreXL, CoSa, DefenseNet, Dynamic Shielding Architecture, Eventia, Eventia Analyzer, Eventia Reporter, Eventia Suite, FireWall-1, FireWall-1 GX, FireWall-1 SecureServer, FloodGate-1, Hacker ID, Hybrid Detection Engine, IMsecure, INSPECT, INSPECT XL, Integrity, Integrity Clientless Security, Integrity SecureClient, InterSpect, IPS-1, IQ Engine, MailSafe, NG, NGX, Open Security Extension, OPSEC, OSFirewall, Pointsec, Pointsec Mobile, Pointsec PC, Pointsec Protector, Policy Lifecycle Management, Provider-1, Safe@Home, Safe@Office, SecureClient, SecureClient Mobile, SecureKnowledge, SecurePlatform, SecurePlatform Pro, SecuRemote, SecureServer, SecureUpdate, SecureXL, SecureXL Turbocard, Sentivist, SiteManager-1, SmartCenter, SmartCenter Express, SmartCenter Power, SmartCenter Pro, SmartCenter UTM, SmartConsole, SmartDashboard, SmartDefense, SmartDefense Advisor, Smarter Security, SmartLSM, SmartMap, SmartPortal, SmartUpdate, SmartView, SmartView Monitor, SmartView Reporter, SmartView Status, SmartViewTracker, SofaWare, SSL Network Extender, Stateful Clustering, TrueVector, Turbocard, UAM, UserAuthority, User-to-Address Mapping, UTM-1, UTM-1 Edge, VPN-1, VPN-1 Accelerator Card, VPN-1 Edge, VPN-1 Express, VPN-1 Express CI, VPN-1 Power, VPN-1 Power VSX, VPN-1 Pro, VPN-1 SecureClient, VPN-1 SecuRemote, VPN-1 SecureServer, VPN-1 UTM, VPN-1 VSX, Web Intelligence, ZoneAlarm, ZoneAlarm Anti-Spyware, ZoneAlarm Antivirus, ZoneAlarm Internet Security Suite, ZoneAlarm Pro, ZoneAlarm Secure Wireless Router, Zone Labs, and the Zone Labs logo are trademarks or registered trademarks of Check Point Software Technologies Ltd. or its affiliates. ZoneAlarm is a Check Point Software Technologies, Inc. Company. All other product names mentioned herein are trademarks or registered trademarks of their respective owners. The products described in this document are protected by U.S. Patent No. 5,606,668, 5,835,726, 5,987,611, 6,496,935, 6,873,988, 6,850,943, and 7,165,076 and may be protected by other U.S. Patents, foreign patents, or pending applications.

For third party notices, see: THIRD PARTY TRADEMARKS AND COPYRIGHTS.

Table Of Contents

Chapter 1 Introduction
Overview 7
Legend 8

Chapter 2 FireWall-1 MIBs
Overview 11
MIB Tree Description 11

Chapter 3 VPN-1 MIBs
Overview 99
MIB Tree Description 99

Chapter 4 FloodGate-1 MIBs
Overview 139
MIB Tree Description 139

Chapter 5 High Availability MIBs
Overview 151
MIB Tree Description 151

Chapter 6 SVN MIBs
Overview 165
MIB Tree Description 165

Chapter 7 SmartCenter MIBs
Overview 187
MIB Tree Description 187

Chapter 8 WebAccess Module MIBs
Overview 195
MIB Tree Description 195

Chapter 9 Desktop Policy Server MIBs
Overview 205
MIB Tree Description 205

Chapter 10 Infrastructure MIBs

Overview 209
MIB Tree Description 209

Chapter 11 VSX Product MIBs
Overview 217
MIB Tree Description 217

Chapter 12 GX Product MIBs
Overview 225
MIB Tree Description 225

CHAPTER 1

Introduction

In This Chapter

Overview *page 7*

Legend *page 8*

Overview

This book describes the Check Point MIBs implemented by Check Point. There are nine MIB trees described in the chapters that follow. At the beginning of each chapter there is a table listing the names of the MIB leafs described in that chapter. Each leaf is linked to the respective page in the chapter where the leaf is described.

The contents of each leaf of the MIB tree is described according to fixed headings, which are each explained in the next section.

The following MIB trees are described:

FireWall-1 MIBs *page 11*

VPN-1 MIBs *page 99*

FloodGate-1 MIBs *page 139*

High Availability MIBs *page 151*

SVN MIBs *page 165*

SmartCenter MIBs *page 187*

WebAccess Module MIBs *page 195*

Desktop Policy Server MIBs *page 205*

Infrastructure MIBs *page 209*

Legend

The leafs of each MIB tree are described under the headings described in TABLE 1-1. Not all the headings are described for each leaf as they may not be applicable.

TABLE 1-1 Legend

Heading	Description
OID	Object Identifier - an administratively assigned name, corresponding to a unique Object Descriptor (A textual name). The OID concept is used to model the notion that names are used to identify managed objects. An OID is a sequence of integers which traverse a global tree. The tree consists of a root connected to a number of labeled nodes via edges. Each node may, in turn, have children of its own which are labeled. In this case, the node is called a subtree. This process may continue to an arbitrary level of depth. For example: In SNMV2-MIB snmpMIBObjects correlates to OID:1.3.6.1.6.3.1.1 sysDescr correlates to OID: 1.3.6.1.2.1.1.1 sysObjectID correlates to OID: 1.3.6.1.2.1.1.2
Full path	Object Descriptor, an administratively assigned name (A textual name), corresponding to a unique Object Identifier.
Type	Object type implemented, can be an abstract syntax.
Syntax	
Base syntax	
Composed syntax	

TABLE 1-1 Legend

Heading	Description
Status	One of current, optional, or obsolete. The status defines the implementation support required for that object type. Obsolete objects are old object types, which are no longer supported.
Max Access	One of read-only, read-write, write-only, or not-accessible.
Description	A textual description of the semantics of the object type. Implementations must ensure that their instance of the object fulfills this definition since this MIB is intended for use in multi-vendor environments.

For more details refer to RFC 1155.

CHAPTER 2

FireWall-1 MIBs

In This Chapter

Overview *page 11*

MIB Tree Description *page 11*

Overview

This chapter describes the nodes/leafs that comprise the MIBs used in FireWall-1.

MIB Tree Description

This section comprises a detailed description of each leaf in the FireWall-1 MIB tree. The following is a diagram of the FireWall-1 MIB tree. Due to the size of the full FireWall-1 MIB tree the diagram has been split into sections. The first section shows the tree with the collapsed branches indicated in red. Each collapsed branch is then shown in full in the next section of the tree.

fw	
	fwModuleState
	fwFilterName
	fwFilterDate
	fwAccepted
	fwRejected
	fwDropped
	fwLogged
	fwMajor
	fwMinor
	fwProduct

- fwEvent
- fwProdName
- fwVerMajor
- fwVerMinor
- fwKernelBuild
- fwPolicyStat
- fwfEntry
  - fwHmem
  - fwKmem
  - fwInspect
  - fwCookies
  - fwChains
  - fwFragments
  - fwUfp
  - fwSS
    - fwSS-http
    - fwSS-ftp
    - fwSS-telnet
    - fwSS-rlogin
    - fwSS-ufp
    - fwSS-smtp

fwPolicyStat

- fwPolicyStat
  - fwPolicyName
  - fwInstallTime
  - fwNumConn
  - fwPeakNumConn
  - fwIfTable
    - fwfEntry
      - fwlfIndex
      - fwlfName
      - fwlfAcceptPcktsOut
      - fwlfAcceptPcktsOut

fwAcceptBytesIn
fwAcceptBytesOut
fwDropPcktsIn
fwDropPcktsOut
fwRejectPcktsIn
fwRejectPcktsOut
fwLogIn
fwLogOut

fwHmem

fwHmem	
	fwHmem-block-size
	fwHmem-requested-bytes
	fwHmem-initial-allocated-bytes
	fwHmem-initial-allocated-blocks
	wHmem-initial-allocated-pools
	fwHmem-current-allocated-bytes
	wHmem-current-allocated-blocks
	fwHmem-current-allocated-pools
	fwHmem-maximum-bytes
	fwHmem-maximum-pools
	fwHmem-bytes-used
	fwHmem-blocks-used
	fwHmem-bytes-unused
	fwHmem-blocks-unused
	fwHmem-bytes-peak
	fwHmem-blocks-peak
	fwHmem-bytes-internal-use
	fwHmem-number-of-items
	fwHmem-alloc-operations
	fwHmem-free-operations
	fwHmem-failed-alloc
	fwHmem-failed-free

fwKmem

fwKmem	
	fwKmem-system-physical-mem
	fwKmem-available-physical-mem
	fwKmem-aix-heap-size
	fwKmem-bytes-used
	fwKmem-blocking-bytes-used
	fwKmem-non-blocking-bytes-used
	fwKmem-bytes-unused
	fwKmem-bytes-peak
	fwKmem-blocking-bytes-peak
	fwKmem-non-blocking-bytes-peak
	fwKmem-bytes-internal-use
	fwKmem-number-of-items
	fwKmem-alloc-operations
	fwKmem-free-operations
	fwKmem-failed-alloc
	fwKmem-failed-free

fwInspect

fwInspect	
	fwInspect-packets
	fwInspect-operations
	fwInspect-lookups
	fwInspect-record
	fwInspect-extract

fwCookies

fwCookies	
	fwCookies-total
	fwCookies-allocfwCookies-total
	fwCookies-freefwCookies-total
	fwCookies-dupfwCookies-total

fwCookies-getfwCookies-total
fwCookies-putfwCookies-total
fwCookies-lenfwCookies-total

fwChains

fwChains	
	fwChains-alloc
	fwChains-free

fwFragments

fwFragments	
	fwFrag-fragments
	fwFrag-expired
	fwFrag-packets

fwUfp

fwUfp	
	fwUfpHitRatio
	fwUfpInspected
	wUfpHits

fwSS-http

fwSS-http	
	fwSS-http-pid
	fwSS-http-proto
	fwSS-http-port
	fwSS-http-logical-port
	fwSS-http-max-avail-socket
	fwSS-http-socket-in-use-max
	fwSS-http-socket-in-use-curr
	fwSS-http-socket-in-use-count
	fwSS-http-sess-max
	fwSS-http-sess-curr

fwSS-http-sess-count
fwSS-http-auth-sess-max
fwSS-http-auth-sess-curr
fwSS-http-auth-sess-count
fwSS-http-accepted-sess
fwSS-http-rejected-sess
fwSS-http-auth-failures
fwSS-http-ops-cvp-sess-max
fwSS-http-ops-cvp-sess-curr
fwSS-http-ops-cvp-sess-count
fwSS-http-ops-cvp-rej-sess
fwSS-http-ssl-encryp-sess-max
fwSS-http-ssl-encryp-sess-curr
fwSS-http-ssl-encryp-sess-count
fwSS-http-transp-sess-max
fwSS-http-transp-sess-curr
fwSS-http-transp-sess-count
fwSS-http-proxied-sess-max
fwSS-http-proxied-sess-curr
fwSS-http-proxied-sess-count
fwSS-http-tunneled-sess-max
fwSS-http-tunneled-sess-curr
fwSS-http-tunneled-sess-count
fwSS-http-ftp-sess-max
fwSS-http-ftp-sess-curr
fwSS-http-ftp-sess-count
fwSS-http-time-stamp
fwSS-http-is-alive

fwSS-ftp

fwSS-ftp	
	fwSS-ftp-pid
	fwSS-ftp-proto
	fwSS-ftp-port
	fwSS-ftp-logical-port
	fwSS-ftp-max-avail-socket
	fwSS-ftp-socket-in-use-max
	fwSS-ftp-socket-in-use-curr
	fwSS-ftp-socket-in-use-count
	fwSS-ftp-sess-max
	fwSS-ftp-sess-curr
	fwSS-ftp-sess-count
	fwSS-ftp-auth-sess-max
	fwSS-ftp-auth-sess-curr
	fwSS-ftp-auth-sess-count
	fwSS-ftp-accepted-sess
	fwSS-ftp-rejected-sess
	fwSS-ftp-auth-failures
	fwSS-ftp-ops-cvp-sess-max
	fwSS-ftp-ops-cvp-sess-curr
	fwSS-ftp-ops-cvp-sess-count
	fwSS-ftp-ops-cvp-rej-sess
	fwSS-ftp-time-stamp
	fwSS-ftp-is-alive

fwSS-telnet

fwSS-telnet	
	fwSS-telnet-pid
	fwSS-telnet-proto
	fwSS-telnet-port

fwSS-telnet-logical-port
fwSS-telnet-max-avail-socket
fwSS-telnet-socket-in-use-max
fwSS-telnet-socket-in-use-curr
fwSS-telnet-socket-in-use-count
fwSS-telnet-sess-max
fwSS-telnet-sess-curr
fwSS-telnet-sess-count
fwSS-telnet-auth-sess-max
fwSS-telnet-auth-sess-curr
fwSS-telnet-auth-sess-count
fwSS-telnet-accepted-sess
fwSS-telnet-rejected-sess
fwSS-telnet-auth-failures
fwSS-telnet-time-stamp
fwSS-telnet-is-alive

fwSS-rlogin

fwSS-rlogin	
	fwSS-rlogin-pid
	fwSS-rlogin-proto
	fwSS-rlogin-port
	fwSS-rlogin-logical-port
	fwSS-rlogin-max-avail-socket
	fwSS-rlogin-socket-in-use-max
	fwSS-rlogin-socket-in-use-curr
	fwSS-rlogin-socket-in-use-count
	fwSS-rlogin-sess-max
	fwSS-rlogin-sess-curr
	fwSS-rlogin-sess-count
	fwSS-rlogin-auth-sess-max

fwSS-rlogin-auth-sess-curr
fwSS-rlogin-auth-sess-count
fwSS-rlogin-accepted-sess
fwSS-rlogin-rejected-sess
fwSS-rlogin-auth-failures
fwSS-rlogin-time-stamp
fwSS-rlogin-is-alive

fwSS-ufp

fwSS-ufp	
	wSS-ufp-ops-ufp-sess-max
	fwSS-ufp-ops-ufp-sess-curr
	fwSS-ufp-ops-ufp-sess-count
	fwSS-ufp-ops-ufp-rej-sess
	fwSS-ufp-time-stamp
	fwSS-ufp-is-alive

fwSS-smtp

fwSS-smtp	
	fwSS-smtp-pid
	fwSS-smtp-proto
	fwSS-smtp-port
	fwSS-smtp-logical-port
	fwSS-smtp-max-avail-socket
	fwSS-smtp-socket-in-use-max
	fwSS-smtp-socket-in-use-curr
	fwSS-smtp-socket-in-use-count
	fwSS-smtp-sess-max
	fwSS-smtp-sess-curr
	fwSS-smtp-sess-count
	fwSS-smtp-auth-sess-max

fwSS-smtp-auth-sess-curr
fwSS-smtp-auth-sess-count
fwSS-smtp-accepted-sess
fwSS-smtp-rejected-sess
fwSS-smtp-auth-failures
fwSS-smtp-mail-max
fwSS-smtp-mail-curr
fwSS-smtp-mail-count
fwSS-smtp-outgoing-mail-max
fwSS-smtp-outgoing-mail-curr
fwSS-smtp-outgoing-mail-count
fwSS-smtp-max-mail-on-conn
fwSS-smtp-total-mails
fwSS-smtp-time-stamp
wSS-smtp-is-alive

fw

OID: 1.3.6.1.4.1.2620.1.1

Full path: checkpoint.products.fw

fwModuleState

OID: 1.3.6.1.4.1.2620.1.1.1

Full path: checkpoint.products.fw.fwModuleState

Type: String

Syntax: "Installed" / "Not installed"

Status: mandatory

Max access: read-only

Description: The state of the fw module

fwFilterName

OID:	1.3.6.1.4.1.2620.1.1.2
Full path:	checkpoint.products.fw.fwFilterName
Type:	String
Status:	mandatory
Max access:	read-only
Description:	The name of the loaded filter

fwFilterDate

OID:	1.3.6.1.4.1.2620.1.1.3
Full path:	checkpoint.products.fw.fwFilterDate
Type:	String
Syntax:	"Wed Mar 17 11:10:28 2004" // This is an example. The exact format depends on the OS setting.
Status:	mandatory
Max access:	read-only
Description:	Install time

fwAccepted

OID:	1.3.6.1.4.1.2620.1.1.4
Full path:	checkpoint.products.fw.fwAccepted
Type:	Integer (32 bit)
Status:	mandatory
Max access:	read-only
Description:	The number of accepted packets.

fwRejected

OID:	1.3.6.1.4.1.2620.1.1.5
Full path:	checkpoint.products.fw.fwRejected
Type:	Integer (32 bit)
Status:	mandatory
Max access:	read-only
Description:	The number of rejected packets.

fwDropped

OID:	1.3.6.1.4.1.2620.1.1.6
Full path:	checkpoint.products.fw.fwDropped
Type:	Integer (32 bit)
Status:	mandatory
Max access:	read-only
Description:	The number of dropped packets.

fwLogged

OID:	1.3.6.1.4.1.2620.1.1.7
Full path:	checkpoint.products.fw.fwLogged
Type:	Integer (32 bit)
Status:	mandatory
Max access:	read-only
Description:	The number of logged packets.

fwMajor

OID: 1.3.6.1.4.1.2620.1.1.8
Full path: checkpoint.products.fw.fwMajor
Type: Integer (32 bit)
Status: mandatory
Max access: read-only
Description: Major version

fwMinor

OID: 1.3.6.1.4.1.2620.1.1.9
Full path: checkpoint.products.fw.fwMinor
Type: Integer (32 bit)
Status: mandatory
Max access: read-only
Description: Minor version

fwProduct

OID: 1.3.6.1.4.1.2620.1.1.10
Full path: checkpoint.products.fw.fwProduct
Type: String
Status: mandatory
Max access: read-only
Description: Product name

fwEvent

OID:	1.3.6.1.4.1.2620.1.1.11
Full path:	checkpoint.products.fw.fwEvent
Type:	String
Status:	mandatory
Max access:	read-only
Description:	A string containing the last snmp trap sent via fw

fwProdName

OID:	1.3.6.1.4.1.2620.1.1.21
Full path:	checkpoint.products.fw.fwProdName
Type:	String
Status:	mandatory
Max access:	read-only
Description:	Product name

fwVerMajor

OID:	1.3.6.1.4.1.2620.1.1.22
Full path:	checkpoint.products.fw.fwVerMajor
Type:	Integer (32 bit)
Status:	mandatory
Max access:	read-only
Description:	Major version

fwVerMinor

OID:	1.3.6.1.4.1.2620.1.1.23
Full path:	checkpoint.products.fw.fwVerMinor
Type:	Integer (32 bit)
Status:	mandatory
Max access:	read-only
Description:	Minor version

fwKernelBuild

OID:	1.3.6.1.4.1.2620.1.1.24
Full path:	checkpoint.products.fw.fwKernelBuild
Type:	Integer (32 bit)
Status:	mandatory
Max access:	read-only
Description	Kernel build num

fwPolicyStat

OID:	1.3.6.1.4.1.2620.1.1.25
Full path:	checkpoint.products.fw.fwPolicyStat

fwPolicyName

OID:	1.3.6.1.4.1.2620.1.1.25.1
Full path:	checkpoint.products.fw.fwPolicyStat. fwPolicyName
Type:	String
Status:	mandatory
Max access:	read-only
Description:	Policy Name

fwInstallTime

OID:	1.3.6.1.4.1.2620.1.1.25.2
Full path:	checkpoint.products.fw.fwPolicyStat. fwInstallTime
Type:	String
Syntax:	"Wed Mar 17 11:10:28 2004" // This is an example. The exact format depends on the OS setting.
Status:	mandatory
Max access:	read-only
Description:	Policy install time

fwNumConn

OID:	1.3.6.1.4.1.2620.1.1.25.3
Full path:	checkpoint.products.fw.fwPolicyStat. fwNumConn
Type:	Integer (32 bit)
Status:	mandatory
Max access:	read-only
Description:	Number of connections

fwPeakNumConn

OID:	1.3.6.1.4.1.2620.1.1.25.4
Full path:	checkpoint.products.fw.fwPolicyStat. fwPeakNumConn
Type:	Integer (32 bit)
Status:	mandatory
Max access:	read-only
Description:	Peak number of connections

fwIfTable

OID: 1.3.6.1.4.1.2620.1.1.25.5

Full path: checkpoint.products.fw.fwPolicyStat. fwIfTable

Type: Sequence

Syntax: SEQUENCE OF FwIfEntry

Status: mandatory

Max access: not-accessible

Sequences:

1: **fwlfIndex** - INTEGER(2 - int, int32)

2: **fwlfName** - DisplayString(4 - octets)

3: **fwlfaccepPcktsIn** - INTEGER(2 - int, int32)

4: **fwlfAcceptPcktsOut** - INTEGER(2 - int, int32)

5: **fwAcceptBytesIn** - INTEGER(2 - int, int32)

6: **fwAcceptBytesOut** - INTEGER(2 - int, int32)

7: **fwDropPcktsIn** - INTEGER(2 - int, int32)

8: **fwDropPcktsOut** - INTEGER(2 - int, int32)

9: **fwRejectPcktsIn** - INTEGER(2 - int, int32)

10: **fwRejectPcktsOut** - INTEGER(2 - int, int32)

11: **fwLogIn** - INTEGER(2 - int, int32)

12: **fwLogOut** - INTEGER(2 - int, int32)

fwfEntry

OID: 1.3.6.1.4.1.2620.1.1.25.5

Full path: checkpoint.products.fw.fwPolicyStat. fwIfEntry

Type: Sequence

Syntax: SEQUENCE OF FwIfEntry

Status: mandatory

Max access: not-accessible

fwIfIndex

OID:	1.3.6.1.4.1.2620.1.1.25.5.1.1
Full path:	checkpoint.products.fw.fwPolicyStat.fwIfEntry.fwIFIndex
Type:	Integer (32 bit)
Status:	mandatory
Max access:	read-only
Description:	Internal Sequential index number for the interface

fwIfName

OID:	1.3.6.1.4.1.2620.1.1.25.5.1.2
Full path:	checkpoint.products.fw.fwPolicyStat. fwIfEntry.fwIFIndex.fwIFName
Type:	String
Status:	mandatory
Max access:	read-only
Description:	The interface name

fwIfaccepPcktsIn

OID:	1.3.6.1.4.1.2620.1.1.25.5.1.5
Full path:	checkpoint.products.fw.fwPolicyStat. fwIfEntry.fwIfIndex.fwIfAcceptPcktsIn
Type:	Integer (32 bit)
Status:	mandatory
Max access:	read-only
Description:	Number of accepted packets in the inbound direction

fwIfAcceptPcktsOut

OID:	1.3.6.1.4.1.2620.1.1.25.5.1.6
Full path:	checkpoint.products.fw.fwPolicyStat. fwIfEntry.fwIFIndex.fwIfAccptPcktsOut
Type:	Integer (32 bit)
Status:	mandatory
Max access:	read-only
Description:	Number of accepted packets in the outbound direction

fwAcceptBytesIn

OID:	1.3.6.1.4.1.2620.1.1.25.5.1.7
Full path:	checkpoint.products.fw.fwPolicyStat. fwIfEntry.fwIFIndex.fwAcceptBytesIn
Type:	Integer (32 bit)
Status:	mandatory
Max access:	read-only
Description:	Number of accepted bytes in the inbound direction

fwAcceptBytesOut

OID:	1.3.6.1.4.1.2620.1.1.25.5.1.8
Full path:	checkpoint.products.fw.fwPolicyStat. fwIfEntry.fwIFIndex.fwAcceptBytesOut
Type:	Integer (32 bit)
Status:	mandatory
Max access:	read-only
Description:	Number of accepted bytes in the outbound direction

fwDropPcktsIn

OID:	1.3.6.1.4.1.2620.1.1.25.5.1.9
Full path:	checkpoint.products.fw.fwPolicyStat. fwIfEntry.fwIFIndex.fwDropPcktsIn
Type:	Integer (32 bit)
Status:	mandatory
Max access:	read-only
Description:	Number of dropped packets in the inbound direction

fwDropPcktsOut

OID:	1.3.6.1.4.1.2620.1.1.25.5.1.10
Full path:	checkpoint.products.fw.fwPolicyStat. fwIfEntry.fwIFIndex.fwDropPcktsOut
Type:	Integer (32 bit)
Status:	mandatory
Max access:	read-only
Description:	Number of dropped packets in the outbound direction

fwRejectPcktsIn

OID:	1.3.6.1.4.1.2620.1.1.25.5.1.11
Full path:	checkpoint.products.fw.fwPolicyStat. fwIfEntry.fwIFIndex.fwRejectPcktsIn
Type:	Integer (32 bit)
Status:	mandatory
Max access:	read-only
Description:	Number of rejected packets in the inbound direction

fwRejectPcktsOut

OID:	1.3.6.1.4.1.2620.1.1.25.5.1.12
Full path:	checkpoint.products.fw.fwPolicyStat. fwIfEntry.fwIFIndex.fwRejectPcktsOut
Type:	Integer (32 bit)
Status:	mandatory
Max access:	read-only
Description:	Number of rejected packets in the outbound direction

fwLogIn

OID:	1.3.6.1.4.1.2620.1.1.25.5.1.13
Full path:	checkpoint.products.fw.fwPolicyStat. fwIfEntry.fwIFIndex.fwLogIn
Type:	Integer (32 bit)
Status:	mandatory
Max access:	read-only
Description:	Number of logged packets in the inbound direction

fwLogOut

OID:	1.3.6.1.4.1.2620.1.1.25.5.1.14
Full path:	checkpoint.products.fw.fwPolicyStat. fwIfEntry.fwIFIndex.fwLogOut
Type:	Integer (32 bit)
Status:	mandatory
Max access:	read-only
Description:	Number of logged packets in the outbound direction

fwPerfStat

OID: 1.3.6.1.4.1.2620.1.1.26

Full path: checkpoint.products.fw.fwPerfStat

fwHmem

OID: 1.3.6.1.4.1.2620.1.1.26.1

Full path: checkpoint.products.fw.fwPerfStat.fwHmem

fwHmem-block-size

OID: 1.3.6.1.4.1.2620.1.1.26.1.1

Full path: checkpoint.products.fw.fwPerfStat.fwHmem. fwHmem-block-size

Type: Integer (32 bit)

Status: mandatory

Max access: read-only

Description: hmem - block size

fwHmem-requested-bytes

OID: 1.3.6.1.4.1.2620.1.1.26.1.2

Full path: checkpoint.products.fw.fwPerfStat.fwHmem. fwHmem-requested-bytes

Type: Integer (32 bit)

Status: mandatory

Max access: read-only

Description hmem - requested bytes

fwHmem-initial-allocated-bytes

OID:	1.3.6.1.4.1.2620.1.1.26.1.3
Full path:	checkpoint.products.fw.fwPerfStat.fwHmem. fwHmem-initial-allocated-bytes
Type:	Integer (32 bit)
Status:	mandatory
Max access:	read-only
Description:	hmem - initial allocated bytes

fwHmem-initial-allocated-blocks

OID:	1.3.6.1.4.1.2620.1.1.26.1.4
Full path:	checkpoint.products.fw.fwPerfStat.fwHmem. fwHmem-initial-allocated-blocks
Type:	Integer (32 bit)
Status:	mandatory
Max access:	read-only
Description:	hmem - initial allocated blocks

wHmem-initial-allocated-pools

OID:	1.3.6.1.4.1.2620.1.1.26.1.5
Full path:	checkpoint.products.fw.fwPerfStat.fwHmem. fwHmem-initial-allocated-pools
Type:	Integer (32 bit)
Status:	mandatory
Max access:	read-only
Description:	hmem - initial allocated pools

fwHmem-current-allocated-bytes

OID:	1.3.6.1.4.1.2620.1.1.26.1.6
Full path:	checkpoint.products.fw.fwPerfStat.fwHmem. fwHmem-current-allocated-bytes
Type:	Integer (32 bit)
Status:	mandatory
Max access:	read-only
Description:	hmem - current allocated bytes

wHmem-current-allocated-blocks

OID:	1.3.6.1.4.1.2620.1.1.26.1.7
Full path:	checkpoint.products.fw.fwPerfStat.fwHmem. fwHmem-current-allocated-blocks
Type:	Integer (32 bit)
Status:	mandatory
Max access:	read-only
Description:	hmem - current allocated blocks

fwHmem-current-allocated-pools

OID:	1.3.6.1.4.1.2620.1.1.26.1.8
Full path:	checkpoint.products.fw.fwPerfStat.fwHmem. fwHmem-current-allocated-pools
Type:	Integer (32 bit)
Status:	mandatory
Max access:	read-only
Description:	hmem - current allocated pools

fwHmem-maximum-bytes

OID:	1.3.6.1.4.1.2620.1.1.26.1.9
Full path:	checkpoint.products.fw.fwPerfStat.fwHmem.fwHmem-maximum-bytes
Type:	Integer (32 bit)
Status:	mandatory
Max access:	read-only
Description:	hmem - maximum bytes

fwHmem-maximum-pools

OID:	1.3.6.1.4.1.2620.1.1.26.1.10
Full path:	checkpoint.products.fw.fwPerfStat.fwHmem.fwHmem-maximum-pools
Type:	Integer (32 bit)
Status:	mandatory
Max access:	read-only
Description:	hmem - maximum pools

fwHmem-bytes-used

OID:	1.3.6.1.4.1.2620.1.1.26.1.11
Full path:	checkpoint.products.fw.fwPerfStat.fwHmem.fwHmem-bytes-used
Type:	Integer (32 bit)
Status:	mandatory
Max access:	read-only
Description:	hmem - bytes used

fwHmem-blocks-used

OID:	1.3.6.1.4.1.2620.1.1.26.1.12
Full path:	checkpoint.products.fw.fwPerfStat.fwHmem.fwHmem-blocks-used
Type:	Integer (32 bit)
Status:	mandatory
Max access:	read-only
Description:	hmem - blocks used

fwHmem-bytes-unused

OID:	1.3.6.1.4.1.2620.1.1.26.1.13
Full path:	checkpoint.products.fw.fwPerfStat.fwHmem.fwHmem-bytes-unused
Type:	Integer (32 bit)
Status:	mandatory
Max access:	read-only
Description:	hmem - bytes unused

fwHmem-blocks-unused

OID:	1.3.6.1.4.1.2620.1.1.26.1.14
Full path:	checkpoint.products.fw.fwPerfStat.fwHmem.fwHmem-blocks-unused
Type:	Integer (32 bit)
Status:	mandatory
Max access:	read-only
Description:	hmem - blocks unused

fwHmem-bytes-peak

OID:	1.3.6.1.4.1.2620.1.1.26.1.15
Full path:	checkpoint.products.fw.fwPerfStat.fwHmem.fwHmem-bytes-peak
Type:	Integer (32 bit)
Status:	mandatory
Max access:	read-only
Description:	hmem - bytes peak

fwHmem-blocks-peak

OID:	1.3.6.1.4.1.2620.1.1.26.1.16
Full path:	checkpoint.products.fw.fwPerfStat.fwHmem.fwHmem-blocks-peak
Type:	Integer (32 bit)
Status:	mandatory
Max access:	read-only
Description:	hmem - blocks peak

fwHmem-bytes-internal-use

OID:	1.3.6.1.4.1.2620.1.1.26.1.17
Full path:	checkpoint.products.fw.fwPerfStat.fwHmem.fwHmem-bytes-internal-use
Type:	Integer (32 bit)
Status:	mandatory
Max access:	read-only
Description:	hmem - bytes internal use

fwHmem-number-of-items

OID:	1.3.6.1.4.1.2620.1.1.26.1.18
Full path:	checkpoint.products.fw.fwPerfStat.fwHmem. fwHmem-number-of-items
Type:	Integer (32 bit)
Status:	mandatory
Max access:	read-only
Description:	hmem - number of items

fwHmem-alloc-operations

OID:	1.3.6.1.4.1.2620.1.1.26.1.19
Full path:	checkpoint.products.fw.fwPerfStat.fwHmem. fwHmem-alloc-operations
Type:	Integer (32 bit)
Status:	mandatory
Max access:	read-only
Description	hmem - alloc operations

fwHmem-free-operations

OID:	1.3.6.1.4.1.2620.1.1.26.1.20
Full path:	checkpoint.products.fw.fwPerfStat.fwHmem. fwHmem-free-operations
Type:	Integer (32 bit)
Status:	mandatory
Max access:	read-only
Description:	hmem - free operations

fwHmem-failed-alloc

OID:	1.3.6.1.4.1.2620.1.1.26.1.21
Full path:	checkpoint.products.fw.fwPerfStat.fwHmem. fwHmem-failed-alloc
Type:	Integer (32 bit)
Status:	mandatory
Max access:	read-only
Description:	hmem - failed alloc

fwHmem-failed-free

OID:	1.3.6.1.4.1.2620.1.1.26.1.22
Full path:	checkpoint.products.fw.fwPerfStat.fwHmem. fwHmem-failed-free
Type:	Integer (32 bit)
Status:	mandatory
Max access:	read-only
Description:	hmem - failed free

fwKmem

OID:	1.3.6.1.4.1.2620.1.1.26.2
Full path:	checkpoint.products.fw.fwPerfStat.fwKmem

fwKmem-system-physical-mem

OID:	1.3.6.1.4.1.2620.1.1.26.2.1
Full path:	checkpoint.products.fw.fwPerfStat.fwKmem. fwKmem-system-physical-mem
Type:	Integer (32 bit)

Status: mandatory

Max access: read-only

Description: kmem - system physical mem

fwKmem-available-physical-mem

OID: 1.3.6.1.4.1.2620.1.1.26.2.2

Full path: checkpoint.products.fw.fwPerfStat.fwKmem. fwKmem-available-physical-mem

Type: Integer (32 bit)

Status: mandatory

Max access: read-only

Description: kmem - available physical mem

fwKmem-aix-heap-size

OID: 1.3.6.1.4.1.2620.1.1.26.2.3

Full path: checkpoint.products.fw.fwPerfStat.fwKmem. fwKmem-aix-heap-size

Type: Integer (32 bit)

Status: mandatory

Max access: read-only

Description: kmem - aix heap size

fwKmem-bytes-used

OID: 1.3.6.1.4.1.2620.1.1.26.2.4

Full path: checkpoint.products.fw.fwPerfStat.fwKmem. fwKmem-bytes-used

Type: Integer (32 bit)

Status: mandatory

Max access: read-only

Description: kmem - bytes used

fwKmem-blocking-bytes-used

OID:	1.3.6.1.4.1.2620.1.1.26.2.5
Full path:	checkpoint.products.fw.fwPerfStat.fwKmem.fwKmem-blocking-bytes-used
Type:	Integer (32 bit)
Status:	mandatory
Max access:	read-only
Description:	kmem - blocking bytes used

fwKmem-non-blocking-bytes-used

OID:	1.3.6.1.4.1.2620.1.1.26.2.6
Full path:	checkpoint.products.fw.fwPerfStat.fwKmem.fwKmem-non-blocking-bytes-used
Type:	Integer (32 bit)
Status:	mandatory
Max access:	read-only
Description	kmem - non blocking bytes used

fwKmem-bytes-unused

OID:	1.3.6.1.4.1.2620.1.1.26.2.7
Full path:	checkpoint.products.fw.fwPerfStat.fwKmem.fwKmem-bytes-unused
Type:	Integer (32 bit)
Status:	mandatory
Max access:	read-only
Description:	kmem - bytes unused

fwKmem-bytes-peak

OID:	1.3.6.1.4.1.2620.1.1.26.2.8
Full path:	checkpoint.products.fw.fwPerfStat.fwKmem. fwKmem-bytes-peak
Type:	Integer (32 bit)
Status:	mandatory
Max access:	read-only
Description:	kmem - bytes peak

fwKmem-blocking-bytes-peak

OID:	1.3.6.1.4.1.2620.1.1.26.2.9
Full path:	checkpoint.products.fw.fwPerfStat.fwKmem. fwKmem-blocking-bytes-peak
Type:	Integer (32 bit)
Status:	mandatory
Max access:	read-only
Description:	kmem - blocking bytes peak

fwKmem-non-blocking-bytes-peak

OID:	1.3.6.1.4.1.2620.1.1.26.2.10
Full path:	checkpoint.products.fw.fwPerfStat.fwKmem. fwKmem-non-blocking-bytes-peak
Type:	Integer (32 bit)
Status:	mandatory
Max access:	read-only
Description:	kmem - non blocking bytes peak

fwKmem-bytes-internal-use

OID:	1.3.6.1.4.1.2620.1.1.26.2.11
Full path:	checkpoint.products.fw.fwPerfStat.fwKmem. fwKmem-bytes-internal-use
Type:	Integer (32 bit)
Status:	mandatory
Max access:	read-only
Description:	kmem - bytes internal use

fwKmem-number-of-items

OID:	1.3.6.1.4.1.2620.1.1.26.2.12
Full path:	checkpoint.products.fw.fwPerfStat.fwKmem. fwKmem-number-of-items
Type:	Integer (32 bit)
Status:	mandatory
Max access:	read-only
Description:	kmem - number of items

fwKmem-alloc-operations

OID:	1.3.6.1.4.1.2620.1.1.26.2.13
Full path:	checkpoint.products.fw.fwPerfStat.fwKmem. fwKmem-alloc-operations
Type:	Integer (32 bit)
Status:	mandatory
Max access:	read-only
Description:	kmem - alloc operations

fwKmem-free-operations

OID:	1.3.6.1.4.1.2620.1.1.26.2.14
Full path:	checkpoint.products.fw.fwPerfStat.fwKmem. fwKmem-free-operations
Type:	Integer (32 bit)
Status:	mandatory
Max access:	read-only
Description:	kmem - free operations

fwKmem-failed-alloc

OID:	1.3.6.1.4.1.2620.1.1.26.2.15
Full path:	checkpoint.products.fw.fwPerfStat.fwKmem. fwKmem-failed-alloc
Type:	Integer (32 bit)
Status:	mandatory
Max access:	read-only
Description:	kmem - failed alloc

fwKmem-failed-free

OID:	1.3.6.1.4.1.2620.1.1.26.2.16
Full path:	checkpoint.products.fw.fwPerfStat.fwKmem. fwKmem-failed-free
Type:	Integer (32 bit)
Status:	mandatory
Max access:	read-only
Description:	kmem - failed free

fwInspect

OID: 1.3.6.1.4.1.2620.1.1.26.3

Full path: checkpoint.products.fw.fwPerfStat.fwInspect

fwInspect-packets

OID: 1.3.6.1.4.1.2620.1.1.26.3.1

Full path: checkpoint.products.fw.fwPerfStat.fwInspect.fwInspect-packets

Type: Integer (32 bit)

Status: mandatory

Max access: read-only

Description: inspect - packets

fwInspect-operations

OID: 1.3.6.1.4.1.2620.1.1.26.3.2

Full path: checkpoint.products.fw.fwPerfStat.fwInspect.fwInspect-operations

Type: Integer (32 bit)

Status: mandatory

Max access: read-only

Description: inspect - operations

fwInspect-lookups

OID: 1.3.6.1.4.1.2620.1.1.26.3.3

Full path: checkpoint.products.fw.fwPerfStat.fwInspect.fwInspect-lookups

Type: Integer (32 bit)

Status: mandatory

Max access: read-only

Description: inspect - lookups

fwInspect-record

OID: 1.3.6.1.4.1.2620.1.1.26.3.4
Full path: checkpoint.products.fw.fwPerfStat.fwInspect.fwInspect-record
Type: Integer (32 bit)
Status: mandatory
Max access: read-only
Description: inspect - record

fwInspect-extract

OID: 1.3.6.1.4.1.2620.1.1.26.3.5
Full path: checkpoint.products.fw.fwPerfStat.fwInspect.fwInspect-extract
Type: integer (32 bit)
Status: mandatory
Max access: read-only
Description: inspect - extract

fwCookies

OID: 1.3.6.1.4.1.2620.1.1.26.4
Full path: checkpoint.products.fw.fwPerfStat.fwCookies

fwCookies-total

OID: 1.3.6.1.4.1.2620.1.1.26.4.1
Full path: checkpoint.products.fw.fwPerfStat.fwCookies.fwCookies-total
Type: Integer (32 bit)
Status: mandatory
Max access: read-only
Description: cookies - total

fwCookies-allocfwCookies-total

OID:	1.3.6.1.4.1.2620.1.1.26.4.2
Full path:	checkpoint.products.fw.fwPerfStat.fwCookies.fwCookies-allocfw Cookies-total
Type:	Integer (32 bit)
Status:	mandatory
Max access:	read-only
Description:	cookies - alloc

fwCookies-freefwCookies-total

OID:	1.3.6.1.4.1.2620.1.1.26.4.3
Full path:	checkpoint.products.fw.fwPerfStat.fwCookies.fwCookies-freefwC ookies-total
Type:	Integer (32 bit)
Status:	mandatory
Max access:	read-only
Description:	cookies - free

fwCookies-dupfwCookies-total

OID:	1.3.6.1.4.1.2620.1.1.26.4.4
Full path:	checkpoint.products.fw.fwPerfStat.fwCookies.fwCookies-dupfwC ookies-total
Type:	Integer (32 bit)
Status:	mandatory
Max access:	read-only
Description:	cookies - dup

fwCookies-getfwCookies-total

OID:	1.3.6.1.4.1.2620.1.1.26.4.5
Full path:	checkpoint.products.fw.fwPerfStat.fwCookies.fwCookies-getfwCookies-total
Type:	Integer (32 bit)
Status:	mandatory
Max access:	read-only
Description:	cookies - get

fwCookies-putfwCookies-total

OID:	1.3.6.1.4.1.2620.1.1.26.4.6
Full path:	checkpoint.products.fw.fwPerfStat.fwCookies.fwCookies-putfwCookies-total
Type:	Integer (32 bit)
Status:	mandatory
Max access:	read-only
Description:	cookies - put

fwCookies-lenfwCookies-total

OID:	1.3.6.1.4.1.2620.1.1.26.4.7
Full path:	checkpoint.products.fw.fwPerfStat.fwCookies.fwCookies-lenfwCookies-total
Type:	Integer (32 bit)
Status:	mandatory
Max access:	read-only
Description:	cookies - len

fwChains

OID: 1.3.6.1.4.1.2620.1.1.26.5

Full path: checkpoint.products.fw.fwPerfStat.fwChains

fwChains-alloc

OID: 1.3.6.1.4.1.2620.1.1.26.5.1

Full path: checkpoint.products.fw.fwPerfStat.fwChains. fwChains-alloc

Type: Integer (32 bit)

Status: mandatory

Max access: read-only

Description: chains - alloc

fwChains-free

OID: 1.3.6.1.4.1.2620.1.1.26.5.2

Full path: iso.org.dod.internet.private.enterprises.checkpoint.products.fw.fw PerfStat.fwChains.fwChains-free

Type: Integer (32 bit)

Status: mandatory

Max access: read-only

Description: chains - free

fwFragments

OID: 1.3.6.1.4.1.2620.1.1.26.6

Full path: checkpoint.products.fw.fwPerfStat. fwFragments

fwFrag-fragments

OID:	1.3.6.1.4.1.2620.1.1.26.6.1
Full path:	checkpoint.products.fw.fwPerfStat.fwFragments.fwFrag-fragments
Type:	Integer (32 bit)
Status:	mandatory
Max access:	read-only
Description:	fragments - fragments

fwFrag-expired

OID:	1.3.6.1.4.1.2620.1.1.26.6.2
Full path:	checkpoint.products.fw.fwPerfStat.fwFragments.fwFrag-expired
Type:	Integer (32 bit)
Status:	mandatory
Max access:	read-only
Description:	fragments - expired

fwFrag-packets

OID:	1.3.6.1.4.1.2620.1.1.26.6.3
Full path:	checkpoint.products.fw.fwPerfStat.fwFragments.fwFrag-packets
Type:	Integer (32 bit)
Status:	mandatory
Max access:	read-only
Description:	fragments - packets

fwUfp

OID:	1.3.6.1.4.1.2620.1.1.26.8
Full path:	checkpoint.products.fw.fwPerfStat.fwUfp

fwUfpHitRatio

OID: 1.3.6.1.4.1.2620.1.1.26.8.1

Full path: checkpoint.products.fw.fwPerfStat.fwUfp. fwUfpHitRatio

Type: Integer (32 bit)

Status: mandatory

Max access: read-only

Description: ufp - % hits ratio

fwUfpInspected

OID: 1.3.6.1.4.1.2620.1.1.26.8.2

Full path: checkpoint.products.fw.fwPerfStat.fwUfp. fwUfpInspected

Type: Integer (32 bit)

Status: mandatory

Max access: read-only

Description: ufp - total connections

wUfpHits

OID: 1.3.6.1.4.1.2620.1.1.26.8.3

Full path: checkpoint.products.fw.fwPerfStat.fwUfp. fwUfpHits

Type: Integer (32 bit)

Status: mandatory

Max access: read-only

Description: ufp - hits connections

fwSS

OID: 1.3.6.1.4.1.2620.1.1.26.9

Full path: checkpoint.products.fw.fwPerfStat.fwSS

fwSS-http

OID: 1.3.6.1.4.1.2620.1.1.26.9.1

Full path: checkpoint.products.fw.fwPerfStat.fwSS. fwSS-http

fwSS-http-pid

OID: 1.3.6.1.4.1.2620.1.1.26.9.1.1

Full path: checkpoint.products.fw.fwPerfStat.fwSS. fwSS-http.fwSS-http-pid

Type: Integer (32 bit)

Status: mandatory

Max access: read-only

Description: http - pid

fwSS-http-proto

OID: 1.3.6.1.4.1.2620.1.1.26.9.1.2

Full path: checkpoint.products.fw.fwPerfStat.fwSS.fwSS-http.fwSS-http-proto

Type: Integer (32 bit)

Status: mandatory

Max access: read-only

Description: http - proto

fwSS-http-port

OID: 1.3.6.1.4.1.2620.1.1.26.9.1.3

Full path: checkpoint.products.fw.fwPerfStat.fwSS. fwSS-http.fwSS-http-port

Type: Integer (32 bit)

Status: mandatory

Max access: read-only

Description: http - port

fwSS-http-logical-port

OID: 1.3.6.1.4.1.2620.1.1.26.9.1.4

Full path: checkpoint.products.fw.fwPerfStat.fwSS.fwSS-http.fwSS-http-logical-port

Type: Integer (32 bit)

Status: mandatory

Max access: read-only

Description: http - logical port

fwSS-http-max-avail-socket

OID: 1.3.6.1.4.1.2620.1.1.26.9.1.5

Full path: checkpoint.products.fw.fwPerfStat.fwSS.fwSS-http.fwSS-http-max-avail-socket

Type: Integer (32 bit)

Status: mandatory

Max access: read-only

Description: http - max avail socket

fwSS-http-socket-in-use-max

OID: 1.3.6.1.4.1.2620.1.1.26.9.1.6

Full path: checkpoint.products.fw.fwPerfStat.fwSS.fwSS-http.fwSS-http-socket-in-use-max

Type: Integer (32 bit)

Status: mandatory

Max access: read-only

Description: http - socket in use max

fwSS-http-socket-in-use-curr

OID: 1.3.6.1.4.1.2620.1.1.26.9.1.7

Full path: checkpoint.products.fw.fwPerfStat.fwSS.fwSS-http.fwSS-http-socket-in-use-curr

Type: Integer (32 bit)

Status: mandatory

Max access: read-only

Description: http - socket in use current

fwSS-http-socket-in-use-count

OID: 1.3.6.1.4.1.2620.1.1.26.9.1.8

Full path: checkpoint.products.fw.fwPerfStat.fwSS.fwSS-http.fwSS-http-socket-in-use-count

Type: Integer (32 bit)

Status: mandatory

Max access: read-only

Description: http - socket in use count

fwSS-http-sess-max

OID: 1.3.6.1.4.1.2620.1.1.26.9.1.9

Full path: checkpoint.products.fw.fwPerfStat.fwSS.fwSS-http.fwSS-http-sess-max

Type: Integer (32 bit)

Status: mandatory

Max access: read-only

Description: http - session max

fwSS-http-sess-curr

OID: 1.3.6.1.4.1.2620.1.1.26.9.1.10

Full path: checkpoint.products.fw.fwPerfStat.fwSS.fwSS-http.fwSS-http-sess-curr

Type: Integer (32 bit)

Status: mandatory

Max access: read-only

Description: http - session current

fwSS-http-sess-count

OID: 1.3.6.1.4.1.2620.1.1.26.9.1.11

Full path: checkpoint.products.fw.fwPerfStat.fwSS.fwSS-http.fwSS-http-sess-count

Type: Integer (32 bit)

Status: mandatory

Max access: read-only

Description: http - session count

fwSS-http-auth-sess-max

OID: 1.3.6.1.4.1.2620.1.1.26.9.1.12

Full path: checkpoint.products.fw.fwPerfStat.fwSS.fwSS-http.fwSS-http-auth-sess-max

Type: Integer (32 bit)

Status: mandatory

Max access: read-only

Description: http - auth session max

fwSS-http-auth-sess-curr

OID: 1.3.6.1.4.1.2620.1.1.26.9.1.13

Full path: checkpoint.products.fw.fwPerfStat.fwSS.
fwSS-http.fwSS-http-auth-sess-curr

Type: Integer (32 bit)

Status: mandatory

Max access: read-only

Description: http - auth session current

fwSS-http-auth-sess-count

OID: 1.3.6.1.4.1.2620.1.1.26.9.1.14

Full path: checkpoint.products.fw.fwPerfStat.fwSS.
fwSS-http.fwSS-http-auth-sess-count

Type: Integer (32 bit)

Status: mandatory

Max access: read-only

Description: http - auth session count

fwSS-http-accepted-sess

OID: 1.3.6.1.4.1.2620.1.1.26.9.1.15

Full path: checkpoint.products.fw.fwPerfStat.fwSS.
fwSS-http.fwSS-http-accepted-sess

Type: Integer (32 bit)

Status: mandatory

Max access: read-only

Description: http - accepted session

fwSS-http-rejected-sess

OID: 1.3.6.1.4.1.2620.1.1.26.9.1.16

Full path: checkpoint.products.fw.fwPerfStat.fwSS.
fwSS-http.fwSS-http-rejected-sess

Type: Integer (32 bit)

Status: mandatory

Max access: read-only

Description: http - rejected session

fwSS-http-auth-failures

OID: 1.3.6.1.4.1.2620.1.1.26.9.1.17

Full path: checkpoint.products.fw.fwPerfStat.fwSS.
fwSS-http.fwSS-http-auth-failures

Type: Integer (32 bit)

Status: mandatory

Max access read-only

Description: http - auth failures

fwSS-http-ops-cvp-sess-max

OID: 1.3.6.1.4.1.2620.1.1.26.9.1.18

Full path: checkpoint.products.fw.fwPerfStat.fwSS.
fwSS-http.fwSS-http-ops-cvp-sess-max

Type: Integer (32 bit)

Status: mandatory

Max access: read-only

Description: http - opsec cvp session max

fwSS-http-ops-cvp-sess-curr

OID: 1.3.6.1.4.1.2620.1.1.26.9.1.19

Full path: checkpoint.products.fw.fwPerfStat.fwSS.
fwSS-http.fwSS-http-ops-cvp-sess-curr

Type: Integer (32 bit)

Status: mandatory

Max access: read-only

Description: http - opsec cvp session current

fwSS-http-ops-cvp-sess-count

OID: 1.3.6.1.4.1.2620.1.1.26.9.1.20

Full path: checkpoint.products.fw.fwPerfStat.fwSS.
fwSS-http.fwSS-http-ops-cvp-sess-count

Type: Integer (32 bit)

Status: mandatory

Max access: read-only

Description: http - opsec cvp session count

fwSS-http-ops-cvp-rej-sess

OID: 1.3.6.1.4.1.2620.1.1.26.9.1.21

Full path: checkpoint.products.fw.fwPerfStat.fwSS.
fwSS-http.fwSS-http-ops-cvp-rej-sess

Type: Integer (32 bit)

Status: mandatory

Max access: read-only

Description: http - opsec cvp rej session

fwSS-http-ssl-encryp-sess-max

OID: 1.3.6.1.4.1.2620.1.1.26.9.1.22

Full path: checkpoint.products.fw.fwPerfStat.fwSS.
fwSS-http.fwSS-http-ssl-encryp-sess-max

Type: Integer (32 bit)

Status: mandatory

Max access: read-only

Description: http - ssl encryp session max

fwSS-http-ssl-encryp-sess-curr

OID: 1.3.6.1.4.1.2620.1.1.26.9.1.23

Full path: checkpoint.products.fw.fwPerfStat.fwSS.
fwSS-http.fwSS-http-ssl-encryp-sess-curr

Type: Integer (32 bit)

Status: mandatory

Max access: read-only

Description: http - ssl encryp session current

fwSS-http-ssl-encryp-sess-count

OID: 1.3.6.1.4.1.2620.1.1.26.9.1.24

Full path: checkpoint.products.fw.fwPerfStat.fwSS.
fwSS-http.fwSS-http-ssl-encryp-sess-count

Type: Integer (32 bit)

Status: mandatory

Max access: read-only

Description: http - ssl encryp session count

fwSS-http-transp-sess-max

OID: 1.3.6.1.4.1.2620.1.1.26.9.1.25

Full path: checkpoint.products.fw.fwPerfStat.fwSS.
fwSS-http.fwSS-http-transp-sess-max

Type: Integer (32 bit)

Status: mandatory

Max access: read-only

Description: http - transparent session max

fwSS-http-transp-sess-curr

OID: 1.3.6.1.4.1.2620.1.1.26.9.1.26

Full path: checkpoint.products.fw.fwPerfStat.fwSS.
fwSS-http.fwSS-http-transp-sess-curr

Type: Integer (32 bit)

Status: mandatory

Max access: read-only

Description: http - transparent session current

fwSS-http-transp-sess-count

OID: 1.3.6.1.4.1.2620.1.1.26.9.1.27

Full path: checkpoint.products.fw.fwPerfStat.fwSS.
fwSS-http.fwSS-http-transp-sess-count

Type: Integer (32 bit)

Status: mandatory

Max access: read-only

Description: http - transparent session count

fwSS-http-proxied-sess-max

OID: 1.3.6.1.4.1.2620.1.1.26.9.1.28

Full path: checkpoint.products.fw.fwPerfStat.fwSS.
fwSS-http.fwSS-http-proxied-sess-max(28)

Type: Integer (32 bit)

Status: mandatory

Max access: read-only

Description: http - proxied session max

fwSS-http-proxied-sess-curr

OID: 1.3.6.1.4.1.2620.1.1.26.9.1.29

Full path: checkpoint.products.fw.fwPerfStat.fwSS.
fwSS-http.fwSS-http-proxied-sess-curr(29)

Type: Integer (32 bit)

Status: mandatory

Max access: read-only

Description: http - proxied session current

fwSS-http-proxied-sess-count

OID: 1.3.6.1.4.1.2620.1.1.26.9.1.30

Full path: checkpoint.products.fw.fwPerfStat.fwSS.
fwSS-http.fwSS-http-proxied-sess-count(30)

Type: integer (32 bit)

Status: mandatory

Max access: read-only

Description: http - proxied session count

fwSS-http-tunneled-sess-max

OID: 1.3.6.1.4.1.2620.1.1.26.9.1.31

Full path: checkpoint.products.fw.fwPerfStat.fwSS.
fwSS-http.fwSS-http-tunneled-sess-max(31)

Type: Integer (32 bit)

Status: mandatory

Max access: read-only

Description: http - tunneled session max

fwSS-http-tunneled-sess-curr

OID: 1.3.6.1.4.1.2620.1.1.26.9.1.32

Full path: checkpoint.products.fw.fwPerfStat.fwSS.
fwSS-http.fwSS-http-tunneled-sess-curr(32)

Type: Integer (32 bit)

Status: mandatory

Max access: read-only

Description: http - tunneled session current

fwSS-http-tunneled-sess-count

OID: 1.3.6.1.4.1.2620.1.1.26.9.1.33

Full path: checkpoint.products.fw.fwPerfStat.fwSS.
fwSS-http.fwSS-http-tunneled-sess-count(33)

Type: Integer (32 bit)

Status: mandatory

Max access: read-only

Description: http - tunneled session count

fwSS-http-ftp-sess-max

OID: 1.3.6.1.4.1.2620.1.1.26.9.1.34

Full path: checkpoint.products.fw.fwPerfStat.fwSS.
fwSS-http.fwSS-http-ftp-sess-max(34)

Type: Integer (32 bit)

Status: mandatory

Max access: read-only

Description: http - ftp session max

fwSS-http-ftp-sess-curr

OID: 1.3.6.1.4.1.2620.1.1.26.9.1.35

Full path: checkpoint.products.fw.fwPerfStat.fwSS.
fwSS-http.fwSS-http-ftp-sess-curr(35)

Type: Integer (32 bit)

Status: mandatory

Max access: read-only

Description: http - ftp session current

fwSS-http-ftp-sess-count

OID: 1.3.6.1.4.1.2620.1.1.26.9.1.36

Full path: checkpoint.products.fw.fwPerfStat.fwSS.
fwSS-http.fwSS-http-ftp-sess-count(36)

Type: Integer (32 bit)

Status: mandatory

Max access: read-only

Description: http - ftp session count

fwSS-http-time-stamp

OID: 1.3.6.1.4.1.2620.1.1.26.9.1.37

Full path: checkpoint.products.fw.fwPerfStat.fwSS. fwSS-http.fwSS-http-time-stamp(37)

Type: String

Syntax: "Wed Mar 17 11:10:28 2004" // This is an example. The exact format depends on the OS setting.

Status: mandatory

Max access: read-only

Description: http - time stamp

fwSS-http-is-alive

OID: 1.3.6.1.4.1.2620.1.1.26.9.1.38

Full path: checkpoint.products.fw.fwPerfStat.fwSS. fwSS-http.fwSS-http-is-alive

Type: Integer (32 bit)

Status: mandatory

Max access: read-only

Description: http - is alive

fwSS-ftp

OID: 1.3.6.1.4.1.2620.1.1.26.9.2

Full path: checkpoint.products.fw.fwPerfStat.fwSS. fwSS-ftp

fwSS-ftp-pid

OID: 1.3.6.1.4.1.2620.1.1.26.9.2.1
Full path: checkpoint.products.fw.fwPerfStat.fwSS. fwSS-ftp.fwSS-ftp-pid
Type: Integer (32 bit)
Status: mandatory
Max access: read-only
Description: ftp - pid

fwSS-ftp-proto

OID: 1.3.6.1.4.1.2620.1.1.26.9.2.2
Full path: checkpoint.products.fw.fwPerfStat.fwSS. fwSS-ftp.fwSS-ftp-proto
Type: Integer (32 bit)
Status: mandatory
Max access: read-only
Description: ftp - proto

fwSS-ftp-port

OID: 1.3.6.1.4.1.2620.1.1.26.9.2.3
Full path: checkpoint.products.fw.fwPerfStat.fwSS. fwSS-ftp.fwSS-ftp-port
Type: Integer (32 bit)
Status: mandatory
Max access: read-only
Description: ftp - port

fwSS-ftp-logical-port

OID:	1.3.6.1.4.1.2620.1.1.26.9.2.4
Full path:	checkpoint.products.fw.fwPerfStat.fwSS. fwSS-ftp.fwSS-ftp-logical-port
Type:	Integer (32 bit)
Status:	mandatory
Max access:	read-only
Description:	ftp - logical port

fwSS-ftp-max-avail-socket

OID:	1.3.6.1.4.1.2620.1.1.26.9.2.5
Full path:	checkpoint.products.fw.fwPerfStat.fwSS. fwSS-ftp.fwSS-ftp-max-avail-socket
Type:	Integer (32 bit)
Status:	mandatory
Max access:	read-only
Description:	ftp - max avail socket

fwSS-ftp-socket-in-use-max

OID:	1.3.6.1.4.1.2620.1.1.26.9.2.6
Full path:	checkpoint.products.fw.fwPerfStat.fwSS. fwSS-ftp.fwSS-ftp-socket-in-use-max
Type:	Integer (32 bit)
Status:	mandatory
Max access:	read-only
Description:	ftp - socket in use max

fwSS-ftp-socket-in-use-curr

OID:	1.3.6.1.4.1.2620.1.1.26.9.2.7
Full path:	checkpoint.products.fw.fwPerfStat.fwSS. fwSS-ftp.fwSS-ftp-socket-in-use-curr
Type:	Integer (32 bit)
Status:	mandatory
Max access:	read-only
Description:	ftp - socket in use current

fwSS-ftp-socket-in-use-count

OID:	1.3.6.1.4.1.2620.1.1.26.9.2.8
Full path:	checkpoint.products.fw.fwPerfStat.fwSS. fwSS-ftp.fwSS-ftp-socket-in-use-count
Type:	Integer (32 bit)
Status:	mandatory
Max access:	read-only
Description:	ftp - socket in use count

fwSS-ftp-sess-max

OID:	1.3.6.1.4.1.2620.1.1.26.9.2.9
Full path:	checkpoint.products.fw.fwPerfStat.fwSS. fwSS-ftp.fwSS-ftp-sess-max
Type:	Integer (32 bit)
Status:	mandatory
Max access:	read-only
Description:	ftp - session max

fwSS-ftp-sess-curr

OID:	1.3.6.1.4.1.2620.1.1.26.9.2.10
Full path:	checkpoint.products.fw.fwPerfStat.fwSS. fwSS-ftp.fwSS-ftp-sess-curr
Type:	Integer (32 bit)
Status:	mandatory
Max access:	read-only
Description:	ftp - session current

fwSS-ftp-sess-count

OID:	1.3.6.1.4.1.2620.1.1.26.9.2.11
Full path:	checkpoint.products.fw.fwPerfStat.fwSS. fwSS-ftp.fwSS-ftp-sess-count
Type:	Integer (32 bit)
Status:	mandatory
Max access:	read-only
Description:	ftp - session count

fwSS-ftp-auth-sess-max

OID:	1.3.6.1.4.1.2620.1.1.26.9.2.12
Full path:	checkpoint.products.fw.fwPerfStat.fwSS. fwSS-ftp.fwSS-ftp-auth-sess-max
Type:	Integer (32 bit)
Status:	mandatory
Max access:	read-only
Description:	ftp - auth session max

fwSS-ftp-auth-sess-curr

OID:	1.3.6.1.4.1.2620.1.1.26.9.2.13
Full path:	checkpoint.products.fw.fwPerfStat.fwSS. fwSS-ftp.fwSS-ftp-auth-sess-curr
Type:	Integer (32 bit)
Status:	mandatory
Max access:	read-only
Description:	ftp - auth session current

fwSS-ftp-auth-sess-count

OID:	1.3.6.1.4.1.2620.1.1.26.9.2.14
Full path:	checkpoint.products.fw.fwPerfStat.fwSS. fwSS-ftp.fwSS-ftp-auth-sess-count
Type:	Integer (32 bit)
Status:	mandatory
Max access:	read-only
Description:	ftp - auth session count

fwSS-ftp-accepted-sess

OID:	1.3.6.1.4.1.2620.1.1.26.9.2.15
Full path:	checkpoint.products.fw.fwPerfStat.fwSS. fwSS-ftp.fwSS-ftp-accepted-sess
Type:	Integer (32 bit)
Status:	mandatory
Max access:	read-only
Description:	ftp - accepted session

fwSS-ftp-rejected-sess

OID:	1.3.6.1.4.1.2620.1.1.26.9.2.16
Full path:	checkpoint.products.fw.fwPerfStat.fwSS. fwSS-ftp.fwSS-ftp-rejected-sess
Type:	Integer (32 bit)
Status:	mandatory
Max access:	read-only
Description:	ftp - rejected session

fwSS-ftp-auth-failures

OID:	1.3.6.1.4.1.2620.1.1.26.9.2.17
Full path:	checkpoint.products.fw.fwPerfStat.fwSS. fwSS-ftp.fwSS-ftp-auth-failures
Type:	Integer (32 bit)
Status:	mandatory
Max access:	read-only
Description:	ftp - auth failures

fwSS-ftp-ops-cvp-sess-max

OID:	1.3.6.1.4.1.2620.1.1.26.9.2.18
Full path:	checkpoint.products.fw.fwPerfStat.fwSS. fwSS-ftp.fwSS-ftp-ops-cvp-sess-max
Type:	Integer (32 bit)
Status:	mandatory
Max access:	read-only
Description:	ftp - opsec cvp session max

fwSS-ftp-ops-cvp-sess-curr

OID:	1.3.6.1.4.1.2620.1.1.26.9.2.19
Full path:	checkpoint.products.fw.fwPerfStat.fwSS. fwSS-ftp.fwSS-ftp-ops-cvp-sess-curr
Type:	Integer (32 bit)
Status:	mandatory
Max access:	read-only
Description:	ftp - opsec cvp session current

fwSS-ftp-ops-cvp-sess-count

OID:	1.3.6.1.4.1.2620.1.1.26.9.2.20
Full path:	checkpoint.products.fw.fwPerfStat.fwSS. fwSS-ftp.fwSS-ftp-ops-cvp-sess-count
Type:	Integer (32 bit)
Status:	mandatory
Max access:	read-only
Description:	ftp - opsec cvp session count

fwSS-ftp-ops-cvp-rej-sess

OID:	1.3.6.1.4.1.2620.1.1.26.9.2.21
Full path:	checkpoint.products.fw.fwPerfStat.fwSS. fwSS-ftp.fwSS-ftp-ops-cvp-rej-sess
Type:	Integer (32 bit)
Status:	mandatory
Max access:	read-only
Description:	ftp - opsec cvp rej session

fwSS-ftp-time-stamp

OID:	1.3.6.1.4.1.2620.1.1.26.9.2.22
Full path:	checkpoint.products.fw.fwPerfStat.fwSS. fwSS-ftp.fwSS-ftp-time-stamp
Type:	String
Syntax:	"Wed Mar 17 11:10:28 2004" // This is an example. The exact format depends on the OS setting.
Status:	mandatory
Max access:	read-only
Description:	ftp - time stamp

fwSS-ftp-is-alive

OID:	1.3.6.1.4.1.2620.1.1.26.9.2.23
Full path:	checkpoint.products.fw.fwPerfStat.fwSS. fwSS-ftp.fwSS-ftp-is-alive
Type:	Integer (32 bit)
Status:	mandatory
Max access:	read-only
Description:	ftp - is alive

fwSS-telnet

OID:	1.3.6.1.4.1.2620.1.1.26.9.3
Full path:	checkpoint.products.fw.fwPerfStat.fwSS. fwSS-telnet

fwSS-telnet-pid

OID: 1.3.6.1.4.1.2620.1.1.26.9.3.1

Full path: checkpoint.products.fw.fwPerfStat.fwSS.fwSS-telnet.fwSS-telnet-pid

Type: Integer (32 bit)

Status: mandatory

Max access: read-only

Description: telnet - pid

fwSS-telnet-proto

OID: 1.3.6.1.4.1.2620.1.1.26.9.3.2

Full path: checkpoint.products.fw.fwPerfStat.fwSS.fwSS-telnet.fwSS-telnet-proto

Type: Integer (32 bit)

Status: mandatory

Max access: read-only

Description: telnet - proto

fwSS-telnet-port

OID: 1.3.6.1.4.1.2620.1.1.26.9.3.3

Full path: checkpoint.products.fw.fwPerfStat.fwSS.fwSS-telnet.fwSS-telnet-port

Type: Integer (32 bit)

Status: mandatory

Max access: read-only

Description: telnet - port

fwSS-telnet-logical-port

OID:	1.3.6.1.4.1.2620.1.1.26.9.3.4
Full path:	checkpoint.products.fw.fwPerfStat.fwSS. fwSS-telnet.fwSS-telnet-logical-port
Type:	Integer (32 bit)
Status:	mandatory
Max access:	read-only
Description:	telnet - logical port

fwSS-telnet-max-avail-socket

OID:	1.3.6.1.4.1.2620.1.1.26.9.3.5
Full path:	checkpoint.products.fw.fwPerfStat.fwSS. fwSS-telnet.fwSS-telnet-max-avail-socket
Type:	Integer (32 bit)
Status:	mandatory
Max access:	read-only
Description:	telnet - max avail socket

fwSS-telnet-socket-in-use-max

OID:	1.3.6.1.4.1.2620.1.1.26.9.3.6
Full path:	checkpoint.products.fw.fwPerfStat.fwSS. fwSS-telnet.fwSS-telnet-socket-in-use-max
Type:	Integer (32 bit)
Status:	mandatory
Max access:	read-only
Description:	telnet - socket in use max

fwSS-telnet-socket-in-use-curr

OID:	1.3.6.1.4.1.2620.1.1.26.9.3.7
Full path:	checkpoint.products.fw.fwPerfStat.fwSS. fwSS-telnet.fwSS-telnet-socket-in-use-curr
Type:	Integer (32 bit)
Status:	mandatory
Max access:	read-only
Description:	telnet - socket in use current

fwSS-telnet-socket-in-use-count

OID:	1.3.6.1.4.1.2620.1.1.26.9.3.8
Full path:	checkpoint.products.fw.fwPerfStat.fwSS. fwSS-telnet.fwSS-telnet-socket-in-use-count
Type:	Integer (32 bit)
Status:	mandatory
Max access:	read-only
Description:	telnet - socket in use count

fwSS-telnet-sess-max

OID:	1.3.6.1.4.1.2620.1.1.26.9.3.9
Full path:	checkpoint.products.fw.fwPerfStat.fwSS. fwSS-telnet.fwSS-telnet-sess-max
Type:	Integer (32 bit)
Status:	mandatory
Max access:	read-only
Description:	telnet - session max

fwSS-telnet-sess-curr

OID:	1.3.6.1.4.1.2620.1.1.26.9.3.10
Full path:	checkpoint.products.fw.fwPerfStat.fwSS. fwSS-telnet.fwSS-telnet-sess-curr
Type:	Integer (32 bit)
Status:	mandatory
Max access:	read-only
Description:	telnet - session current

fwSS-telnet-sess-count

OID:	1.3.6.1.4.1.2620.1.1.26.9.3.11
Full path:	checkpoint.products.fw.fwPerfStat.fwSS. fwSS-telnet.fwSS-telnet-sess-count
Type:	Integer (32 bit)
Status:	mandatory
Max access	read-only
Description:	telnet - session count

fwSS-telnet-auth-sess-max

OID:	1.3.6.1.4.1.2620.1.1.26.9.3.12
Full path:	checkpoint.products.fw.fwPerfStat.fwSS. fwSS-telnet.fwSS-telnet-auth-sess-max
Type:	Integer (32 bit)
Status:	mandatory
Max access:	read-only
Description:	telnet - auth session max

fwSS-telnet-auth-sess-curr

OID:	1.3.6.1.4.1.2620.1.1.26.9.3.13
Full path:	checkpoint.products.fw.fwPerfStat.fwSS. fwSS-telnet.fwSS-telnet-auth-sess-curr
Type:	Integer (32 bit)
Status:	mandatory
Max access:	read-only
Description:	telnet - auth session current

fwSS-telnet-auth-sess-count

OID:	1.3.6.1.4.1.2620.1.1.26.9.3.14
Full path:	checkpoint.products.fw.fwPerfStat.fwSS. fwSS-telnet.fwSS-telnet-auth-sess-count
Type:	Integer (32 bit)
Status:	mandatory
Max access:	read-only
Description:	Telnet - auth session count

fwSS-telnet-accepted-sess

OID:	1.3.6.1.4.1.2620.1.1.26.9.3.15
Full path:	checkpoint.products.fw.fwPerfStat.fwSS. fwSS-telnet.fwSS-telnet-accepted-sess
Type:	Integer (32 bit)
Status:	mandatory
Max access:	read-only
Description:	telnet - accepted session

fwSS-telnet-rejected-sess

OID:	1.3.6.1.4.1.2620.1.1.26.9.3.16
Full path:	checkpoint.products.fw.fwPerfStat.fwSS. fwSS-telnet.fwSS-telnet-rejected-sess
Type:	Integer (32 bit)
Status:	mandatory
Max access:	read-only
Description:	telnet - rejected session

fwSS-telnet-auth-failures

OID:	1.3.6.1.4.1.2620.1.1.26.9.3.17
Full path:	checkpoint.products.fw.fwPerfStat.fwSS. fwSS-telnet.fwSS-telnet-auth-failures
Type:	Integer (32 bit)
Status:	mandatory
Max access:	read-only
Description:	telnet - auth failures

fwSS-telnet-time-stamp

OID:	1.3.6.1.4.1.2620.1.1.26.9.3.18
Full path:	checkpoint.products.fw.fwPerfStat.fwSS. fwSS-telnet.fwSS-telnet-time-stamp
Type:	String
Syntax:	"Wed Mar 17 11:10:28 2004" // This is an example. The exact format depends on the OS setting.
Status:	mandatory
Max access:	read-only
Description:	telnet - time stamp

fwSS-telnet-is-alive

OID: 1.3.6.1.4.1.2620.1.1.26.9.3.19

Full path: checkpoint.products.fw.fwPerfStat.fwSS. fwSS-telnet.fwSS-telnet-is-alive

Type: Integer (32 bit)

Status: mandatory

Max access: read-only

Description: telnet - is alive

fwSS-rlogin

OID: 1.3.6.1.4.1.2620.1.1.26.9.4

Full path: checkpoint.products.fw.fwPerfStat.fwSS. fwSS-rlogin

fwSS-rlogin-pid

OID: 1.3.6.1.4.1.2620.1.1.26.9.4.1

Full path: checkpoint.products.fw.fwPerfStat.fwSS. fwSS-rlogin.fwSS-rlogin-pid

Type: Integer (32 bit)

Status: mandatory

Max access: read-only

Description: rlogin - pid

fwSS-rlogin-proto

OID: 1.3.6.1.4.1.2620.1.1.26.9.4.2

Full path: checkpoint.products.fw.fwPerfStat.fwSS. fwSS-rlogin.fwSS-rlogin-proto

Type: Integer (32 bit)

Status: mandatory

Max access: read-only

Description: rlogin - proto

fwSS-rlogin-port

OID: 1.3.6.1.4.1.2620.1.1.26.9.4.3

Full path: checkpoint.products.fw.fwPerfStat.fwSS.
fwSS-rlogin.fwSS-rlogin-port

Type: Integer (32 bit)

Status: mandatory

Max access: read-only

Description: rlogin - port

fwSS-rlogin-logical-port

OID: 1.3.6.1.4.1.2620.1.1.26.9.4.4

Full path: checkpoint.products.fw.fwPerfStat.fwSS.
fwSS-rlogin.fwSS-rlogin-logical-port

Type: Integer (32 bit)

Status: mandatory

Max access: read-only

Description: rlogin - logical port

fwSS-rlogin-max-avail-socket

OID: 1.3.6.1.4.1.2620.1.1.26.9.4.5

Full path: checkpoint.products.fw.fwPerfStat.fwSS.
fwSS-rlogin.fwSS-rlogin-max-avail-socket

Type: Integer (32 bit)

Status: mandatory

Max access: read-only

Description: rlogin - max avail socket

fwSS-rlogin-socket-in-use-max

OID: 1.3.6.1.4.1.2620.1.1.26.9.4.6

Full path: checkpoint.products.fw.fwPerfStat.fwSS.
fwSS-rlogin.fwSS-rlogin-socket-in-use-max

Type: Integer (32 bit)

Status: mandatory

Max access: read-only

Description: rlogin - socket in use max

fwSS-rlogin-socket-in-use-curr

OID: 1.3.6.1.4.1.2620.1.1.26.9.4.7

Full path: checkpoint.products.fw.fwPerfStat.fwSS.
fwSS-rlogin.fwSS-rlogin-socket-in-use-curr

Type: Integer (32 bit)

Status: mandatory

Max access: read-only

Description: rlogin - socket in use current

fwSS-rlogin-socket-in-use-count

OID: 1.3.6.1.4.1.2620.1.1.26.9.4.8

Full path: checkpoint.products.fw.fwPerfStat.fwSS.
fwSS-rlogin.fwSS-rlogin-socket-in-use-count

Type: Integer (32 bit)

Status: mandatory

Max access: read-only

Description: rlogin - socket in use count

fwSS-rlogin-sess-max

OID: 1.3.6.1.4.1.2620.1.1.26.9.4.9

Full path: checkpoint.products.fw.fwPerfStat.fwSS.
fwSS-rlogin.fwSS-rlogin-sess-max

Type: Integer (32 bit)

Status: mandatory

Max access: read-only

Description: rlogin - session max

fwSS-rlogin-sess-curr

OID: 1.3.6.1.4.1.2620.1.1.26.9.4.10

Full path: checkpoint.products.fw.fwPerfStat.fwSS.
fwSS-rlogin.fwSS-rlogin-sess-curr

Type: Integer (32 bit)

Status: mandatory

Max access: read-only

Description: rlogin - session current

fwSS-rlogin-sess-count

OID: 1.3.6.1.4.1.2620.1.1.26.9.4.11

Full path: checkpoint.products.fw.fwPerfStat.fwSS.
fwSS-rlogin.fwSS-rlogin-sess-count

Type: Integer (32 bit)

Status: mandatory

Max access: read-only

Description: rlogin - session count

fwSS-rlogin-auth-sess-max

OID: 1.3.6.1.4.1.2620.1.1.26.9.4.12

Full path: checkpoint.products.fw.fwPerfStat.fwSS.
fwSS-rlogin.fwSS-rlogin-auth-sess-max

Type: Integer (32 bit)

Status: mandatory

Max access: read-only

Description: rlogin - auth session max

fwSS-rlogin-auth-sess-curr

OID: 1.3.6.1.4.1.2620.1.1.26.9.4.13

Full path: checkpoint.products.fw.fwPerfStat.fwSS.
fwSS-rlogin.fwSS-rlogin-auth-sess-curr

Type: Integer (32 bit)

Status: mandatory

Max access: read-only

Description: rlogin - auth session current

fwSS-rlogin-auth-sess-count

OID: 1.3.6.1.4.1.2620.1.1.26.9.4.14

Full path: checkpoint.products.fw.fwPerfStat.fwSS.
fwSS-rlogin.fwSS-rlogin-auth-sess-count

Type: Integer (32 bit)

Status: mandatory

Max access: read-only

Description: rlogin - auth session count

fwSS-rlogin-accepted-sess

OID: 1.3.6.1.4.1.2620.1.1.26.9.4.15

Full path: checkpoint.products.fw.fwPerfStat.fwSS.fwSS-rlogin.fwSS-rlogin-accepted-sess

Type: Integer (32 bit)

Status: mandatory

Max access: read-only

Description: rlogin - accepted session

fwSS-rlogin-rejected-sess

OID: 1.3.6.1.4.1.2620.1.1.26.9.4.16

Full path: checkpoint.products.fw.fwPerfStat.fwSS.fwSS-rlogin.fwSS-rlogin-rejected-sess

Type: Integer (32 bit)

Status: mandatory

Max access: read-only

Description: rlogin - rejected session

fwSS-rlogin-auth-failures

OID: 1.3.6.1.4.1.2620.1.1.26.9.4.17

Full path: checkpoint.products.fw.fwPerfStat.fwSS.fwSS-rlogin.fwSS-rlogin-auth-failures

Type: Integer (32 bit)

Status: mandatory

Max access read-only

Description: rlogin - auth failures

fwSS-rlogin-time-stamp

OID: 1.3.6.1.4.1.2620.1.1.26.9.4.18

Full path: checkpoint.products.fw.fwPerfStat.fwSS. fwSS-rlogin.fwSS-rlogin-time-stamp

Type: String

Syntax: "Wed Mar 17 11:10:28 2004" // This is an example. The exact format depends on the OS setting.

Status: mandatory

Max access: read-only

Description: rlogin - time stamp

fwSS-rlogin-is-alive

OID: 1.3.6.1.4.1.2620.1.1.26.9.4.19

Full path: checkpoint.products.fw.fwPerfStat.fwSS. fwSS-rlogin.fwSS-rlogin-is-alive

Type: Integer (32 bit)

Status: mandatory

Max access: read-only

Description: rlogin - is alive

fwSS-ufp

OID: 1.3.6.1.4.1.2620.1.1.26.9.5

Full path: checkpoint.products.fw.fwPerfStat.fwSS. fwSS-ufp

wSS-ufp-ops-ufp-sess-max

OID:	1.3.6.1.4.1.2620.1.1.26.9.5.1
Full path:	checkpoint.products.fw.fwPerfStat.fwSS. fwSS-ufp.fwSS-ufp-ops-ufp-sess-max
Type:	Integer (32 bit)
Status:	mandatory
Max access:	read-only
Description:	ufp - session max

fwSS-ufp-ops-ufp-sess-curr

OID:	1.3.6.1.4.1.2620.1.1.26.9.5.2
Full path:	checkpoint.products.fw.fwPerfStat.fwSS. fwSS-ufp.fwSS-ufp-ops-ufp-sess-curr
Type:	Integer (32 bit)
Status:	mandatory
Max access:	read-only
Description:	ufp - session current

fwSS-ufp-ops-ufp-sess-count

OID:	1.3.6.1.4.1.2620.1.1.26.9.5.3
Full path:	checkpoint.products.fw.fwPerfStat.fwSS. fwSS-ufp.fwSS-ufp-ops-ufp-sess-count
Type:	Integer (32 bit)
Status:	mandatory
Max access:	read-only
Description:	ufp - session count

fwSS-ufp-ops-ufp-rej-sess

OID: 1.3.6.1.4.1.2620.1.1.26.9.5.4

Full path: checkpoint.products.fw.fwPerfStat.fwSS.fwSS-ufp.fwSS-ufp-ops-ufp-rej-sess

Type: Integer (32 bit)

Status: mandatory

Max access: read-only

Description: ufp - rej session

fwSS-ufp-time-stamp

OID: 1.3.6.1.4.1.2620.1.1.26.9.5.5

Full path: checkpoint.products.fw.fwPerfStat.fwSS.fwSS-ufp.fwSS-ufp-time-stamp

Type: String

Syntax: fwSS-ufp-time-stamp

Status: mandatory

Max access: read-only

Description: ufp - time stamp

fwSS-ufp-is-alive

OID: 1.3.6.1.4.1.2620.1.1.26.9.5.6

Full path: checkpoint.products.fw.fwPerfStat.fwSS.fwSS-ufp.fwSS-ufp-is-alive

Type: Integer (32 bit)

Status: mandatory

Max access: read-only

Description: ufp - is alive

fwSS-smtp

OID: 1.3.6.1.4.1.2620.1.1.26.9.6

Full path: checkpoint.products.fw.fwPerfStat.fwSS. fwSS-smtp

fwSS-smtp-pid

OID: 1.3.6.1.4.1.2620.1.1.26.9.6.1

Full path: checkpoint.products.fw.fwPerfStat.fwSS.
fwSS-smtp.fwSS-smtp-pid

Type: Integer (32 bit)

Status: mandatory

Max access: read-only

Description: smtp - pid

fwSS-smtp-proto

OID: 1.3.6.1.4.1.2620.1.1.26.9.6.2

Full path: checkpoint.products.fw.fwPerfStat.fwSS.
fwSS-smtp.fwSS-smtp-proto

Type: Integer (32 bit)

Status: mandatory

Max access: read-only

Description: smtp - proto

fwSS-smtp-port

OID: 1.3.6.1.4.1.2620.1.1.26.9.6.3

Full path: checkpoint.products.fw.fwPerfStat.fwSS.
fwSS-smtp.fwSS-smtp-port

Type: Integer (32 bit)

Status: mandatory

Max access: read-only

Description: smtp - port

fwSS-smtp-logical-port

OID: 1.3.6.1.4.1.2620.1.1.26.9.6.4

Full path: checkpoint.products.fw.fwPerfStat.fwSS.fwSS-smtp.fwSS-smtp-logical-port

Type: Integer (32 bit)

Status: mandatory

Max access: read-only

Description: smtp - logical port

fwSS-smtp-max-avail-socket

OID: 1.3.6.1.4.1.2620.1.1.26.9.6.5

Full path: checkpoint.products.fw.fwPerfStat.fwSS.fwSS-smtp.fwSS-smtp-max-avail-socket

Type: Integer (32 bit)

Status: mandatory

Max access: read-only

Description: smtp - max avail socket

fwSS-smtp-socket-in-use-max

OID: 1.3.6.1.4.1.2620.1.1.26.9.6.6

Full path: checkpoint.products.fw.fwPerfStat.fwSS.fwSS-smtp.fwSS-smtp-socket-in-use-max

Type: Integer (32 bit)

Status: mandatory

Max access: read-only

Description: smtp - socket in use max

fwSS-smtp-socket-in-use-curr

OID: 1.3.6.1.4.1.2620.1.1.26.9.6.7

Full path: checkpoint.products.fw.fwPerfStat.fwSS.fwSS-smtp.fwSS-smtp-socket-in-use-curr

Type: Integer (32 bit)

Status: mandatory

Max access: read-only

Description: smtp - socket in use current

fwSS-smtp-socket-in-use-count

OID: 1.3.6.1.4.1.2620.1.1.26.9.6.8

Full path: checkpoint.products.fw.fwPerfStat.fwSS.fwSS-smtp.fwSS-smtp-socket-in-use-count

Type: Integer (32 bit)

Status: mandatory

Max access: read-only

Description: smtp - socket in use count

fwSS-smtp-sess-max

OID: 1.3.6.1.4.1.2620.1.1.26.9.6.9

Full path: checkpoint.products.fw.fwPerfStat.fwSS.fwSS-smtp.fwSS-smtp-sess-max

Type: Integer (32 bit)

Status: mandatory

Max access: read-only

Description: smtp - session max

fwSS-smtp-sess-curr

OID: 1.3.6.1.4.1.2620.1.1.26.9.6.10

Full path: checkpoint.products.fw.fwPerfStat.fwSS.
fwSS-smtp.fwSS-smtp-sess-curr

Type: Integer (32 bit

Status: mandatory

Max access: read-only

Description: smtp - session current

fwSS-smtp-sess-count

OID: 1.3.6.1.4.1.2620.1.1.26.9.6.11

Full path: checkpoint.products.fw.fwPerfStat.fwSS.
fwSS-smtp.fwSS-smtp-sess-count

Type: Integer (32 bit)

Status: mandatory

Max access: read-only

Description: smtp - session count

fwSS-smtp-auth-sess-max

OID: 1.3.6.1.4.1.2620.1.1.26.9.6.12

Full path: checkpoint.products.fw.fwPerfStat.fwSS.
fwSS-smtp.fwSS-smtp-auth-sess-max

Type: Integer (32 bit)

Status: mandatory

Max access: read-only

Description: smtp - auth session max

fwSS-smtp-auth-sess-curr

OID: 1.3.6.1.4.1.2620.1.1.26.9.6.13

Full path: checkpoint.products.fw.fwPerfStat.fwSS.
fwSS-smtp.fwSS-smtp-auth-sess-curr

Type: Integer (32 bit)

Status: mandatory

Max access: read-only

Description: smtp - auth session current

fwSS-smtp-auth-sess-count

OID: 1.3.6.1.4.1.2620.1.1.26.9.6.14

Full path: checkpoint.products.fw.fwPerfStat.fwSS.
fwSS-smtp.fwSS-smtp-auth-sess-count

Type: Integer (32 bit)

Status: mandatory

Max access: read-only

Description: smtp - auth session count

fwSS-smtp-accepted-sess

OID: 1.3.6.1.4.1.2620.1.1.26.9.6.15

Full path: checkpoint.products.fw.fwPerfStat.fwSS.
fwSS-smtp.fwSS-smtp-accepted-sess

Type: Integer (32 bit)

Status: mandatory

Max access: read-only

Description: smtp - accepted session

fwSS-smtp-rejected-sess

OID: 1.3.6.1.4.1.2620.1.1.26.9.6.16

Full path: checkpoint.products.fw.fwPerfStat.fwSS.fwSS-smtp.fwSS-smtp-rejected-sess

Type: Integer (32 bit)

Status: mandatory

Max access: read-only

Description: smtp - rejected session

fwSS-smtp-auth-failures

OID: 1.3.6.1.4.1.2620.1.1.26.9.6.17

Full path: checkpoint.products.fw.fwPerfStat.fwSS.fwSS-smtp.fwSS-smtp-auth-failures

Type: Integer (32 bit)

Status: mandatory

Max access: read-only

Description: smtp - auth failures

fwSS-smtp-mail-max

OID: 1.3.6.1.4.1.2620.1.1.26.9.6.18

Full path: checkpoint.products.fw.fwPerfStat.fwSS.fwSS-smtp.fwSS-smtp-mail-max

Type: Integer (32 bit)

Status: mandatory

Max access: read-only

Description: smtp - mail max

fwSS-smtp-mail-curr

OID: 1.3.6.1.4.1.2620.1.1.26.9.6.19

Full path: checkpoint.products.fw.fwPerfStat.fwSS.
fwSS-smtp.fwSS-smtp-mail-curr

Type: Integer (32 bit)

Status: mandatory

Max access: read-only

Description: smtp - mail curr

fwSS-smtp-mail-count

OID: 1.3.6.1.4.1.2620.1.1.26.9.6.20

Full path: checkpoint.products.fw.fwPerfStat.fwSS.
fwSS-smtp.fwSS-smtp-mail-count

Type: Integer (32 bit)

Status: mandatory

Max access: read-only

Description: smtp - mail count

fwSS-smtp-outgoing-mail-max

OID: 1.3.6.1.4.1.2620.1.1.26.9.6.21

Full path: checkpoint.products.fw.fwPerfStat.fwSS.
fwSS-smtp.fwSS-smtp-outgoing-mail-max

Type: Integer (32 bit)

Status: mandatory

Max access: read-only

Description: smtp - outgoing mail max

fwSS-smtp-outgoing-mail-curr

OID: 1.3.6.1.4.1.2620.1.1.26.9.6.22

Full path: checkpoint.products.fw.fwPerfStat.fwSS.
fwSS-smtp.fwSS-smtp-outgoing-mail-curr

Type: Integer (32 bit)

Status: mandatory

Max access: read-only

Description: smtp - outgoing mail curr

fwSS-smtp-outgoing-mail-count

OID: 1.3.6.1.4.1.2620.1.1.26.9.6.23

Full path: checkpoint.products.fw.fwPerfStat.fwSS.
fwSS-smtp.fwSS-smtp-outgoing-mail-count

Type: Integer (32 bit)

Status: mandatory

Max access: read-only

Description: smtp - outgoing mail count

fwSS-smtp-max-mail-on-conn

OID: 1.3.6.1.4.1.2620.1.1.26.9.6.24

Full path: checkpoint.products.fw.fwPerfStat.fwSS.
fwSS-smtp.fwSS-smtp-max-mail-on-conn

Type: Integer (32 bit)

Status: mandatory

Max access: read-only

Description: smtp - max mail on conn

fwSS-smtp-total-mails

OID: 1.3.6.1.4.1.2620.1.1.26.9.6.25

Full path: checkpoint.products.fw.fwPerfStat.fwSS.fwSS-smtp.fwSS-smtp-total-mails

Type: Integer (32 bit)

Status: mandatory

Max access: read-only

Description: smtp - total mails

fwSS-smtp-time-stamp

OID: 1.3.6.1.4.1.2620.1.1.26.9.6.26

Full path: checkpoint.products.fw.fwPerfStat.fwSS.fwSS-smtp.fwSS-smtp-time-stamp

Type: String

Syntax: "Wed Mar 17 11:10:28 2004" // This is an example. The exact format depends on the OS setting.

Status: mandatory

Max access: read-only

Description: smtp - time stamp

wSS-smtp-is-alive

OID: 1.3.6.1.4.1.2620.1.1.26.9.6.27

Full path: checkpoint.products.fw.fwPerfStat.fwSS.fwSS-smtp.fwSS-smtp-is-alive

Type: Integer (32 bit)

Status: mandatory

Max access: read-only

Description: smtp - is alive

CHAPTER 3

VPN-1 MIBs

In This Chapter

Overview *page 99*

MIB Tree Description *page 99*

Overview

This chapter describes the nodes/leafs that comprise the MIBs used in VPN-1.

MIB Tree Description

This section comprises a detailed description of each leaf in the VPN-1 MIB tree. The following is a diagram of the VPN-1 MIB tree.

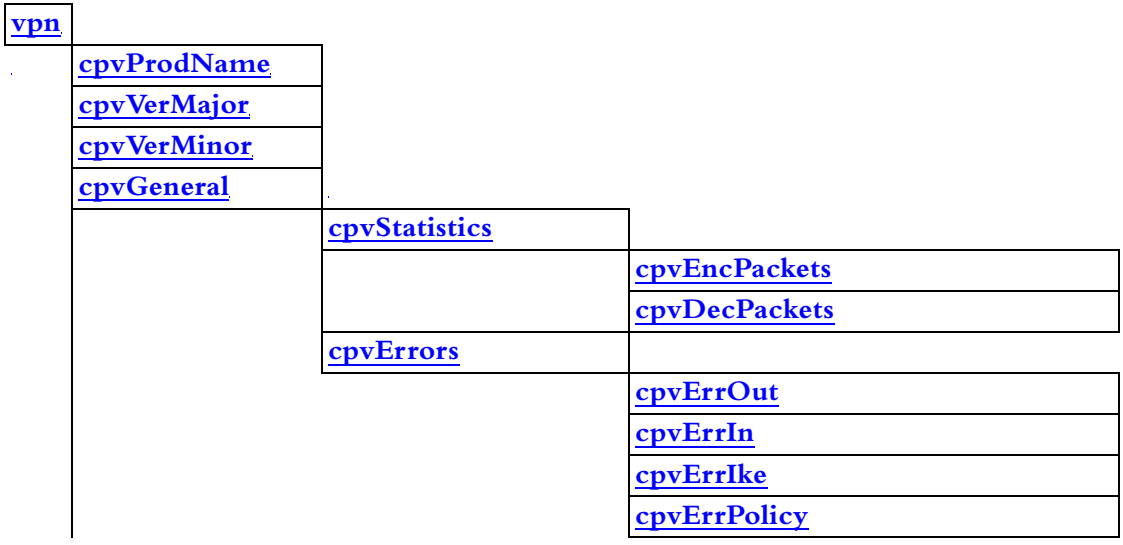

cpvIpsec		
	cpvSaStatistics	
		cpvCurrEspSAsIn
		cpvTotalEspSAsIn
		cpvCurrEspSAsOut
		cpvTotalEspSAsOut
		cpvCurrAhSAsIn
		cpvTotalAhSAsIn
		cpvCurrAhSAsOut
		cpvTotalAhSAsOut
		cpvMaxConncurEspSAsIn
		cpvMaxConncurEspSAsOut
		cpvMaxConncurAhSAsIn
		cpvMaxConncurAhSAsOut
	cpvSaErrors	
		cpvSaDecrErr
		cpvSaAuthErr
		cpvSaReplayErr
		cpvSaPolicyErr
		cpvSaOtherErrIn
		cpvSaOtherErrOut
		cpvSaUnknownSpiErr
	cpvIpsecStatistics	
		cpvIpsecUdpEspEncPkts
		cpvIpsecUdpEspDecPkts
		cpvIpsecAhEncPkts
		cpvIpsecAhDecPkts
		cpvIpsecEspEncPkts
		cpvIpsecEspDecPkts
		cpvIpsecDecomprBytesBefore
		cpvIpsecDecomprBytesAfter
		cpvIpsecDecomprOverhead
		cpvIpsecDecomprPkts
		cpvIpsecDecomprErr
		cpvIpsecComprBytesBefore

		cpvIpsecComprBytesAfter
		cpvIpsecComprOverhead
		cpvIpsecNonCompressibleBytes
		cpvIpsecCompressiblePkts
		cpvIpsecNonCompressiblePkts
		cpvIpsecComprErrors
		cpvIpsecEspEncBytes
		cpvIpsecEspDecBytes
cpvFwz		
	cpvFwzStatistics	
		cpvFwzEncapsEncPkts
		cpvFwzEncapsDecPkts
		cpvFwzEncPkts
		cpvFwzDecPkts
	cpvFwzErrors	
		cpvFwzEncapsEncErrs
		cpvFwzEncapsDecErrs
		cpvFwzEncErrs
		cpvFwzDecErrs
cpvAccelerator		
	cpvHwAccelGeneral	
		cpvHwAccelVendor
		cpvHwAccelStatus
		cpvHwAccelDriverMajorVer
		cpvHwAccelDriverMinorVer
	cpvHwAccelStatistics	
		cpvHwAccelEspEncPkts
		cpvHwAccelEspDecPkts
		cpvHwAccelEspEncBytes
		cpvHwAccelEspDecBytes
		cpvHwAccelAhEncPkts
		cpvHwAccelAhDecPkts
		cpvHwAccelAhEncBytes
		cpvHwAccelAhDecBytes
cpvIKE		

	cpvIKEglobals	
		cpvIKECurrSAs
		cpvIKECurrInitSAs
		cpvIKECurrRespSAs
		cpvIKETotalSAs
		cpvIKETotalInitSAs
		cpvIKETotalRespSAs
		cpvIKETotalSAsAttempts
		cpvIKETotalSAsInitAttempts
		cpvIKETotalSAsRespAttempts
		cpvIKEMaxConncurSAs
		cpvIKEMaxConncurInitSAs
		cpvIKEMaxConncurRespSAs
	cpvIKEerrors	
		cpvIKETotalFailuresInit
		cpvIKENoResp
		cpvIKENoResp
cpvIPsec		
	cpvIPsecNIC	
		cpvIPsecNICsNum
		cpvIPsecNICTotalDownLoadedSAs
		cpvIPsecNICCurrDownLoadedSAs
		cpvIPsecNICDecrBytes
		cpvIPsecNICEncrBytes
		cpvIPsecNICDecrPackets
		cpvIPsecNICEncrPackets
cpvTnlMonTable		
	cpvTnlMonEntry	
		cpvTnlMonAddr
		cpvTnlMonStatus
		cpvTnlMonStatus

vpn

OID: 1.3.6.1.4.1.2620.1.2

Full path: checkpoint(2620).products(1).vpn(2)

cpvProdName

OID: 1.3.6.1.4.1.2620.1.2.1

Full path: checkpoint(2620).products(1).vpn(2).cpvProdName(1)

Type: String

Status: mandatory

Max access: read-only

Description: Product name

cpvVerMajor

OID: 1.3.6.1.4.1.2620.1.2.2

Full path: checkpoint(2620).products(1).vpn(2).cpvVerMajor(2)

Type: Integer (32 bit)

Status mandatory

Max access: read-only

Description: Major version

cpvVerMinor

OID: 1.3.6.1.4.1.2620.1.2.3

Full path: checkpoint(2620).products(1).vpn(2).cpvVerMinor(3)

Type: Integer (32 bit)

Status: mandatory

Max access: read-only

Description: Minor version

cpvGeneral

OID: 1.3.6.1.4.1.2620.1.2.4

Full path: checkpoint(2620).products(1).vpn(2).cpvGeneral(4)

cpvStatistics

OID: 1.3.6.1.4.1.2620.1.2.4.1

Full path: checkpoint(2620).products(1).vpn(2).cpvGeneral(4).cpvStatistics(1)

cpvEncPackets

OID: 1.3.6.1.4.1.2620.1.2.4.1.1

Full path: checkpoint(2620).products(1).vpn(2).cpvGeneral(4).cpvStatistics(1).cpvEncPackets(1)

Type: String

Syntax: int64 formatted string

Status: mandatory

Max access: read-only

Description: Encrypted packets

cpvDecPackets

OID: 1.3.6.1.4.1.2620.1.2.4.1.2

Full path: checkpoint(2620).products(1).vpn(2).cpvGeneral(4).cpvStatistics(1).cpvDecPackets(2)

Type: String

Syntax: int64 formatted string

Status: mandatory

Max access: read-only

Description: Decrypted packets

cpvErrors

OID: 1.3.6.1.4.1.2620.1.2.4.2

Full path: checkpoint(2620).products(1).vpn(2).cpvGeneral(4).cpvErrors(2)

cpvErrOut

OID: 1.3.6.1.4.1.2620.1.2.4.2.1

Full path: checkpoint(2620).products(1).vpn(2).cpvGeneral(4).cpvErrors(2).cpvErrOut(1)

Type: String

Syntax: int64 formatted string

Status: mandatory

Max access: read-only

Description: Encryption errors

cpvErrIn

Name: cpvErrIn

Full path: checkpoint(2620).products(1).vpn(2).cpvGeneral(4).cpvErrors(2).cpvErrIn(2)

Type: String

Syntax: int64 formatted string

Status: mandatory

Max access: read-only

Description: Decryption errors

cpvErrIke

OID:	1.3.6.1.4.1.2620.1.2.4.2.3
Full path:	checkpoint(2620).products(1).vpn(2).cpvGeneral(4).cpvErrors(2).cpvErrIke(3)
Type:	String
Syntax:	int64 formatted string
Status:	optional
Max access:	read-only
Description:	IKE errors

cpvErrPolicy

OID:	1.3.6.1.4.1.2620.1.2.4.2.4
Full path:	checkpoint(2620).products(1).vpn(2).cpvGeneral(4).cpvErrors(2).cpvErrPolicy(4)
Type:	String
Syntax:	int64 formatted string
Status:	mandatory
Max access:	read-only
Description:	Policy errors

cpvIpsec

OID:	1.3.6.1.4.1.2620.1.2.5
Full path:	checkpoint(2620).products(1).vpn(2).cpvIpsec(5)

cpvSaStatistics

OID:	1.3.6.1.4.1.2620.1.2.5.2
Full path:	checkpoint(2620).products(1).vpn(2).cpvIpsec(5).cpvSaStatistics(2)

cpvCurrEspSAsIn

OID:	1.3.6.1.4.1.2620.1.2.5.2.1
Full path:	checkpoint(2620).products(1).vpn(2).cpvIpsec(5).cpvSaStatistics(2).cpvCurrEspSAsIn(1)
Type:	String
Syntax:	int64 formatted string
Status:	mandatory
Max access:	read-only
Description:	IPsec current Inbound ESP SAs

cpvTotalEspSAsIn

OID:	1.3.6.1.4.1.2620.1.2.5.2.2
Full path:	checkpoint(2620).products(1).vpn(2).cpvIpsec(5).cpvSaStatistics(2).cpvTotalEspSAsIn(2)
Type:	String
Syntax:	int64 formatted string
Status:	mandatory
Max access:	read-only
Description:	IPsec total Inbound ESP SAs

cpvCurrEspSAsOut

OID:	1.3.6.1.4.1.2620.1.2.5.2.3
Full path:	checkpoint(2620).products(1).vpn(2).cpvIpsec(5).cpvSaStatistics(2).cpvCurrEspSAsOut(3)
Type:	String
Syntax:	int64 formatted string
Status:	mandatory
Max access:	read-only
Description:	IPsec current Outbound ESP SAs

cpvTotalEspSAsOut

OID:	1.3.6.1.4.1.2620.1.2.5.2.4
Full path:	checkpoint(2620).products(1).vpn(2).cpvIpsec(5).cpvSaStatistics(2).cpvTotalEspSAsOut(4)
Type:	String
Syntax:	int64 formatted string
Status:	mandatory
Max access:	read-only
Description:	IPsec total Outbound ESP SAs

cpvCurrAhSAsIn

OID:	1.3.6.1.4.1.2620.1.2.5.2.5
Full path:	checkpoint(2620).products(1).vpn(2).cpvIpsec(5).cpvSaStatistics(2).cpvCurrAhSAsIn(5)
Type:	String
Syntax:	int64 formatted string
Status:	mandatory
Max access:	read-only
Description:	IPsec current Inbound AH SAs

cpvTotalAhSAsIn

OID:	1.3.6.1.4.1.2620.1.2.5.2.6
Full path:	checkpoint(2620).products(1).vpn(2).cpvIpsec(5).cpvSaStatistics(2).cpvTotalAhSAsIn(6)
Type:	String
Syntax:	int64 formatted string
Status:	mandatory
Max access:	read-only
Description:	IPsec total Inbound AH SAs

cpvCurrAhSAsOut

OID:	1.3.6.1.4.1.2620.1.2.5.2.7
Full path:	checkpoint(2620).products(1).vpn(2).cpvIpsec(5).cpvSaStatistics(2).cpvCurrAhSAsOut(7)
Type:	String
Syntax:	int64 formatted string
Status:	mandatory
Max access:	read-only
Description:	IPsec current Outbound AH SAs

cpvTotalAhSAsOut

OID:	1.3.6.1.4.1.2620.1.2.5.2.8
Full path:	checkpoint(2620).products(1).vpn(2).cpvIpsec(5).cpvSaStatistics(2).cpvTotalAhSAsOut(8)
Type:	String
Syntax:	int64 formatted string
Status:	mandatory
Max access:	read-only
Description:	IPsec total Outbound AH SAs

cpvMaxConncurEspSAsIn

OID:	1.3.6.1.4.1.2620.1.2.5.2.9
Full path:	checkpoint(2620).products(1).vpn(2).cpvIpsec(5).cpvSaStatistics(2).cpvMaxConncurEspSAsIn(9)
Type:	String
Syntax:	int64 formatted string
Status:	mandatory
Max access:	read-only
Description:	IPsec max concurrent Inbound ESP SAs

cpvMaxConncurEspSAsOut

OID: 1.3.6.1.4.1.2620.1.2.5.2.10

Full path: checkpoint(2620).products(1).vpn(2).cpvIpsec(5).cpvSaStatistics(2).cpvMaxConncurEspSAsOut(10)

Type: String

Syntax: int64 formatted string

Status: mandatory

Max access: read-only

Description: IPsec max concurrent Outbound ESP SAs

cpvMaxConncurAhSAsIn

OID: 1.3.6.1.4.1.2620.1.2.5.2.11

Full path: checkpoint(2620).products(1).vpn(2).cpvIpsec(5).cpvSaStatistics(2).cpvMaxConncurAhSAsIn(11)

Type: String

Syntax: int64 formatted string

Status: mandatory

Max access: read-only

Description: IPsec max concurrent Inbound AH SAs

cpvMaxConncurAhSAsOut

OID: 1.3.6.1.4.1.2620.1.2.5.2.12

Full path: checkpoint(2620).products(1).vpn(2).cpvIpsec(5).cpvSaStatistics(2).cpvMaxConncurAhSAsOut(12)

Type: String

Syntax: int64 formatted string

Status: mandatory

Max access: read-only

Description: IPsec max concurrent Outbound AH SAs

cpvSaErrors

OID: 1.3.6.1.4.1.2620.1.2.5.3

Full path: checkpoint(2620).products(1).vpn(2).cpvIpsec(5).cpvSaErrors(3)

cpvSaDecrErr

OID: 1.3.6.1.4.1.2620.1.2.5.3.1

Full path: checkpoint(2620).products(1).vpn(2).cpvIpsec(5).cpvSaErrors(3).cpvSaDecrErr(1)

Type: String

Syntax: int64 formatted string

Status: mandatory

Max access: read-only

Description: IPsec decryption errors

cpvSaAuthErr

OID: 1.3.6.1.4.1.2620.1.2.5.3.2

Full path: checkpoint(2620).products(1).vpn(2).cpvIpsec(5).cpvSaErrors(3).cpvSaAuthErr(2)

Type: String

Syntax: int64 formatted string

Status: mandatory

Max access: read-only

Description: IPsec authentication errors

cpvSaReplayErr

OID:	1.3.6.1.4.1.2620.1.2.5.3.3
Full path:	checkpoint(2620).products(1).vpn(2).cpvIpsec(5).cpvSaErrors(3).cpvSaReplayErr(3)
Type:	String
Syntax:	int64 formatted string
Status:	mandatory
Max access:	read-only
Description:	IPsec replay errors

cpvSaPolicyErr

OID:	1.3.6.1.4.1.2620.1.2.5.3.4
Full path:	checkpoint(2620).products(1).vpn(2).cpvIpsec(5).cpvSaErrors(3).cpvSaPolicyErr(4)
Type:	String
Syntax:	int64 formatted string
Status:	mandatory
Max access:	read-only
Description:	IPsec policy errors

cpvSaOtherErrIn

OID:	1.3.6.1.4.1.2620.1.2.5.3.5
Full path:	checkpoint(2620).products(1).vpn(2).cpvIpsec(5).cpvSaErrors(3).cpvSaOtherErrIn(5)
Type:	String
Syntax:	int64 formatted string
Status:	mandatory
Max access:	read-only
Description:	Psec other inbound errors

cpvSaOtherErrOut

OID:	1.3.6.1.4.1.2620.1.2.5.3.6
Full path:	checkpoint(2620).products(1).vpn(2).cpvIpsec(5).cpvSaErrors(3).cpvSaOtherErrOut(6)
Type:	String
Syntax:	int64 formatted string
Status:	mandatory
Max access:	read-only
Description:	IPsec other outbound errors

cpvSaUnknownSpiErr

OID:	1.3.6.1.4.1.2620.1.2.5.3.7
Full path:	iso(1).org(3).dod(6).internet(1).private(4).enterprises(1).checkpoint(2620).products(1).vpn(2).cpvIpsec(5).cpvSaErrors(3).cpvSaUnknownSpiErr(7)
Type:	String
Syntax:	int64 formatted string
Status:	mandatory
Max access:	read-only
Description:	Psec unknown SPI errors

cpvIpsecStatistics

OID:	1.3.6.1.4.1.2620.1.2.5.4
Full path:	checkpoint(2620).products(1).vpn(2).cpvIpsec(5).cpvIpsecStatistics(4)

cpvIpsecUdpEspEncPkts

OID: 1.3.6.1.4.1.2620.1.2.5.4.1

Full path: checkpoint(2620).products(1).vpn(2).cpvIpsec(5).cpvIpsecStatistics(4).cpvIpsecUdpEspEncPkts(1)

Type: String

Syntax: int64 formatted string

Status: mandatory

Max access: read-only

Description: IPsec UDP ESP encrypted packets

cpvIpsecUdpEspDecPkts

OID: 1.3.6.1.4.1.2620.1.2.5.4.2

Full path: checkpoint(2620).products(1).vpn(2).cpvIpsec(5).cpvIpsecStatistics(4).cpvIpsecUdpEspDecPkts(2)

Type: String

Syntax: int64 formatted string

Status: mandatory

Max access: read-only

Description: IPsec UDP ESP decrypted packets

cpvIpsecAhEncPkts

OID: 1.3.6.1.4.1.2620.1.2.5.4.3

Full path: checkpoint(2620).products(1).vpn(2).cpvIpsec(5).cpvIpsecStatistics(4).cpvIpsecAhEncPkts(3)

Type: String

Syntax: int64 formatted string

Status: mandatory

Max access: read-only

Description: Psec AH encrypted packets

cpvIpsecAhDecPkts

OID:	1.3.6.1.4.1.2620.1.2.5.4.4
Full path:	checkpoint(2620).products(1).vpn(2).cpvIpsec(5).cpvIpsecStatistics(4).cpvIpsecAhDecPkts(4)
Type:	String
Syntax:	int64 formatted string
Status:	mandatory
Max access:	read-only
Description:	IPsec AH decrypted packets

cpvIpsecEspEncPkts

OID:	1.3.6.1.4.1.2620.1.2.5.4.5
Full path:	checkpoint(2620).products(1).vpn(2).cpvIpsec(5).cpvIpsecStatistics(4).cpvIpsecEspEncPkts(5)
Type:	String
Syntax:	int64 formatted string
Status:	mandatory
Max access:	read-only
Description:	IPsec ESP encrypted packets

cpvIpsecEspDecPkts

OID:	1.3.6.1.4.1.2620.1.2.5.4.6
Full path:	checkpoint(2620).products(1).vpn(2).cpvIpsec(5).cpvIpsecStatistics(4).cpvIpsecEspDecPkts(6)
Type:	String
Syntax:	int64 formatted string
Status:	mandatory
Max access:	read-only
Description:	IPsec ESP decrypted packets

cpvIpsecDecomprBytesBefore

OID:	1.3.6.1.4.1.2620.1.2.5.4.7
Full path:	checkpoint(2620).products(1).vpn(2).cpvIpsec(5). cpvIpsecStatistics(4).cpvIpsecDecomprBytesBefore(7)
Type:	String
Syntax:	int64 formatted string
Status:	mandatory
Max access:	read-only
Description:	IPsec bytes before decompression

cpvIpsecDecomprBytesAfter

OID:	1.3.6.1.4.1.2620.1.2.5.4.8
Full path:	checkpoint(2620).products(1).vpn(2).cpvIpsec(5). cpvIpsecStatistics(4).cpvIpsecDecomprBytesAfter(8)
Type:	String
Syntax:	int64 formatted string
Status:	mandatory
Max access:	read-only
Description:	IPsec bytes after decompression

cpvIpsecDecomprOverhead

OID:	1.3.6.1.4.1.2620.1.2.5.4.9
Full path:	checkpoint(2620).products(1).vpn(2).cpvIpsec(5). cpvIpsecStatistics(4).cpvIpsecDecomprOverhead(9)
Type:	String
Syntax:	int64 formatted string
Status:	mandatory
Max access:	read-only
Description:	IPsec bytes decompression overhead

cpvIpsecDecomprPkts

OID: 1.3.6.1.4.1.2620.1.2.5.4.10

Full path: checkpoint(2620).products(1).vpn(2).cpvIpsec(5).cpvIpsecStatistics(4).cpvIpsecDecomprPkts(10)

Type: String

Syntax: int64 formatted string

Status: mandatory

Max access: read-only

Description: IPsec packets decompressed

cpvIpsecDecomprErr

OID: 1.3.6.1.4.1.2620.1.2.5.4.11

Full path: checkpoint(2620).products(1).vpn(2).cpvIpsec(5).cpvIpsecStatistics(4).cpvIpsecDecomprErr(11)

Type: String

Syntax: int64 formatted string

Status: mandatory

Max access: read-only

Description: IPsec decompression errors

cpvIpsecComprBytesBefore

OID: 1.3.6.1.4.1.2620.1.2.5.4.12

Full path: checkpoint(2620).products(1).vpn(2).cpvIpsec(5).cpvIpsecStatistics(4).cpvIpsecComprBytesBefore(12)

Type: String

Syntax: int64 formatted string

Status: mandatory

Max access: read-only

Description: IPsec bytes before compression

cpvIpsecComprBytesAfter

OID:	1.3.6.1.4.1.2620.1.2.5.4.13
Full path:	checkpoint(2620).products(1).vpn(2).cpvIpsec(5).cpvIpsecStatistics(4).cpvIpsecComprBytesAfter(13)
Type:	String
Syntax:	int64 formatted string
Status:	mandatory
Max access:	read-only
Description:	IPsec bytes after compression

cpvIpsecComprOverhead

OID:	1.3.6.1.4.1.2620.1.2.5.4.14
Full path:	checkpoint(2620).products(1).vpn(2).cpvIpsec(5).cpvIpsecStatistics(4).cpvIpsecComprOverhead(14)
Type:	String
Syntax:	int64 formatted string
Status:	mandatory
Max access:	read-only
Description:	IPsec bytes compression overhead

cpvIpsecNonCompressibleBytes

OID:	1.3.6.1.4.1.2620.1.2.5.4.15
Full path:	checkpoint(2620).products(1).vpn(2).cpvIpsec(5).cpvIpsecStatistics(4).cpvIpsecNonCompressibleBytes(15)
Type:	String
Syntax:	int64 formatted string
Status:	mandatory
Max access:	read-only
Description:	IPsec bytes non compressible

cpvIpsecCompressiblePkts

Name:	cpvIpsecCompressiblePkts
Full path:	checkpoint(2620).products(1).vpn(2).cpvIpsec(5).cpvIpsecStatistics(4).cpvIpsecCompressiblePkts(16)
Type:	String
Syntax:	int64 formatted string
Status:	mandatory
Max access:	read-only
Description:	IPsec packets compressed

cpvIpsecNonCompressiblePkts

OID:	1.3.6.1.4.1.2620.1.2.5.4.17
Full path:	checkpoint(2620).products(1).vpn(2).cpvIpsec(5).cpvIpsecStatistics(4).cpvIpsecNonCompressiblePkts(17)
Type:	String
Syntax:	int64 formatted string
Status:	mandatory
Max access:	read-only
Description:	IPsec packets non compressible

cpvIpsecComprErrors

OID:	1.3.6.1.4.1.2620.1.2.5.4.18
Full path:	checkpoint(2620).products(1).vpn(2).cpvIpsec(5).cpvIpsecStatistics(4).cpvIpsecComprErrors(18)
Type:	String
Syntax:	int64 formatted string
Status:	mandatory
Max access:	read-only
Description:	IPsec compression errors

cpvIpsecEspEncBytes

OID: 1.3.6.1.4.1.2620.1.2.5.4.19

Full path: checkpoint(2620).products(1).vpn(2).cpvIpsec(5).cpvIpsecStatistics(4).cpvIpsecEspEncBytes(19)

Type: String

Syntax: int64 formatted string

Status: mandatory

Max access: read-only

Description: IPsec ESP encrypted bytes

cpvIpsecEspDecBytes

OID: 1.3.6.1.4.1.2620.1.2.5.4.20

Full path: checkpoint(2620).products(1).vpn(2).cpvIpsec(5).cpvIpsecStatistics(4).cpvIpsecEspDecBytes(20)

Type: String

Syntax: int64 formatted string

Status: mandatory

Max access: read-only

Description: IPsec ESP decrypted bytes

cpvFwz

OID: 1.3.6.1.4.1.2620.1.2.6

Full path: checkpoint(2620).products(1).vpn(2).cpvFwz(6)

cpvFwzStatistics

OID: 1.3.6.1.4.1.2620.1.2.6.1

Full path: checkpoint(2620).products(1).vpn(2).cpvFwz(6).cpvFwzStatistics(1)

cpvFwzEncapsEncPkts

OID:	1.3.6.1.4.1.2620.1.2.6.1.1
Full path:	checkpoint(2620).products(1).vpn(2).cpvFwz(6).cpvFwzStatistics(1).cpvFwzEncapsEncPkts(1)
Type:	Integer (32 bit)
Status:	mandatory
Max access:	read-only
Description:	Fwz encapsulated encrypted packets

cpvFwzEncapsDecPkts

OID:	1.3.6.1.4.1.2620.1.2.6.1.2
Full path:	checkpoint(2620).products(1).vpn(2).cpvFwz(6).cpvFwzStatistics(1).cpvFwzEncapsDecPkts(2)
Type:	Integer (32 bit)
Status:	mandatory
Max access:	read-only
Description:	Fwz encapsulated decrypted packets

cpvFwzEncPkts

OID:	1.3.6.1.4.1.2620.1.2.6.1.3
Full path:	checkpoint(2620).products(1).vpn(2).cpvFwz(6).cpvFwzStatistics(1).cpvFwzEncPkts(3)
Type:	Integer (32 bit)
Status:	mandatory
Max access:	read-only
Description:	Fwz encrypted packets

cpvFwzDecPkts

OID:	1.3.6.1.4.1.2620.1.2.6.1.4
Full path:	checkpoint(2620).products(1).vpn(2).cpvFwz(6).cpvFwzStatistics(1).cpvFwzDecPkts(4)
Type:	Integer (32 bit)
Status:	mandatory
Max access:	read-only
Description:	Fwz decrypted packets

cpvFwzErrors

OID:	1.3.6.1.4.1.2620.1.2.6.2
Full path:	checkpoint(2620).products(1).vpn(2).cpvFwz(6).cpvFwzErrors(2)

cpvFwzEncapsEncErrs

OID:	1.3.6.1.4.1.2620.1.2.6.2.1
Full path:	checkpoint(2620).products(1).vpn(2).cpvFwz(6).cpvFwzErrors(2).cpvFwzEncapsEncErrs(1)
Type:	Integer (32 bit)
Status:	mandatory
Max access:	read-only
Description:	Fwz encapsulated encryption errors

cpvFwzEncapsDecErrs

OID:	1.3.6.1.4.1.2620.1.2.6.2.2
Full path:	checkpoint(2620).products(1).vpn(2).cpvFwz(6).cpvFwzErrors(2).cpvFwzEncapsDecErrs(2)
Type:	Integer (32 bit)

Status: mandatory

Max access: read-only

Description: Fwz encapsulated decryption errors

cpvFwzEncErrs

OID: 1.3.6.1.4.1.2620.1.2.6.2.3

Full path: iso(1).org(3).dod(6).internet(1).private(4).enterprises(1).checkpoint(2620).products(1).vpn(2).cpvFwz(6).cpvFwzErrors(2).cpvFwzEncErrs(3)

Type: Integer (32 bit)

Status: mandatory

Max access: read-only

Description: Fwz encryption errors

cpvFwzDecErrs

OID: 1.3.6.1.4.1.2620.1.2.6.2.4

Full path: checkpoint(2620).products(1).vpn(2).cpvFwz(6).cpvFwzErrors(2).cpvFwzDecErrs(4)

Type: Integer (32 bit)

Status: mandatory

Max access: read-only

Description: Fwz decryption errors

cpvAccelerator

OID: 1.3.6.1.4.1.2620.1.2.8

Full path: checkpoint(2620).products(1).vpn(2).cpvAccelerator(8)

cpvHwAccelGeneral

OID: 1.3.6.1.4.1.2620.1.2.8.1

Full path: checkpoint(2620).products(1).vpn(2).cpvAccelerator(8).cpvHwAccelGeneral(1)

cpvHwAccelVendor

OID: 1.3.6.1.4.1.2620.1.2.8.1.1

Full path: checkpoint(2620).products(1).vpn(2).cpvAccelerator(8).cpvHwAccelGeneral(1).cpvHwAccelVendor(1)

Type: String

Status: mandatory

Max access: read-only

Description: HW accel. vendor

cpvHwAccelStatus

OID: 1.3.6.1.4.1.2620.1.2.8.1.2

Full path: checkpoint(2620).products(1).vpn(2).cpvAccelerator(8).cpvHwAccelGeneral(1).cpvHwAccelStatus(2)

Type: String

Status: mandatory

Max access: read-only

Description: HW accel. status

cpvHwAccelDriverMajorVer

OID: 1.3.6.1.4.1.2620.1.2.8.1.3

Full path: checkpoint(2620).products(1).vpn(2).cpvAccelerator(8).cpvHwAccelGeneral(1).cpvHwAccelDriverMajorVer(3)

Type: Integer (32 bit)

Status: mandatory

Max access: read-only

Description: HW accel. driver major version

cpvHwAccelDriverMinorVer

OID: 1.3.6.1.4.1.2620.1.2.8.1.4

Full path: checkpoint(2620).products(1).vpn(2).cpvAccelerator(8).cpvHwAccelGeneral(1).cpvHwAccelDriverMinorVer(4)

Type: Integer (32 bit)

Status: mandatory

Max access: read-only

Description: HW accel. driver minor version

cpvHwAccelStatistics

OID: 1.3.6.1.4.1.2620.1.2.8.2

Full path: checkpoint(2620).products(1).vpn(2).cpvAccelerator(8).cpvHwAccelStatistics(2)

cpvHwAccelEspEncPkts

OID: 1.3.6.1.4.1.2620.1.2.8.2.1

Full path: checkpoint(2620).products(1).vpn(2).cpvAccelerator(8).cpvHwAccelStatistics(2).cpvHwAccelEspEncPkts(1)

Type: String

Syntax: int64 formatted string

Status: mandatory

Max access: read-only

Description: HW accel. encrypted IPsec ESP packets

cpvHwAccelEspDecPkts

OID:	1.3.6.1.4.1.2620.1.2.8.2.2
Full path:	checkpoint(2620).products(1).vpn(2).cpvAccelerator(8).cpvHwAccelStatistics(2).cpvHwAccelEspDecPkts(2)
Type:	String
Syntax:	int64 formatted string
Status:	mandatory
Max access:	read-only
Description:	HW accel. decrypted IPsec ESP packets

cpvHwAccelEspEncBytes

OID:	1.3.6.1.4.1.2620.1.2.8.2.3
Full path:	checkpoint(2620).products(1).vpn(2).cpvAccelerator(8).cpvHwAccelStatistics(2).cpvHwAccelEspEncBytes(3)
Type:	String
Syntax:	int64 formatted string
Status:	mandatory
Max access:	read-only
Description:	HW accel. encrypted IPsec ESP bytes

cpvHwAccelEspDecBytes

OID:	1.3.6.1.4.1.2620.1.2.8.2.4
Full path:	checkpoint(2620).products(1).vpn(2).cpvAccelerator(8).cpvHwAccelStatistics(2).cpvHwAccelEspDecBytes(4)
Type:	String
Syntax:	int64 formatted string
Status:	mandatory
Max access:	read-only
Description:	HW accel. decrypted IPsec ESP bytes

cpvHwAccelAhEncPkts

OID:	1.3.6.1.4.1.2620.1.2.8.2.5
Full path:	checkpoint(2620).products(1).vpn(2).cpvAccelerator(8).cpvHwAccelStatistics(2).cpvHwAccelAhEncPkts(5)
Type:	String
Syntax:	int64 formatted string
Status:	mandatory
Max access:	read-only
Description:	HW accel. encrypted IPsec AH packets

cpvHwAccelAhDecPkts

OID:	1.3.6.1.4.1.2620.1.2.8.2.6
Full path:	checkpoint(2620).products(1).vpn(2).cpvAccelerator(8).cpvHwAccelStatistics(2).cpvHwAccelAhDecPkts(6)
Type:	String
Syntax:	int64 formatted string
Status:	mandatory
Max access:	read-only
Description:	HW accel. decrypted IPsec AH packets

cpvHwAccelAhEncBytes

OID:	1.3.6.1.4.1.2620.1.2.8.2.7
Full path:	iso(1).org(3).dod(6).internet(1).private(4).enterprises(1).checkpoint(2620).products(1).vpn(2).cpvAccelerator(8).cpvHwAccelStatistics(2).cpvHwAccelAhEncBytes(7)
Type:	String
Syntax:	int64 formatted string

Status: mandatory

Max access: read-only

Description: HW accel. encrypted IPsec AH bytes

cpvHwAccelAhDecBytes

OID: 1.3.6.1.4.1.2620.1.2.8.2.8

Full path: checkpoint(2620).products(1).vpn(2).cpvAccelerator(8). cpvHwAccelStatistics(2).cpvHwAccelAhDecBytes(8)

Type: String

Syntax: int64 formatted string

Status: mandatory

Max access: read-only

Description: HW accel. decrypted IPsec AH bytes

cpvIKE

OID: 1.3.6.1.4.1.2620.1.2.9

Full path: checkpoint(2620).products(1).vpn(2).cpvIKE(9)

cpvIKEglobals

OID: 1.3.6.1.4.1.2620.1.2.9.1

Full path: checkpoint(2620).products(1).vpn(2).cpvIKE(9). cpvIKEglobals(1)

cpvIKECurrSAs

OID: 1.3.6.1.4.1.2620.1.2.9.1.1

Full path: checkpoint(2620).products(1).vpn(2).cpvIKE(9). cpvIKEglobals(1).cpvIKECurrSAs(1)

Type: String

Syntax: int64 formatted string

Status: mandatory

Max access: read-only

Description: IKE current SAs

cpvIKECurrInitSAs

OID: 1.3.6.1.4.1.2620.1.2.9.1.2

Full path: checkpoint(2620).products(1).vpn(2).cpvIKE(9).cpvIKEglobals(1).cpvIKECurrInitSAs(2)

Type: String

Syntax: int64 formatted string

Status: mandatory

Max access: read-only

Description: IKE current initiated SAs

cpvIKECurrRespSAs

OID: 1.3.6.1.4.1.2620.1.2.9.1.3

Full path: checkpoint(2620).products(1).vpn(2).cpvIKE(9).cpvIKEglobals(1).cpvIKECurrRespSAs(3)

Type: String

Syntax: int64 formatted string

Status: mandatory

Max access: read-only

Description: IKE current responded SAs

cpvIKETotalSAs

OID: 1.3.6.1.4.1.2620.1.2.9.1.4

Full path: checkpoint(2620).products(1).vpn(2).cpvIKE(9).cpvIKEglobals(1).cpvIKETotalSAs(4)

Type: String

Syntax: int64 formatted string

Status: mandatory

Max access: read-only

Description: IKE total SAs

cpvIKETotalInitSAs

OID: 1.3.6.1.4.1.2620.1.2.9.1.5

Full path: checkpoint(2620).products(1).vpn(2).cpvIKE(9).cpvIKEglobals(1).cpvIKETotalInitSAs(5)

Type: String

Syntax: int64 formatted string

Status: mandatory

Max access: read-only

Description: IKE total initiated SAs

cpvIKETotalRespSAs

OID: 1.3.6.1.4.1.2620.1.2.9.1.6

Full path: checkpoint(2620).products(1).vpn(2).cpvIKE(9).cpvIKEglobals(1).cpvIKETotalRespSAs(6)

Type: String

Syntax: int64 formatted string

Status: mandatory

Max access: read-only

Description: IKE total responded SAs

cpvIKETotalSAsAttempts

OID:	1.3.6.1.4.1.2620.1.2.9.1.7
Full path:	checkpoint(2620).products(1).vpn(2).cpvIKE(9). cpvIKEglobals(1).cpvIKETotalSAsAttempts(7)
Type:	String
Syntax:	int64 formatted string
Status:	mandatory
Max access:	read-only
Description:	IKE total SAs attempts

cpvIKETotalSAsInitAttempts

OID:	1.3.6.1.4.1.2620.1.2.9.1.8
Full path:	checkpoint(2620).products(1).vpn(2).cpvIKE(9). cpvIKEglobals(1).cpvIKETotalSAsInitAttempts(8)
Type:	String
Syntax:	int64 formatted string
Status:	mandatory
Max access:	read-only
Description:	IKE total SAs initiated attempts

cpvIKETotalSAsRespAttempts

OID:	1.3.6.1.4.1.2620.1.2.9.1.9
Full path:	checkpoint(2620).products(1).vpn(2).cpvIKE(9). cpvIKEglobals(1).cpvIKETotalSAsRespAttempts(9)
Type:	String
Syntax:	int64 formatted string
Status:	mandatory
Max access:	read-only
Description:	IKE total SAs responded attempts

cpvIKEMaxConncurSAs

OID:	1.3.6.1.4.1.2620.1.2.9.1.10
Full path:	checkpoint(2620).products(1).vpn(2).cpvIKE(9). cpvIKEglobals(1).cpvIKEMaxConncurSAs(10)
Type:	String
Syntax:	int64 formatted string
Status:	mandatory
Max access:	read-only
Description:	IKE max concurrent SAs

cpvIKEMaxConncurInitSAs

OID:	1.3.6.1.4.1.2620.1.2.9.1.11
Full path:	checkpoint(2620).products(1).vpn(2).cpvIKE(9). cpvIKEglobals(1).cpvIKEMaxConncurInitSAs(11)
Type:	String
Syntax:	int64 formatted string
Status:	mandatory
Max access:	read-only
Description:	IKE max concurrent initiated SAs

cpvIKEMaxConncurRespSAs

OID:	1.3.6.1.4.1.2620.1.2.9.1.12
Full path:	checkpoint(2620).products(1).vpn(2).cpvIKE(9). cpvIKEglobals(1).cpvIKEMaxConncurRespSAs(12)
Type:	String
Syntax:	int64 formatted string
Status:	mandatory
Max access:	read-only
Description:	IKE max concurrent responded SAs

cpvIKEerrors

OID:	1.3.6.1.4.1.2620.1.2.9.2
Full path:	checkpoint(2620).products(1).vpn(2).cpvIKE(9).cpvIKEerrors(2)

cpvIKETotalFailuresInit

Name:	cpvIKETotalFailuresInit
Type:	OBJECT-TYPE
OID:	1.3.6.1.4.1.2620.1.2.9.2.1
Full path:	checkpoint(2620).products(1).vpn(2).cpvIKE(9).cpvIKEerrors(2).cpvIKETotalFailuresInit(1)
Type:	String
Syntax:	int64 formatted string
Status:	mandatory
Max access:	read-only
Description:	IKE total failures (initiator errors)

cpvIKENoResp

OID:	1.3.6.1.4.1.2620.1.2.9.2.2
Full path:	checkpoint(2620).products(1).vpn(2).cpvIKE(9).cpvIKEerrors(2).cpvIKENoResp(2)
Type:	String
Syntax:	int64 formatted string
Status:	mandatory
Max access:	read-only
Description:	IKE no response from peer (initiator errors)

cpvIKETotalFailuresResp

OID: 1.3.6.1.4.1.2620.1.2.9.2.3

Full path: checkpoint(2620).products(1).vpn(2).cpvIKE(9).cpvIKEerrors(2).cpvIKETotalFailuresResp(3)

Type: String

Syntax: int64 formatted string

Status: mandatory

Max access: read-only

Description: IKE total failures (responder errors)

cpvIPsec

OID: 1.3.6.1.4.1.2620.1.2.10

Full path: checkpoint(2620).products(1).vpn(2).cpvIPsec(10)

cpvIPsecNIC

OID: 1.3.6.1.4.1.2620.1.2.10.1

Full path: checkpoint(2620).products(1).vpn(2).cpvIPsec(10).cpvIPsecNIC(1)

cpvIPsecNICsNum

OID: 1.3.6.1.4.1.2620.1.2.10.1.1

Full path: checkpoint(2620).products(1).vpn(2).cpvIPsec(10).cpvIPsecNIC(1).cpvIPsecNICsNum(1)

Type: Integer (32 bit)

Status: mandatory

Max access: read-only

Description: IPsec NIC: Number of IPsec NIC's

cpvIPsecNICTotalDownLoadedSAs

OID:	1.3.6.1.4.1.2620.1.2.10.1.2
Full path:	checkpoint(2620).products(1).vpn(2).cpvIPsec(10).cpvIPsecNIC(1).cpvIPsecNICTotalDownLoadedSAs(2)
Type:	String
Syntax:	int64 formatted string
Status:	mandatory
Max access:	read-only
Description:	IPsec NIC: Total downloaded SA's

cpvIPsecNICCurrDownLoadedSAs

OID:	1.3.6.1.4.1.2620.1.2.10.1.3
Full path:	checkpoint(2620).products(1).vpn(2).cpvIPsec(10).cpvIPsecNIC(1).cpvIPsecNICCurrDownLoadedSAs(3)
Type:	String
Syntax:	int64 formatted string
Status:	mandatory
Max access:	read-only
Description:	IPsec NIC: Current downloaded SA's

cpvIPsecNICDecrBytes

OID:	1.3.6.1.4.1.2620.1.2.10.1.4
Full path:	checkpoint(2620).products(1).vpn(2).cpvIPsec(10).cpvIPsecNIC(1).cpvIPsecNICDecrBytes(4)
Type:	String
Syntax:	int64 formatted string
Status:	mandatory
Max access:	read-only
Description:	IPsec NIC: Decrypted bytes by NIC

cpvIPsecNICEncrBytes

OID:	1.3.6.1.4.1.2620.1.2.10.1.5
Full path:	checkpoint(2620).products(1).vpn(2).cpvIPsec(10).cpvIPsecNIC(1).cpvIPsecNICEncrBytes(5)
Type:	String
Syntax:	int64 formatted string
Status:	mandatory
Max access:	read-only
Description:	IPsec NIC: Encrypted bytes by NIC

cpvIPsecNICDecrPackets

OID:	1.3.6.1.4.1.2620.1.2.10.1.6
Full path:	checkpoint(2620).products(1).vpn(2).cpvIPsec(10).cpvIPsecNIC(1).cpvIPsecNICDecrPackets(6)
Type:	String
Syntax:	int64 formatted string
Status:	mandatory
Max access:	read-only
Description:	IPsec NIC: Decrypted packets by NIC

cpvIPsecNICEncrPackets

OID:	1.3.6.1.4.1.2620.1.2.10.1.7
Full path:	checkpoint(2620).products(1).vpn(2).cpvIPsec(10).cpvIPsecNIC(1).cpvIPsecNICEncrPackets(7)
Type:	String
Syntax:	int64 formatted string
Status:	mandatory
Max access:	read-only
Description:	IPsec NIC: Encrypted packets by NIC

cpvTnlMonTable

OID:	1.3.6.1.4.1.2620.1.2.11
Full path:	checkpoint.products.vpn.cpvTnlMonTable
Type:	Sequence
Syntax:	SEQUENCE OF CpvTnlMonEntry
Status:	optional
Max access:	read-only
Sequences:	1. **cpvTnlMonAddr** - IpAddress(64 - ipaddr) 2. **cpvTnlMonStatus** - INTEGER(2 - int, int32) 3. **cpvTnlMonCurrAddr** - IpAddress(64 - ipaddr)
Description:	The table of monitored tunnels

cpvTnlMonEntry

OID:	1.3.6.1.4.1.2620.1.2.11.1
Full path:	checkpoint.products.vpn.cpvTnlMonTable.cpvTnlMonEntry
Type:	Sequence
Syntax:	SEQUENCE OF CpvTnlMonEntry
Status:	optional
Max access:	read-only

cpvTnlMonAddr

OID:	1.3.6.1.4.1.2620.1.2.11.1.2
Full path:	checkpoint.products.vpn.cpvTnlMonTable.cpvTnlMonEntry.cpvTnlMonAddr
Type:	IP Address
Status:	mandatory
Max access:	read-only
Description:	The main IP address of the peer (bogus IP for DAIP)

cpvTnlMonStatus

OID:	1.3.6.1.4.1.2620.1.2.11.1.2
Full path:	checkpoint.products.vpn.cpvTnlMonTable.cpvTnlMonEntry.cpvTnlMonStatus
Type:	Integer (32 bit)
Status:	mandatory
Max access:	read-only
Description:	The status of the peer

cpvTnlMonCurrAddr

OID:	1.3.6.1.4.1.2620.1.2.11.1.3
Full path:	checkpoint.products.vpn.cpvTnlMonTable.cpvTnlMonEntry.cpvTnlMonCurrAddr
Type:	IP Address
Status:	mandatory
Max access:	read-only
Description:	The current IP address of the peer (for DAIPs)

CHAPTER 4

FloodGate-1 MIBs

In This Chapter

Overview *page 139*

MIB Tree Description *page 139*

Overview

This chapter describes the nodes/leafs that comprise the MIBs used in FloodGate-1.

MIB Tree Description

This section comprises a detailed description of each leaf in the FloodGate-1 MIB tree. The following is a diagram of the FloodGate-1 MIB tree.

- fg
  - fgProdName
  - fgVerMajor
  - fgVerMinor
  - fgVersionString
  - fgModuleKernelBuild
  - fgStrPolicyName
  - fgInstallTime
  - fgNumInterfaces
  - fgIfTable
    - fgIfEntry

fgIfIndex
fgIfName
fgIfPolicyName
fgRateLimitIn
fgIfRateLimitOut
fgAvrRateIn
fgAvrRateOut
fgRetransPcktsIn
fgRetransPcktsOut
fgPendPcktsIn
fgPendPcktsOut
fgPendBytesIn
fgPendBytesOut
fgNumConnIn
fgNumConnOut

fg

OID: 1.3.6.1.4.1.2620.1.3

Full path: checkpoint.products.fg

fgProdName

OID: 1.3.6.1.4.1.2620.1.3.1

Full path: checkpoint.products.fg.fgProdName

Type: String

Status: mandatory

Max access: read-only

Description: Product name

fgVerMajor

OID:	1.3.6.1.4.1.2620.1.3.2
Full path:	checkpoint.products.fg.fgVerMajor
Type:	Integer (32 bit)
Status:	mandatory
Max access:	read-only
Description:	Major version

fgVerMinor

OID:	1.3.6.1.4.1.2620.1.3.3
Full path:	checkpoint.products.fg.fgVerMinor
Type:	Integer (32 bit)
Status:	mandatory
Max access:	read-only
Description:	Minor version

fgVersionString

OID:	1.3.6.1.4.1.2620.1.3.4
Full path:	checkpoint.products.fg.fgVersionString
Type:	String
Status:	mandatory
Max access:	read-only
Size list:	1: 0..255
Description:	Version string

fgModuleKernelBuild

OID:	1.3.6.1.4.1.2620.1.3.5
Full path:	checkpoint.products.fg.fgModuleKernelBuild
Type:	Integer (32 bit)
Status:	mandatory
Max access:	read-only
Description:	Kernel build

fgStrPolicyName

OID:	1.3.6.1.4.1.2620.1.3.6
Full path:	checkpoint.products.fg.fgStrPolicyName
Type:	String
Status:	mandatory
Max access:	read-only
Size list:	1: 0..255
Description:	Policy name

fgInstallTime

OID:	1.3.6.1.4.1.2620.1.3.7
Full path:	checkpoint.products.fg.fgInstallTime
Type:	String
Syntax:	"Wed Mar 17 11:10:28 2004" // This is an example. The exact format depends on the OS setting.
Status:	mandatory
Max access:	read-only
Description:	Install time

fgNumInterfaces

OID:	1.3.6.1.4.1.2620.1.3.8
Full path:	iso.org.dod.internet.private.enterprises.checkpoint.products.fg.fgNumInterfaces
Type:	String
Status:	mandatory
Max access:	read-only
Description:	Interfaces num

fgIfTable

OID:	1.3.6.1.4.1.2620.1.3.9
Full path:	checkpoint.products.fg.fgIfTable
Type:	Sequence
Status:	mandatory
Max access:	not-accessible
Sequences:	1: **fgIfIndex** - INTEGER(2 - int, int32) 2: **fgIfName** - DisplayString(4 - octets) 3: **fgIfPolicyName** - DisplayString(4 - octets) 4: **fgRateLimitIn** - INTEGER(2 - int, int32) 5: **fgIfRateLimitOut** - INTEGER(2 - int, int32) 6: **fgAvrRateIn** - INTEGER(2 - int, int32) 7: **fgAvrRateOut** - INTEGER(2 - int, int32) 8: **fgRetransPcktsIn** - INTEGER(2 - int, int32) 9: **fgRetransPcktsOut** - INTEGER(2 - int, int32) 10: **fgPendPcktsIn** - INTEGER(2 - int, int32) 11: **fgPendPcktsOut** - INTEGER(2 - int, int32) 12: **fgPendBytesIn** - INTEGER(2 - int, int32)

13: **fgPendBytesOut** - INTEGER(2 - int, int32)

14: **fgNumConnIn** - INTEGER(2 - int, int32)

15: **fgNumConnOut** - INTEGER(2 - int, int32)

fgIfEntry

OID:	1.3.6.1.4.1.2620.1.3.9.1
Full path:	checkpoint.products.fg.fgIfTable.fgIfEntry
Type:	Sequence
Status:	mandatory
Max access:	not-accessible

fgIfIndex

OID:	1.3.6.1.4.1.2620.1.3.9.1.1
Full path:	checkpoint.products.fg.fgIfTable.fgIfEntry.fgIfIndex
Type:	Integer (32 bit)
Status:	mandatory
Max access:	read-only
Description:	A serial number, an index for the displayed interface.

fgIfName

OID:	1.3.6.1.4.1.2620.1.3.9.1.2
Full path:	checkpoint.products.fg.fgIfTable.fgIfEntry.fgIfString
Type:	String
Status:	mandatory
Max access:	read-only
Description:	The name of the interface, same as displayed by the operating system. For example "hme0".

fgIfPolicyName

OID:	1.3.6.1.4.1.2620.1.3.9.1.3
Full path:	checkpoint.products.fg.fgIfTable.fgIfEntry.fgIfPolicyName
Type:	String
Status:	mandatory
Max access:	read-only
Description:	The name of the installed policy on that interface.

fgRateLimitIn

OID:	1.3.6.1.4.1.2620.1.3.9.1.4
Full path:	checkpoint.products.fg.fgIfTable.fgIfEntry.fgRateLimitIn
Type:	Integer (32 bit)
Status:	mandatory
Max access:	read-only
Description:	The Rate Limit. The interface rate as defined in the network object interface definition. Only X BPS will be allowed to get through the interface in the inbound direction.

fgIfRateLimitOut

OID:	1.3.6.1.4.1.2620.1.3.9.1.5
Full path:	checkpoint.products.fg.fgIfTable.fgIfEntry.fgRateLimitOut
Type:	Integer (32 bit)
Status:	mandatory
Max access:	read-only
Description:	The Rate Limit. The interface rate as defined in the network object interface definition. Only X BPS will be allowed to get through the interface in the outbound direction .

fgAvrRateIn

OID:	1.3.6.1.4.1.2620.1.3.9.1.6
Full path:	checkpoint.products.fg.fgIfTable.fgIfEntry.fgAvrRateIn
Type:	Integer (32 bit)
Status:	mandatory
Max access:	read-only
Description:	The Average Rate, X BPS that passed through the interface in the inbound direction.

fgAvrRateOut

OID:	1.3.6.1.4.1.2620.1.3.9.1.7
Full path:	checkpoint.products.fg.fgIfTable.fgIfEntry.fgAvrRateOut
Type:	Integer (32 bit)
Status:	mandatory
Max access:	read-only
Description:	The Average Rate, X BPS that passed through the interface in the outbound direction.

fgRetransPcktsIn

OID:	1.3.6.1.4.1.2620.1.3.9.1.8
Full path:	checkpoint.products.fg.fgIfTable.fgIfEntry.fgRetransPcktsIn
Type:	Integer (32 bit)
Status:	mandatory
Max access:	read-only
Description:	Not in use - will show zero at all times.

fgRetransPcktsOut

OID:	1.3.6.1.4.1.2620.1.3.9.1.9
Full path:	checkpoint.products.fg.fgIfTable.fgIfEntry.fgRetransPcktsOut
Type:	Integer (32 bit)
Status:	mandatory
Max access:	read-only
Description:	Not in use - will show zero at all times.

fgPendPcktsIn

OID:	1.3.6.1.4.1.2620.1.3.9.1.10
Full path:	checkpoint.products.fg.fgIfTable.fgIfEntry.fgPendPcktsIn
Type:	Integer (32 bit)
Status:	mandatory
Max access:	read-only
Description:	The number of packets in the FloodGate queue is called "pending Packets". (inbound direction).

fgPendPcktsOut

OID:	1.3.6.1.4.1.2620.1.3.9.1.11
Full path:	checkpoint.products.fg.fgIfTable.fgIfEntry.fgPendPcktsOut
Type:	Integer (32 bit)
Status:	mandatory
Max access:	read-only
Description:	The number of packets in the FloodGate queue is called "pending Packets". (outbound direction).

fgPendBytesIn

OID:	1.3.6.1.4.1.2620.1.3.9.1.12
Full path:	checkpoint.products.fg.fgIfTable.fgIfEntry.fgPendBytesIn
Type:	Integer (32 bit)
Status:	mandatory
Max access:	read-only
Description:	The number of Bytes in the FloodGate queue is called "pending Bytes". (inbound direction).

fgPendBytesOut

OID:	1.3.6.1.4.1.2620.1.3.9.1.13
Full path:	checkpoint.products.fg.fgIfTable.fgIfEntry.fgPendBytesOut
Type:	Integer (32 bit)
Status:	mandatory
Max access:	read-only
Description:	The number of Bytes in the FloodGate queue is called "pending Bytes". (outbound direction).

fgNumConnIn

OID:	1.3.6.1.4.1.2620.1.3.9.1.14
Full path:	checkpoint.products.fg.fgIfTable.fgIfEntry.fgNumConnIn
Type:	Integer
Status:	mandatory
Max access:	read-only
Description:	The number of "live" connections going through the FloodGate on the certain interface in the inbound direction.

fgNumConnOut

OID:	1.3.6.1.4.1.2620.1.3.9.1.15
Full path:	checkpoint.products.fg.fgIfTable.fgIfEntry.fgNumConnOut
Type:	Integer (32 bit)
Status:	mandatory
Max access:	read-only
Description:	The number of "live" connections going through the FloodGate on the certain interface in the outbound direction.

CHAPTER 5

High Availability MIBs

In This Chapter

Overview *page 151*

MIB Tree Description *page 151*

Overview

This chapter describes the nodes/leafs that comprise the MIBs used in High Availability.

MIB Tree Description

This section comprises a detailed description of each leaf in the High Availability MIB tree. The following is a diagram of the High Availability MIB tree..

ha
haProdName
haInstalled
haVerMajor
haVerMinor
haStarted
haState
haBlockState
haIdentifier
haProtoVersion
haWorkMode

- haIfTable
  - haIfEntry
    - haIfIndex
    - haIfName
    - haIP
    - haStatus
    - haVerified
    - haTrusted
    - haShared
- haProblemTable
  - haProblemEntry
    - haProblemIndex
    - haProblemName
    - haProblemStatus
    - haProblemPriority
    - haProblemVerified
    - haProblemDescr
- haVersionString
- haStatCode
- haStatShort
- haStatLong
- haServicePack

ha

OID: 1.3.6.1.4.1.2620.1.5

Full path: checkpoint.products.ha

haProdName

OID:	1.3.6.1.4.1.2620.1.5.1
Full path:	checkpoint.products.ha.haProdName
Type:	String
Status:	mandatory
Max access:	read-only
Description:	Product name

haInstalled

OID:	1.3.6.1.4.1.2620.1.5.2
Full path:	checkpoint.products.ha.haInstalled
Type:	Integer (32 bit)
Status:	mandatory
Max access:	read-only
Description:	HA installed

haVerMajor

OID:	1.3.6.1.4.1.2620.1.5.3
Full path:	checkpoint.products.ha.haVerMajor
Type:	Integer (32 bit)
Status:	mandatory
Max access:	read-only
Description:	Major version

haVerMinor

OID:	1.3.6.1.4.1.2620.1.5.4
Full path:	checkpoint.products.ha.haVerMinor
Type:	Integer (32 bit)
Status:	mandatory
Max access:	read-only
Description:	Minor version

haStarted

OID:	1.3.6.1.4.1.2620.1.5.5
Full path:	checkpoint.products.ha.haStarted(5)
Type:	String
Syntax:	"yes", "no"
Status:	mandatory
Max access:	read-only
Description:	HA started

haState

OID:	1.3.6.1.4.1.2620.1.5.6
Full path:	checkpoint.products.ha.haState
Type:	String
Syntax:	"active", "not active", "stand-by", "unknown HA state"
Status:	mandatory
Max access:	read-only
Description:	HA state

haBlockState

Name:	haBlockState
Type:	OBJECT-TYPE
OID:	1.3.6.1.4.1.2620.1.5.7
Full path:	checkpoint(2620).products(1).ha(5).haBlockState(7)
Module:	CHECKPOINT-MIB
Type:	String
Syntax:	"OK", "problem", "initializing"
Status:	mandatory
Max access:	read-only
Description:	HA blocking state

haIdentifier

OID:	1.3.6.1.4.1.2620.1.5.8
Full path:	checkpoint.products.ha.haIdentifier(8)
Type:	Integer (32 bit)
Status:	mandatory
Max access:	read-only
Description:	HA identifier

haProtoVersion

OID:	1.3.6.1.4.1.2620.1.5.10
Full path:	checkpoint.products.ha.haProtoVersion
Type:	Integer (32 bit)
Status:	mandatory
Max access:	read-only
Description:	HA protocol version

haWorkMode

OID:	1.3.6.1.4.1.2620.1.5.11
Full path:	checkpoint.products.ha.haWorkMode
Type:	String
Status:	mandatory
Max access:	read-only
Description:	Working mode

haIfTable

OID:	1.3.6.1.4.1.2620.1.5.12
Full path:	checkpoint.products.ha.ha.haIfTable
Type:	Sequence
syntax:	SEQUENCE OF HaIfEntry
Status:	mandatory
Max access:	not-accessible
Sequences:	1: **haIfIndex** - INTEGER(2 - int, int32)
	2: **haIfName** - DisplayString(4 - octets)
	3: **haIP** - INTEGER(2 - int, int32)
	4: **haStatus** - DisplayString(4 - octets)
	5: **haVerified** - INTEGER(2 - int, int32)
	6: **haTrusted** - INTEGER(2 - int, int32)
	7: **haShared** - INTEGER(2 - int, int32)

haIfEntry

OID:	1.3.6.1.4.1.2620.1.5.12.1
Full path:	checkpoint.products.ha.ha.haIfTable.haIfEntry
Type:	Sequence

syntax:	SEQUENCE OF HaIfEntry
Status:	mandatory
Max access:	not-accessible

haIfIndex

OID:	1.3.6.1.4.1.2620.1.5.12.1.1
Full path:	checkpoint.products.ha.ha.haIfTable.haIfEntry.haIfIndex
Type:	Integer (32 bit)
Status:	mandatory
Max access:	read-only
Description:	Index of the interface

haIfName

OID:	1.3.6.1.4.1.2620.1.5.12.1.2
Full path:	checkpoint.products.ha.ha.haIfTable.haIfEntry.haIfName
Type:	String
Status:	mandatory
Max access:	read-only
Description:	Interface name as in HA records

haIP

OID:	1.3.6.1.4.1.2620.1.5.12.1.3
Full path:	checkpoint.products.ha.ha.haIfTable.haIfEntry.haIfIP
Type:	Integer (32 bit)
Status:	mandatory
Max access:	read-only
Description:	IP address

haStatus

OID:	1.3.6.1.4.1.2620.1.5.12.1.4
Full path:	checkpoint.products.ha.ha.haIfTable.haIfEntry.haIfStatus
Type:	String
Status:	mandatory
Max access:	read-only
Description:	Status of the interface (up/down)

haVerified

OID:	1.3.6.1.4.1.2620.1.5.12.1.5
Full path:	checkpoint.products.ha.ha.haIfTable.haIfEntry.haIfVerified
Type:	Integer (32 bit)
Status:	mandatory
Max access:	read-only
Description:	Number of clock ticks since the last packet was sent or received on this I/F

haTrusted

OID:	1.3.6.1.4.1.2620.1.5.12.1.6
Full path:	checkpoint.products.ha.ha.haIfTable.haIfEntry.haIfTrusted
Type:	Integer (32 bit)
Status:	mandatory
Max access:	read-only
Description:	Is it trusted for sync

haShared

OID:	1.3.6.1.4.1.2620.1.5.12.1.7
Full path:	checkpoint.products.ha.ha.haIfTable.haIfEntry.haIfStatus
Type:	Integer (32 bit)
Status:	mandatory
Max access:	read-only
Description:	Is it a shared interface (Virtual interface)

haProblemTable

OID:	1.3.6.1.4.1.2620.1.5.13
Full path:	checkpoint.products.ha.haProblemTable
Type:	Sequence
syntax:	SEQUENCE OF HaProblemEntry
Status:	mandatory
Max access:	not-accessible
Sequences:	1: **haProblemIndex** - INTEGER(2 - int, int32)
	2: **haProblemName** - DisplayString(4 - octets)
	3: **haProblemStatus** - DisplayString(4 - octets)
	4: **haProblemPriority** - INTEGER(2 - int, int32)
	5: **haProblemVerified** - INTEGER(2 - int, int32)
	6: **haProblemDescr** - DisplayString(4 - octets)

haProblemEntry

OID:	1.3.6.1.4.1.2620.1.5.13.1
Full path:	checkpoint.products.ha.haProblemTable.haProblemEntry
Type:	Sequence

syntax:	SEQUENCE OF HaProblemEntry
Status:	mandatory
Max access:	not-accessible

haProblemIndex

OID:	1.3.6.1.4.1.2620.1.5.13.1.1
Full path:	checkpoint.products.ha.haProblemTable.haProblemEntry.haProblemIndex
Type:	Integer (32 bit)
Status:	mandatory
Max access:	read-only
Description:	Index

haProblemName

OID:	1.3.6.1.4.1.2620.1.5.13.1.2
Full path:	checkpoint.products.ha.haProblemTable.haProblemEntry.haProblemName
Type:	String
Status:	mandatory
Max access:	read-only
Description:	Name

haProblemStatus

OID:	1.3.6.1.4.1.2620.1.5.13.1.3
Full path:	checkpoint.products.ha.haProblemTable.haProblemEntry.haProblemStatus
Type:	String

Status: mandatory

Max access: read-only

Description: Is this problem ok/not ok

haProblemPriority

OID: 1.3.6.1.4.1.2620.1.5.13.1.4

Full path: checkpoint.products.ha.haProblemTable.haProblemEntry.haProblemPriority

Type: Integer (32 bit)

Status: mandatory

Max access: read-only

Description: Which priority does it have in relation to keeping the machine active

haProblemVerified

OID: 1.3.6.1.4.1.2620.1.5.13.1.5

Full path: checkpoint.products.ha.haProblemTable.haProblemEntry.haProblemVerified

Type: Integer (32 bit)

Status: mandatory

Max access: read-only

Description: Number of clock ticks since the last status report of this problem

haProblemDescr

OID: 1.3.6.1.4.1.2620.1.5.13.1.6

Full path: checkpoint.products.ha.haProblemTable.haProblemEntry.haProblemDescr

Type: String

Status: mandatory

Max access: read-only

Description: Description of the problem

haVersionString

OID: 1.3.6.1.4.1.2620.1.5.14

Full path: checkpoint.products.ha.haVersionSting

Type: String

Status: mandatory

Max access: read-only

Description: Version string

haStatCode

OID: 1.3.6.1.4.1.2620.1.5.101

Full path: checkpoint.products.ha.haStatCode

Type: Integer (32 bit)

Status: mandatory

Max access: read-only

Description: Status code

haStatShort

OID: 1.3.6.1.4.1.2620.1.5.102

Full path: checkpoint.products.ha.haStatShort

Type: String

Syntax: "OK", "Attention", "Problem"

Status: mandatory

Max access: read-only

Description: Status short

haStatLong

OID:	1.3.6.1.4.1.2620.1.5.103
Full path:	checkpoint.products.ha.haStatLong
Type:	String
Syntax:	"OK", "Attention", "Problem"
Status:	mandatory
Max access:	read-only
Description:	Status long

haServicePack

OID:	1.3.6.1.4.1.2620.1.5.999
Full path:	checkpoint.products.ha.haServicePack
Type:	Integer (32 bit)
Status:	mandatory
Max access:	read-only
Description:	Service pack

CHAPTER 6

SVN MIBs

In This Chapter

Overview *page 165*

MIB Tree Description *page 165*

Overview

This chapter describes the nodes/leafs that comprise the MIBs used in SVN.

MIB Tree Description

This section comprises a detailed description of each leaf in the SVN MIB tree. The following is a diagram of the SVN MIB tree.

svn		
	svnProdName	
	svnProdVerMajor	
	svnProdVerMinor	
	svnInfo	
		svnVersion
		svnBuild
	svnOSInfo	
		osName
		osMajorVer
		osMinorVer
		osBuildNum

	osSPmajor	
	osSPminor	
	osVersionLevel	
routingTable		
	routingEntryl	
		routingIndex
		routingDest
		routingMask
		routingGatweway
		routingIntrfName
svnPerf		
	svnMem	
		memTotalVirtual
		memActiveVirtual
		memTotalReal
		memActiveReal
		memFreeReal
		memSwapsSec
		memDiskTransfers
	svnProc	
		procUsrTime
		procSysTime
		procIdleTime
		procUsage
		procQueue
		procInterrupts
		procNum
	svnDisk	
		diskTime
		diskQueue
		diskPercent

		diskFreeTotal
		diskFreeAvail
		diskTotal
	svnMem64	
		memTotalVirtual64
		memActiveVirtual64
		memTotalReal64
		memActiveReal64
		memFreeReal64
		memSwapsSec64
		memDiskTransfers64
svnStatCode		
svnStatShortDescr		
svnStatLongDescr		
svnServicePack		

svn

OID: 1.3.6.1.4.1.2620.1.6

Full path: checkpoint.products.svn

svnProdName

OID: 1.3.6.1.4.1.2620.1.6.1

Full path: checkpoint.products.svn.svnProdName

Type: String

Status: mandatory

Max access: read-only

Description: Product name

svnProdVerMajor

OID: 1.3.6.1.4.1.2620.1.6.2
Full path: checkpoint.products.svn.svnProdVerMajor
Type: Integer (32 bit)
Status: mandatory
Max access: read-only
Description: Major version

svnProdVerMinor

OID: 1.3.6.1.4.1.2620.1.6.3
Full path: checkpoint.products.svn.svnProdVerMinor
Type: Integer (32 bit)
Status: mandatory
Max access: read-only
Description: Minor version

svnInfo

OID: 1.3.6.1.4.1.2620.1.6.4
Full path: checkpoint.products.svn.svnInfo

svnVersion

OID: 1.3.6.1.4.1.2620.1.6.4.1
Full path: checkpoint.products.svn.svnInfo.svnVersion
Type: String
Status: mandatory
Max access: read-only
Description: SVN version

svnBuild

OID:	1.3.6.1.4.1.2620.1.6.4.2
Full path:	checkpoint.products.svn.svnInfo.svnBuild
Type:	Integer (32 bit)
Status:	mandatory
Max access:	read-only
Description:	SVN build number

svnOSInfo

OID:	1.3.6.1.4.1.2620.1.6.5
Full path:	checkpoint.products.svn.svnOSInfo

osName

OID:	1.3.6.1.4.1.2620.1.6.5.1
Full path:	checkpoint.products.svn.svnOSInfo.osName
Type:	String
Status:	mandatory
Max access:	read-only
Description:	OS name

osMajorVer

OID:	1.3.6.1.4.1.2620.1.6.5.2
Full path:	checkpoint.products.svn.svnOSInfo.osMajorVer
Type:	Integer (32 bit)
Status:	mandatory
Max access:	read-only
Description:	OS Major version

osMinorVer

OID:	1.3.6.1.4.1.2620.1.6.5.3
Full path:	checkpoint.products.svn.svnOSInfo.osMinorVer
Type:	Integer (32 bit)
Status:	mandatory
Max access:	read-only
Description:	OS minor version

osBuildNum

OID:	1.3.6.1.4.1.2620.1.6.5.4
Full path:	checkpoint.products.svn.svnOSInfo.osBuildNum
Type:	Integer (32 bit)
Status:	optional
Max access:	read-only
Description:	OS build number

osSPmajor

OID:	1.3.6.1.4.1.2620.1.6.5.5
Full path:	checkpoint.products.svn.svnOSInfo.osSPmajor
Type:	Integer (32 bit)
Status:	optional
Max access:	read-only
Description:	OS SP major

osSPminor

OID:	1.3.6.1.4.1.2620.1.6.5.6
Full path:	checkpoint.products.svn.svnOSInfo.osSPminor
Type:	Integer (32 bit)
Status:	optional
Max access:	read-only
Description:	OS SP minor

osVersionLevel

OID:	1.3.6.1.4.1.2620.1.6.5.7
Full path:	checkpoint.products.svn.svnOSInfo.osVersionLevel
Type:	String
Status:	optional
Max access:	read-only
Description:	OS version level

routingTable

OID:	1.3.6.1.4.1.2620.1.6.6
Full path:	checkpoint.products.svn.routingTable
Type:	Sequence
Syntax:	SEQUENCE OF RoutingEntry
Status:	mandatory
Max access:	not-accessible
Sequences:	1: **routingIndex** - INTEGER(2 - int, int32)
	2: **routingDest** - IpAddress(64 - ipaddr)
	3: **routingMask** - IpAddress(64 - ipaddr)
	4: **routingGatweway** - IpAddress(64 - ipaddr)
	5: **routingIntrfName** - DisplayString(4 - octets)

routingEntryl

OID:	1.3.6.1.4.1.2620.1.6.6.1
Full path:	checkpoint.products.svn.routingTable.routingEntry
Type:	Sequence
Syntax:	SEQUENCE OF RoutingEntry
Status:	mandatory
Max access:	not-accessible

routingIndex

OID:	1.3.6.1.4.1.2620.1.6.6.1.1
Full path:	checkpoint.products.svn.routingTable.routingEntry.routingIndex
Type:	Integer (32 bit)
Status:	optional
Max access:	read-only
Description:	Index of the interface

routingDest

OID:	1.3.6.1.4.1.2620.1.6.6.1.2
Full path:	checkpoint.products.svn.routingTable.routingEntry.routingDest
Type:	IP address
Status:	optional
Max access:	read-only
Description:	The network destination IP. The range of IPs for that network is defined by the next field, the network mask.

routingMask

OID:	1.3.6.1.4.1.2620.1.6.6.1.3
Full path:	checkpoint.products.svn.routingTable.routingEntry.routingMask
Type:	IP address
Status:	optional
Max access:	read-only
Description:	The network mask. For each outgoing packet, each bit in the target IP is tested against each bit in the network destination if the respective mask bit is on.

routingGatweway

OID:	1.3.6.1.4.1.2620.1.6.6.1.4
Full path:	checkpoint.products.svn.routingTable.routingEntry.routingGatweway
Type:	IP address
Status:	optional
Max access:	read-only
Description:	The local network interface IP or a router on the local network used to forward the packet to its destination network.

routingIntrfName

OID:	1.3.6.1.4.1.2620.1.6.6.1.5
Full path:	checkpoint.products.svn.routingTable.routingEntry.routingIntrfName
Type:	String
Status:	optional
Max access:	read-only
Description:	In case a packet is forwarded through a router on the local network, the local network interface used to forward the packet to the router. Otherwise similar to the routing gateway.

svnPerf

OID: 1.3.6.1.4.1.2620.1.6.7

Full path: checkpoint.products.svn.svnPerf

Module: CHECKPOINT-MIB

svnMem

OID: 1.3.6.1.4.1.2620.1.6.7.1

Full path: checkpoint.products.svn.svnPerf.svnMem

memTotalVirtual

OID: 1.3.6.1.4.1.2620.1.6.7.1.1

Full path: checkpoint.products.svn.svnPerf.svnMem.memTotalVirtual

Type: Integer (32 bit)

Status: mandatory

Max access: read-only

Description: Total virtual memory (32 bit)

NOTE: This 32 bit object has been superseded by a 64 bit object - memTotalVirtual64, which is supported by Check Point SVN FP3 and above. The 32 bit object is still supported, but it is recommended to work with the new 64 bit object (avoid receiving erroneous values from 64 bit machines).

memActiveVirtual

OID: 1.3.6.1.4.1.2620.1.6.7.1.2

Full path: checkpoint.products.svn.svnPerf.svnMem.memActiveVirtual

Type: Integer (32 bit)

Status: mandatory

Max access: read-only

Description: Active virtual memory (32 bit)

NOTE: This 32 bit object has been superseded by a 64 bit object - memActiveVirtual64, which is supported by Check Point SVN FP3 and above. The 32 bit object is still supported, but it is recommended to work with the new 64 bit object (avoid receiving erroneous values from 64 bit machines).

---

memTotalReal

OID: 1.3.6.1.4.1.2620.1.6.7.1.3

Full path: checkpoint.products.svn.svnPerf.svnMem.memTotalReal

Type: Integer (32 bit)

Status: mandatory

Max access: read-only

Description: Total real memory (32 bit)

NOTE: This 32 bit object has been superseded by a 64 bit object - memTotalReal64, which is supported by Check Point SVN FP3 and above. The 32 bit object is still supported, but it is recommended to work with the new 64 bit object (avoid receiving erroneous values from 64 bit machines).

---

memActiveReal

OID: 1.3.6.1.4.1.2620.1.6.7.1.4

Full path: checkpoint.products.svn.svnPerf.svnMem. memActiveReal

Type: Integer (32 bit)

Status: optional

Max access: read-only

Description: Active real memory (32 bit)

NOTE: This 32 bit object has been superseded by a 64 bit object - memActiveReal64, which is supported by Check Point SVN FP3 and above. The 32 bit object is still supported, but it is recommended to work with the new 64 bit object (avoid receiving erroneous values from 64 bit machines).

---

memFreeReal

OID: 1.3.6.1.4.1.2620.1.6.7.1.5

Full path: checkpoint.products.svn.svnPerf.svnMem.memFreeReal

Type: Integer (32 bit)

Status: mandatory

Max access: read-only

Description: Free real memory (32 bit)

NOTE: This 32 bit object has been superseded by a 64 bit object - memFreeReal64, which is supported by Check Point SVN FP3 and above. The 32 bit object is still supported, but it is recommended to work with the new 64 bit object (avoid receiving erroneous values from 64 bit machines).

---

memSwapsSec

OID: 1.3.6.1.4.1.2620.1.6.7.1.6

Full path: checkpoint.products.svn.svnPerf.svnMem.memSwapsSec

Type Integer (32 bit)

Status: optional

Max access: read-only

Description: Memory swaped pages/sec (32 bit)

NOTE: This 32 bit object has been superseded by a 64 bit object - memSwapsSec64, which is supported by Check Point SVN FP3 and above. The 32 bit object is still supported, but it is recommended to work with the new 64 bit object (avoid receiving erroneous values from 64 bit machines).

memDiskTransfers

OID: 1.3.6.1.4.1.2620.1.6.7.1.7

Full path: checkpoint.products.svn.svnPerf.svnMem.memDiskTransfers

Type: Integer (32 bit)

Status: optional

Max access: read-only

Description: Memory to Disk transfers/sec (32 bit)

NOTE: This 32 bit object has been superseded by a 64 bit object - memDiskTransfers64, which is supported by Check Point SVN FP3 and above. The 32 bit object is still supported, but it is recommended to work with the new 64 bit object (avoid receiving erroneous values from 64 bit machines).

svnProc

OID: 1.3.6.1.4.1.2620.1.6.7.2

Full path: checkpoint.products.svn.svnPerf.svnProc

procUsrTime

OID: 1.3.6.1.4.1.2620.1.6.7.2.1

Full path: checkpoint.products.svn.svnPerf.svnProc.procUsrTime

Type: Integer (32 bit)

Status: mandatory

Max access: read-only

Description: Processor user time

---

procSysTime

OID: 1.3.6.1.4.1.2620.1.6.7.2.2

Full path: checkpoint.products.svn.svnPerf.svnProc.procSysTime

Type: Integer (32 bit)

Status: mandatory

Max access: read-only

Description: Processor system time

---

procIdleTime

OID: 1.3.6.1.4.1.2620.1.6.7.2.3

Full path: checkpoint.products.svn.svnPerf.svnProc.procIdleTime

Type: Integer (32 bit)

Status: mandatory

Max access: read-only

Description: Processor idle time

---

procUsage

OID: 1.3.6.1.4.1.2620.1.6.7.2.4

Full path: checkpoint.products.svn.svnPerf.svnProc.procUsage

Type: Integer (32 bit)

Status: mandatory

Max access: read-only

Description: Processor usage

procQueue

OID:	1.3.6.1.4.1.2620.1.6.7.2.5
Full path:	checkpoint.products.svn.svnPerf.svnProc.procQueue(5)
Type:	Integer (32 bit)
Status:	optional
Max access:	read-only
Description:	Processor queue length

procInterrupts

Full path:	checkpoint.products.svn.svnPerf.svnProc.procInterrupts
Type:	Integer (32 bit)
Status:	optional
Max access:	read-only
Description:	Processor interrupts/sec

procNum

ID:	1.3.6.1.4.1.2620.1.6.7.2.7
Full path:	checkpoint.products.svn.svnPerf.svnProc.procNum
Type:	Integer (32 bit)
Status:	mandatory
Max access:	read-only
Description:	Number of processors

svnDisk

OID:	1.3.6.1.4.1.2620.1.6.7.3
Full path:	checkpoint.products.svn.svnPerf.svnDisk

diskTime

OID:	1.3.6.1.4.1.2620.1.6.7.3.1
Full path:	checkpoint.products.svn.svnPerf.svnDisk.diskTime
Type:	Integer (32 bit)
Status:	optional
Max access:	read-only
Description:	Time the disk is performing io requests

diskQueue

OID:	1.3.6.1.4.1.2620.1.6.7.3.2
Full path:	checkpoint.products.svn.svnPerf.svnDisk.diskQueue
Type:	Integer (32 bit)
Status:	optional
Max access:	read-only
Description:	Disk requests queue length

diskPercent

OID:	1.3.6.1.4.1.2620.1.6.7.3.3
Full path:	checkpoint.products.svn.svnPerf.svnDisk.diskPercent
Type:	Integer (32 bit)
Status:	mandatory
Max access:	read-only
Description:	Percent of free space

diskFreeTotal

OID:	1.3.6.1.4.1.2620.1.6.7.3.4
Full path:	checkpoint.products.svn.svnPerf.svnDisk.diskFreeTotal
Type:	String
Syntax:	int64 formatted string
Status:	mandatory
Max access:	read-only
Description:	Disk total free space

diskFreeAvail

OID:	1.3.6.1.4.1.2620.1.6.7.3.5
Full path:	checkpoint.products.svn.svnPerf.svnDisk.diskFreeAvail
Type:	String
Syntax:	int64 formatted string
Status:	mandatory
Max access:	read-only
Description:	Disk available free space

diskTotal

OID:	1.3.6.1.4.1.2620.1.6.7.3.6
Full path:	checkpoint.products.svn.svnPerf.svnDisk.diskTotal
Type:	String
Syntax:	int64 formatted string
Status:	mandatory
Max access:	read-only
Description:	Disk total space

svnMem64

OID: 1.3.6.1.4.1.2620.1.6.7.4

Full path: checkpoint.products.svn.svnPerf.svnMem64

memTotalVirtual64

OID: 1.3.6.1.4.1.2620.1.6.7.4.1

Full path: checkpoint.products.svn.svnPerf.svnMem64.memTotalVirtual64

Type: String

Syntax: int64 formatted string

Status: optional

Max access: read-only

Description: Total virtual memory

memActiveVirtual64

OID: 1.3.6.1.4.1.2620.1.6.7.4.2

Full path: checkpoint.products.svn.svnPerf.svnMem64. memActiveVirtual64

Type: String

Syntax: int64 formatted string

Status: optional

Max access: read-only

Description: Active virtual memory

memTotalReal64

OID: 1.3.6.1.4.1.2620.1.6.7.4.3

Full path: checkpoint.products.svn.svnPerf.svnMem64.memTotalReal64

Type: String

Syntax: int64 formatted string

Status: optional

Max access: read-only

Description: Total real memory

---

memActiveReal64

OID: 1.3.6.1.4.1.2620.1.6.7.4.4

Full path: checkpoint.products.svn.svnPerf.svnMem64.memActiveReal64

Type: String

Syntax: int64 formatted string

Status: optional

Max access: read-only

Description: Active real memory

---

memFreeReal64

OID: 1.3.6.1.4.1.2620.1.6.7.4.5

Full path: checkpoint.products.svn.svnPerf.svnMem64.memFreeReal64

Type: String

Syntax: int64 formatted string

Status: optional

Max access: read-only

Description: Free real memory

---

memSwapsSec64

OID: 1.3.6.1.4.1.2620.1.6.7.4.6

Full path: checkpoint.products.svn.svnPerf.svnMem64.memSwapsSec64

Type: Integer (32 bit)

Status: optional

Max access: read-only

Description: Memory swapped pages/sec

memDiskTransfers64

OID: 1.3.6.1.4.1.2620.1.6.7.4.7

Full path: checkpoint.products.svn.svnPerf.svnMem64. memDiskTransfers64

Type: Integer (32 bit)

Status: optional

Max access: read-only

Description: Memory to Disk transfers/sec

svnStatCode

OID: 1.3.6.1.4.1.2620.1.6.101

Full path: checkpoint.products.svn.svnStatCode

Type: Integer (32 bit)

Status: mandatory

Max access: read-only

Description: Status code

svnStatShortDescr

OID: 1.3.6.1.4.1.2620.1.6.102

Full path: checkpoint.products.svn.svnStatShortDescr

Type: String

Status: mandatory

Max access: read-only

Description: Status short description

svnStatLongDescr

OID:	1.3.6.1.4.1.2620.1.6.103
Full path:	checkpoint.products.svn.svnStatLongDescr
Type:	String
Status:	mandatory
Max access:	read-only
Description:	Status long description

svnServicePack

OID:	1.3.6.1.4.1.2620.1.6.999
Full path:	checkpoint.products.svn.svnServicePack
Type:	Integer (32 bit)
Status:	mandatory
Max access:	read-only
Description:	SVN service pack

CHAPTER 7

SmartCenter MIBs

In This Chapter

Overview *page 187*

MIB Tree Description *page 187*

Overview

This chapter describes the nodes/leafs that comprise the MIBs used in SmartCenter.

MIB Tree Description

This section comprises a detailed description of each leaf in the SmartCenter MIB tree. The following is a diagram of the SmartCenter MIB tree.

- **mngmt**
  - **mgProdName**
  - **mgVerMajor**
  - **mgVerMinor**
  - **mgBuildNumber**
  - **mgActiveStatus**
  - **mgFwmIsAlive**
  - **mgConnectedClientsTable**
    - **mgConnectedClientsEntry**
      - **mgIndex**
      - **mgClientName**

mgClientHost
mgClientDbLock
mgApplicationType

mgStatCode
mgStatShortDescr
mgStatLongDescr

mngmt

OID: 1.3.6.1.4.1.2620.1.7

Full path: checkpoint.products.mngmt

mgProdName

OID: 1.3.6.1.4.1.2620.1.7.1

Full path: checkpoint.products.mngmt.mgProdName

Type: String

Status: mandatory

Max access: read-only

Description: Product name

mgVerMajor

OID: 1.3.6.1.4.1.2620.1.7.2

Full path: checkpoint.products.mngmt.mgVerMajor

Type: Integer (32 bit)

Status: mandatory

Max access: read-only

Description: Major version

mgVerMinor

OID:	1.3.6.1.4.1.2620.1.7.3
Full path:	checkpoint.products.mngmt.mgVerMinor
Type:	Integer (32 bit)
Status:	mandatory
Max access:	read-only
Description:	Minor version

mgBuildNumber

OID:	1.3.6.1.4.1.2620.1.7.4
Full path:	checkpoint.products.mngmt.mgBuildNumber
Type:	Integer (32 bit)
Status:	mandatory
Max access:	read-only
Description:	Build number

mgActiveStatus

OID:	1.3.6.1.4.1.2620.1.7.5
Full path:	checkpoint.products.mngmt.mgActiveStatus
Type:	String
Syntax:	"standby", "Not synchronized"
Status:	mandatory
Max access:	read-only
Description:	Active status

mgFwmIsAlive

OID:	1.3.6.1.4.1.2620.1.7.6
Full path:	checkpoint.products.mngmt.mgFwmIsAlive
Type:	Integer (32 bit)
Status:	mandatory
Max access:	read-only
Description:	Managment is alive

mgConnectedClientsTable

OID:	1.3.6.1.4.1.2620.1.7.7
Full path:	checkpoint.products.mngmt.mgConnectedClientsTable
Type:	Sequence
syntax:	SEQUENCE OF MgConnectedClientsEntry
Status:	mandatory
Max access:	not-accessible
Sequences:	1: **mgIndex** - INTEGER(2 - int, int32)
	2: **mgClientName** - DisplayString(4 - octets)
	3: **mgClientHost** - DisplayString(4 - octets)
	4: **mgClientDbLock** - DisplayString(4 - octets)
	5: **mgApplicationType** - DisplayString(4 - octets)

mgConnectedClientsEntry

OID:	1.3.6.1.4.1.2620.1.7.7.1
Full path:	checkpoint.products.mngmt.mgConnectedClientsTable.mgConnectedClientsEntry
Type:	Sequence

syntax:	SEQUENCE OF MgConnectedClientsEntry
Status:	mandatory
Max access:	not-accessible

mgIndex

OID:	1.3.6.1.4.1.2620.1.7.7.1.1
Full path:	checkpoint.products.mngmt.mgConnectedClientsTable.mgConnectedClientsEntry.mgIndex
Type:	Integer (32 bit)
Status:	mandatory
Max access:	read-only
Description:	Consecutive number of the GUI client.

mgClientName

OID:	1.3.6.1.4.1.2620.1.7.7.1.2
Full path:	checkpoint.products.mngmt.mgConnectedClientsTable.mgConnectedClientsEntry.mgClientName
Type:	String
Status:	mandatory
Max access:	read-only
Description:	The administrator name

mgClientHost

OID:	1.3.6.1.4.1.2620.1.7.7.1.3
Full path:	checkpoint.products.mngmt.mgConnectedClientsTable.mgConnectedClientsEntry.mgClientHost
Type:	String

Status: mandatory

Max access: read-only

Description: The GUI client host name

mgClientDbLock

OID: 1.3.6.1.4.1.2620.1.7.7.1.4

Full path: checkpoint.products.mngmt.mgConnectedClientsTable.mgConnectedClientsEntry.mgClientDbLock

Type: String

Status: mandatory

Max access: read-only

Description: Indicates if the client has locked the database

mgApplicationType

OID: 1.3.6.1.4.1.2620.1.7.7.1.5

Full path: checkpoint.products.mngmt.mgConnectedClientsTable.mgConnectedClientsEntry.mgApplicationType

Type: String

Status: mandatory

Max access: read-only

Description: Type of the GUI application. For example, Dashboard, SmartView Tracker, SmartView Status and so on.

mgStatCode

OID: 1.3.6.1.4.1.2620.1.7.101

Full path: checkpoint.products.mngmt.mgStatCode

Type: Integer (32 bit)

Status: mandatory

Max access: read-only

Description: Status code

mgStatShortDescr

OID: 1.3.6.1.4.1.2620.1.7.102

Full path: checkpoint.products.mngmt.mgStatShortDescr

Type: String

Status: mandatory

Max access: read-only

Description: Status short description

mgStatLongDescr

OID: 1.3.6.1.4.1.2620.1.7.103

Full path: checkpoint.products.mngmt.mgStatLongDesc

Type: String

Status: mandatory

Max access: read-only

Description: Status long description

CHAPTER 8

WebAccess Module MIBs

In This Chapter

Overview *page 195*

MIB Tree Description *page 195*

Overview

This chapter describes the nodes/leafs that comprise the MIBs used in WebAccess Module.

MIB Tree Description

This section comprises a detailed description of each leaf in the WebAccess Module MIB tree. The following is a diagram of the WebAccess Module MIB tree.

wam		
	wamProdName	
	wamVerMajor	
	wamVerMinor	
	wamState	
	wamName	
	wamPluginPerformance	
		wamAcceptReq
		wamRejectReq
	wamPolicy	
		wamPolicyName

	wamPolicyUpdate
wamUagQueries	
	wamUagHost
	wamUagIp
	wamUagPort
	wamUagNoQueries
	wamUagLastQuery
wamGlobalPerformance	
	wamOpenSessions
	wamLastSession
wamStatCode	
wamStatShortDescr	
wamStatLongDescr	

wam

OID: 1.3.6.1.4.1.2620.1.8

Full path: checkpoint.products.wam

wamProdName

OID: 1.3.6.1.4.1.2620.1.8.1

Full path: checkpoint.products.wam.wamProdName

Type: String

Status: mandatory

Max access: read-only

Description: Product name

wamVerMajor

OID:	1.3.6.1.4.1.2620.1.8.2
Full path:	checkpoint.products.wam.wamVerMajor
Type:	Integer (32 bit)
Status:	mandatory
Max access:	read-only
Description:	Major version

wamVerMinor

OID:	1.3.6.1.4.1.2620.1.8.3
Full path:	checkpoint.products.wam.wamVerMinor
Type:	Integer (32 bit)
Status:	mandatory
Max access:	read-only
Description:	Minor version

wamState

OID:	1.3.6.1.4.1.2620.1.8.4
Full path:	checkpoint.products.wam.wamState
Type:	String
Syntax:	"Unknown", "Down", "Up"
Status:	mandatory
Max access:	read-only
Description:	WAM state

wamName

OID:	1.3.6.1.4.1.2620.1.8.5
Full path:	checkpoint.products.wam.wamName
Type:	String
Status:	mandatory
Max access:	read-only
Description:	WAM name

wamPluginPerformance

OID:	1.3.6.1.4.1.2620.1.8.6
Full path:	checkpoint.products.wam.wamPluginPerformance

wamAcceptReq

OID:	1.3.6.1.4.1.2620.1.8.6.1
Full path:	checkpoint.products.wam.wamPluginPerformance.wamAcceptReq
Type:	Integer (32 bit)
Status:	mandatory
Max access:	read-only
Description:	Plugin accepted requests

wamRejectReq

OID:	1.3.6.1.4.1.2620.1.8.6.2
Full path:	checkpoint.products.wam.wamPluginPerformance.wamRejectReq
Type:	Integer (32 bit)

Status: mandatory

Max access: read-only

Description: Plugin rejected requests

wamPolicy

OID: 1.3.6.1.4.1.2620.1.8.7

Full path: checkpoint.products.wam.wamPolicy

wamPolicyName

OID: 1.3.6.1.4.1.2620.1.8.7.1

Full path: checkpoint.products.wam.wamPolicy.wamPolicyName

Type: String

Status: mandatory

Max access: read-only

Description: Policy name

wamPolicyUpdate

OID: 1.3.6.1.4.1.2620.1.8.7.2

Full path: checkpoint.products.wam.wamPolicy.wamPolicyUpdate

Type: String

Syntax: "Wed Mar 17 11:10:28 2004" // This is an example. The exact format depends on the OS setting.

Status: mandatory

Max access: read-only

Description: Last update time

wamUagQueries

OID: 1.3.6.1.4.1.2620.1.8.8

Full path: checkpoint.products.wam.wamUagQueries

wamUagHost

OID: 1.3.6.1.4.1.2620.1.8.8.1

Full path: checkpoint.products.wam.wamUagQueries.wamUagHost

Type: String

Status: mandatory

Max access: read-only

Description: UAG host name

wamUagIp

OID: 1.3.6.1.4.1.2620.1.8.8.2

Full path: checkpoint.products.wam.wamUagQueries.wamUagIp

Type: Integer (32 bit)

Status: mandatory

Max access: read-only

Description: UAG IP address

wamUagPort

OID: 1.3.6.1.4.1.2620.1.8.8.3

Full path: checkpoint.products.wam.wamUagQueries.wamUagPort

Type: Integer (32 bit)

Status: mandatory

Max access: read-only

Description: UAG port

wamUagNoQueries

OID:	1.3.6.1.4.1.2620.1.8.8.4
Full path:	checkpoint.products.wam.wamUagQueries.wamUagNoQueries
Type:	Integer (32 bit)
Status:	mandatory
Max access:	read-only
Description:	UAG no. of queries

wamUagLastQuery

OID:	1.3.6.1.4.1.2620.1.8.8.5
Full path:	checkpoint.products.wam.wamUagQueries.wamUagLastQuery
Type:	String
Syntax:	"Wed Mar 17 11:10:28 2004" // This is an example. The exact format depends on the OS setting.
Status:	mandatory
Max access:	read-only
Description:	UAG last query time

wamGlobalPerformance

OID:	1.3.6.1.4.1.2620.1.8.9
Full path:	checkpoint.products.wam.wamGlobalPerformance

wamOpenSessions

OID:	1.3.6.1.4.1.2620.1.8.9.1
Full path:	checkpoint.products.wam.wamGlobalPerformance.wamOpenSessions
Type:	Integer (32 bit)

Status: mandatory

Max access: read-only

Description: Open sessions

wamLastSession

OID: 1.3.6.1.4.1.2620.1.8.9.2

Full path: checkpoint.products.wam.wamGlobalPerformance.wamLastSession

Type: String

Syntax: "Wed Mar 17 11:10:28 2004" // This is an example. The exact format depends on the OS setting.

Status: mandatory

Max access: read-only

Description: Last open session time

wamStatCode

OID: 1.3.6.1.4.1.2620.1.8.101

Full path: checkpoint.products.wam.wamStatCode

Type: Integer (32 bit)

Status: mandatory

Max access: read-only

Description: WAM status code

wamStatShortDescr

OID: 1.3.6.1.4.1.2620.1.8.102

Full path: checkpoint.products.wam.wamStatShortDescr

Type: String

Status: mandatory

Max access: read-only

Description: WAM status short description

---

wamStatLongDescr

OID: 1.3.6.1.4.1.2620.1.8.103

Full path: checkpoint.products.wam.wamStatLongDescr

Type: String

Status: mandatory

Max access: read-only

Description: WAM status full description

CHAPTER 9

Desktop Policy Server MIBs

In This Chapter

Overview *page 205*

MIB Tree Description *page 205*

Overview

This chapter describes the nodes/leafs that comprise the MIBs used in Desktop Policy Server.

MIB Tree Description

This section comprises a detailed description of each leaf in the Desktop Policy Server MIB tree. The following is a diagram of the Desktop Policy Server MIB tree.

dtps	
	dtpsProdName
	dtpsVerMajor
	dtpsVerMinor
	dtpsLicensedUsers
	dtpsConnectedUsers
	dtpsStatCode
	dtpsStatShortDescr
	dtpsStatLongDescr

dtps

OID: 1.3.6.1.4.1.2620.1.9

Full path: checkpoint.products.dtps

dtpsProdName

OID: 1.3.6.1.4.1.2620.1.9.1

Full path: checkpoint.products.dtps.dtpsProdName

Type: String

Status: mandatory

Max access: read-only

Description: Product name

dtpsVerMajor

OID: 1.3.6.1.4.1.2620.1.9.2

Full path: checkpoint.products.dtps.dtpsVerMajor

Type: Integer (32 bit)

Status: mandatory

Max access: read-only

Description: Major version

dtpsVerMinor

OID: 1.3.6.1.4.1.2620.1.9.3

Full path: checkpoint.products.dtps.dtpsVerMinor

Type: Integer (32 bit)

Status: mandatory

Max access: read-only

Description: Minor version

dtpsLicensedUsers

OID:	1.3.6.1.4.1.2620.1.9.4
Full path:	checkpoint.products.dtps.dtpsLicensedUsers
Type:	Integer (32 bit)
Status:	mandatory
Max access:	read-only
Description:	Licensed users

dtpsConnectedUsers

OID:	1.3.6.1.4.1.2620.1.9.5
Full path:	checkpoint.products.dtps.dtpsConnectedUsers
Type:	Integer (32 bit)
Status:	mandatory
Max access:	read-only
Description:	Connected users

dtpsStatCode

OID:	1.3.6.1.4.1.2620.1.9.101
Full path:	checkpoint.products.dtps.dtpsStatCode
Type:	Integer (32 bit)
Status:	mandatory
Max access:	read-only
Description:	Status code

dtpsStatShortDescr

OID:	1.3.6.1.4.1.2620.1.9.102
Full path:	checkpoint.products.dtps.dtpsStatShortDescr
Type:	String
Status:	mandatory
Max access:	read-only
Description:	Status short description

dtpsStatLongDescr

OID:	1.3.6.1.4.1.2620.1.9.103
Full path:	checkpoint.products.dtps.dtpsStatLongDescr
Type:	String
Status:	mandatory
Max access:	read-only
Description:	Status long description

CHAPTER 10

Infrastructure MIBs

In This Chapter

Overview *page 209*

MIB Tree Description *page 209*

Overview

This chapter describes the nodes/leafs that comprise the MIBs used in Infrastructure.

MIB Tree Description

This section comprises a detailed description of each leaf in the Infrastructure MIB tree. The following is a diagram of the Infrastructure MIB tree.

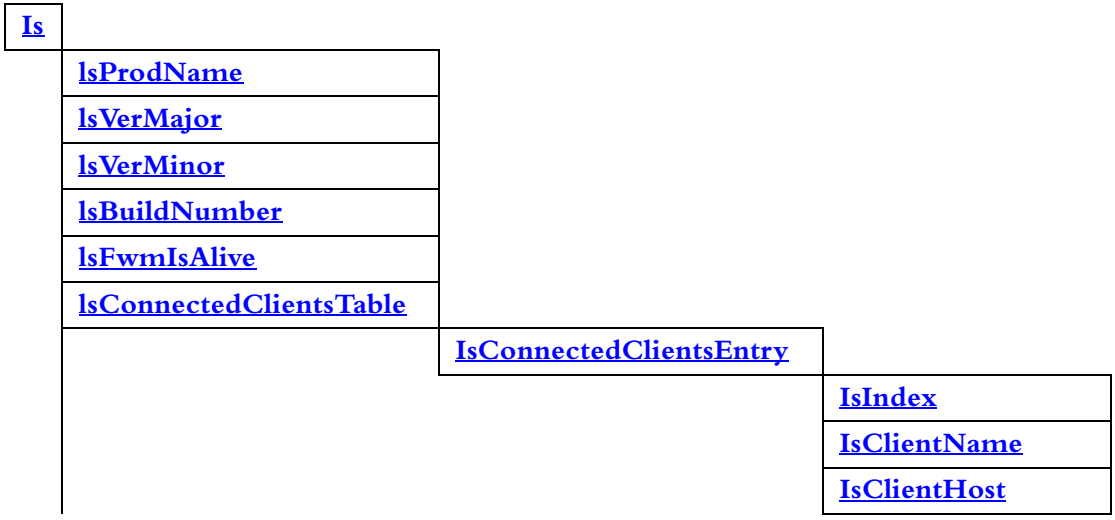

isStatCode
lsStatShortDescr
lsStatLongDescr

IsClientDbLock
IsApplicationType

Is

OID: 1.3.6.1.4.1.2620.1.11

Full path: checkpoint.products.ls

IsProdName

OID: 1.3.6.1.4.1.2620.1.11.1

Full path: checkpoint.products.ls.lsProdName

Type: String

Status: mandatory

Max access: read-only

Description: Product name

IsVerMajor

OID: 1.3.6.1.4.1.2620.1.11.2

Full path: checkpoint.products.ls.lsVerMajor

Type: Integer (32 bit)

Status: mandatory

Max access: read-only

Description: Major version

lsVerMinor

OID:	1.3.6.1.4.1.2620.1.11.3
Full path:	checkpoint.products.ls.lsVerMinor
Type:	Integer (32 bit)
Status:	mandatory
Max access:	read-only
Description:	Minor version

lsBuildNumber

OID:	1.3.6.1.4.1.2620.1.11.4
Full path:	checkpoint.products.ls.lsBuildNumber
Type:	Integer (32 bit)
Status:	mandatory
Max access:	read-only
Description:	Build number

lsFwmIsAlive

OID:	1.3.6.1.4.1.2620.1.11.5
Full path:	checkpoint.products.ls.lsFwmIsAlive
Type:	Integer (32 bit)
Status:	mandatory
Max access:	read-only
Description:	Log Server is alive

IsConnectedClientsTable

OID:	1.3.6.1.4.1.2620.1.11.7
Full path:	checkpoint.products.ls.lsConnectedClientsTable
Type:	Sequence
syntax:	SEQUENCE OF LSConnectedClientsEntry
Status:	mandatory
Max access:	not-accessible
Sequences:	1: **IsIndex** - INTEGER(2 - int, int32)
	2: **IsClientName** - DisplayString(4 - octets)
	3: **IsClientHost** - DisplayString(4 - octets)
	4: **IsClientDbLock** - DisplayString(4 - octets)
	5: **IsApplicationType** - DisplayString(4 - octets)

IsConnectedClientsEntry

OID:	1.3.6.1.4.1.2620.1.11.7.1
Full path:	checkpoint.products.Is.IsConnectedClientsTable.IsConnectedClientsEntry
Type:	Sequence
syntax:	SEQUENCE OF IsConnectedClientsEntry
Status:	mandatory
Max access:	not-accessible

IsIndex

OID:	1.3.6.1.4.1.2620.1.11.7.1.1
Full path:	checkpoint.products.Is.IsConnectedClientsTable.isConnectedClientsEntry.IsIndex
Type:	Integer (32 bit)

Status: mandatory

Max access: read-only

Description: Consecutive number of the GUI clients

IsClientName

OID: 1.3.6.1.4.1.2620.1.11.7.1.2

Full path: checkpoint.products.Is.IsConnectedClientsTable.isConnectedClientsEntry.IsClientName

Type: String

Status: mandatory

Max access: read-only

Description: The administrator name

IsClientHost

OID: 1.3.6.1.4.1.2620.1.11.7.1.3

Full path: checkpoint.products.Is.IsConnectedClientsTable.isConnectedClientsEntry.IsClientHost

Type: String

Status: mandatory

Max access: read-only

Description: The GUI client host name

IsClientDbLock

OID: 1.3.6.1.4.1.2620.1.11.7.1.4

Full path: checkpoint.products.Is.IsConnectedClientsTable.IsConnectedClientsEntry.IsClientDbLock

Type: String

Status: mandatory

Max access: read-only

Description: Indicates if the client has locked the database

IsApplicationType

OID: 1.3.6.1.4.1.2620.1.11.7.1.5

Full path: checkpoint.products.Is.IsConnectedClientsTable.IsConnectedClientsEntry.IsApplicationType

Type: String

Status: mandatory

Max access: read-only

Description: Type of the GUI application. For example, Dashboard, SmartView Tracker, SmartView Status and so on.

isStatCode

OID: 1.3.6.1.4.1.2620.1.11.101

Full path: checkpoint.products.ls.lsStatCode

Type: Integer (32 bit)

Status: mandatory

Max access: read-only

Description: Status code

lsStatShortDescr

OID: 1.3.6.1.4.1.2620.1.11.102

Full path: checkpoint.products.ls.lsStatShortDescr

Type: String

Status: mandatory

Max access: read-only

Description: Status short description

lsStatLongDescr

OID:	1.3.6.1.4.1.2620.1.11.103
Full path:	checkpoint.products.ls.lsStatLongDescr
Type:	String
Status:	mandatory
Max access:	read-only
Description:	Status long description

CHAPTER 11

VSX Product MIBs

In This Chapter

Overview *page 217*

MIB Tree Description *page 217*

Overview

This chapter describes the nodes/leafs that comprise the MIBs used in VSX.

MIB Tree Description

This section comprises a detailed description of each leaf in the VSX MIB tree. The following is a diagram of the VSX MIB tree.

- vsx
  - vsxVsSupported
  - vsxVsConfigured
  - vsxVsInstalled
  - vsxVStatus
  - vsxStatusTable
    - vsxStatusEntrySeq
      - vsxStatusVSId
      - vsxStatusVRId
      - vsxStatusVsName
      - vsxStatusVsType
      - vsxStatusMainIP
      - vsxStatusPolicyName
      - vsxStatusvsPolicyType
      - vsxStatusSicTrustState

vsx

OID: 1.3.6.1.4.1.2620.1.16

Full path: checkpoint.products.vsx

vsxVsSupported

OID: 1.3.6.1.4.1.2620.1.16.11

Full path: checkpoint.products.vsx.vsxVsSupported

Type: Integer

Status: mandatory

Max access: read-only

Description: The number of Virtual Systems supported by license

vsxVsConfigured

OID: 1.3.6.1.4.1.2620.1.16.12

Full path: checkpoint.products.vsx.vsxVsConfigured

Type: Integer

Status: mandatory

Max access: read-only

Description: The number of Virtual Systems currently configured in the system

vsxVsInstalled

OID: 1.3.6.1.4.1.2620.1.16.13

Full path: checkpoint.products.vsx.vsxVsInstalled

Type: Integer (32 bit)

Status: mandatory

Max access: read-only

Description: The number of Virtual Systems with Security Policies installed

vsxVStatus

OID: 1.3.6.1.4.1.2620.1.16.22

Full path: checkpoint.products.vsx.vsxStatus

Description: General VSX information

vsxStatusTable

OID: 1.3.6.1.4.1.2620.1.16.22.1

Full path: checkpoint.products.vsx.vsxStatusTable

Type: Sequence

syntax: SEQURENCE OF vsxStatusEntrySeq

Status: mandatory

Max access: not accessible

Sequences:

1: vsxStatusVSId - INTEGER

2: vsxStatusVRId - INTEGER

3: vsxStatusVsName - DisplayString

4: vsxStatusVsType - DisplayString

5: vsxStatusMainIP - DisplayString

6: vsxStatusPolicyName- DisplayString

7: vsxStatusvsPolicyType - DisplayString

8: vsxStatusSicTrustState - DisplayString

vsxStatusEntrySeq

OID:	1.3.6.1.4.1.2620.1.16.22.1.1
Full path:	checkpoint.products.vsx.vsxStatusEntrySeq
Type:	Sequence
syntax:	SEQURENCE OF vsxStatusEntrySeq
Status:	mandatory
Max access:	not accessible

vsxStatusVSId

OID:	1.3.6.1.4.1.2620.1.16.22.1.1.1
Full path:	checkpoint.products.vsx.vsxStatusVSId
Type:	Integer
Status:	mandatory
Max access:	read-only
Description:	Virtual System ID for VS in question

vsxStatusVRId

OID:	1.3.6.1.4.1.2620.1.16.22.1.1.2
Full path:	checkpoint.products.vsx.vsxStatusVRId
Type:	Integer
Status:	mandatory
Max access:	read-only
Description:	Virtual System Operating System ID (VRF ID)

vsxStatusVsName

OID: 1.3.6.1.4.1.2620.1.16.22.1.1.3

Full path: checkpoint.products.vsx.vsxStatusVsName

Type: String

Status: mandatory

Max access: read-only

Description: Virtual System's name

vsxStatusVsType

OID: 1.3.6.1.4.1.2620.1.16.22.1.1.4

Full path: checkpoint.products.vsx.vsxStatusVsType

Type: String

Status: mandatory

Max access: read-only

Description: Virtual System's type:

- M (Management Virtual System)
- S (Virtual System)
- R (Virtual Router)

vsxStatusMainIP

OID: 1.3.6.1.4.1.2620.1.16.22.1.1.5

Full path: checkpoint.products.vsx.vsxStatusMainIP

Type: String

Status: mandatory

Max access: read-only

Description: Main (management) IP for Virtual System in question

vsxStatusPolicyName

OID: 1.3.6.1.4.1.2620.1.16.22.1.1.6

Full path: checkpoint.products.vsx.vsxStatusPolicyName

Type: Sequence

Status: mandatory

Max access: read-only

Description: Name of Security Policy currently installed on Virtual System in question

vsxStatusvsPolicyType

OID: 1.3.6.1.4.1.2620.1.16.22.1.1.7

Full path: checkpoint.products.vsx.vsxStatusvsPolicyType

Type: String

Status: mandatory

Max access: read-only

Description: Virtual System's general status:

- Not Active
- No Policy
- Default Filter
- Initial Policy
- Active

vsxStatusSicTrustState

OID: 1.3.6.1.4.1.2620.1.16.22.1.1.8

Full path: checkpoint.products.vsx.vsxStatusSicTrustState

Type: String

Status: mandatory

Max access: read-only

Description: Virtual System's SIC status:

- Trust not initialized
- Trust initialized, not established
- Trust established
- Trust failed

CHAPTER 12

GX Product MIBs

In This Chapter

Overview *page 225*

MIB Tree Description *page 225*

Overview

This chapter describes the nodes/leafs that comprise the MIBs used in FireWall-1 GX.

MIB Tree Description

This section comprises a detailed description of each leaf in the FireWall-1 GX MIB tree. The following is a diagram of the FireWall-1 GX MIB tree.

- gx
  - gxInfo
  - gxProdName
  - vsxVsInstalled
  - vsxVStatus
  - vsxStatusTable
    - vsxStatusEntrySeq
      - vsxStatusVSId
      - vsxStatusVRId
      - vsxStatusVsName
      - vsxStatusVsType
      - vsxStatusMainIP
      - vsxStatusPolicyName
      - vsxStatusvsPolicyType
      - vsxStatusSicTrustState

gx

OID: 1.3.6.1.4.1.2620.1.20

Full path: checkpoint.products.gx

gxInfo

OID: 1.3.6.1.4.1.2620.1.20.1

Full path: checkpoint.products.gx.gxInfo

gxProdName

OID: 1.3.6.1.4.1.2620.1.20.1.1

Full path: checkpoint.products.gx.gxInfo.gxProdName

Type: String

Access: read-only

Status: mandatory

Description: Product name

vsxVsInstalled

OID: 1.3.6.1.4.1.2620.1.16.13

Full path: checkpoint.products.vsx.vsxVsInstalled

Type: Integer (32 bit)

Status: mandatory

Max access: read-only

Description: The number of Virtual Systems with Security Policies installed

vsxVStatus

OID: 1.3.6.1.4.1.2620.1.16.22

Full path: checkpoint.products.vsx.vsxStatus

Description: General VSX information

vsxStatusTable

OID: 1.3.6.1.4.1.2620.1.16.22.1

Full path: checkpoint.products.vsx.vsxStatusTable

Type: Sequence

syntax: SEQURENCE OF vsxStatusEntrySeq

Status: mandatory

Max access: not accessible

Sequences:

1: vsxStatusVSId - INTEGER

2: vsxStatusVRId - INTEGER

3: vsxStatusVsName - DisplayString

4: vsxStatusVsType - DisplayString

5: vsxStatusMainIP - DisplayString

6: vsxStatusPolicyName- DisplayString

7: vsxStatusvsPolicyType - DisplayString

8: vsxStatusSicTrustState - DisplayString

vsxStatusEntrySeq

OID: 1.3.6.1.4.1.2620.1.16.22.1.1

Full path: checkpoint.products.vsx.vsxStatusEntrySeq

Type: Sequence

syntax: SEQURENCE OF vsxStatusEntrySeq

Status: mandatory

Max access: not accessible

---

vsxStatusVSId

OID: 1.3.6.1.4.1.2620.1.16.22.1.1.1

Full path: checkpoint.products.vsx.vsxStatusVSId

Type: Integer

Status: mandatory

Max access: read-only

Description: Virtual System ID for VS in question

---

vsxStatusVRId

OID: 1.3.6.1.4.1.2620.1.16.22.1.1.2

Full path: checkpoint.products.vsx.vsxStatusVRId

Type: Integer

Status: mandatory

Max access: read-only

Description: Virtual System Operating System ID (VRF ID)

---

vsxStatusVsName

OID: 1.3.6.1.4.1.2620.1.16.22.1.1.3

Full path: checkpoint.products.vsx.vsxStatusVsName

Type: String

Status: mandatory

Max access: read-only

Description: Virtual System's name

vsxStatusVsType

OID: 1.3.6.1.4.1.2620.1.16.22.1.1.4

Full path: checkpoint.products.vsx.vsxStatusVsType

Type: String

Status: mandatory

Max access: read-only

Description: Virtual System's type:

- M (Management Virtual System)
- S (Virtual System)
- R (Virtual Router)

vsxStatusMainIP

OID: 1.3.6.1.4.1.2620.1.16.22.1.1.5

Full path: checkpoint.products.vsx.vsxStatusMainIP

Type: String

Status: mandatory

Max access: read-only

Description: Main (management) IP for Virtual System in question

vsxStatusPolicyName

OID: 1.3.6.1.4.1.2620.1.16.22.1.1.6

Full path: checkpoint.products.vsx.vsxStatusPolicyName

Type: Sequence

Status: mandatory

Max access: read-only

Description: Name of Security Policy currently installed on Virtual System in question

vsxStatusvsPolicyType

OID: 1.3.6.1.4.1.2620.1.16.22.1.1.7

Full path: checkpoint.products.vsx.vsxStatusvsPolicyType

Type: String

Status: mandatory

Max access: read-only

Description: Virtual System's general status:

- Not Active
- No Policy
- Default Filter
- Initial Policy
- Active

vsxStatusSicTrustState

OID: 1.3.6.1.4.1.2620.1.16.22.1.1.8

Full path: checkpoint.products.vsx.vsxStatusSicTrustState

Type: String

Status: mandatory

Max access: read-only

Description: Virtual System's SIC status:

- Trust not initialized
- Trust initialized, not established
- Trust established
- Trust failed

THIRD PARTY TRADEMARKS AND COPYRIGHTS

Entrust is a registered trademark of Entrust Technologies, Inc. in the United States and other countries. Entrust's logos and Entrust product and service names are also trademarks of Entrust Technologies, Inc. Entrust Technologies Limited is a wholly owned subsidiary of Entrust Technologies, Inc. FireWall-1 and SecuRemote incorporate certificate management technology from Entrust.

Verisign is a trademark of Verisign Inc.

The following statements refer to those portions of the software copyrighted by University of Michigan. Portions of the software copyright © 1992-1996 Regents of the University of Michigan. All rights reserved. Redistribution and use in source and binary forms are permitted provided that this notice is preserved and that due credit is given to the University of Michigan at Ann Arbor. The name of the University may not be used to endorse or promote products derived from this software without specific prior written permission. This software is provided "as is" without express or implied warranty. Copyright © Sax Software (terminal emulation only).

The following statements refer to those portions of the software copyrighted by Carnegie Mellon University.

Copyright 1997 by Carnegie Mellon University. All Rights Reserved.

Permission to use, copy, modify, and distribute this software and its documentation for any purpose and without fee is hereby granted, provided that the above copyright notice appear in all copies and that both that copyright notice and this permission notice appear in supporting documentation, and that the name of CMU not be used in advertising or publicity pertaining to distribution of the software without specific, written prior permission.CMU DISCLAIMS ALL WARRANTIES WITH REGARD TO THIS SOFTWARE, INCLUDING ALL IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS, IN NO EVENT SHALL CMU BE LIABLE FOR ANY SPECIAL, INDIRECT OR CONSEQUENTIAL DAMAGES OR ANY DAMAGES WHATSOEVER RESULTING FROM LOSS OF USE, DATA OR PROFITS, WHETHER IN AN ACTION OF CONTRACT, NEGLIGENCE OR OTHER TORTIOUS ACTION, ARISING OUT OF OR IN CONNECTION WITH THE USE OR PERFORMANCE OF THIS SOFTWARE.

The following statements refer to those portions of the software copyrighted by The Open Group.

THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE OPEN GROUP BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

The following statements refer to those portions of the software copyrighted by The OpenSSL Project. This product includes software developed by the OpenSSL Project for use in the OpenSSL Toolkit (http://www.openssl.org/).

THIS SOFTWARE IS PROVIDED BY THE OpenSSL PROJECT ``AS IS'' AND ANY * EXPRESSED OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE OpenSSL PROJECT OR ITS CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

The following statements refer to those portions of the software copyrighted by Eric Young. THIS SOFTWARE IS PROVIDED BY ERIC YOUNG ``AS IS'' AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE AUTHOR OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE. Copyright © 1998 The Open Group.

The following statements refer to those portions of the software copyrighted by Jean-loup Gailly and Mark Adler Copyright (C) 1995-2002 Jean-loup Gailly and Mark Adler. This software is provided 'as-is', without any express or implied warranty. In no event will the authors be held liable for any damages arising from the use of this software. Permission is granted to anyone to use this software for any purpose, including commercial applications, and to alter it and redistribute it freely, subject to the following restrictions:

1. The origin of this software must not be misrepresented; you must not claim that you wrote the original software. If you use this software in a product, an acknowledgment in the product documentation would be appreciated but is not required.

2. Altered source versions must be plainly marked as such, and must not be misrepresented as being the original software.

3. This notice may not be removed or altered from any source distribution.

The following statements refer to those portions of the software copyrighted by the Gnu Public License. This program is free software; you can redistribute it and/or modify it under the terms of the GNU General Public License as published by the Free Software Foundation; either version 2 of the License, or (at your option) any later version. This program is distributed in the hope that it will be useful, but WITHOUT ANY WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the GNU General Public License for more details.You should have received a copy of the GNU General Public License along with this program; if not, write to the Free Software Foundation, Inc., 675 Mass Ave, Cambridge, MA 02139, USA.

The following statements refer to those portions of the software copyrighted by Thai Open Source Software Center Ltd and Clark Cooper Copyright (c) 2001, 2002 Expat maintainers. Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute, sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions: The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software. THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.
GDChart is free for use in your applications and for chart generation. YOU MAY NOT re-distribute or represent the code as your own. Any re-distributions of the code MUST reference the author, and include any and all original documentation. Copyright. Bruce Verderaime. 1998, 1999, 2000, 2001. Portions copyright 1994, 1995, 1996, 1997, 1998, 1999, 2000, 2001, 2002 by Cold Spring Harbor Laboratory. Funded under Grant P41-RR02188 by the National Institutes of Health. Portions copyright 1996, 1997, 1998, 1999, 2000, 2001, 2002 by Boutell.Com, Inc. Portions relating to GD2 format copyright 1999, 2000, 2001, 2002 Philip Warner. Portions relating to PNG copyright 1999, 2000, 2001, 2002 Greg Roelofs. Portions relating to gdttf.c copyright 1999, 2000, 2001, 2002 John Ellson (ellson@graphviz.org). Portions relating to gdft.c copyright 2001, 2002 John Ellson (ellson@graphviz.org). Portions relating to JPEG and to color quantization copyright 2000, 2001, 2002, Doug Becker and copyright (C) 1994, 1995, 1996, 1997, 1998, 1999, 2000, 2001, 2002, Thomas G. Lane. This software is based in part on the work of the Independent JPEG Group. See the file README-JPEG.TXT for more information. Portions relating to WBMP copyright 2000, 2001, 2002 Maurice Szmurlo and Johan Van den Brande. Permission has been granted to copy, distribute and modify gd in any context without fee, including a commercial application, provided that this notice is present in user-accessible supporting documentation. This does not affect your ownership of the derived work itself, and the intent is to assure proper credit for the authors of gd, not to interfere with your productive use of gd. If you have questions, ask. "Derived works" includes all programs that utilize the library. Credit must be given in user-accessible documentation. This software is provided "AS IS." The copyright holders disclaim all warranties, either express or implied, including but not limited to implied warranties of merchantability and fitness for a particular purpose, with respect to this code and accompanying documentation. Although their code does not appear in gd 2.0.4, the authors wish to thank David Koblas, David Rowley, and Hutchison Avenue Software Corporation for their prior contributions.

Licensed under the Apache License, Version 2.0 (the "License"); you may not use this file except in compliance with the License. You may obtain a copy of the License at http://www.apache.org/licenses/LICENSE-2.0

The curl license

COPYRIGHT AND PERMISSION NOTICE

Copyright (c) 1996 - 2004, Daniel Stenberg, <daniel@haxx.se>.All rights reserved.

Permission to use, copy, modify, and distribute this software for any purpose

with or without fee is hereby granted, provided that the above copyright

notice and this permission notice appear in all copies.

THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT OF THIRD PARTY RIGHTS. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

Except as contained in this notice, the name of a copyright holder shall not be used in advertising or otherwise to promote the sale, use or other dealings in this Software without prior written authorization of the copyright holder.

The PHP License, version 3.0

Copyright (c) 1999 - 2004 The PHP Group. All rights reserved.

Redistribution and use in source and binary forms, with or without modification, is permitted provided that the following conditions are met:

1. Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.

2. Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.

3. The name "PHP" must not be used to endorse or promote products derived from this software without prior written permission. For written permission, please contact group@php.net.

4. Products derived from this software may not be called "PHP", nor may "PHP" appear in their name, without prior written permission from group@php.net. You may indicate that your software works in conjunction with PHP by saying "Foo for PHP" instead of calling it "PHP Foo" or "phpfoo"

5. The PHP Group may publish revised and/or new versions of the license from time to time. Each version will be given a distinguishing version number. Once covered code has been published under a particular version of the license, you may always continue to use it under the terms of that version. You may also choose to use such covered code under the terms of any subsequent version of the license published by the PHP Group. No one other than the PHP Group has the right to modify the terms applicable to covered code created under this License.

6. Redistributions of any form whatsoever must retain the following acknowledgment:

"This product includes PHP, freely available from <http://www.php.net/>".

THIS SOFTWARE IS PROVIDED BY THE PHP DEVELOPMENT TEAM ``AS IS'' AND ANY EXPRESSED OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE PHP DEVELOPMENT TEAM OR ITS CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

This software consists of voluntary contributions made by many individuals on behalf of the PHP Group. The PHP Group can be contacted via Email at group@php.net.

For more information on the PHP Group and the PHP project, please see <http://www.php.net>. This product includes the Zend Engine, freely available at <http://www.zend.com>.

This product includes software written by Tim Hudson (tjh@cryptsoft.com).

THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE COPYRIGHT OWNER OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS

INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

Copyright (c) 1998, 1999, 2000 Thai Open Source Software Center Ltd

Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute, sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions: The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software.

THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

Copyright © 2003, 2004 NextHop Technologies, Inc. All rights reserved.

Confidential Copyright Notice

Except as stated herein, none of the material provided as a part of this document may be copied, reproduced, distrib-uted, republished, downloaded, displayed, posted or transmitted in any form or by any means, including, but not lim-ited to, electronic, mechanical, photocopying, recording, or otherwise, without the prior written permission of NextHop Technologies, Inc. Permission is granted to display, copy, distribute and download the materials in this doc-ument for personal, non-commercial use only, provided you do not modify the materials and that you retain all copy-right and other proprietary notices contained in the materials unless otherwise stated. No material contained in this document may be "mirrored" on any server without written permission of NextHop. Any unauthorized use of any material contained in this document may violate copyright laws, trademark laws, the laws of privacy and publicity, and communications regulations and statutes. Permission terminates automatically if any of these terms or condi-tions are breached. Upon termination, any downloaded and printed materials must be immediately destroyed.

Trademark Notice

The trademarks, service marks, and logos (the "Trademarks") used and displayed in this document are registered and unregistered Trademarks of NextHop in the US and/or other countries. The names of actual companies and products mentioned herein may be Trademarks of their respective owners. Nothing in this document should be construed as granting, by implication, estoppel, or otherwise, any license or right to use any Trademark displayed in the document. The owners aggressively enforce their intellectual property rights to the fullest extent of the law. The Trademarks may not be used in any way, including in advertising or publicity pertaining to distribution of, or access to, materials in

this document, including use, without prior, written permission. Use of Trademarks as a "hot" link to any website is prohibited unless establishment of such a link is approved in advance in writing. Any questions concerning the use of these Trademarks should be referred to NextHop at U.S. +1 734 222 1600.

U.S. Government Restricted Rights

The material in document is provided with "RESTRICTED RIGHTS." Software and accompanying documentation are provided to the U.S. government ("Government") in a transaction subject to the Federal Acquisition Regulations with Restricted Rights. The Government's rights to use, modify, reproduce, release, perform, display or disclose are

restricted by paragraph (b)(3) of the Rights in Noncommercial Computer Software and Noncommercial Computer Soft-ware Documentation clause at DFAR 252.227-7014 (Jun 1995), and the other restrictions and terms in paragraph (g)(3)(i) of Rights in Data-General clause at FAR 52.227-14, Alternative III (Jun 87) and paragraph (c)(2) of the Commer-cial

Computer Software-Restricted Rights clause at FAR 52.227-19 (Jun 1987).

Use of the material in this document by the Government constitutes acknowledgment of NextHop's proprietary rights in them, or that of the original creator. The Contractor/Licensor is NextHop located at 1911 Landings Drive, Mountain View, California 94043. Use, duplication, or disclosure by the Government is subject to restrictions as set forth in applicable laws and regulations.

Disclaimer Warranty Disclaimer Warranty Disclaimer Warranty Disclaimer Warranty

THE MATERIAL IN THIS DOCUMENT IS PROVIDED "AS IS" WITHOUT WARRANTIES OF ANY KIND EITHER EXPRESS OR IMPLIED. TO THE FULLEST EXTENT POSSIBLE PURSUANT TO THE APPLICABLE LAW, NEXTHOP DISCLAIMS ALL WARRANTIES,

EXPRESSED OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, NON INFRINGEMENT OR OTHER VIOLATION OF RIGHTS. NEITHER NEXTHOP NOR ANY OTHER PROVIDER OR DEVELOPER OF MATERIAL CONTAINED IN THIS DOCUMENT WARRANTS OR MAKES ANY REPRESEN-TATIONS REGARDING THE USE, VALIDITY, ACCURACY, OR RELIABILITY OF, OR THE RESULTS OF THE USE OF, OR OTHERWISE RESPECTING, THE MATERIAL IN THIS DOCUMENT.

Limitation of Liability

UNDER NO CIRCUMSTANCES SHALL NEXTHOP BE LIABLE FOR ANY DIRECT, INDIRECT, SPECIAL, INCIDENTAL OR CONSEQUENTIAL DAMAGES, INCLUDING, BUT NOT LIMITED TO, LOSS OF DATA OR PROFIT, ARISING OUT OF THE USE, OR THE INABILITY TO USE, THE MATERIAL IN THIS DOCUMENT, EVEN IF NEXTHOP OR A NEXTHOP AUTHORIZED REPRESENTATIVE HAS ADVISED OF THE POSSIBILITY OF SUCH DAMAGES. IF YOUR USE OF MATERIAL FROM THIS DOCUMENT RESULTS IN THE NEED FOR SERVICING, REPAIR OR CORRECTION OF EQUIPMENT OR DATA, YOU ASSUME ANY COSTS THEREOF. SOME STATES DO NOT ALLOW THE EXCLUSION OR LIMITATION OF INCIDENTAL OR CONSEQUENTIAL DAMAGES, SO THE ABOVE LIMITATION OR EXCLUSION MAY NOT FULLY APPLY TO YOU.

Copyright © ComponentOne, LLC 1991-2002. All Rights Reserved.

BIND: ISC Bind (Copyright (c) 2004 by Internet Systems Consortium, Inc. ("ISC"))

Copyright 1997-2001, Theo de Raadt: the OpenBSD 2.9 Release

PCRE LICENCE

PCRE is a library of functions to support regular expressions whose syntax and semantics are as close as possible to those of the Perl 5 language. Release 5 of PCRE is distributed under the terms of the "BSD" licence, as specified below. The documentation for PCRE, supplied in the "doc" directory, is distributed under the same terms as the software itself.

Written by: Philip Hazel <ph10@cam.ac.uk>

University of Cambridge Computing Service, Cambridge, England. Phone:

+44 1223 334714.

Copyright (c) 1997-2004 University of Cambridge All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

* Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.

* Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.

* Neither the name of the University of Cambridge nor the names of its contributors may be used to endorse or promote products derived from this software without specific prior written permission.

THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE COPYRIGHT OWNER OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

Eventia Reporter includes software whose copyright is owned by, or licensed from, MySQL AB.