Software quality and formal methods: Hoare/Dijkstra approach

Dr. Ivan S. Zapreev

Neat Software Designs

2020-01-20

Global Outline:

Software Quality

Software Quality: Outline

- Our Motivation
- Software Development
- Software Verification

Our Motivation: Therac-25

- Years 1985–1987:
    - Radiation therapy overdose
    - Control software flaw:
        - Race conditions
    - Death of 6 (six) cancer patients

Figure 1: Radiation therapy

Our Motivation: Ariane-5

- Year **1996**:
  - Missile crash
  - Control software flaw:
    - 64-bit float to 16-bit int
  - $7 billion development program
  - $500 million cargo

Our Motivation: Toyota Camry

- Year 2005
  - Sudden unintended acceleration:
  - Control software flaw:
    - Recursion causing stack overflow
  - 89 deaths and 57 injuries
  - $1.2 billion compensations

Figure 3: Automobiles

Our Motivation: Plenty More

The 12 Software Bugs That Caused Epic Failures: <link>

Software Development: V-model

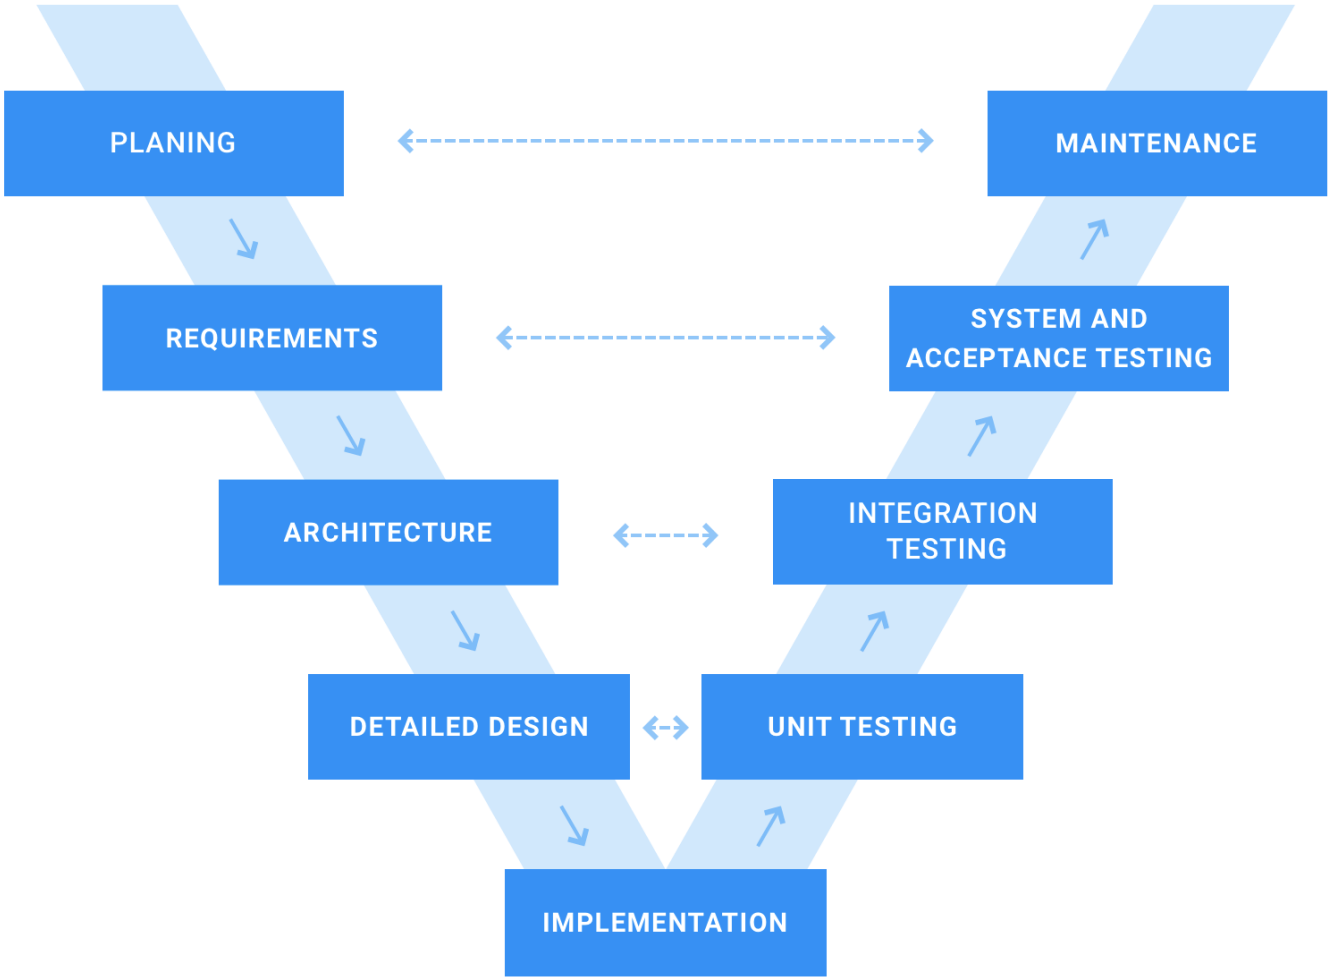

Figure 4: Software development process

Software Development: V & V

Is formally defined in, e.g.: `ISO-9000:2015`:

- **Verification** – *"Confirmation, through the provision of objective evidence, that specified requirements have been fulfilled."*
- **Validation** – *"Confirmation, through the provision of objective evidence, that the requirements for a specific intended use or application have been fulfilled."*

Software Development: Testing

- **Verification**:
  - Are we building the product right?
  - Does the system comply with its specification?
- **Validation**:
  - Are we building the right product?
  - Does the system meet the needs of the customer?

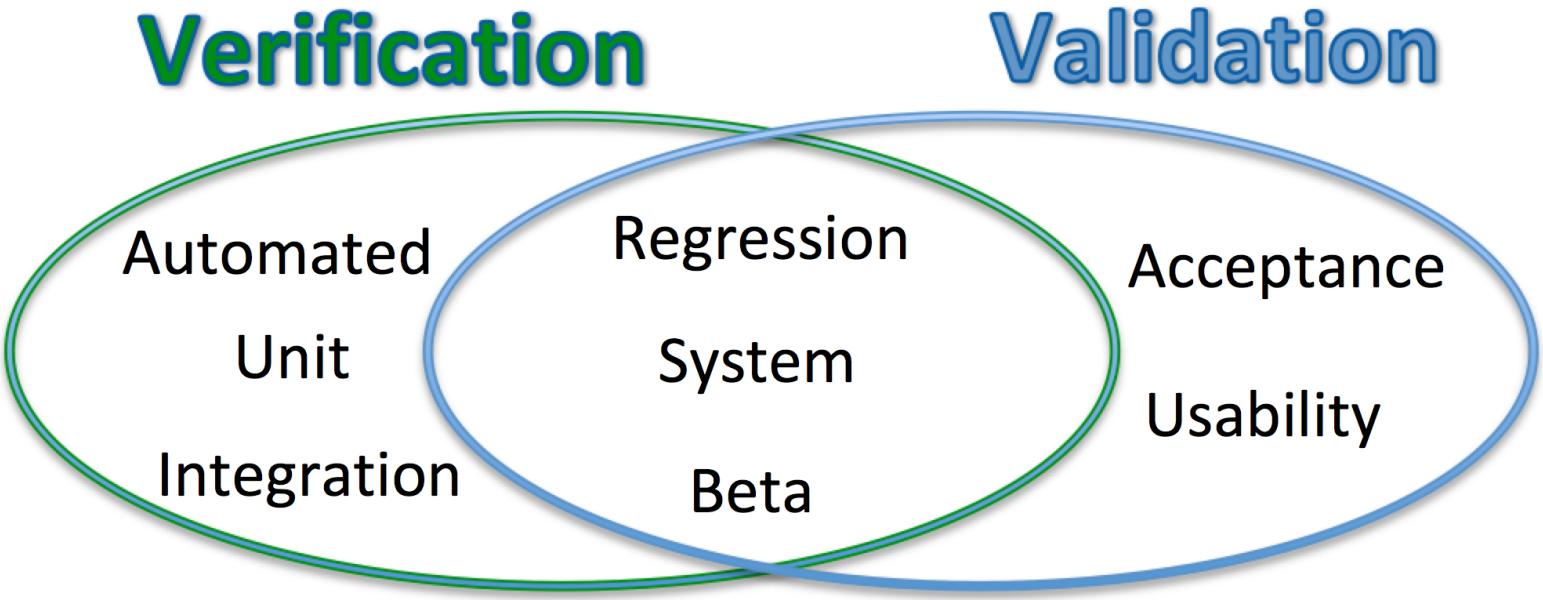

Figure 5: Devision of testing types

Formal Verification

Facts:

- No globally recognized definition of Formal Methods[1].
- Local attempts to have one[2], e.g.:

"Formal methods are techniques used to model complex systems as mathematical entities."

"By building a rigorous model of a complex system, it is possible to verify the system's properties in a more thorough fashion than empirical testing."

Conclusion:

Formal methods are techniques suitable for Verification.

[1] "Formal Methods for Industrial Critical Systems", S. Gnesi, T. Margaria
[2] "Formal Methods", Michael Collins, CMU

Software Verification

Goal:

A program shall satisfy a formal specification of its behavior.

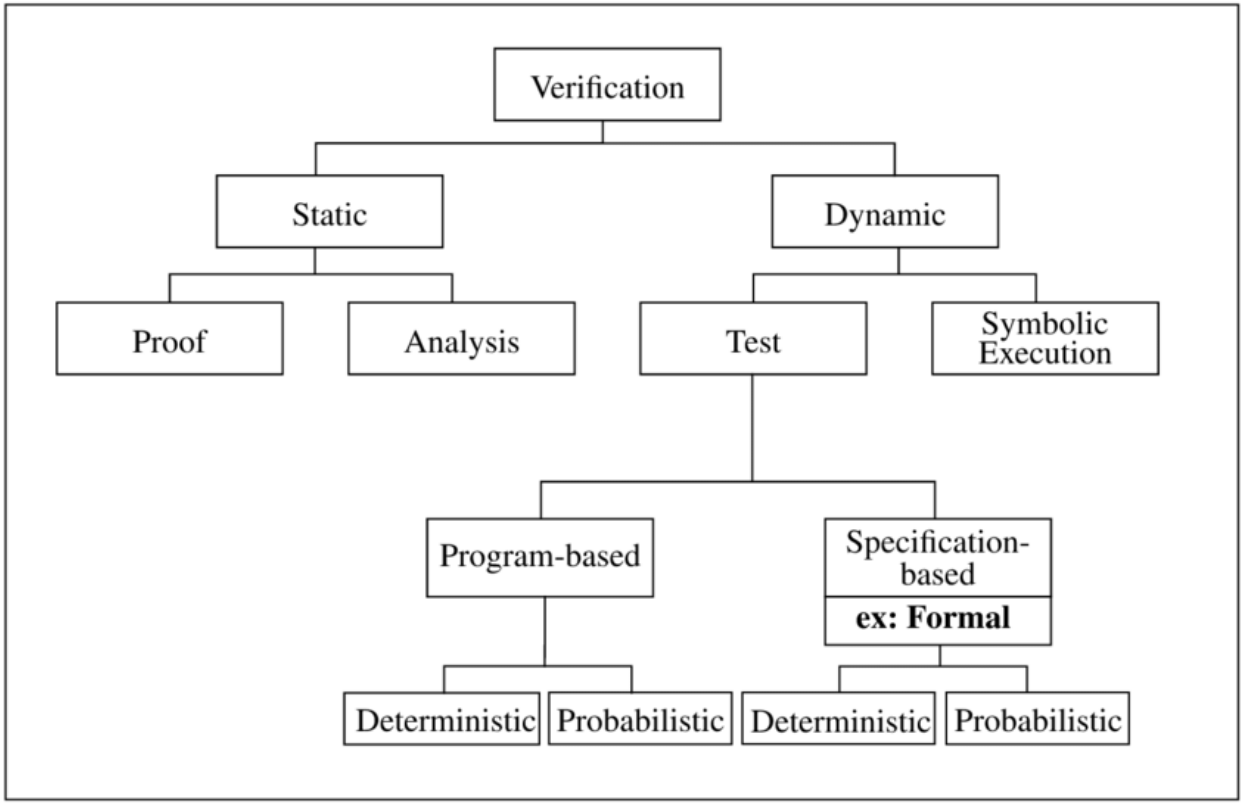

Figure 6: Verification methods

Programming Languages

Programming Languages: Outline

- Language generations
- Declarative vs. Imperative
- What is ANSI-C?

Language generations

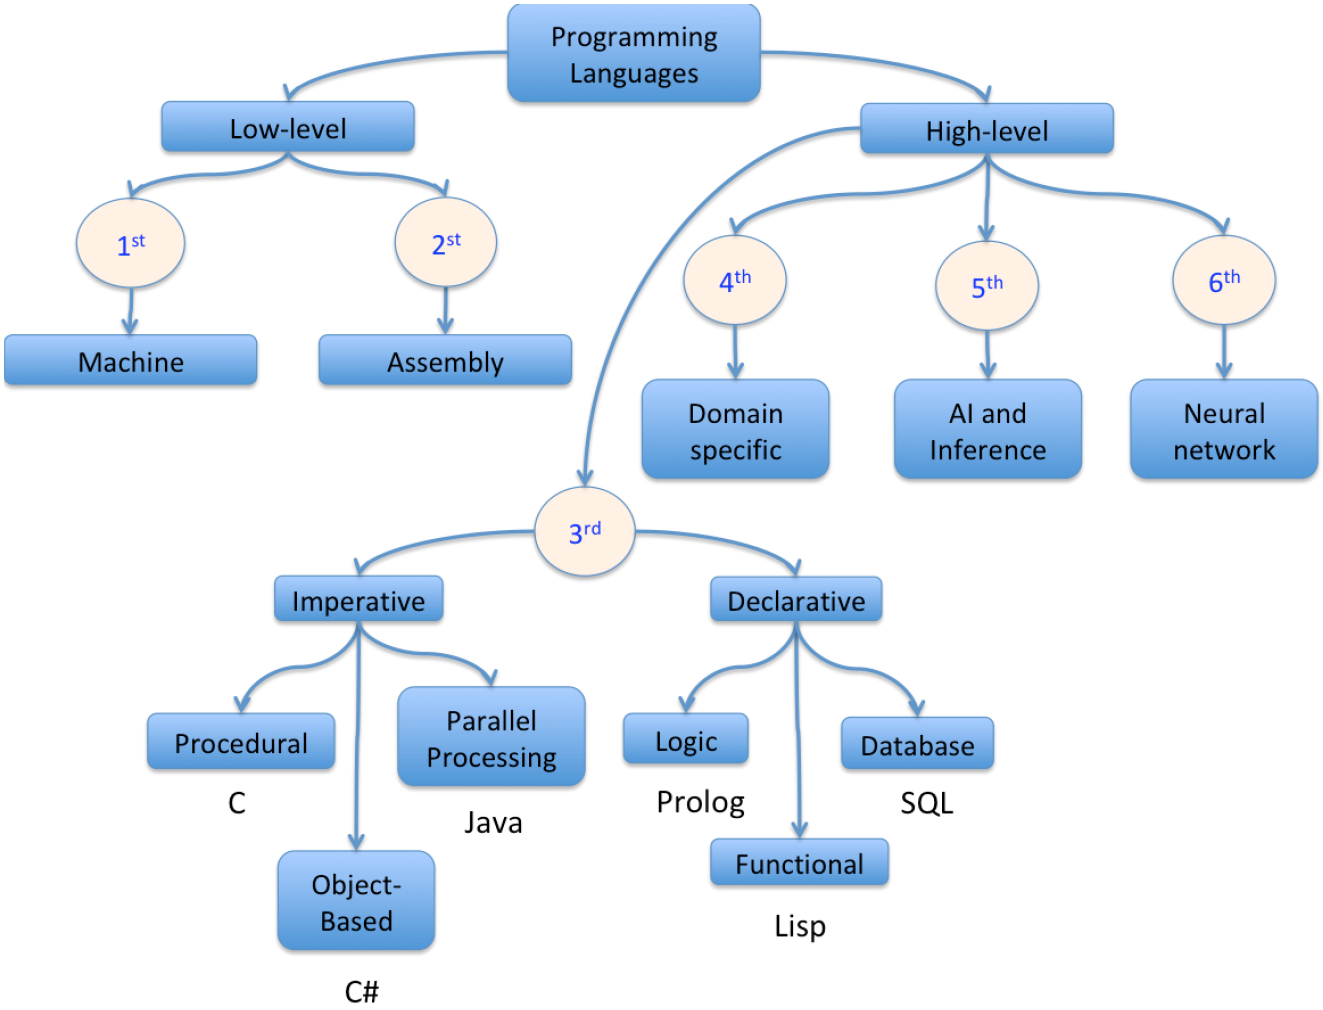

Figure 7: Generations of Programming languages

Declarative vs. Imperative: Main

- *Declarative* – Expresses what to accomplish without specifying concrete steps.

```
//Declarative `JavaScript`
var arr_dbl = arr.map((x) => x * 2)
```

- *Imperative* – Describes computation in terms of statements that change a program state.

```
//Imperative `JavaScript`
var arr_dbl = []
for (let i = 0; i < arr.length; i++) {
  arr_dbl.push(arr[i] * 2)
}
```

Declarative vs. Imperative: Test

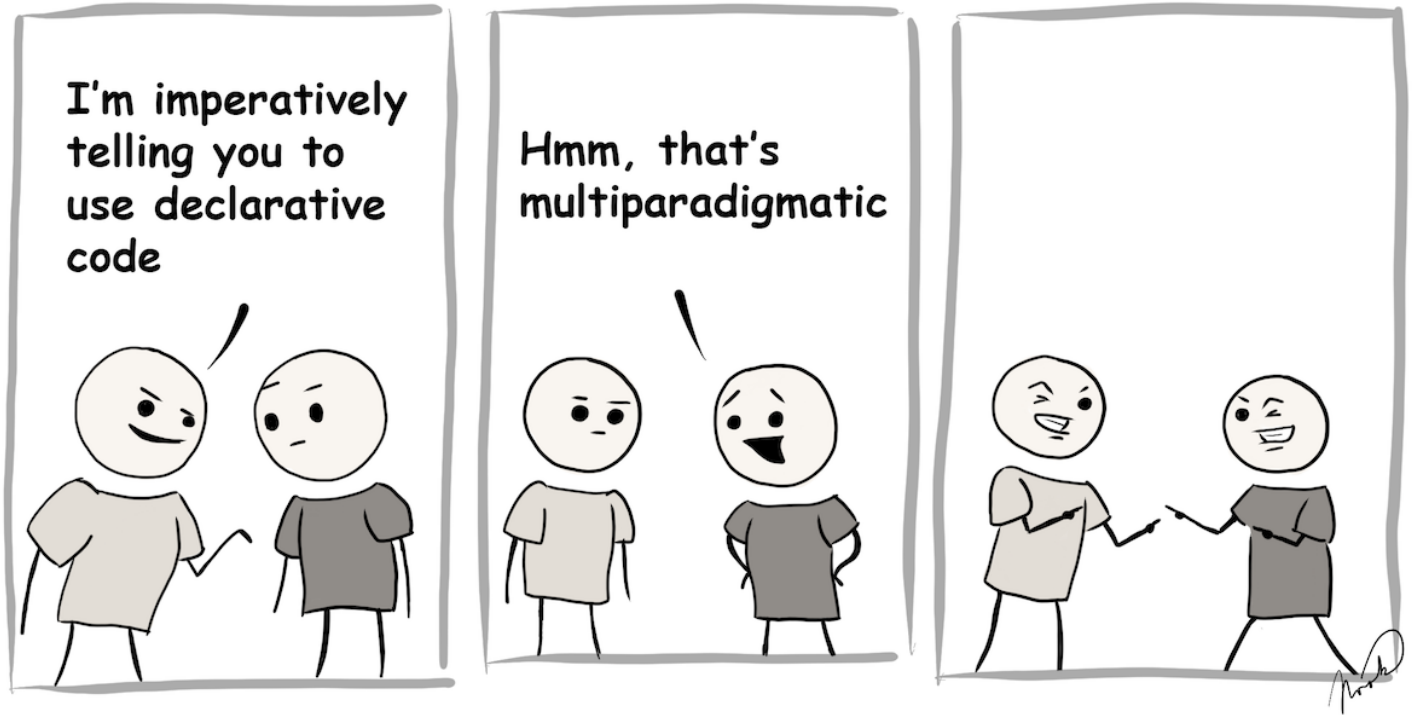

Figure 8: If you laugh, it means you've passed

What is ANSI-C: Old C

Procedural language:

Is an imperative language in which the program is built from one or more subroutines commonly known as `functions`.

`C` language:

`C` is an *imperative procedural* language.

Defining ANSI-C:

`ANSI-C` is a common name for two equivalent language specs:

- `C89` by American National Standards Institute (ANSI)
- `C90` by International Organization for Standardization (ISO)

Formal Methods

Formal Methods: Outline

- Formal Verification
- Hoare Approach
- Dijkstra Extension

Formal verification

Question: Does formal *validation* exist?

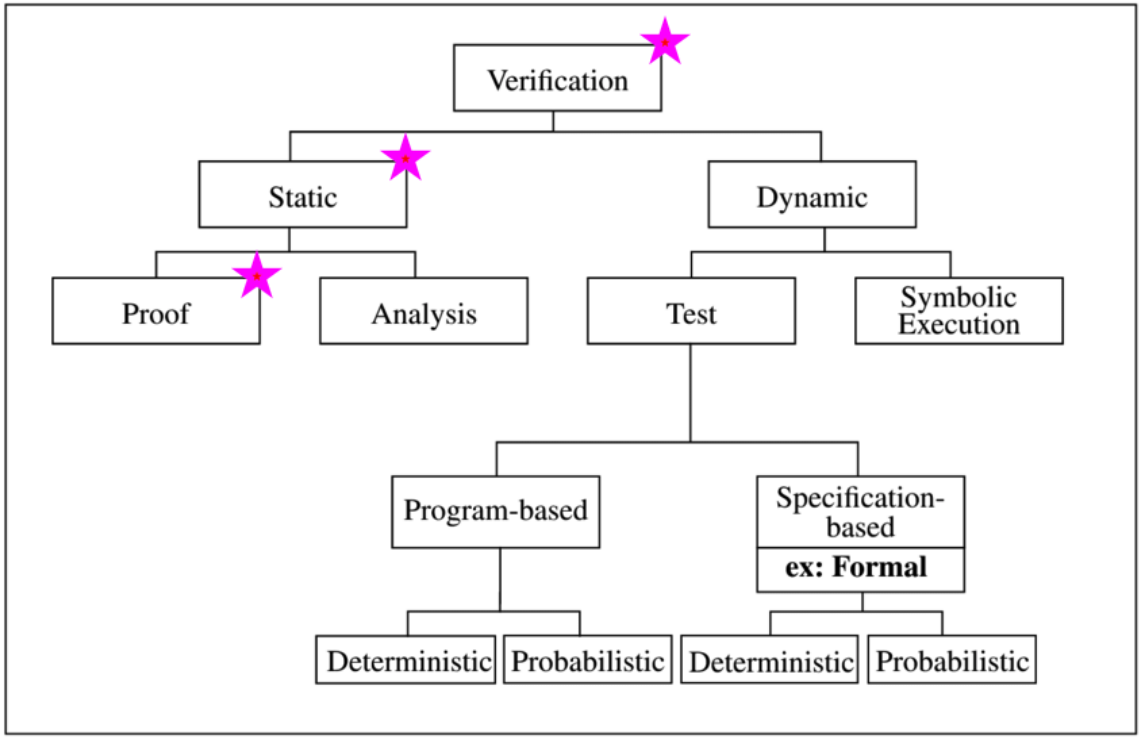

Figure 9: Formal correctness proving

Prove conformance to specifications for *imperative programs*.

Hoare Approach[3]

Hoare triples: $\{P\}\,C\,\{Q\}$

C - code; P - pre-condition; Q - post-condition;

Axioms, e.g. *Skip* and *Assign*:

$$\frac{-}{\{P\}skip\{P\}} \text{ and } \frac{-}{\{P[E/V]\}V{:=}E\{P\}}$$

Where E is any expression and V is any variable.

Inference rules, e.g. *Composition* and *Conditional*:

$$\frac{\{P\}S_1\{R\},\,\{R\}S_2\{Q\}}{\{P\}S_1;\,S_2\{Q\}} \text{ and } \frac{\{B \wedge P\}S\{Q\},\,\{\neg B \wedge P\}T\{Q\}}{\{P\}\ \textbf{if}\ B\ \textbf{then}\ S\ \textbf{else}\ T\ \textbf{elseif}\ \{Q\}}$$

Partial correctness: If P holds before executing C then Q holds afterwards, ONLY if C terminates.

[3] "An Axiomatic Basis for Computer Programming", Tony Hoare, 1969.

Dijkstra Extension[4]

The *weakest precondition calculus* for

- A predicate transform semantics to mechanize the proofs.
- Explains how C transforms P into Q.

Backward reasoning:

- Based on Q and C calculate the *weakest pre-condition* $\widehat{P}$
- If $P \implies \widehat{P}$, then the proof is complete

Forward reasoning:

- Based on P and C calculate the *strongest post-condition* $\widehat{Q}$
- If $\widehat{Q} \implies Q$, then the proof is complete

[4] "Guarded commands, non-determinacy and formal derivation of programs", Edsger Dijkstra, 1975

Frama - C

Frama - C: Outline

- Platform description
- Plugins overview
- What is ACSL?

Platform description

A plug-in-based open-source cross-platform framework for `C` source-code analysis:

- Browsing unfamiliar code
- Static code analysis
- Dynamic code analysis
- Code transformations
- Certification of critical software

You can easily build upon the existing plug-ins to implement your own analysis.

Plugins overview: Main

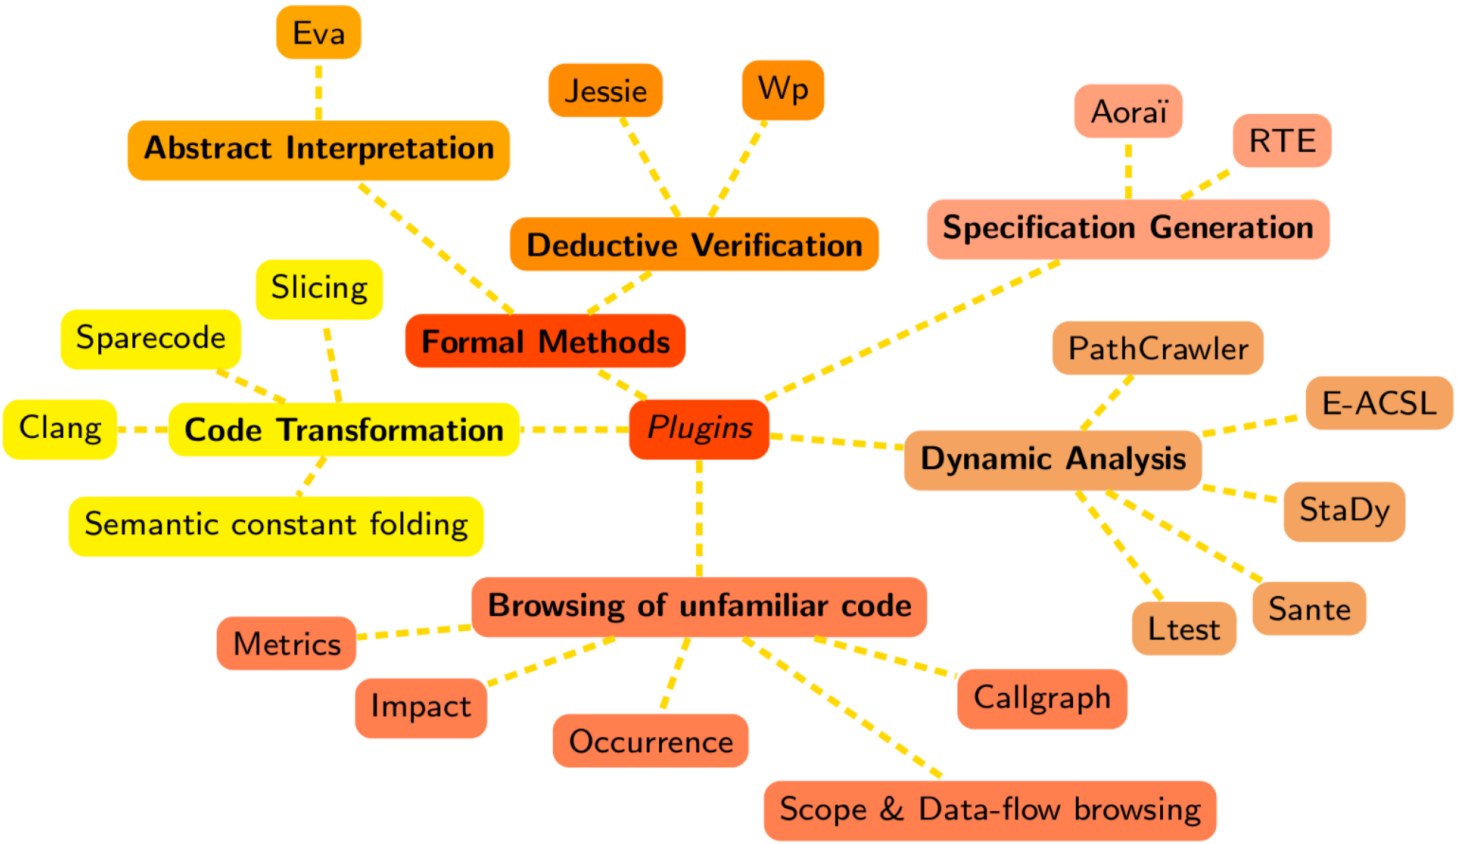

Figure 10: Frama-C plugins

Plugins overview: WP

WP – *weakest precondition* for ACSL specs of ANSI-C programs.

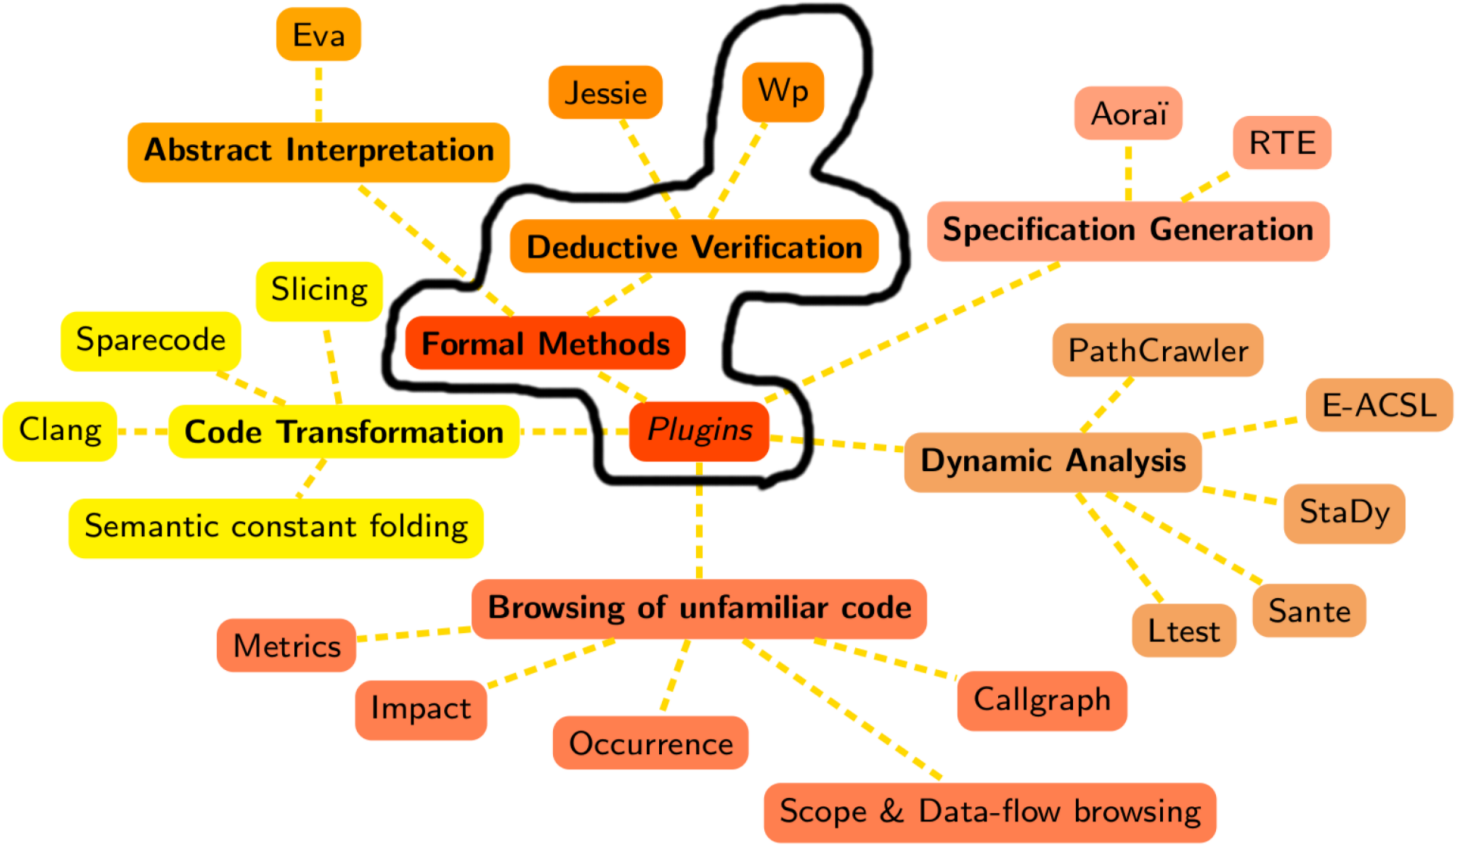

Figure 11: Frama-C WP plugin

What is ACSL: General

In short:

- ACSL – ANSI/ISO C Specification Language
- Allows to formally specify properties of a C program

It is all about function contracts:

```
/*@ ensures \result >= x && \result >= y;
    ensures \result == x || \result == y;
 */
int max (int x, int y) {
  return(x > y) ? x : y;
}
```

A function contract is a combination of:

- post-conditions - `ensures`
- pre-conditions - `requires`

What is ACSL: Pointers

ACSL allows to reason about, e.g.:

- Pointers
- Arrays
- Termination

Consider pointers:

```
/*@ requires \valid(p) && \valid(q);
    ensures *p <= *q;
 */
void max_ptr (int *x, int *y) {
  if(*x >*y) {
    int tmp =*x;
    *x =*y;
    *y = tmp;
  }
}
```

What is ACSL: Completeness

Is the following `max_ptr` implementation correct?

```
/*@ requires \valid(p) && \valid(q);
      ensures *p <= *q;
 */
void max_ptr (int *x, int *y) {
  *p = *q = 0;
}
```

The is the following specification *complete*?

```
/*@ requires \valid(p) && \valid(q);
      ensures *p <= *q;
      ensures (*p == \old(*p) && *q == \old(*q)) ||
              (*p == \old(*q) && *q == \old(*p));
 */
void max_ptr(int*p, int*q);
```

What is ACSL: The whole spec.

The complete specification *v1.4* has 93 pages:
https://frama-c.com/download/acsl_1.4.pdf

Figure 12: Feel free to explore

Verification in practice

Verification in practice: Outline

- Verification Examples
- Verification Outcomes
- The morale

Verification Examples

Verification Outcomes

If the proof is **OK**:

- The program satisfies the specification
- *Is the specification correct/complete?*

If the proof is **NOK**:

- An *incorrect implementation*
  - Find counter-example via test generation;
- A *wrong specification*
  - Complete spec. and proof analysis;
  - Change/extend the specification;
- A *prover's failure*
  - Alternative provers;
  - Interactive proof assistants;

The morale

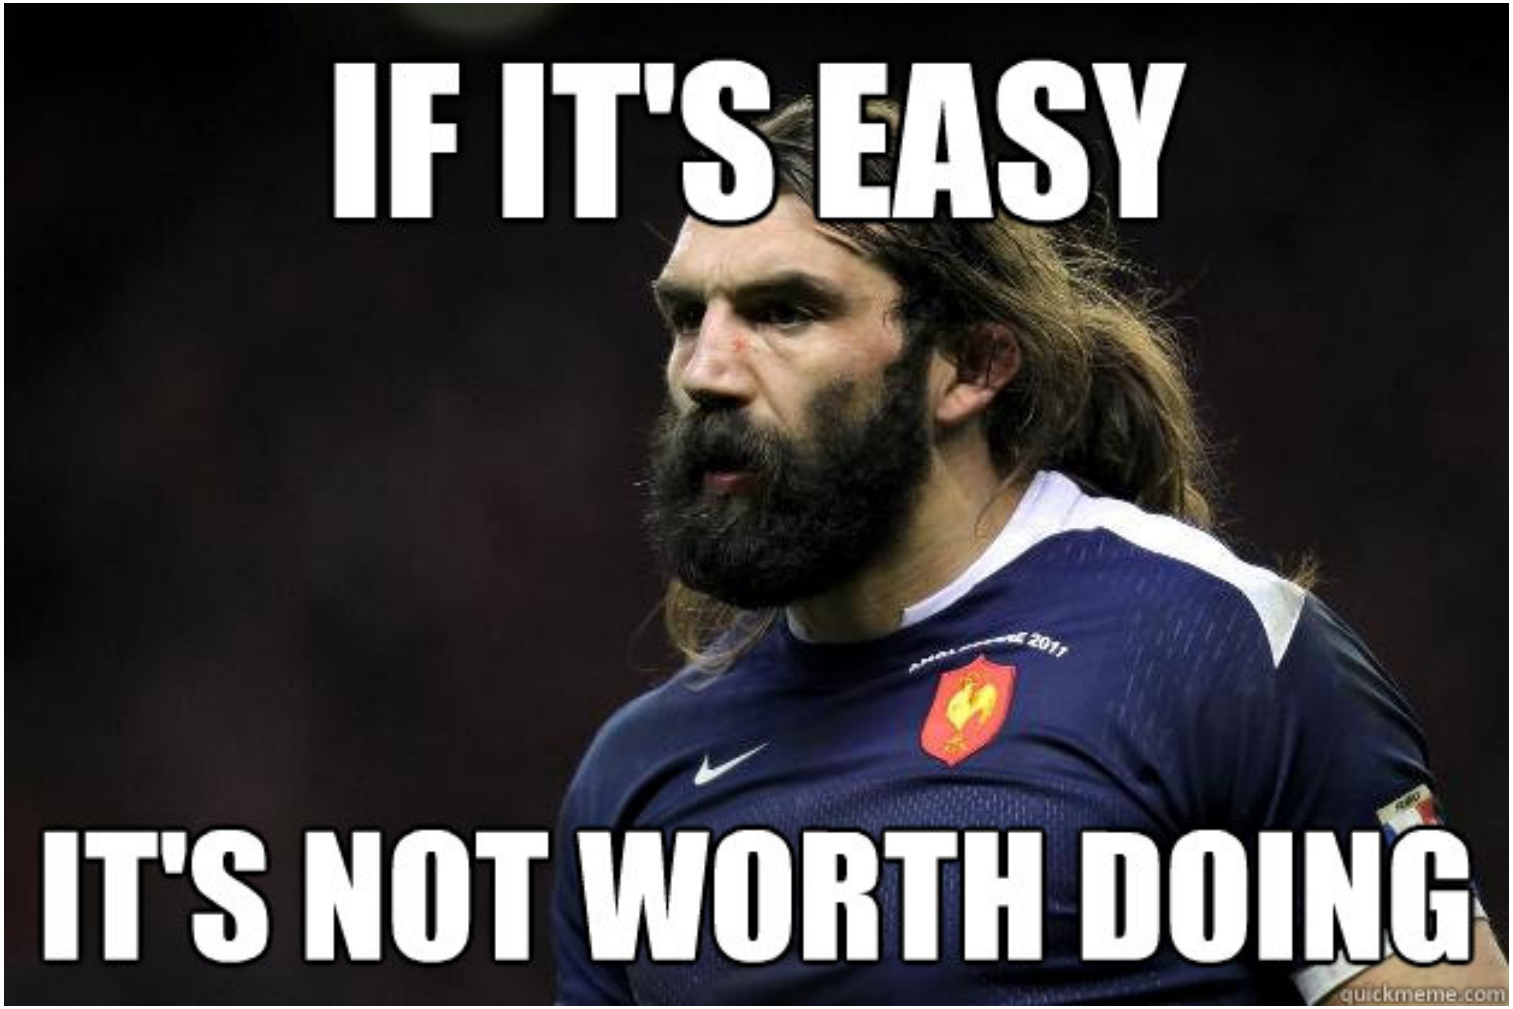

Figure 13: It is not so easy but . . .

Concluding remarks

Concluding remarks

- We had an overview of
- Questions?