

Capture the Flag 6: Active or Inactive?

Goal: Make your Student Directory respond to student data by conditionally showing, hiding, and changing UI elements based on each student's state.

Instructor Note

These activities require your own problem-solving and research skills.

DO NOT use AI to generate the code for you.

You may use AI to:

- Research what a Dart/Flutter feature does
- Understand syntax
- Explain an error (not fix your error)
- Clarify documentation

You may **NOT** ask AI to generate the solution/code for a flag.

🚩 Flag 0 — Create Your Feature Branch

Objective: Create a new feature branch before adding conditional UI.

Create:

`feature/conditional-ui`

Screenshot:

- Terminal showing your current branch

```
C:\Users\johnf\Downloads\ggs\my_first_flutter_app>git switch -c feature/conditional-ui
Switched to a new branch 'feature/conditional-ui'

C:\Users\johnf\Downloads\ggs\my_first_flutter_app>git branch
* feature/conditional-ui
  feature/data-ui
  feature/student-interactions
  feature/student-list
  feature/widgets
  main
```

🚩 Flag 1 — Show Active or Inactive

Objective: Change the Student Card based on whether a student is active or inactive.

Add an **active** status to your student data.

Research how Flutter uses **conditional expressions** to display different widgets.

Example states:

- Active
- Inactive

Test

Active students should display an Active indicator.

Inactive students should display an Inactive indicator.

Screenshot:

- Active Student Card
- Inactive Student Card
- Conditional logic in your code

5G

85

2:59 PM

Student Directory



Ivan Villareal
ACTIVE
BSIT - 3rd Year
Age: 24
Hobby: Photography, Videography, & Video Editing

Student ID: 2026-0001

Email: ivan.villareal@dbtc-cebu.edu.ph

Favorite Subject: Snacks

Favorite

Edit

Delete



Mannes Artajo
INACTIVE
BSIT - 2nd Year
Age: 21
Hobby: Reading

Student ID: 2026-0002

Email: mannes.artajo@dbtc-cebu.edu.ph

Favorite Subject: Programming

Favorite

Edit

Delete

```

332 // CAPTURE THE FLAG 6 #1 - ACTIVE / INACTIVE STATUS
333 student.isActive
334   ? const Text(
335     "ACTIVE",
336     style: TextStyle(
337       color: Colors.green,
338       fontWeight: FontWeight.bold,
339     ),
340   )
341   : const Text(
342     "INACTIVE",
343     style: TextStyle(
344       color: Colors.red,
345       fontWeight: FontWeight.bold,
346     ),
347   ),
348

```

🚩 Flag 2 — Show or Hide

Objective: Display certain UI elements only when a condition is true.

Add a conditional element to the Student Card.

Examples:

- Favorite badge appears only when favorited
- Warning appears only when inactive
- Delete action appears only if active

Research ways to conditionally include or exclude widgets from the widget tree.

Test

When the condition is true, the element appears.

When the condition is false, the element disappears.


Screenshot:

- UI with the element visible
- UI with the element hidden
- Conditional widget code

```

349 // CAPTURE THE FLAG 6 #2 - SHOW WARNING ONLY WHEN INACTIVE
350 if (!student.isActive)
351     const Padding(
352         padding: EdgeInsets.only(top: 8),
353         child: Text(
354             "⚠ This student is currently inactive.",
355             style: TextStyle(
356                 color: Colors.red,
357                 fontWeight: FontWeight.bold,
358             ),
359             Text
360         ),
361     ),
362     Padding

```

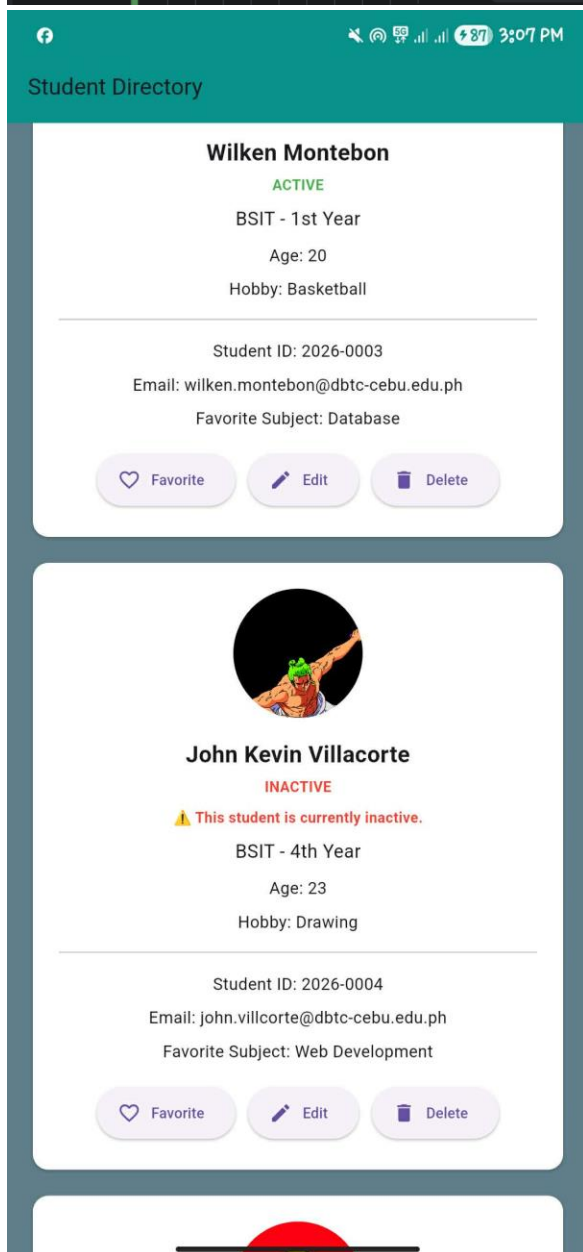

🚩 Flag 3 — The Empty Directory

Objective: Handle situations where there are no students to display.

Modify your Student Directory so it detects when the student list is empty.

Create an **empty state**.

Examples:

- "No students found"
- Empty-state icon
- Button to add a student

Test

Delete all students in your application (not the code)

Instead of showing a blank screen, your application should display your empty state.

Screenshot:

- Empty student list
- Empty-state UI
- Condition checking for an empty list



100 3:23 PM

Student Directory



No students found.

The student list is currently empty.

```

body: students.isEmpty
268   ? const Center(
269   child: Column(
270     mainAxisAlignment: MainAxisAlignment.center,
271     children: [
272       Icon(
273         Icons.people_outline,
274         color: Colors.white,
275         size: 70,
276       ), Icon
277       SizedBox(height: 15),
278       Text(
279         "No students found.",
280         style: TextStyle(
281           color: Colors.white,
282           fontSize: 24,
283           fontWeight: FontWeight.bold,
284         ), TextStyle
285       ), Text

```

Flag 4 — Loading the Directory

Objective: Display different UI while student data is being loaded.

Create a loading state for your Student Directory.

Research how Flutter can conditionally display a loading indicator.

Examples:

- `CircularProgressIndicator`
- Loading message
- Loading placeholder

Test


When the application is in a loading state, the student list should not be displayed as the main content.

Once loading is complete, the Student Directory should appear.

Screenshot:

- Loading state

- Loaded state
- Conditional loading logic

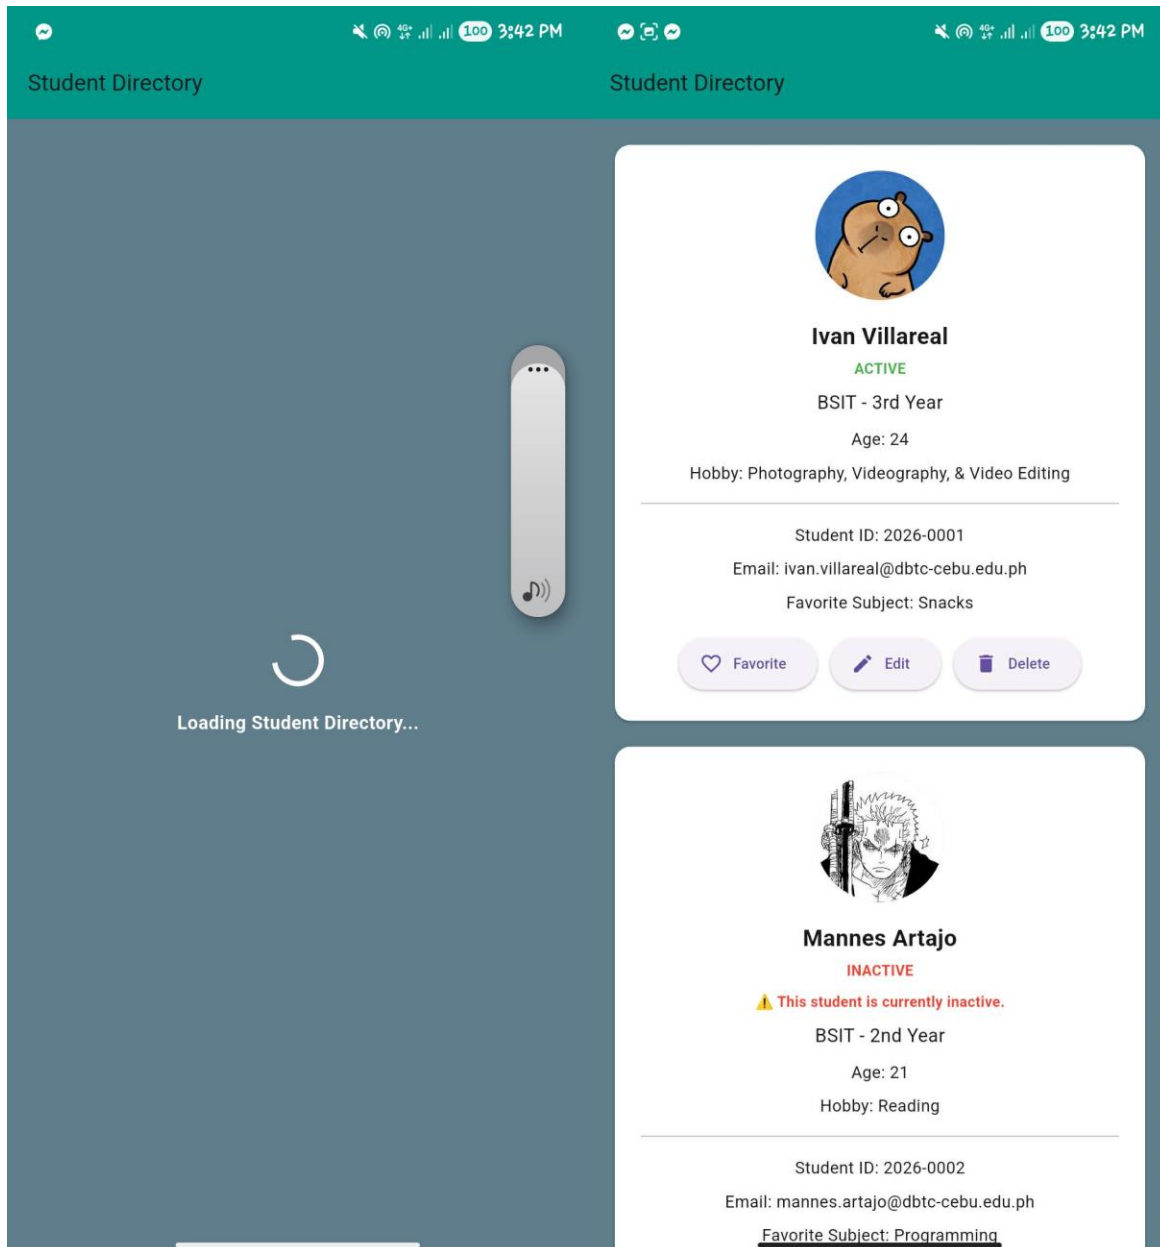

```

279 // CAPTURE THE FLAG 6 #FLAG 4 - LOADING STATE
280 body: isLoading
281   ? const Center(
282     child: Column(
283       mainAxisAlignment: MainAxisAlignment.center,
284       children: [
285         CircularProgressIndicator(
286           color: Colors.white,
287         ), CircularProgressIndicator
288         SizedBox(height: 20),
289         Text(
290           "Loading Student Directory...",
291           style: TextStyle(
292             color: Colors.white,
293             fontSize: 18,
294             fontWeight: FontWeight.bold,
295           ), TextStyle
296         ), Text

```

Flag 5 — Multiple States

Objective: Make your Student Directory handle multiple UI states correctly.

Your application should now be able to display:

1. Loading
2. Students available
3. No students available

Determine which state should be displayed based on your data.

Test

Verify each state:

Loading

→ Loading UI

Students available

→ Student List


Empty list


→ Empty State

Only the appropriate UI should appear at a time.

Screenshot:

- Loading state
- Student list state
- Empty state

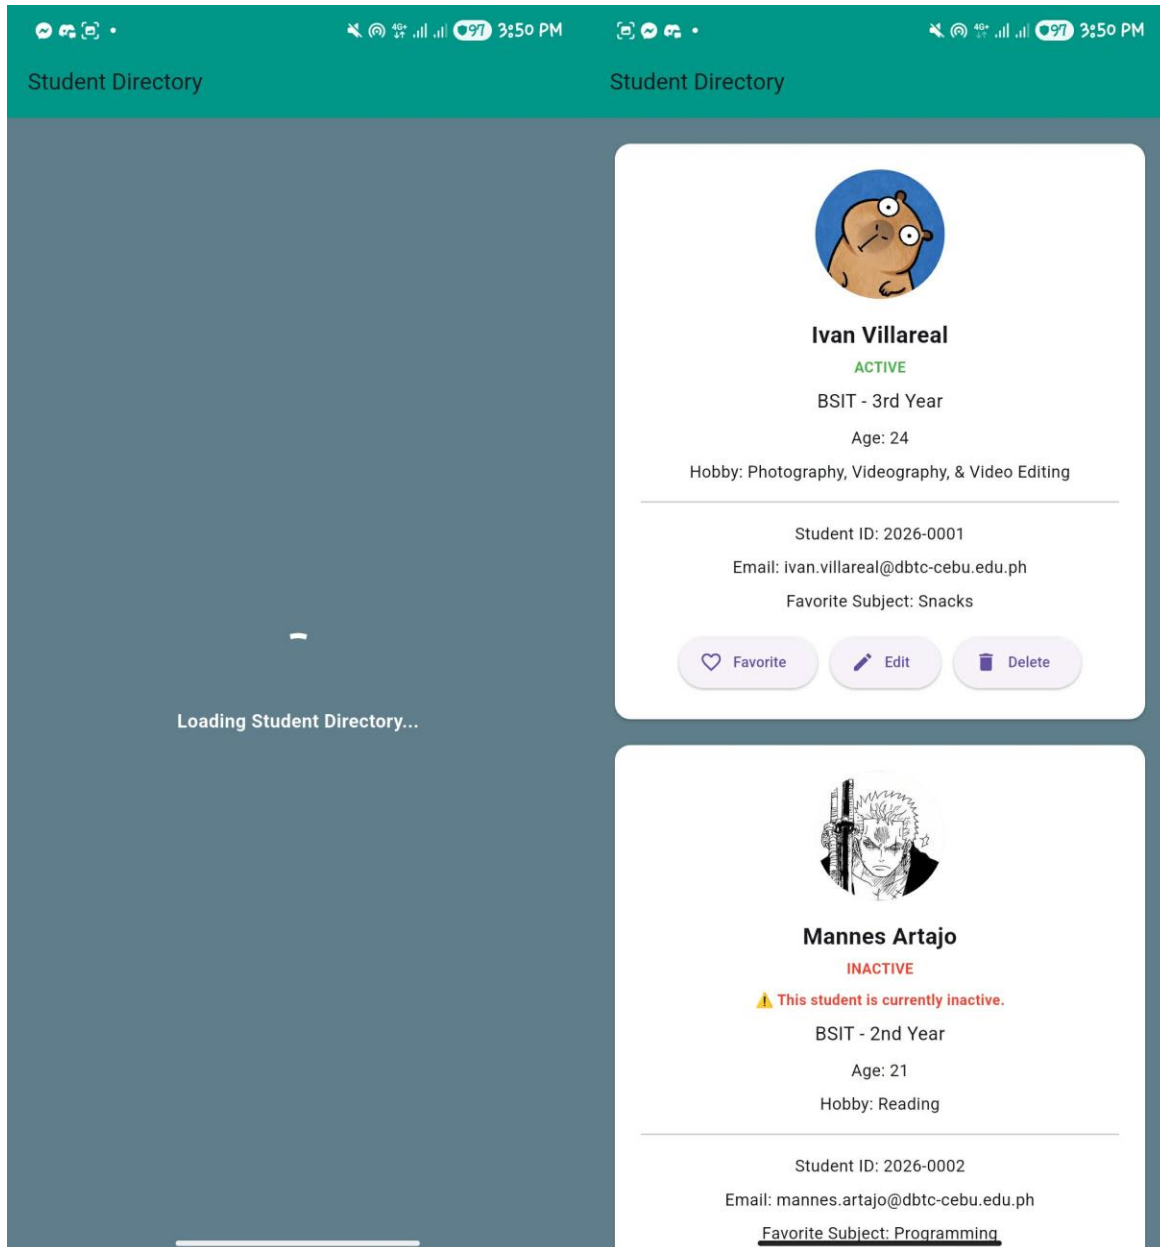

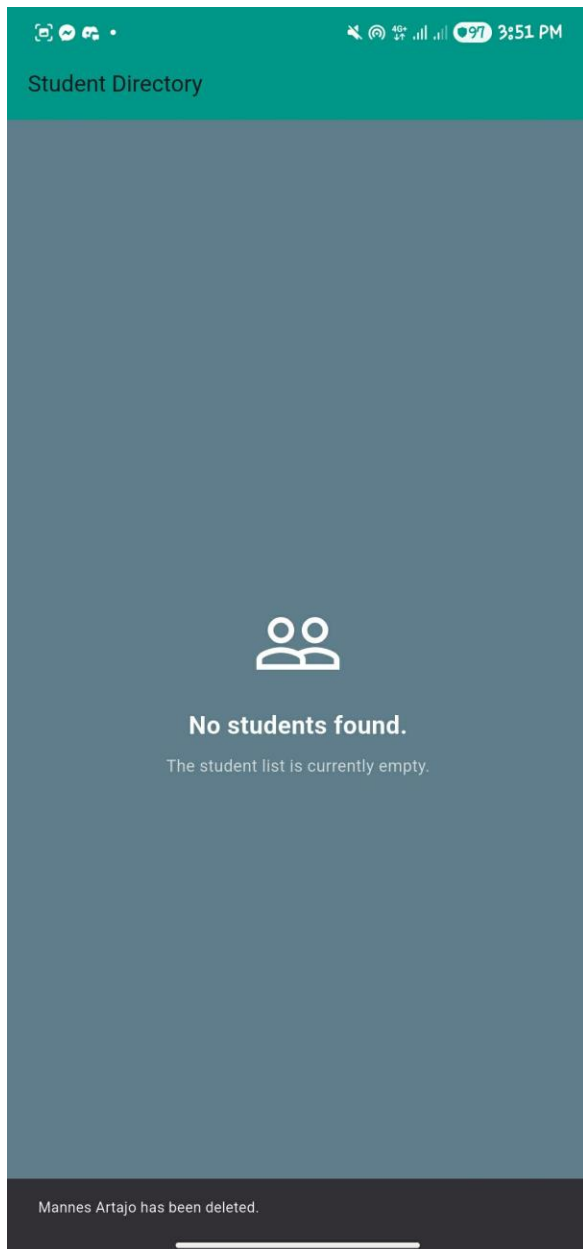

🚩 Flag 6 — States Work Together

Objective: Make sure conditional UI does not break your existing interactions.

Test the combination of:

- Favorite
- Delete
- Edit
- Active/Inactive

- Show/Hide
- Empty state
- Loading state


Test Scenario


1. Favorite a student.
2. Change or display their Active/Inactive state.
3. Delete students until the directory becomes empty.
4. Verify the Empty State appears.
5. Reload or restore students.
6. Verify the Student Directory appears again.

The application should continue functioning correctly as its state changes.

Screenshot:

- Multiple conditional states working
- Interactive Student Card
- Empty State
- Application functioning normally

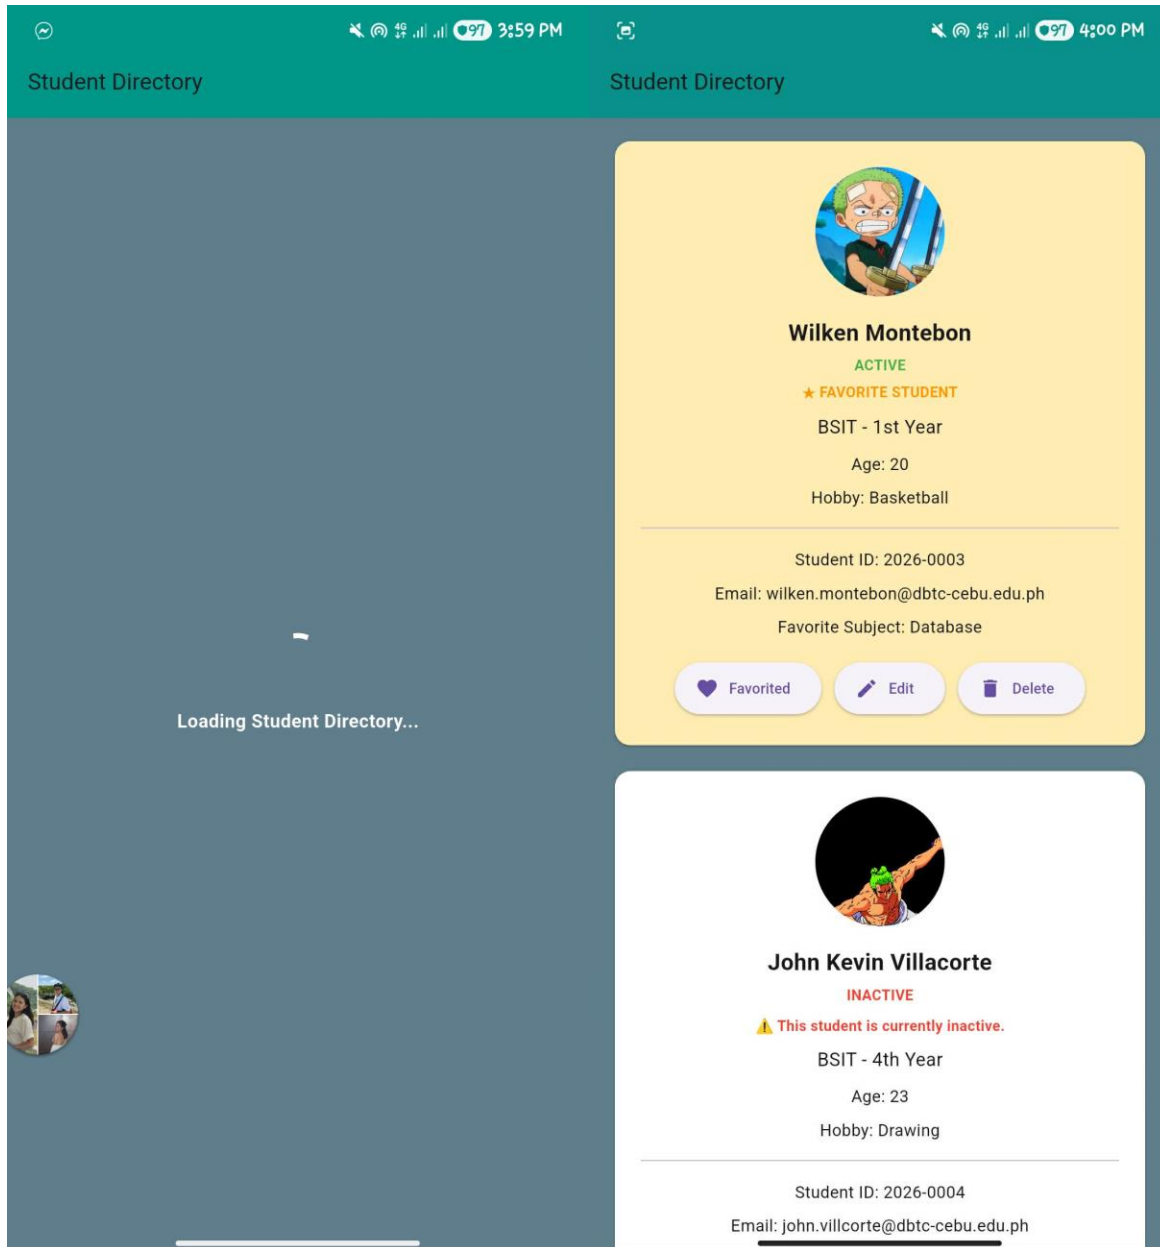

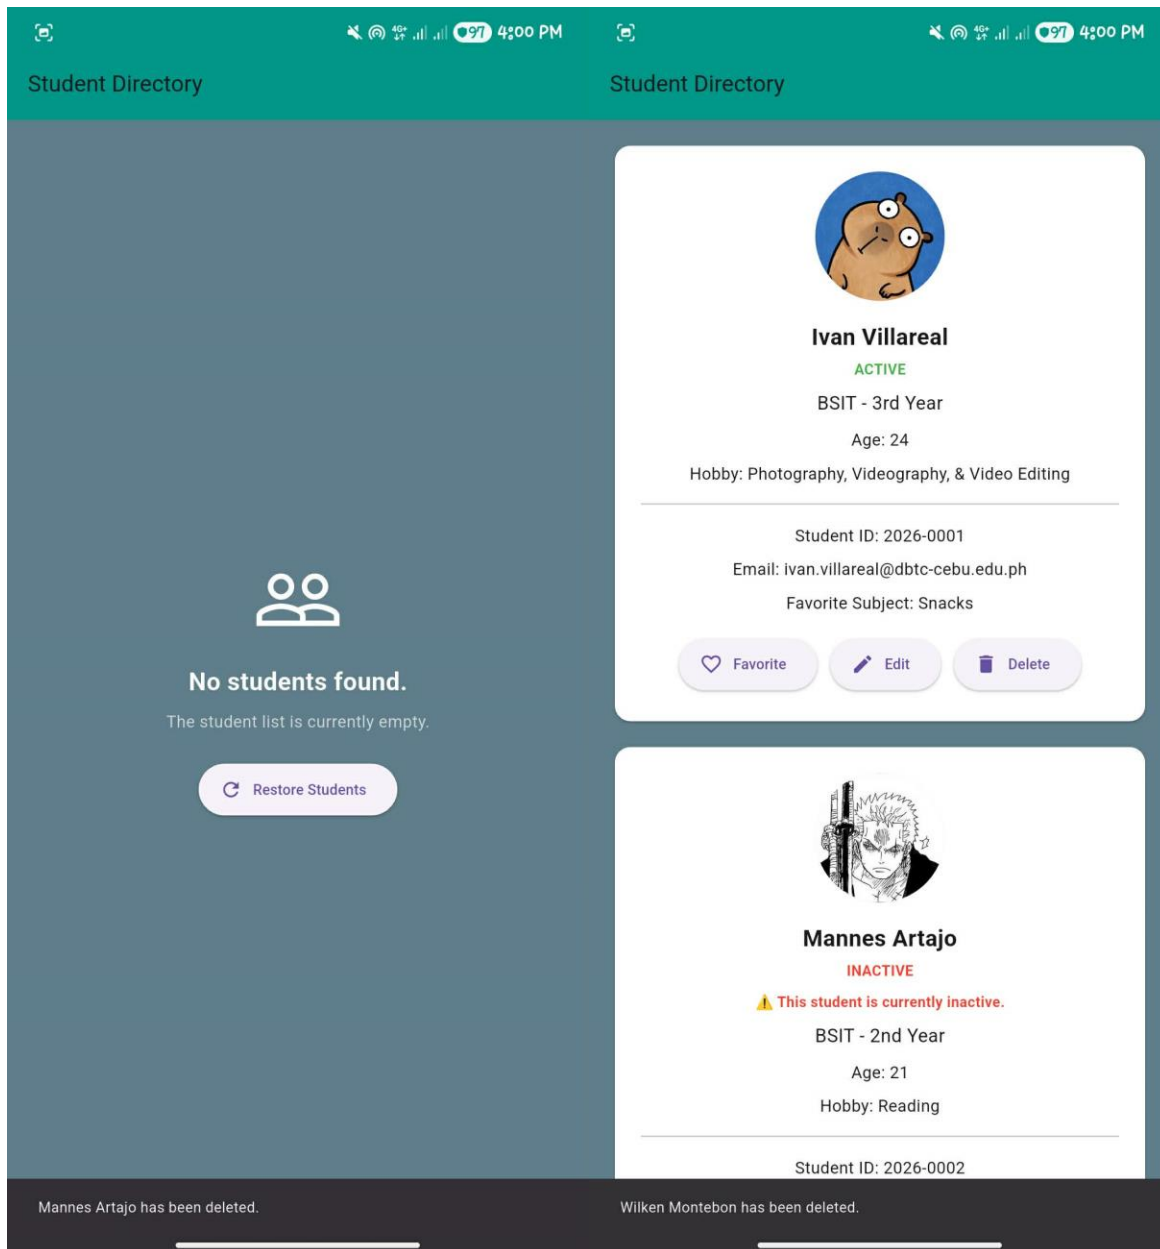

🚩 Flag 7 — Save Your Progress

Objective: Commit and push your completed Conditional UI Student Directory.

Use a proper Git commit message.

Branch:

`feature/conditional-ui`

Screenshot:

- Successful commit
- Current branch
- Terminal showing the commit

```
C:\Users\johnf\Downloads\ggs>git status
On branch feature/conditional-ui
Changes to be committed:
  (use "git restore --staged <file>..." to unstage)
        modified:   my_first_flutter_app/lib/main.dart

C:\Users\johnf\Downloads\ggs>git commit -m "Feat: Complete Conditional UI Student Directory"
[feature/conditional-ui 07d04db] Feat: Complete Conditional UI Student Directory
 1 file changed, 214 insertions(+), 31 deletions(-)

C:\Users\johnf\Downloads\ggs>git push -u origin feature/conditional-ui
Enumerating objects: 9, done.
Counting objects: 100% (9/9), done.
Delta compression using up to 12 threads
Compressing objects: 100% (4/4), done.
Writing objects: 100% (5/5), 1.90 KiB | 388.00 KiB/s, done.
Total 5 (delta 3), reused 0 (delta 0), pack-reused 0 (from 0)
remote: Resolving deltas: 100% (3/3), completed with 3 local objects.
remote:
remote: Create a pull request for 'feature/conditional-ui' on GitHub by visiting:
remote:   https://github.com/ivan013102/IT314AB_VILLAREAL/pull/new/feature/conditional-ui
remote:
To https://github.com/ivan013102/IT314AB_VILLAREAL.git
 * [new branch]      feature/conditional-ui -> feature/conditional-ui
branch 'feature/conditional-ui' set up to track 'origin/feature/conditional-ui'.
```