SPRINT 3

NIVEL 1

Ejercicio 1

```sql
USE transactions;

CREATE TABLE credit_card (
    id VARCHAR(20) PRIMARY KEY,
    iban VARCHAR(50) NOT NULL,
    pan VARCHAR(20) NOT NULL,
    pin VARCHAR(4) NOT NULL,
    cvv INT NOT NULL,
    expiring_date VARCHAR(20) NOT NULL
);
```

Output

Action Output

#	Time	Action	Message	Duration / Fetch
1	00:31:57	INSERT INTO credit_card (id, iban, pan, pin, cvv, expiring_d...	Error Code: 1146. Table 'transactions.credit_card' doesn't exist	0.015 sec
2	00:36:42	USE transactions	0 row(s) affected	0.000 sec
3	00:44:47	CREATE TABLE credit_card (id VARCHAR(20) PRIMARY K...	0 row(s) affected	0.062 sec

Para iniciar, se crea la tabla con la sentencia CREATE TABLE junto con el nombre de la tabla, en este caso credit_card. La id será la PRIMARY KEY de esta tabla.

A continuación, se refresca el gesto MySQL para comprobar que la tabla credit_card se ha creado correctamente.

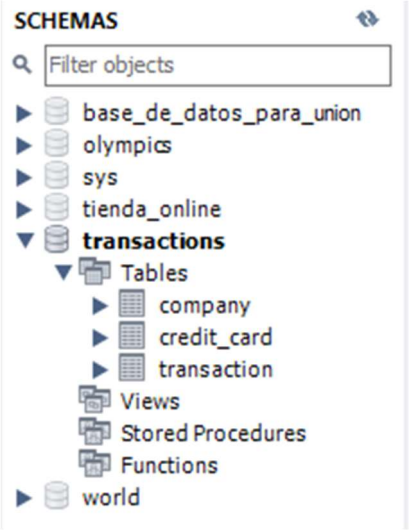

El siguiente paso sería cargar los datos de las tarjetas de crédito a través del SQL Script:

Sprint 3 | datos_introducir_sprint3_credit

```sql
-- Insertamos datos de credit_card
INSERT INTO credit_card (id, iban, pan, pin, cvv, expiring_date) VALUES ('CcU-2938', 'TR301950312213576 81
INSERT INTO credit_card (id, iban, pan, pin, cvv, expiring_date) VALUES ('CcU-2945', 'DO26854763748537475
INSERT INTO credit_card (id, iban, pan, pin, cvv, expiring_date) VALUES ('CcU-2952', 'BG45IVQL52710525608
INSERT INTO credit_card (id, iban, pan, pin, cvv, expiring_date) VALUES ('CcU-2959', 'CR72424772443358415
INSERT INTO credit_card (id, iban, pan, pin, cvv, expiring_date) VALUES ('CcU-2966', 'BG72LKTQ15627628377
INSERT INTO credit_card (id, iban, pan, pin, cvv, expiring_date) VALUES ('CcU-2973', 'PT87806228135092429
INSERT INTO credit_card (id, iban, pan, pin, cvv, expiring_date) VALUES ('CcU-2980', 'DE39241881883086277
INSERT INTO credit_card (id, iban, pan, pin, cvv, expiring_date) VALUES ('CcU-2987', 'GE89681434837748781
INSERT INTO credit_card (id, iban, pan, pin, cvv, expiring_date) VALUES ('CcU-2994', 'BH62714428368066765
INSERT INTO credit_card (id, iban, pan, pin, cvv, expiring_date) VALUES ('CcU-3001', 'CY49087426654774581
```

Output — Action Output

#	Time	Action	Message	Duration / Fetch
4980	01:18:31	INSERT INTO credit_card (id, iban, pan, pin, cvv, expiring...	1 row(s) affected	0.000 sec
4981	01:18:31	INSERT INTO credit_card (id, iban, pan, pin, cvv, expiring...	1 row(s) affected	0.000 sec
4982	01:18:31	INSERT INTO credit_card (id, iban, pan, pin, cvv, expiring...	1 row(s) affected	0.000 sec
4983	01:18:31	INSERT INTO credit_card (id, iban, pan, pin, cvv, expiring...	1 row(s) affected	0.000 sec
4984	01:18:31	INSERT INTO credit_card (id, iban, pan, pin, cvv, expiring...	1 row(s) affected	0.000 sec
4985	01:18:31	INSERT INTO credit_card (id, iban, pan, pin, cvv, expiring...	1 row(s) affected	0.015 sec

Acto seguido, se crea la relación con las otras tablas usando ALTER TABLE, en este caso de la tabla transaction, creando una FOREIGN KEY que se denominará fk_creditcard y asignándola a la columna credit_card_id. Esta FOREIGN KEY hará referencia a la columna id de la tabla credit_card.

```sql
ALTER TABLE transaction
ADD CONSTRAINT fk_creditcard
FOREIGN KEY (credit_card_id)
REFERENCES credit_card(id);
```

Output — Action Output

#	Time	Action	Message	Duration / Fetch
5004	01:18:31	INSERT INTO credit_card (id, iban, pan, pin, cvv, expiring...	1 row(s) affected	0.000 sec
5005	01:25:43	ALTER TABLE transaction ADD CONSTRAINT fk_creditc...	100000 row(s) affected Records: 100000 Duplicates: 0 W...	4.657 sec

Esto significa que una tarjeta de crédito puede tener muchas transaccione. Y cada transacción pertenece a una sola tarjeta. Relación credit_card (1) a (N) transaction.

La relación entre estas 3 tablas (company, transaction y credit_card) queda de la siguiente manera:

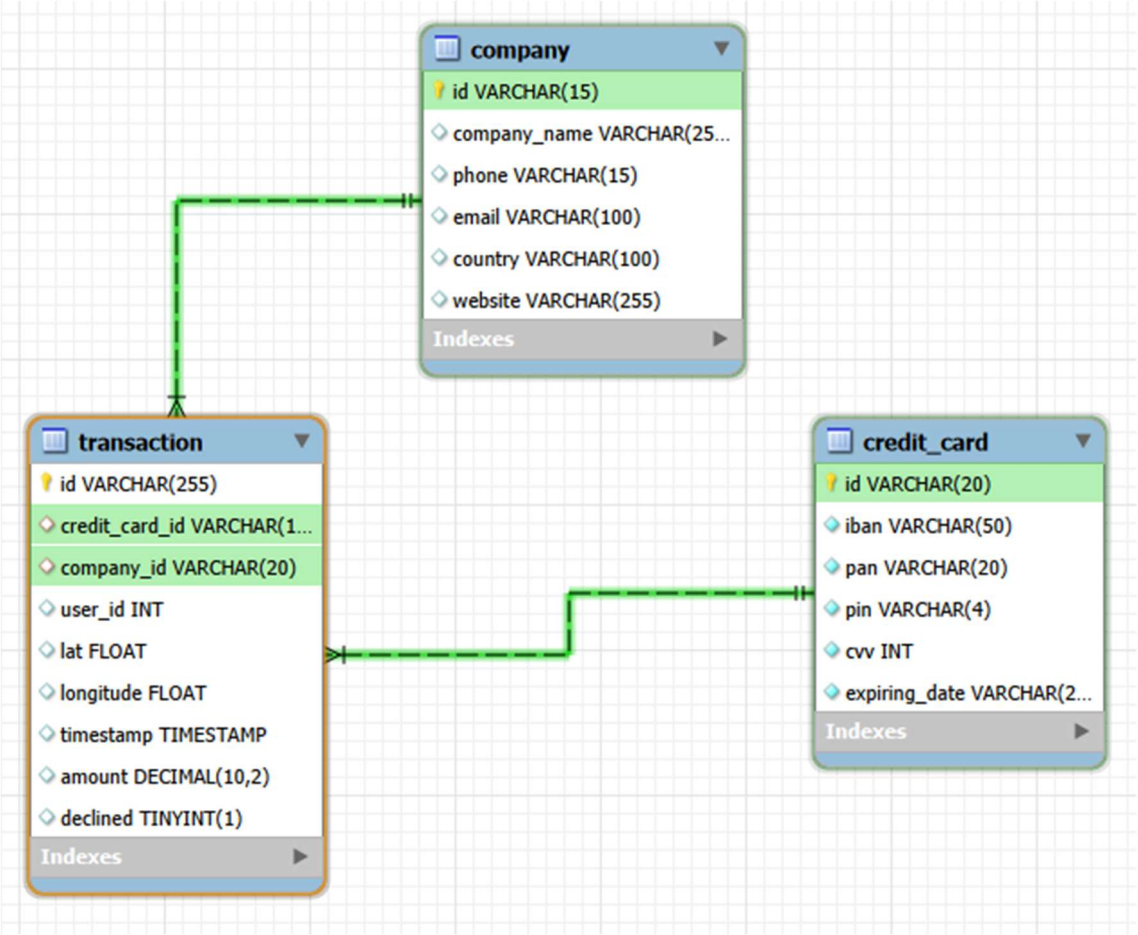

Ejercicio 2

Primero se realiza una comprobación del número de IBAN que se quiere cambiar:

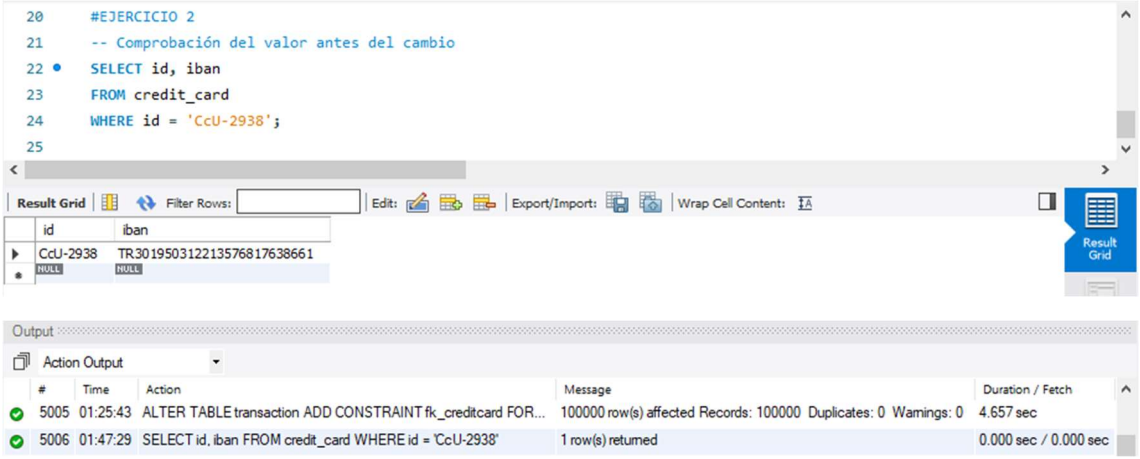

```
#EJERCICIO 2
-- Comprobación del valor antes del cambio
SELECT id, iban
FROM credit_card
WHERE id = 'CcU-2938';
```

Result Grid | Filter Rows: | Edit: | Export/Import: | Wrap Cell Content:

id	iban
CcU-2938	TR301950312213576817638661
NULL	NULL

Output

Action Output

#	Time	Action	Message	Duration / Fetch
5005	01:25:43	ALTER TABLE transaction ADD CONSTRAINT fk_creditcard FOR...	100000 row(s) affected Records: 100000 Duplicates: 0 Warnings: 0	4.657 sec
5006	01:47:29	SELECT id, iban FROM credit_card WHERE id = 'CcU-2938'	1 row(s) returned	0.000 sec / 0.000 sec

Después actualizamos la cuenta IBAN usando UPDATE sobre la tabla credit_card, SET para introducir el nuevo dato y WHERE para ubicar el id de la tarjeta.

```
UPDATE credit_card
SET iban = 'TR3234563122135768176999999'
WHERE id = 'CcU-2938';
```

Output

Action Output

#	Time	Action	Message	Duration / Fetch
5006	01:47:29	SELECT id, iban FROM credit_card WHERE id = 'CcU-2938'	1 row(s) returned	0.000 sec / 0.000 sec
5007	01:54:23	UPDATE credit_card SET iban = 'TR3234563122135768176999999...	1 row(s) affected Rows matched: 1 Changed: 1 Warnings: 0	0.016 sec

Finalmente, se vuelve a comprobar el que el cambio se realizó con éxito:

```
SELECT id, iban
FROM credit_card
WHERE id = 'CcU-2938';
```

Result Grid | Filter Rows: | Edit: | Export/Import: | Wrap Cell Content:

id	iban
CcU-2938	TR3234563122135768176999999
NULL	NULL

Output

Action Output

#	Time	Action	Message	Duration / Fetch
5007	01:54:23	UPDATE credit_card SET iban = 'TR3234563122135768176999999...	1 row(s) affected Rows matched: 1 Changed: 1 Warnings: 0	0.016 sec
5008	02:01:35	SELECT id, iban FROM credit_card WHERE id = 'CcU-2938'	1 row(s) returned	0.000 sec / 0.000 sec

Ejercicio 3

Se pide que se inserte una nueva transacción en la tabla transaction. Se prueba, pero da error, esto se debe a que son tablas relacionales y para poder insertar una nueva id de transacción deben existir antes los id de las de la tarjeta y la empresa en sendas tablas credit_card.id y company.id.

```
#EJERCICIO 3
INSERT INTO transaction
(id, credit_card_id, company_id, user_id, lat, longitude, amount, declined)
VALUES
('108B1D1D-5B23-A76C-55EF-C568E49A99DD', 'CcU-9999', 'b-9999', 9999, 829.999, -117.999, 111.11, 0);
#ERROR
```

- Crear company ‘b-9999’

```
-- Crear company "b-9999"
INSERT INTO company (id)
VALUES ('b-9999');
```

- Crear credit_card ‘CcU-9999’

```
INSERT INTO credit_card (id, iban, pan, pin, cvv, expiring_date)
VALUES ('CcU-9999', 'XX0000000000000000000000', '0000000000000000', '0000', '000', '00/00/00');
```

En este caso también se deben crear valores (ficticios) en el resto de las columnas porque no pueden ser NULL según las restricciones aplicadas en la creación de la tabla. A continuación, introducimos la transacción:

```
INSERT INTO transaction
(id, credit_card_id, company_id, user_id, lat, longitude, amount, declined)
VALUES
('108B1D1D-5B23-A76C-55EF-C568E49A99DD', 'CcU-9999', 'b-9999', 9999, 829.999, -117.999, 111.11, 0);
```

Y Comprobamos:

```
97 •  SELECT *
98    FROM transaction
99    WHERE id = '108B1D1D-5B23-A76C-55EF-C568E49A99DD'; -- Se ha creado correctamente
```

Result Grid | Filter Rows: | Edit: | Export/Import: | Wrap Cell Content:

id	credit_card_id	company_id	user_id	lat	longitude	timestamp	amount	declin
108B1D1D-5B23-A76C-55EF-C568E49A99DD	CcU-9999	b-9999	9999	829.999	-117.999	NULL	111.11	0
NULL	NULL	NULL	NULL	NULL	NULL	NULL	NULL	NULL

Output

Action Output

#	Time	Action	Message	Duration / Fetch
14	11:06:06	SELECT * FROM transaction WHERE id = '108B1D1D-...	0 row(s) returned	0.000 sec / 0.000 sec
15	11:06:14	INSERT INTO transaction (id, credit_card_id, company...	1 row(s) affected	0.016 sec
16	11:06:24	SELECT * FROM transaction WHERE id = '108B1D1D-...	1 row(s) returned	0.000 sec / 0.000 sec

Ejercicio 4

Primero se comprueba si alguna tabla usa la columna ‘pan’ como FOREIGN KEY

```
103 •  SELECT *
104    FROM information_schema.KEY_COLUMN_USAGE
105    WHERE COLUMN_NAME = 'pan'
106    AND TABLE_SCHEMA = DATABASE();
```

Result Grid | Filter Rows: | Export: | Wrap Cell Content:

CONSTRAINT_CATALOG	CONSTRAINT_SCHEMA	CONSTRAINT_NAME	TABLE_CATALOG	TABLE_SCHEMA	TABLE_NAME	COLUM

Se elimina la columna:

```
108    -- Eliminar columna 'pan'
109 •  ALTER TABLE credit_card
110    DROP COLUMN pan;
111
```

Output

Action Output

#	Time	Action	Message	Duration / Fetch
20	11:15:01	SELECT * FROM information_schema.KEY_COLUM...	0 row(s) returned	0.000 sec / 0.000 sec
21	11:24:36	ALTER TABLE credit_card DROP COLUMN pan	0 row(s) affected Records: 0 Duplicates: 0 Warnings...	0.031 sec

Comprobación:

```
112    -- Comprobación
113 •  DESCRIBE credit_card;
114
```

Result Grid | Filter Rows: | Export: | Wrap Cell Content:

Field	Type	Null	Key	Default	Extra
id	varchar(15)	NO	PRI	NULL	
iban	varchar(50)	NO		NULL	
pin	varchar(4)	NO		NULL	
cvv	int	NO		NULL	
expiring_date	varchar(20)	NO		NULL	

NIVEL 2

Ejercicio 1

Se comprueba la transacción que se quiere eliminar

```
#EJERCICIO 1
-- Comprobar el registro
SELECT *
FROM transaction
WHERE id = '000447FE-B650-4DCF-85DE-C7ED0EE1CAAD';
```

Result Grid | Filter Rows: | Edit: | Export/Import: | Wrap Cell Content:

id	credit_card_id	company_id	user_id	lat	longitude	timestamp	a
000447FE-B650-4DCF-85DE-C7ED0EE1CAAD	CcS-5019	b-2370	438	41.5972	12.2218	2016-12-21 20:07:18	1
NULL	NULL	NULL	NULL	NULL	NULL	NULL	NU

Output

Action Output

#	Time	Action	Message	Duration / Fetch
22	11:26:45	DESCRIBE credit_card	5 row(s) returned	0.000 sec / 0.000 sec
23	12:09:05	SELECT * FROM transaction WHERE id = '000447F...	1 row(s) returned	0.000 sec / 0.000 sec

Se elimina el registro

```
-- Se elimina el registro
DELETE FROM transaction
WHERE id = '000447FE-B650-4DCF-85DE-C7ED0EE1CAAD';
```

Output

Action Output

#	Time	Action	Message	Duration / Fetch
23	12:09:05	SELECT * FROM transaction WHERE id = '000447F...	1 row(s) returned	0.000 sec / 0.000 sec
24	12:22:11	DELETE FROM transaction WHERE id = '000447FE-...	1 row(s) affected	0.000 sec

Se muestra el cambio

```
-- Mostrar que el cambio se realizó
SELECT *
FROM transaction
WHERE id = '000447FE-B650-4DCF-85DE-C7ED0EE1CAAD';
```

Result Grid | Filter Rows: | Edit: | Export/Import: | Wrap Cell Content:

id	credit_card_id	company_id	user_id	lat	longitude	timestamp	amount	declined
NULL	NULL	NULL	NULL	NULL	NULL	NULL	NULL	NULL

Output

Action Output

#	Time	Action	Message	Duration / Fetch
24	12:22:11	DELETE FROM transaction WHERE id = '000447FE-...	1 row(s) affected	0.000 sec
25	12:26:17	SELECT * FROM transaction WHERE id = '000447F...	0 row(s) returned	0.000 sec / 0.000 sec

Ejercicio 2

Para empezar, se genera la vista VistaMarketing con el siguiente código

```
CREATE VIEW VistaMarketing AS
SELECT  c.company_name AS Empresa, c.phone AS Teléfono,
        c.country AS País, AVG(t.amount) AS media_compra
FROM company c
JOIN transaction t
ON c.id = t.company_id
GROUP BY c.id, c.company_name, c.phone, c.country;
```

Output

Action Output

#	Time	Action	Message	Duration / Fetch
25	12:26:17	SELECT * FROM transaction WHERE id = '000447F...	0 row(s) returned	0.000 sec / 0.000 sec
26	13:03:01	CREATE VIEW VistaMarketing AS SELECTc.compa...	0 row(s) affected	0.016 sec

Se comprueba que la vista figura en Schemas

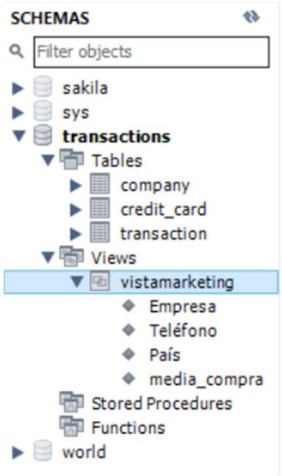

Se presenta la vista creada ordenando los datos de mayor a menor media de compra. Esto se hace por una cuestión de buenas prácticas por si se puede aprovechar la vista para otras consultas.

```
SELECT *
FROM VistaMarketing
ORDER BY media_compra DESC;
```

Result Grid | Filter Rows: | Export: | Wrap Cell Content:

Empresa	Teléfono	País	media_compra
Ac Fermentum Incorporated	06 85 56 52 33	Germany	284.867160
Pretium Neque Corp.	07 77 48 55 28	Australia	276.158330
Urna Convallis Associates	06 01 24 77 04	United States	274.235011
At Associates	09 56 61 10 65	New Zealand	272.214870
Metus Vitae Associates	08 25 44 40 66	Australia	270.080965
Aliquet Diam Limited	02 76 61 47 46	United States	269.599181
Nec Luctus LLC	02 14 71 75 73	Norway	268.604837

VistaMarketing 19 | Result Grid | Form Editor | Read Only

Output

Action Output

#	Time	Action	Message	Duration / Fetch
26	13:03:01	CREATE VIEW VistaMarketing AS SELECTc.compa...	0 row(s) affected	0.016 sec
27	13:10:27	SELECT * FROM VistaMarketing ORDER BY media_...	101 row(s) returned	0.468 sec / 0.000 sec

Ejercicio 3

En esta consulta se buscan las empresas que residen en ‘Germany’. Se aprovecha el orden de la consulta anterior. Como se puede comprobar, en un primer intento se obtuvo un Error, esto se debe a que en la condición WHERE se usó el nombre original ‘country’ de la columna que se cambió en la creación de la vista VistaMarketing (c.country AS País).

```
153 •  SELECT *
154    FROM VistaMarketing
155    WHERE País = 'Germany'
156    ORDER BY media_compra DESC;
157
```

Result Grid | Filter Rows: | Export: | Wrap Cell Content:

Empresa	Teléfono	País	media_compra
Ac Fermentum Incorporated	06 85 56 52 33	Germany	284.867160
Nunc Interdum Incorporated	05 18 15 48 13	Germany	259.319156
Convallis In Incorporated	06 66 57 29 50	Germany	257.745376
Ac Industries	09 34 65 40 60	Germany	255.147288
Rutrum Non Inc.	02 66 31 61 09	Germany	255.136927

VistaMarketing 8 | Read Only

Output

Action Output

#	Time	Action	Message	Duration / Fetch
11	21:04:19	SELECT * FROM VistaMarketing WHERE country = '...	Error Code: 1054. Unknown column 'country' in 'where...	0.000 sec
12	21:04:42	SELECT * FROM VistaMarketing WHERE País = 'Ger...	8 row(s) returned	0.094 sec / 0.000 sec

NIVEL 3

Ejercicio 1

1.Se ejecuta el script de la estructura de la tabla user

2.Se ejecuta el script de los datos de la tabla user

3.Se cambia el nombre de la tabla user por data_user (así figura en el diagrama) y porque de lo contrario podría haber problemas con las tablas y las consultas ya que user es una palabra reservada en MySQL.

```
169 •  RENAME TABLE user TO data_user;
```

Output

Action Output

#	Time	Action	Message	Duration / Fetch
5007	12:15:30	SELECT * FROM transaction WHERE id = '108B1D1...	1 row(s) returned	0.000 sec / 0.000 sec
5008	12:16:28	RENAME TABLE user TO data_user	0 row(s) affected	0.031 sec

Se comprueba el cambio de nombre:

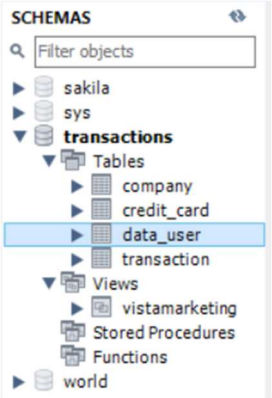

4.Cambiar tipo de valor del id CHAR por INT de la tabla data_user para crear la relación entre tablas

```
171 •  ALTER TABLE data_user
172    MODIFY id INT;
```

Output

Action Output

#	Time	Action	Message	Duration / Fetch
5008	12:16:28	RENAME TABLE user TO data_user	0 row(s) affected	0.031 sec
5009	12:28:28	ALTER TABLE data_user MODIFY id INT	5000 row(s) affected Records: 5000 Duplicates: 0 W...	0.250 sec

5.Crear FOREIGN KEY para relacionar las tablas transaction y data_user, pero antes se debe crear el 'user_id 9999'

```
184 •  INSERT INTO data_user (id)
185    VALUES (9999);
```

Output

Action Output

#	Time	Action	Message	Duration / Fetch
5011	12:51:05	INSERT INTO data_user (id) VALUES (9999)	1 row(s) affected	0.015 sec

FOREIGN KEY

```
188 •  ALTER TABLE transaction
189    ADD CONSTRAINT fk_user
190    FOREIGN KEY (user_id)
191    REFERENCES data_user(id);
192
```

Output

Action Output

#	Time	Action	Message	Duration / Fetch
5011	12:51:05	INSERT INTO data_user (id) VALUES (9999)	1 row(s) affected	0.015 sec
5012	12:51:51	ALTER TABLE transaction ADD CONSTRAINT fk_us...	100000 row(s) affected Records: 100000 Duplicates: ...	3.296 sec

Se comprueba que se ha creado la relación entre las tablas transaction y data_user

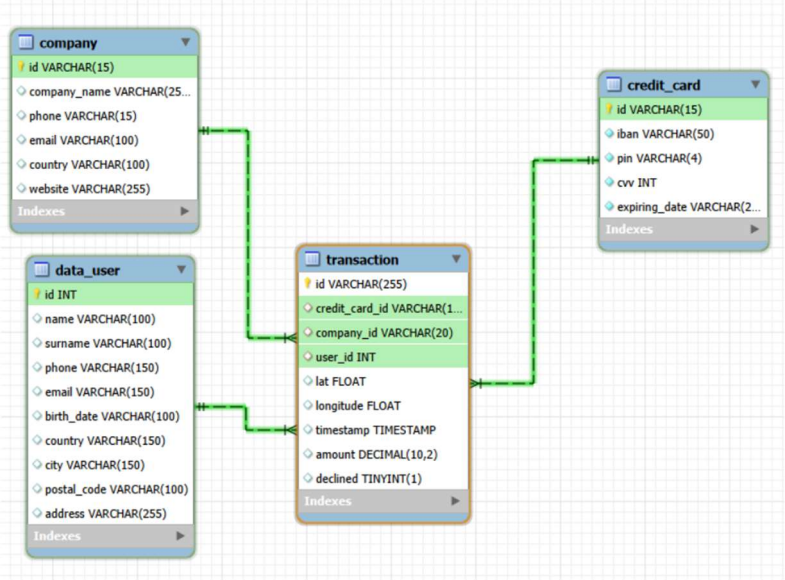

6. Cambiar longitud del tipo del id de la tabla credit_card y credit_card_id de la tabla transaction.

```
198 •  ALTER TABLE transaction
199    MODIFY credit_card_id VARCHAR(20);
200
201 •  ALTER TABLE credit_card
202    MODIFY id VARCHAR(20);
```

Output

Action Output

#	Time	Action	Message	Duration / Fetch
5016	13:28:54	ALTER TABLE transaction MODIFY credit_card_id VAR...	0 row(s) affected Records: 0 Duplicates: 0 Warnings: 0	0.031 sec
5017	13:29:49	ALTER TABLE credit_card MODIFY id VARCHAR(20)	0 row(s) affected Records: 0 Duplicates: 0 Warnings: 0	0.015 sec

7.Eliminar columna website de la tabla company

```
204 •  ALTER TABLE company
205    DROP COLUMN website;
206
```

Output

Action Output

#	Time	Action	Message	Duration / Fetch
5018	13:48:39	ALTER TABLE company DROP COLUMN website	0 row(s) affected Records: 0 Duplicates: 0 Warnings: 0	0.032 sec

8.Cambiar nombre columna email por personal_email en la tabla data_user

```
208 •  ALTER TABLE data_user
209    RENAME COLUMN email TO personal_email;
```

Output

Action Output

#	Time	Action	Message	Duration / Fetch
5018	13:48:39	ALTER TABLE company DROP COLUMN website	0 row(s) affected Records: 0 Duplicates: 0 Warnings: 0	0.032 sec
5019	13:54:17	ALTER TABLE data_user RENAME COLUMN email TO p...	0 row(s) affected Records: 0 Duplicates: 0 Warnings: 0	0.031 sec

9. Crear columna fecha_actual en la tabla credit_card

```
212 •  ALTER TABLE credit_card
213    ADD COLUMN fecha_actual DATE;
214
```

Output

Action Output

#	Time	Action	Message	Duration / Fetch
5019	13:54:17	ALTER TABLE data_user RENAME COLUMN email...	0 row(s) affected Records: 0 Duplicates: 0 Warning...	0.031 sec
5020	14:01:44	ALTER TABLE credit_card ADD COLUMN fecha_a...	0 row(s) affected Records: 0 Duplicates: 0 Warning...	0.031 sec

COMPROBACIÓN FINAL ENTRE TABLAS

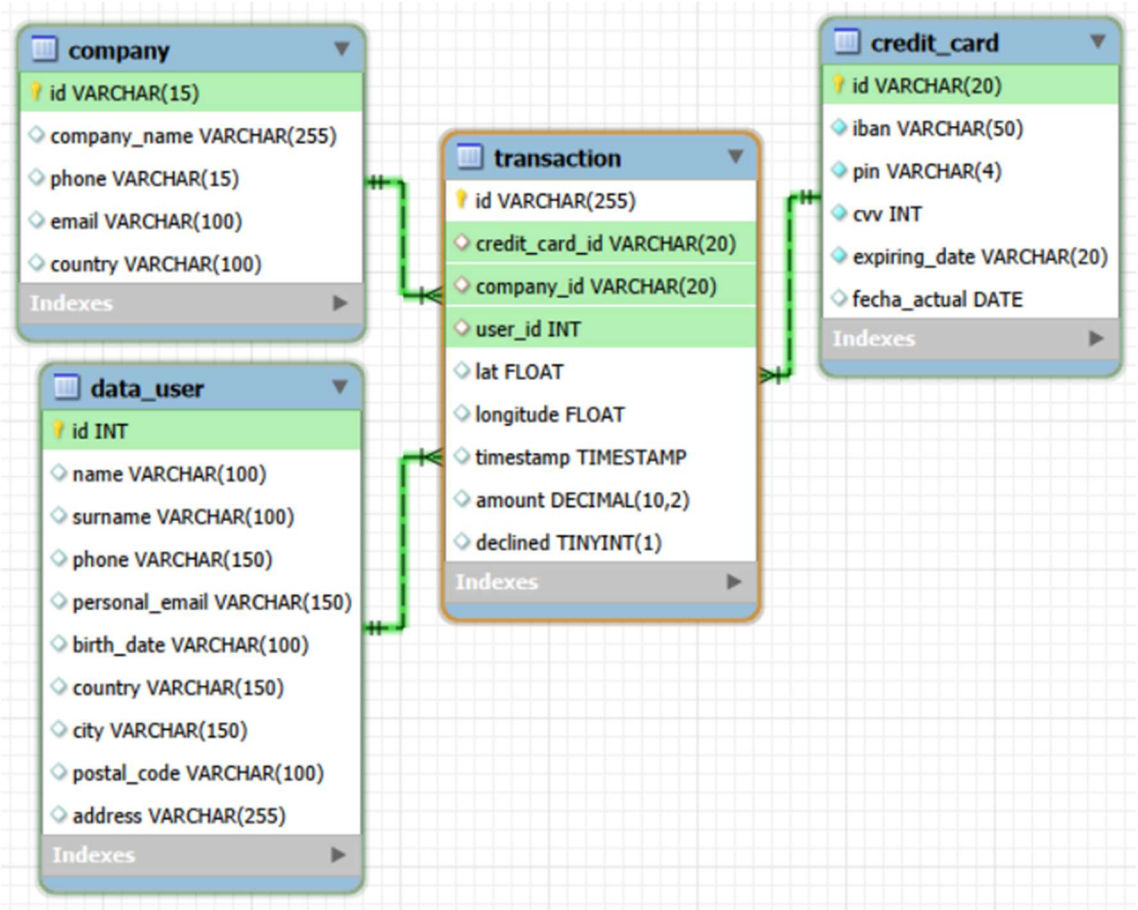

Ejercicio 2

Se genera la vista con los campos requeridos

```
217 •  CREATE VIEW InformeTecnico AS
218    SELECT  t.id AS ID_transaccion, u.name AS nombre_usuario, u.surname AS apellido_usuario,
219            cc.iban AS IBAN_tarjeta, c.company_name AS nombre_empresa
220    FROM transaction t
221    JOIN data_user u ON t.user_id = u.id
222    JOIN credit_card cc ON t.credit_card_id = cc.id
223    JOIN company c ON t.company_id = c.id;
224
```

Output

Action Output

#	Time	Action	Message	Duration / Fetch
1	10:44:23	USE transactions	0 row(s) affected	0.000 sec
2	11:38:57	CREATE VIEW InformeTecnico AS SELECTt.id AS ID_...	0 row(s) affected	0.016 sec

Mostrar los resultados ordenados en función de la variable ID_transaccion en forma descendente

```
226 •  SELECT *
227    FROM InformeTecnico
228    ORDER BY ID_transaccion DESC;
229
```

Result Grid | Filter Rows: | Export: | Wrap Cell Content: | Fetch rows:

ID_transaccion	nombre_usuario	apellido_usuario	IBAN_tarjeta	nombre_empre
FFFD31D6-9495-47CE-B54A-7DB8E1CC274B	Bmrgli	Tprvvmrc	XX7948144512112891824909 22	Turpis Compan
FFFCF76D-ECF0-4985-A2D0-B2A7B75998FC	Dfrled	Vilqcjdl	XX636251701647892036676034	Amet Nulla Don
FFFC9E8D-27C7-4ADE-98F2-7533EF4DF126	Securp	Faofvqfy	XX162677143304223631437567	Nunc Interdum
FFFB270D-F53A-4D5D-9666-E5307C53CC84	Ggzjpa	Uirzjulh	XX395114267082019952567052	Viverra Donec F
FFF9E3CE-234E-408C-A8EF-F9CAD577224A	Yshimq	Zpsjsleed	XX884546215653757036 7941	Convallis In Inc

Result Grid | Form Editor | Read Only

ormeTecnico 1

Output

Action Output

#	Time	Action	Message	Duration / Fetch
2	11:38:57	CREATE VIEW InformeTecnico AS SELECTt.id AS I...	0 row(s) affected	0.016 sec
3	11:44:08	SELECT * FROM InformeTecnico ORDER BY ID_tr...	100000 row(s) returned	0.781 sec / 0.047 sec

CORRECCIÓN

Se incluye la condición declined = 0 para obtener unos resultados más fiables:

```sql
CREATE VIEW InformeTecnico AS
SELECT  t.id AS ID_transaccion, u.name AS nombre_usuario, u.surname AS apellido_usuario,
        cc.iban AS IBAN_tarjeta, c.company_name AS nombre_empresa
FROM transaction t
JOIN data_user u ON t.user_id = u.id
JOIN credit_card cc ON t.credit_card_id = cc.id
JOIN company c ON t.company_id = c.id
WHERE t.declined = 0;

-- Mostrar los resultados ordenados en función de la variable ID_transaccion en forma descendente
SELECT *
FROM InformeTecnico
ORDER BY ID_transaccion DESC;
```

Result Grid | Filter Rows: | Export: | Wrap Cell Content: | Fetch rows:

ID_transaccion	nombre_usuario	apellido_usuario	IBAN_tarjeta	nombre_empre
FFF660D4-4244-47F6-9210-E5D1DCB99DB0	Lopzaj	Itgryfay	XX6337665973662745401512 5	Pede Cum Ltd
FFF5C660-4441-436D-BD27-E6C53B618622	Gmnbnu	Oxdvhkll	XX2378202561726463940164 83	At Associates
FFF54F54-B439-41F0-BDD2-F7332DC1ACAD	Gqcfyy	Mpifnltn	XX8027239432401476121587 18	Enim Condimen
FFF42F7D-7A0D-46E2-AF72-5996903F8AA9	Ddkugq	Ycsbpryu	XX9264423015551959741995 41	At Pede Corp.

Result Grid

InformeTecnico 5 × Read Only

Output

Action Output

#	Time	Action	Message	Duration / Fetch
19	12:45:16	CREATE VIEW InformeTecnico AS SELECTt.id AS I...	0 row(s) affected	0.016 sec
20	12:45:28	SELECT * FROM InformeTecnico ORDER BY ID_tr...	99763 row(s) returned	0.000 sec / 1.187 sec