




SOFTWARE BASE

ARQUITECTO DESARROLLADOR PLATAFORMA WEB NET CORE



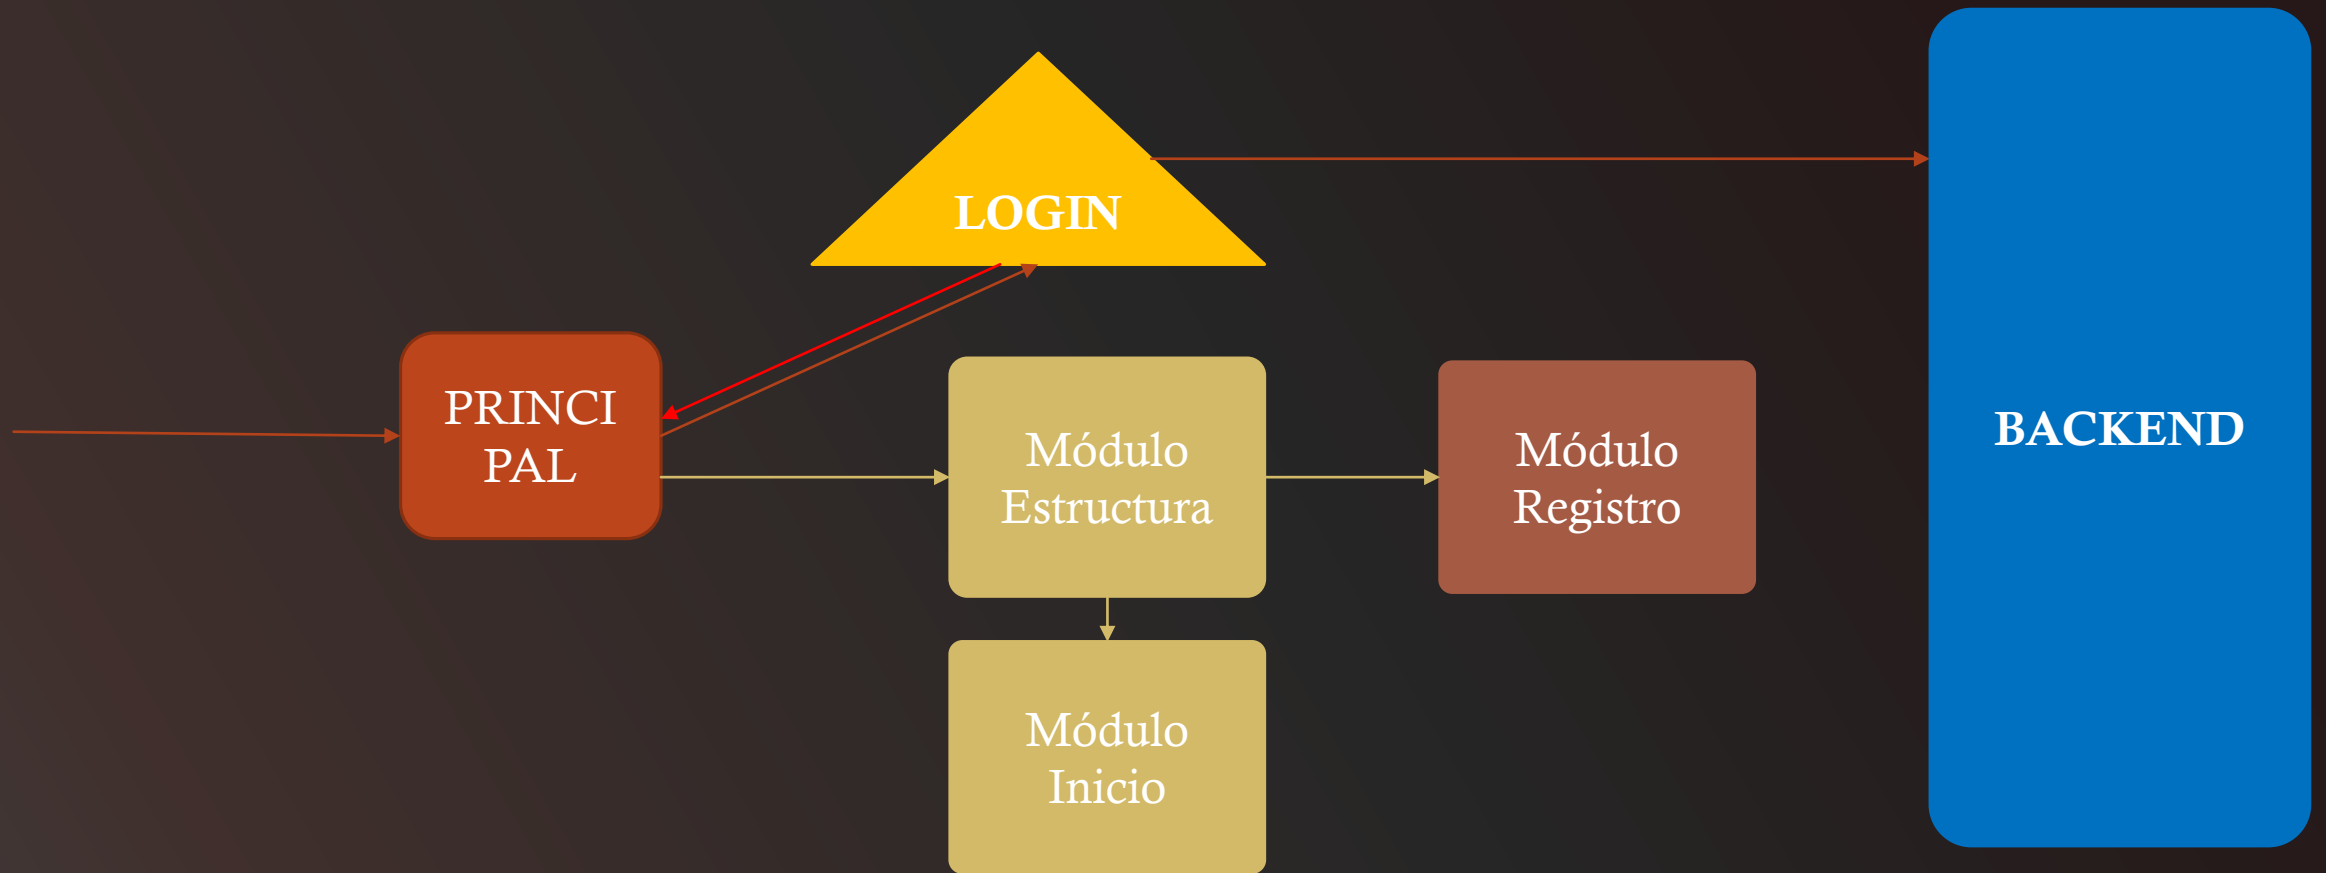

LoginComponent

MODIFICACIÓN

AGREGANDO EL SERVICE DE LOGIN PARA TRABAJAR SOLO CON EL COMPONENTE

```
import { Component, OnInit } from '@angular/core';
import { Usuario } from './usuario';
import { Router, ActivatedRoute, ParamMap } from '@angular/router';
import { LoginService } from './login.service';
```


```
@Component({
  templateUrl: './login.component.html',
  styleUrls: ['./login.component.css']
})
export class LoginComponent implements OnInit {
  model: Usuario = new Usuario();
  errorMessage:string;
  loading:boolean = false;
  constructor(private router: Router, private service:LoginService) { }
  ngOnInit() {
  }

}
```

AGREGANDO EL SERVICE DE LOGIN PARA TRABAJAR SOLO CON EL COMPONENTE

```
.....
@Component({
  templateUrl: './login.component.html',
  styleUrls: ['./login.component.css']
})
export class LoginComponent implements OnInit {
  .....
  ngOnInit() {
  }
  public login(){
    this.service.getToken(this.model).subscribe(
      usuario=>{
        console.log("usuario",usuario);
        this.redirectLogin();
      },
      error=>{
        this.errorMessage=<any>error;
        console.log("error login",this.errorMessage);
        this.router.navigate(['/mlogin']);
      }
    );
  }
}
```

AGREGANDO EL SERVICE DE LOGIN PARA TRABAJAR SOLO CON EL COMPONENTE

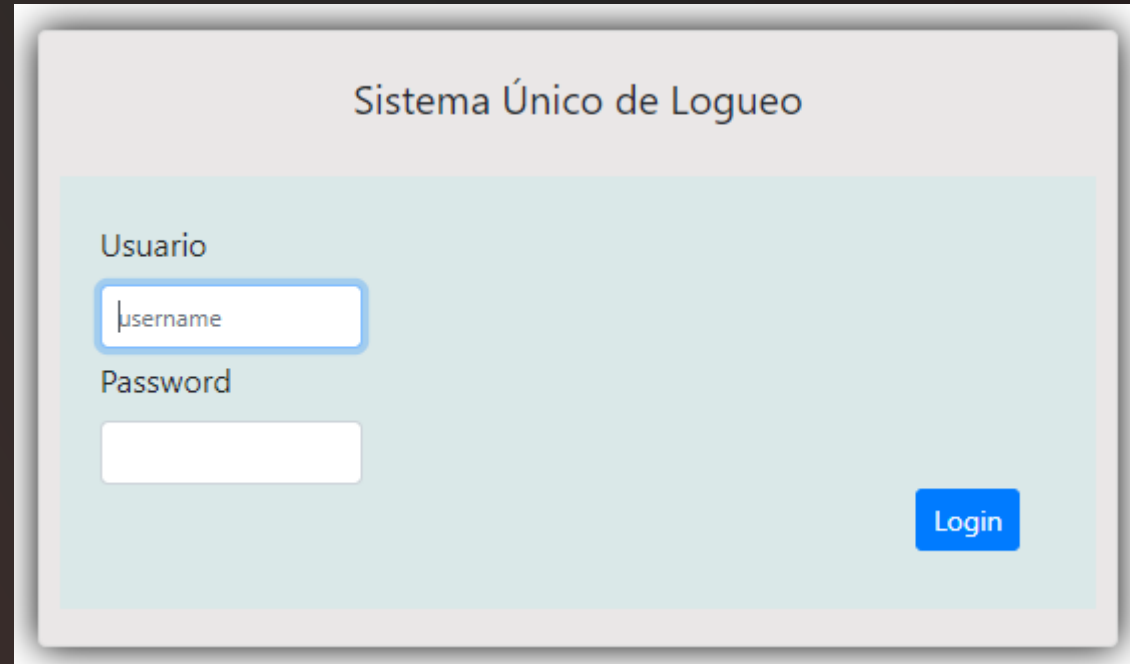

The image shows a login interface with a light blue background. At the top, the title "Sistema Único de Logueo" is centered. Below it, the label "Usuario" is positioned above a text input field containing the placeholder text "username". The label "Password" is positioned above an empty text input field. A blue "Login" button is located in the bottom right corner of the form area.

Sistema Único de Logueo

Usuario

username

Password

Login



Elements Console Sources Network Performance Memory Application Security Audits

top Filter Default levels ▾ Group similar 1 hidden

Angular is running in the development mode. Call enableProdMode() to enable the production mode. [core.js:3123](#)

LoginService - registrando en contexto usuario: {"login":"lima","password":"123","token":"123"} [login.service.ts:30](#)

usuario ▾ {login: "lima", password: "123", token: "123"} [login.component.ts:25](#)

- login: "lima"
- password: "123"
- token: "123"
- __proto__: Object

LoginComponent.html

MODIFICACIÓN


```
<form name="form" #formLogin="ngForm" >
```

```
    ... name="username" [(ngModel)]="model.login" ...
```

```
    ...name="password" [(ngModel)]="model.password" ...
```

```
  <div class="row" >
```

```
    <div class="col-xs-12 col-sm-12 col-md-12" style="">
```


```
      <div *ngIf="errorMessage" class="alert alert-danger"> {{ errorMessage }}</div>
```

```
    </div>
```

```
  </div>
```

```
  <div style="clear:both"></div>
```

```
</form >
```



CONSULTAS

CONVERTIMOS EL CAFÉ EN CÓDIGO