



A Practical Guide to Collaborative Software Design

2025 edition - Session 1



How it was supposed to be



Reality



1 Architecture and Software Design

2 Mindset and practices

Today

3 Models

4 How to Design

5 Next Steps &
Further reading and viewing...



In theory, there is
no difference between
theory and practice; In
practice, there is.



Software Engineering: it's a Craft, should be a Culture and needs to be about People

Manifesto for Software Craftsmanship

Raising the bar.

Aspiring Software Craftsmen we are raising the bar of professional software development by practicing it and helping others learn the craft. Through this work we have come to value:

Not only working software,
but also **well-crafted software**

Not only responding to change,
but also **steadily adding value**

Not only individuals and interactions,
but also **a community of professionals**


Not only customer collaboration,
but also **productive partnerships**

That is, in pursuit of the items on the left we have found the items on the right to be indispensable.





Software Engineering: it's a Craft, should be a Culture and needs to be about People

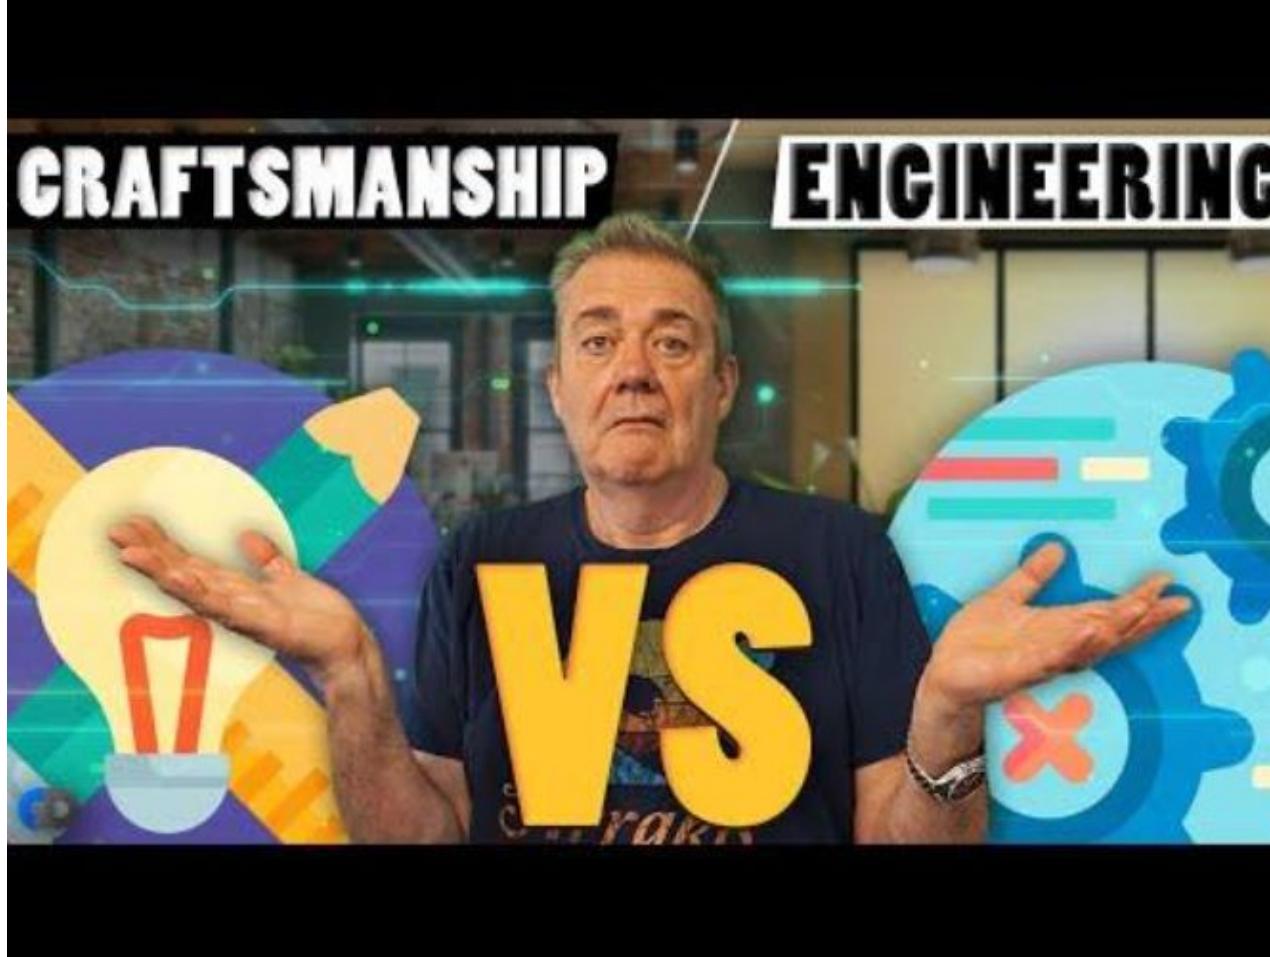


Software Craftsmanship vs Software Engineering

[youtube.com](https://www.youtube.com)



Design is not just what it looks
and feels like. Design is how it works.

Steve Jobs

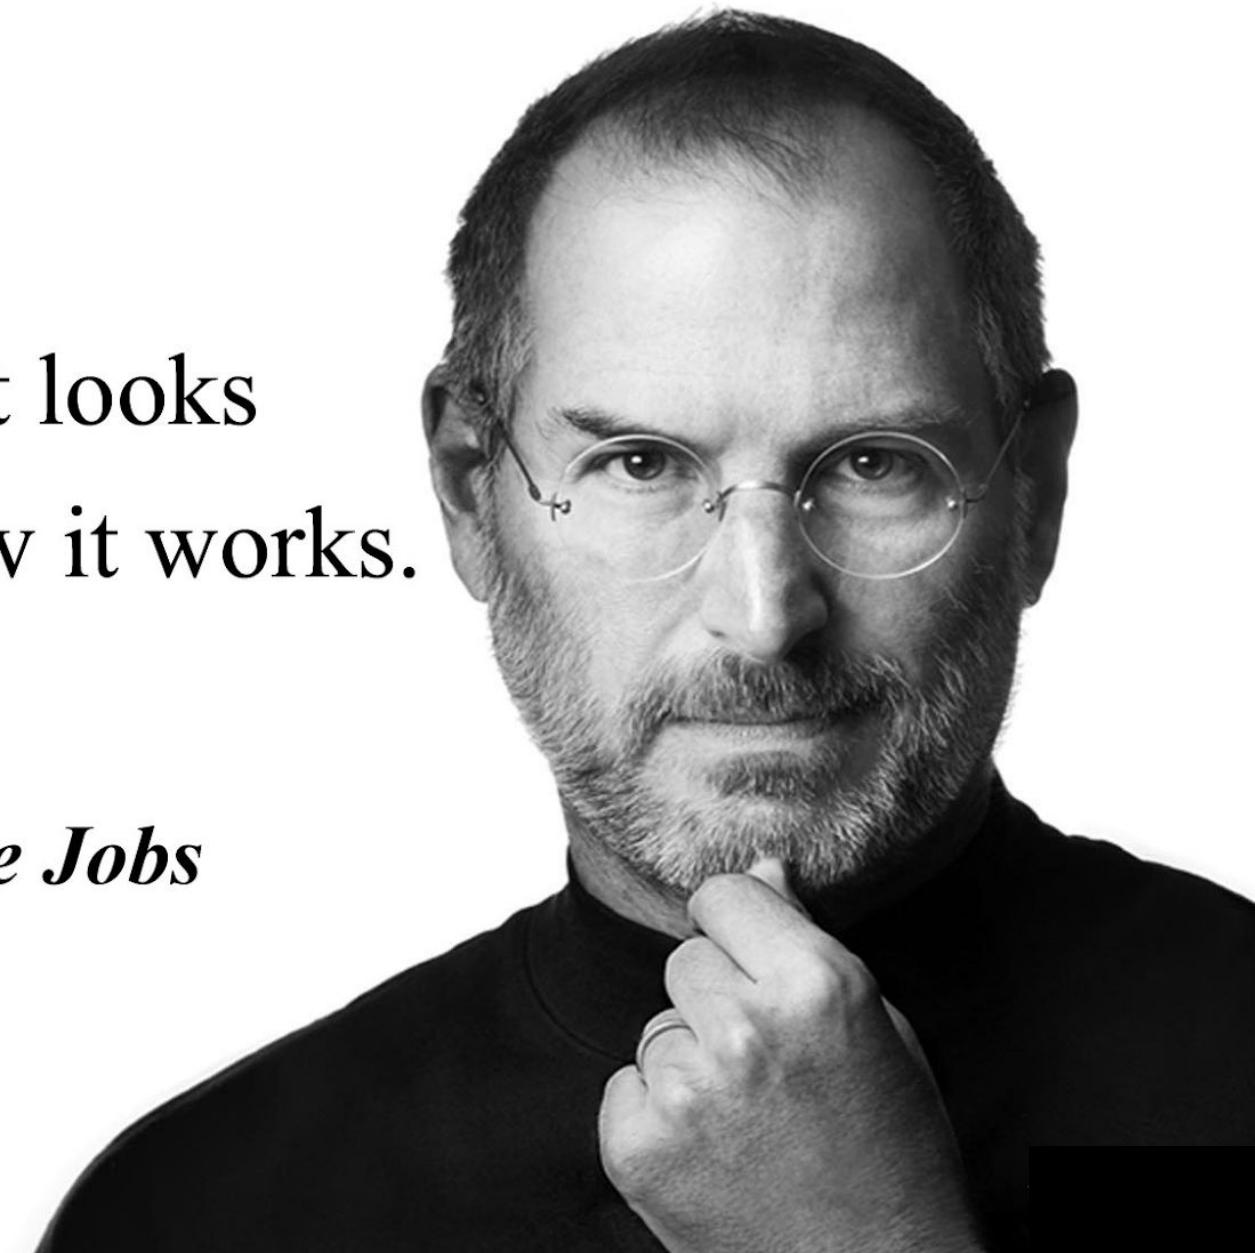

If you are in a hurry.....The lost art of software design by Simon Brown



DEVOXX
BELGIUM

Continuous attention to
technical excellence and
good design enhances agility.

Principle 9 of the Manifesto for Agile Software Development

Mininlayer (i)




<https://youtu.be/36OTe7LNd6M>


If you are in a hurry.....The lost art of software design by Simon Brown



The lost art of software design by Simon Brown

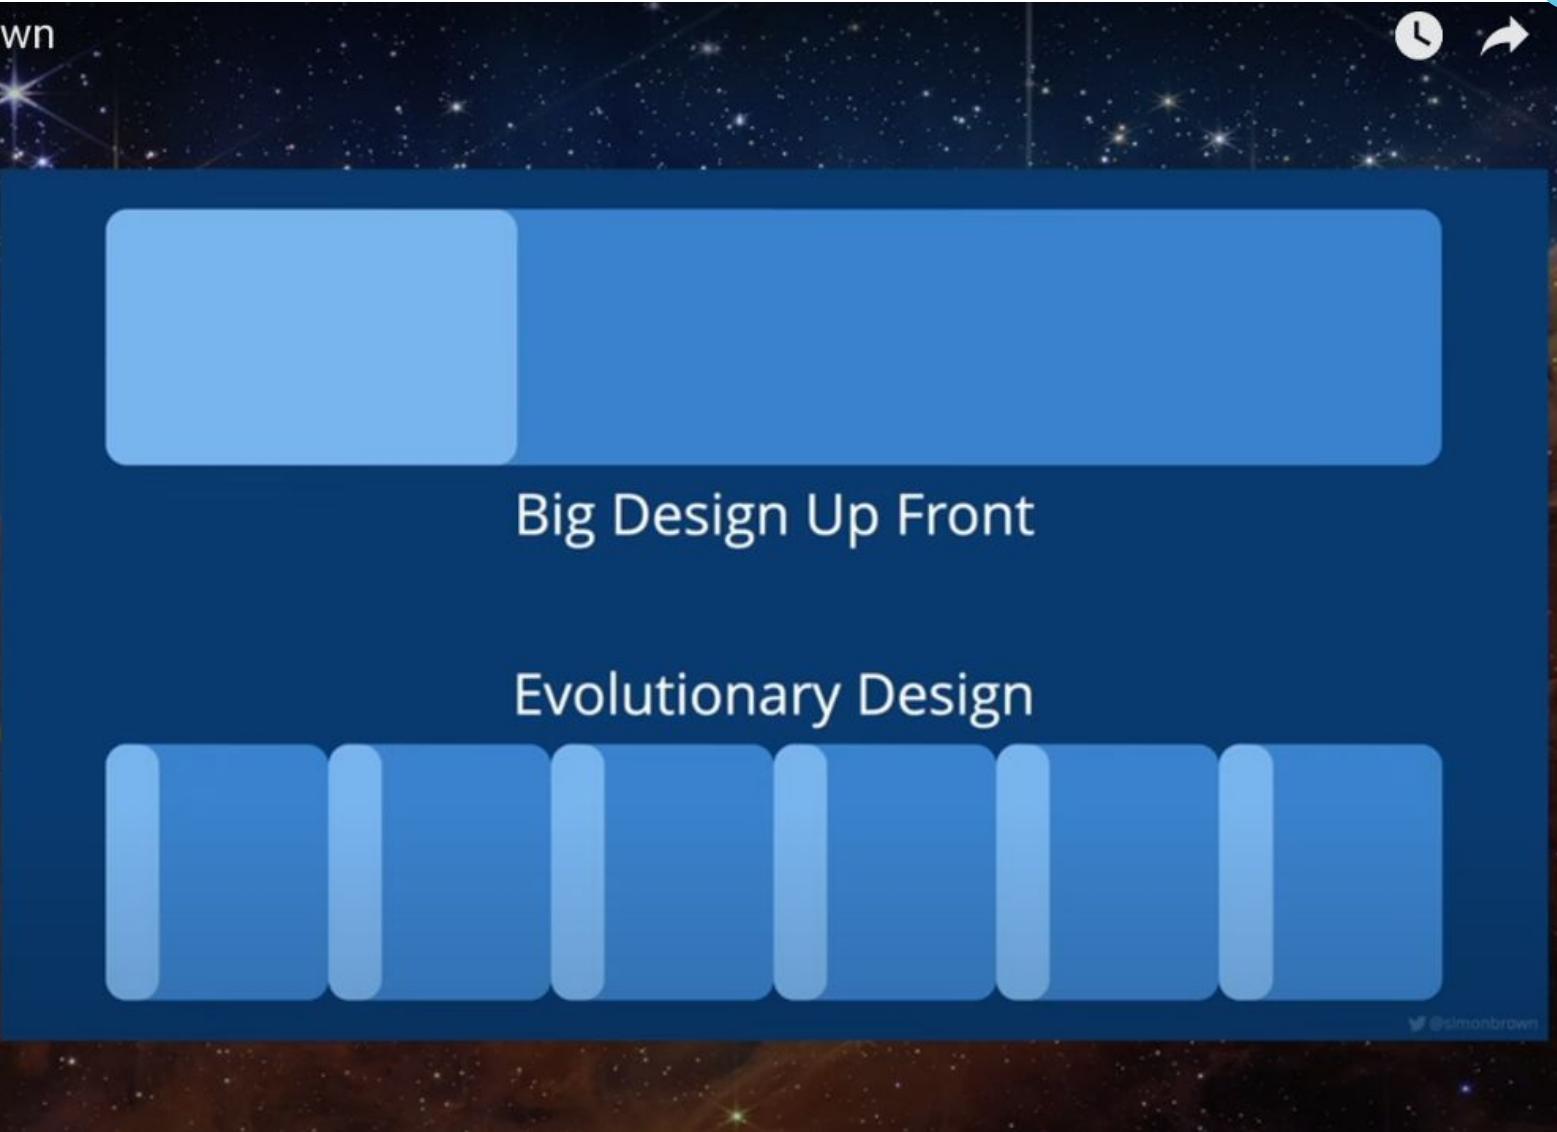

<https://youtu.be/36OTe7LNd6M>

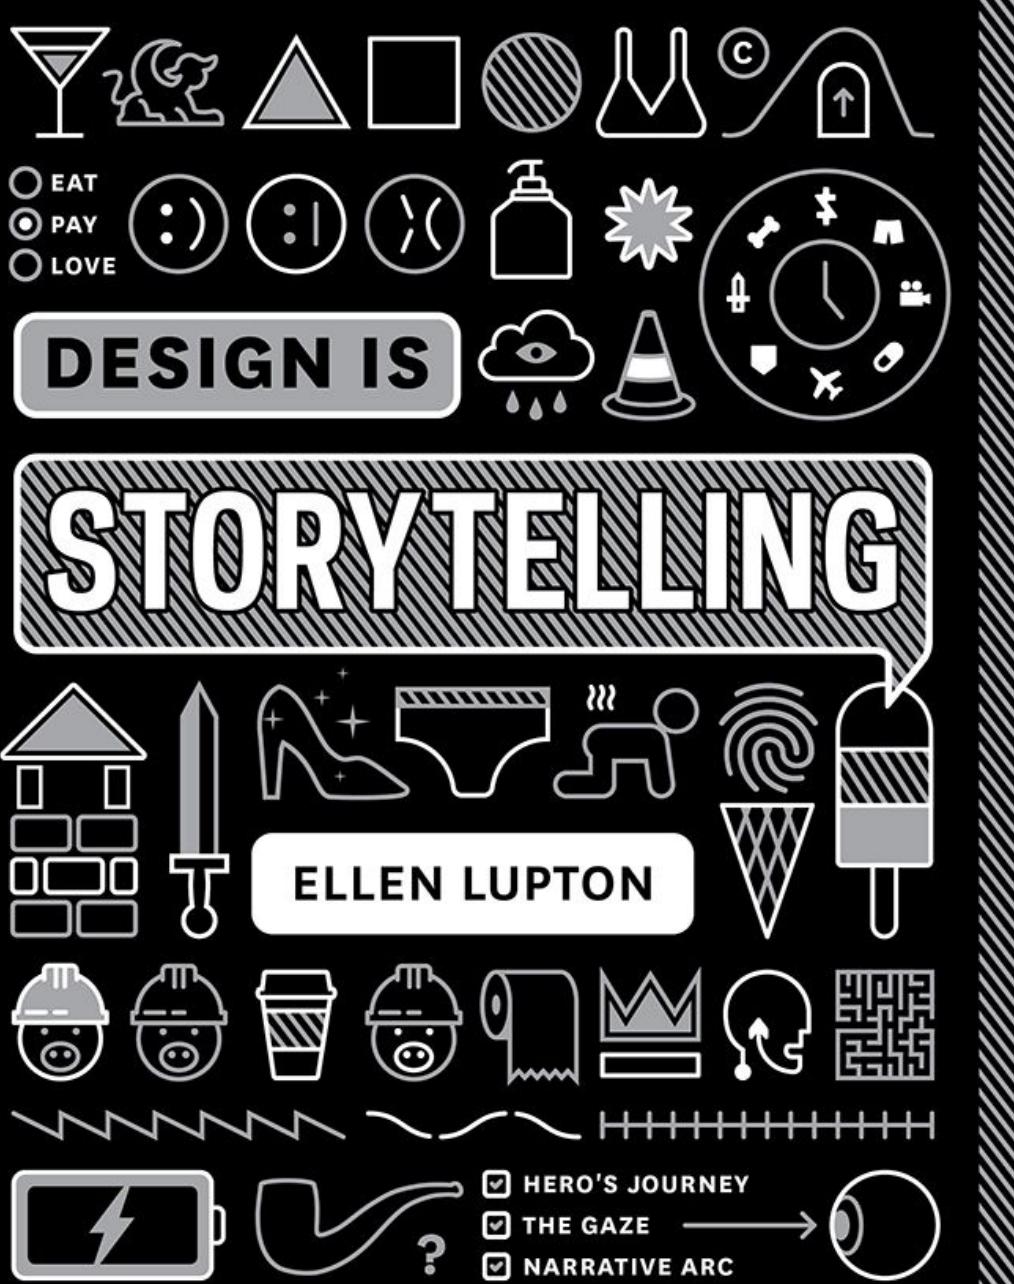


Design is describing
- telling a story -
about How “it” works

Lupton's *Design is Storytelling* reminds software engineers that **humans connect with systems and interfaces through stories**—whether explicit or implicit.

For example: In software, user flows are like narratives. They take users on a journey with a beginning (onboarding), middle (tasks), and end (success or feedback).

By treating software experiences as narratives, engineers and designers can create products that are not only functional but also intuitive, memorable, and engaging.

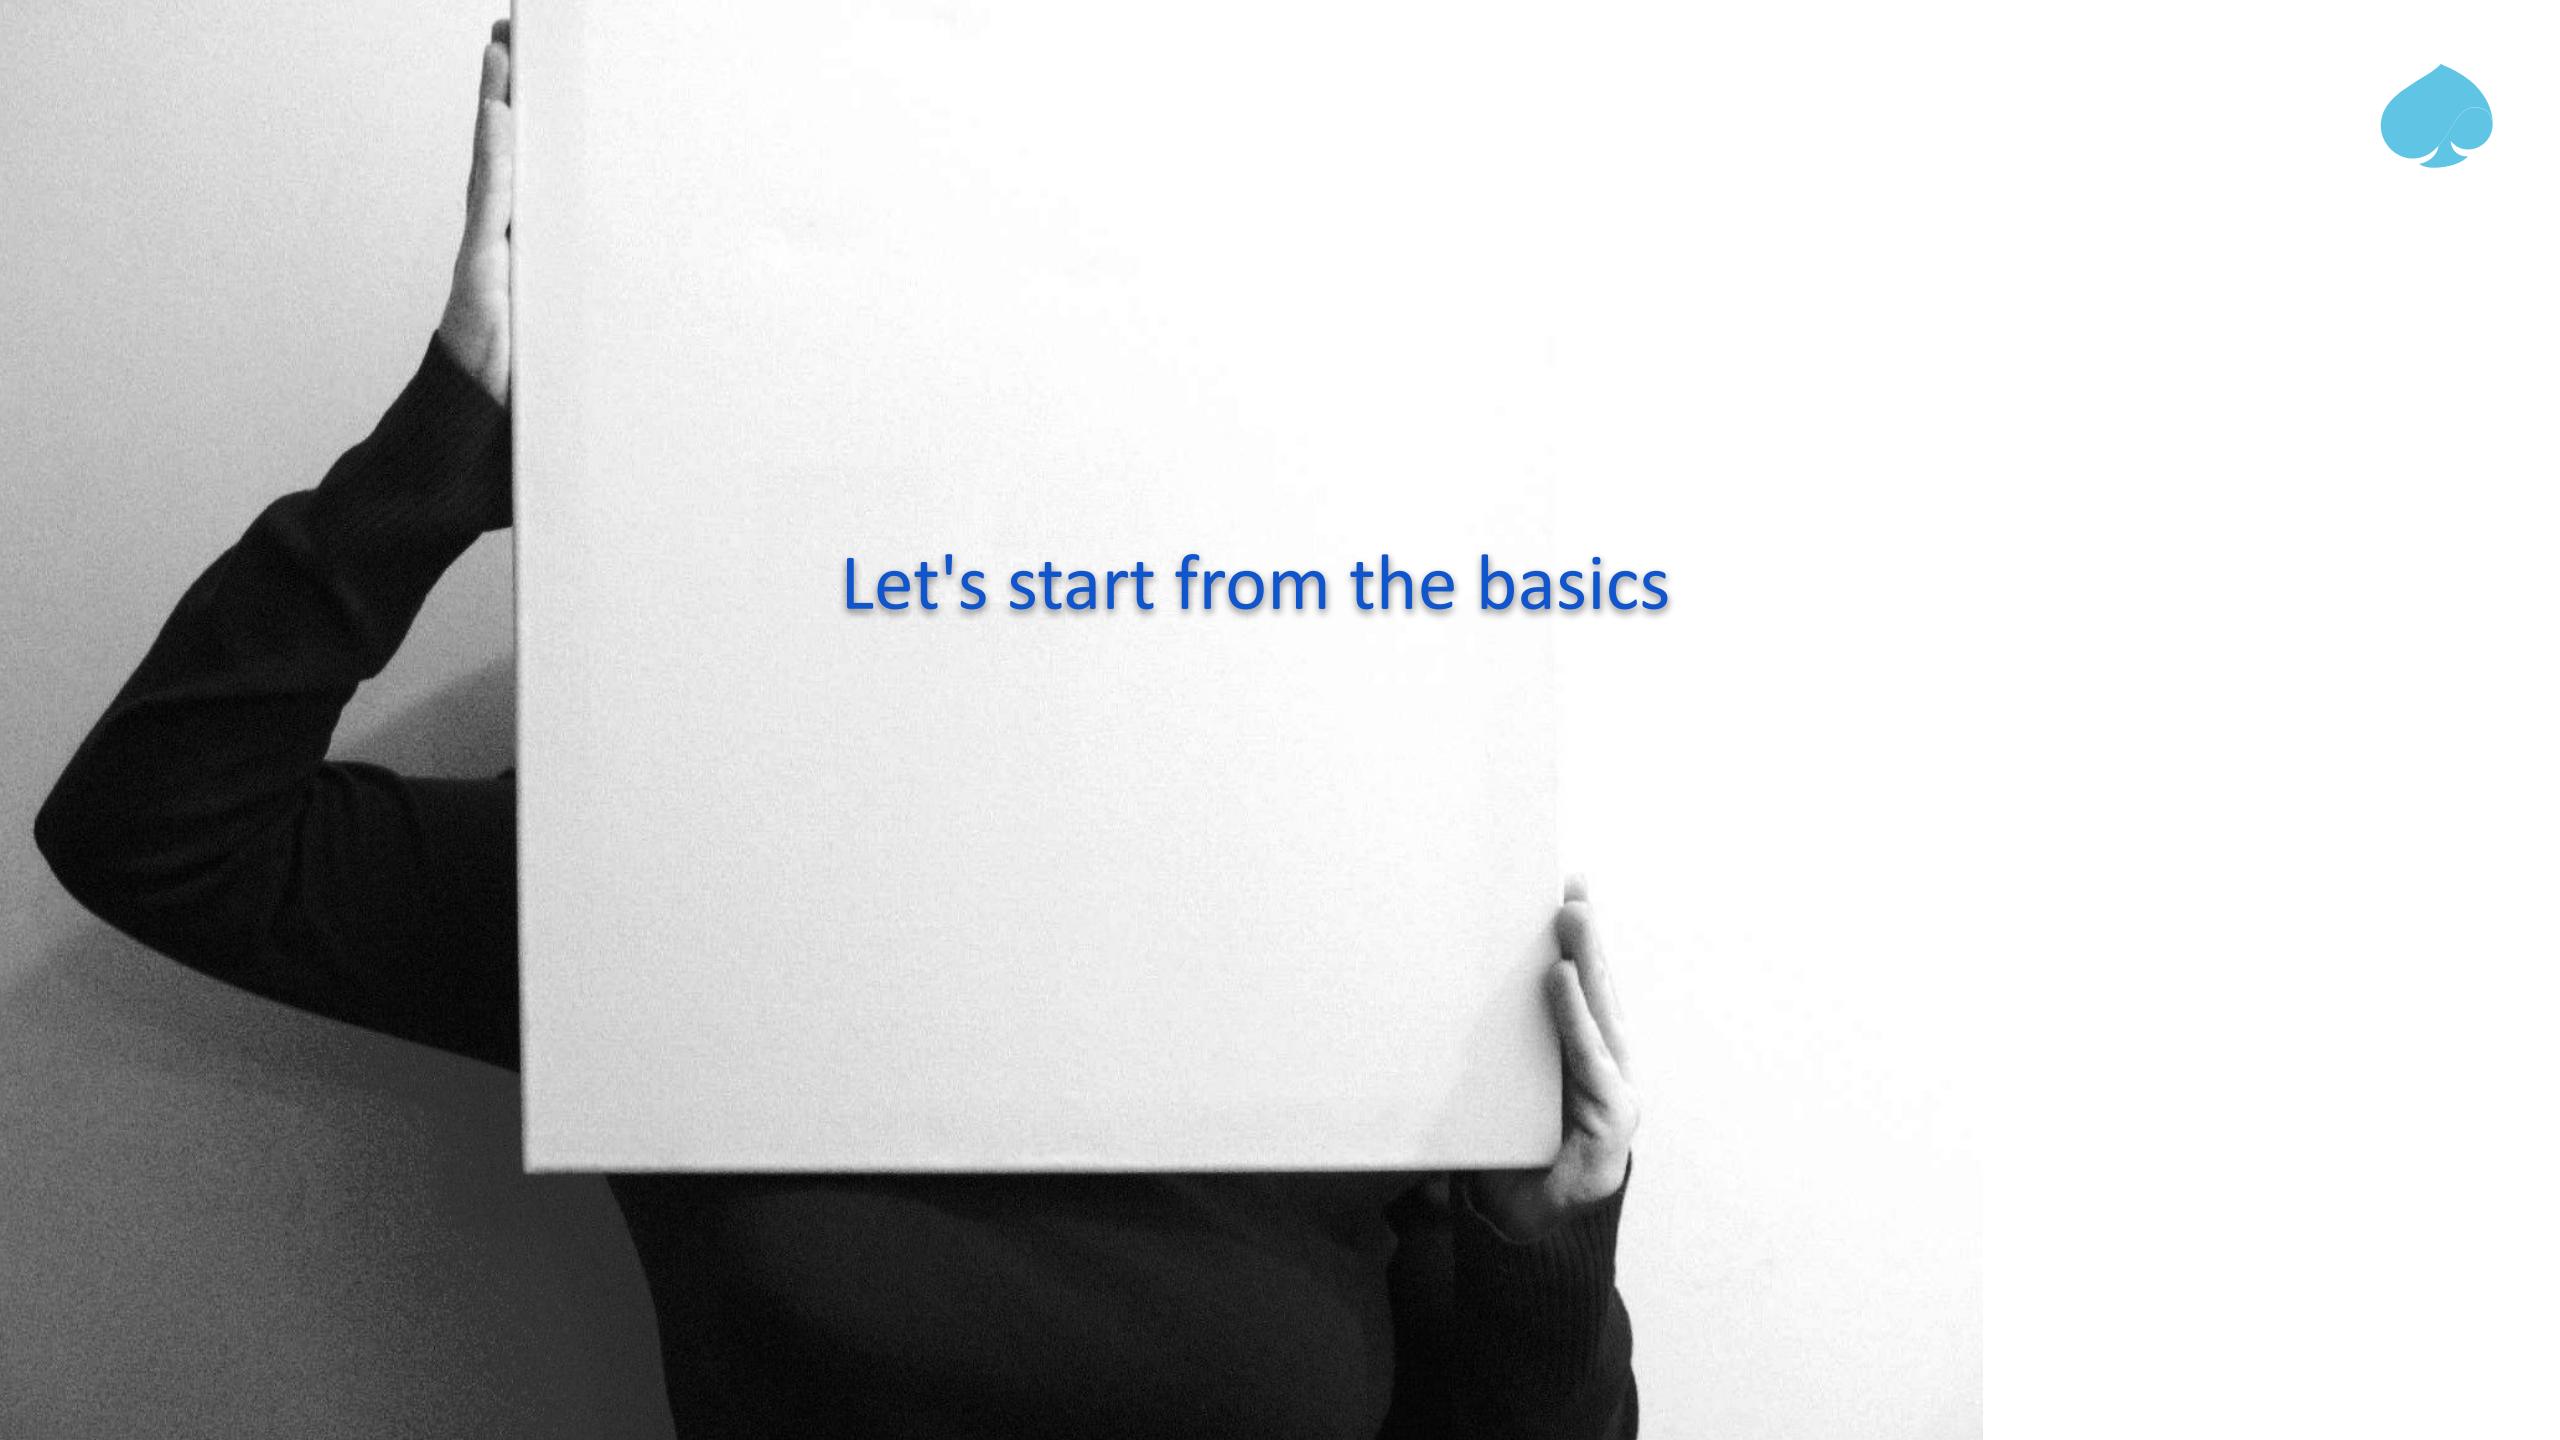A black and white photograph showing a person from the chest up. They are wearing a dark, long-sleeved shirt. Their hands are visible at the bottom, holding a large, blank sheet of paper in front of their face, completely obscuring it. The background is a plain, light color.

Let's start from the basics



Architecture and Software Design



Defining the terms...

A Practical Guide to


Collaborative

Software Design




Collaborative?

TOP-DOWN VS BOTTOM-UP APPROACH

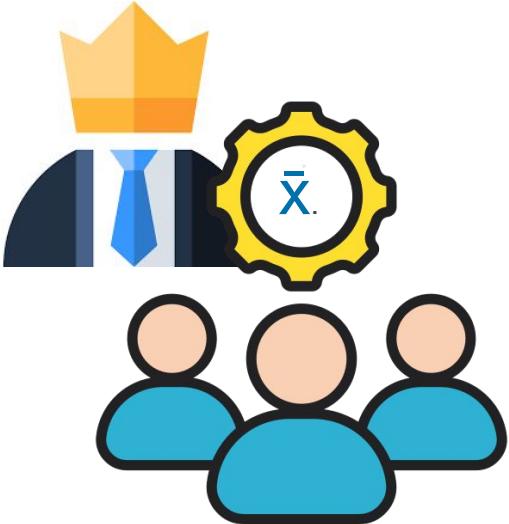

An strongly led, average, baseline team will suffice

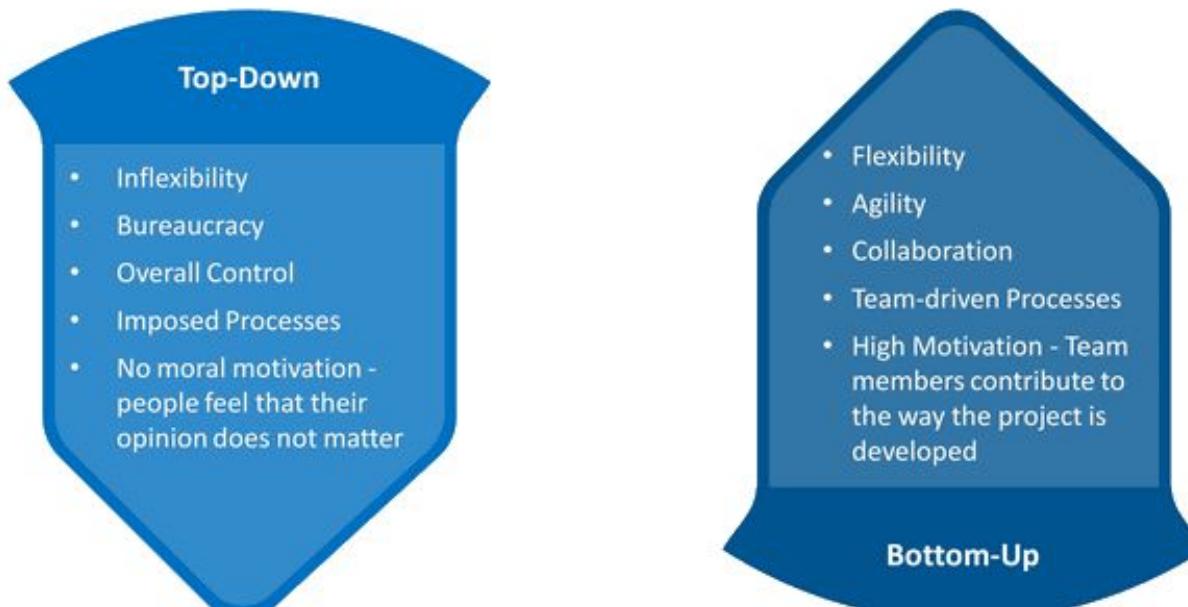

Requires a strong, motivated team, capable and inclined to work peer to peer

Control and
Collaboration

Clarity of Project goals and visibility
of internal organization processes

Coordination and
Collective Intelligence



The Team should (be able to) work as one



Defining the terms...



A Practical Guide to

Collaborative

Software Design

An important side note:



Software Design is not separate from User Experience Design

USER EXPERIENCE IS...

LOOK + FEEL + USABILITY



UX Design is PART OF Software Design, part of the process as well as the final artifacts. It is NOT a separate process in the same way that designing the Data Model is NOT a separate process.



What *is* Software Design? Is it “Architecture”? What *is* “Architecture”?



The poster is for OSCON Portland 2015. It features a red background with a black rectangular overlay containing the title and speaker information. On the left side, there is a cartoon illustration of an owl wearing glasses and holding a small device.

O'REILLY®
OSCON
PORTLAND, OR
JULY 20-24, 2015
oscon.com #oscon

Making architecture matter
Martin Fowler
ThoughtWorks

<https://www.youtube.com/watch?v=DngAZyWMGR0>

Ralph Johnson (one of the Design Patterns Gang of Four (GoF) – as paraphrased by Martin Fowler:

“....Expert developers’ shared understanding of the system design

...

very much a social activity

...

The set of design decisions that are hard to change

...

Which boils down to”




Software Architecture is

O'REILLY®

Building Evolutionary Architectures

SUPPORT CONSTANT CHANGE

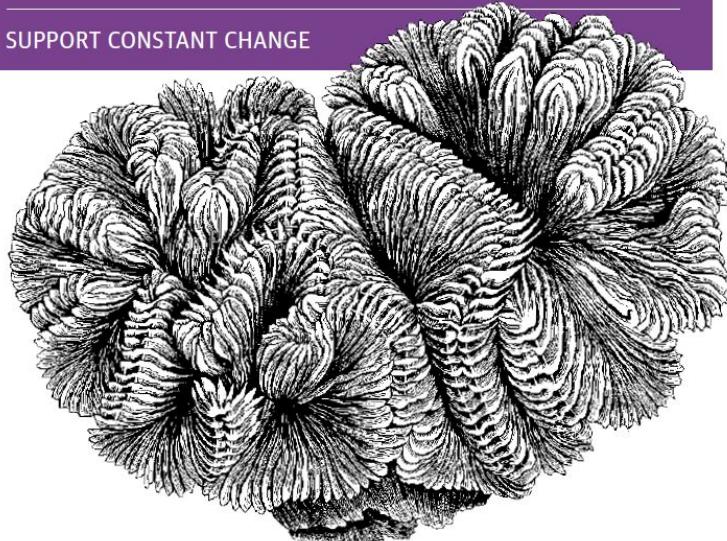

Neal Ford, Rebecca Parsons & Patrick Kua

“.....the important stuff
(whatever that is).....”


The architect's job is to understand and balance all of those important things
(whatever they are)

.....

and to define and document in such a way that all involved understand it and do so in the same way



The important stuff

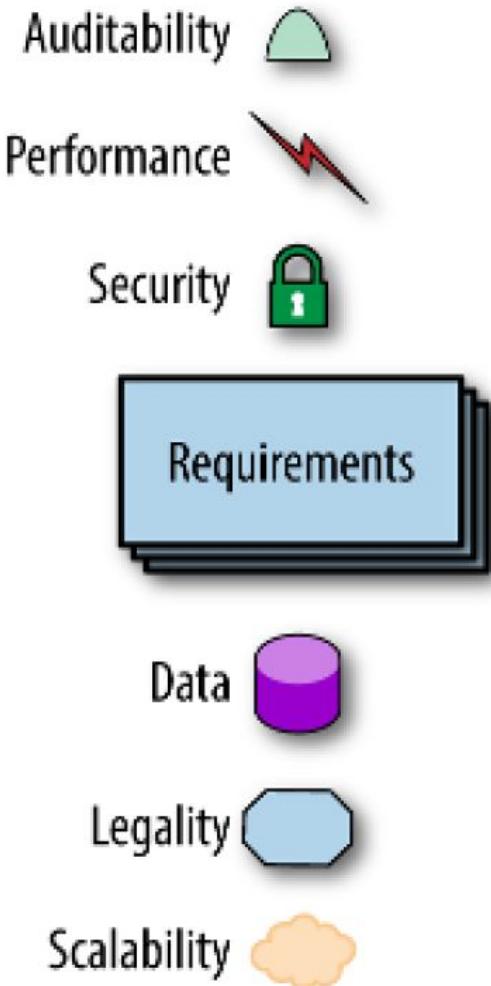

accessibility accountability accuracy adaptability administrability
affordability agility auditability autonomy availability
compatibility composable configurability correctness credibility
customizability debugability degradability determinability
demonstrability
dependability deployability discoverability distributability durability
effectiveness efficiency usability extensibility failure transparency
fault tolerance fidelity flexibility inspectability installability
integrity interoperability learnability maintainability manageability
mobility modifiability modularity operability orthogonality
portability precision predictability process capabilities producibility
provability recoverability relevance reliability repeatability
reproducibility resilience responsiveness reusability robustness
safety scalability seamlessness self-sustainability serviceability
securability simplicity stability standards compliance survivability
sustainability tailorability testability timeliness traceability



Architecture and Software Design

“....Architecture is the bigger picture: the choice of frameworks, languages, scope, goals, and high-level methodologies (Rational, waterfall, agile, etc.).

Design is the smaller picture: the plan for how code will be organized; how the contracts between different parts of the system will look; the ongoing implementation of the project's methodologies and goals. Specification are written during this stage....”

Architecture => Structure

Design => Structure and Meaning



The central question

How do we **define** and
communicate
this **structure** and
meaning
of the system (to be) build?



So what is (a) Software Design

“...Software design is both a process and a model...”

- The design as a model is the “plan” of what to build
- It should define the structure of the code
- It should describe, make explicit, the functionality
- Using abstractions to arrange and reduce complexity




“...It's too abstract...”

- The imperative mind-set
- “...It's too vague...” or “.. too abstract..”
- Mistake low-level imperative operations for exactness
- Every programming language, even assembler, is composed of high-level abstractions



In computers, ALL is abstraction

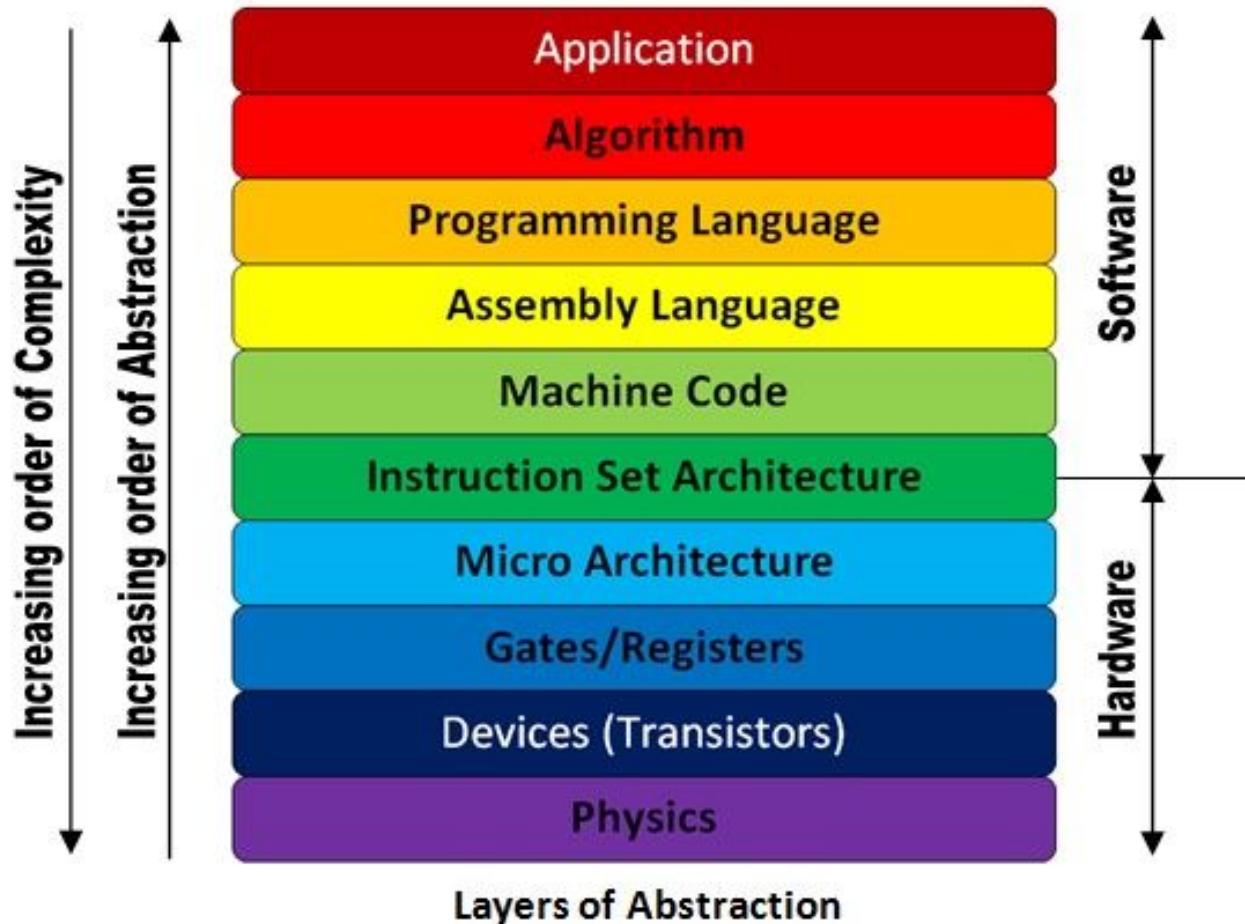




The design

A software design is based on
a composition of *abstractions*

(but what does that mean?)

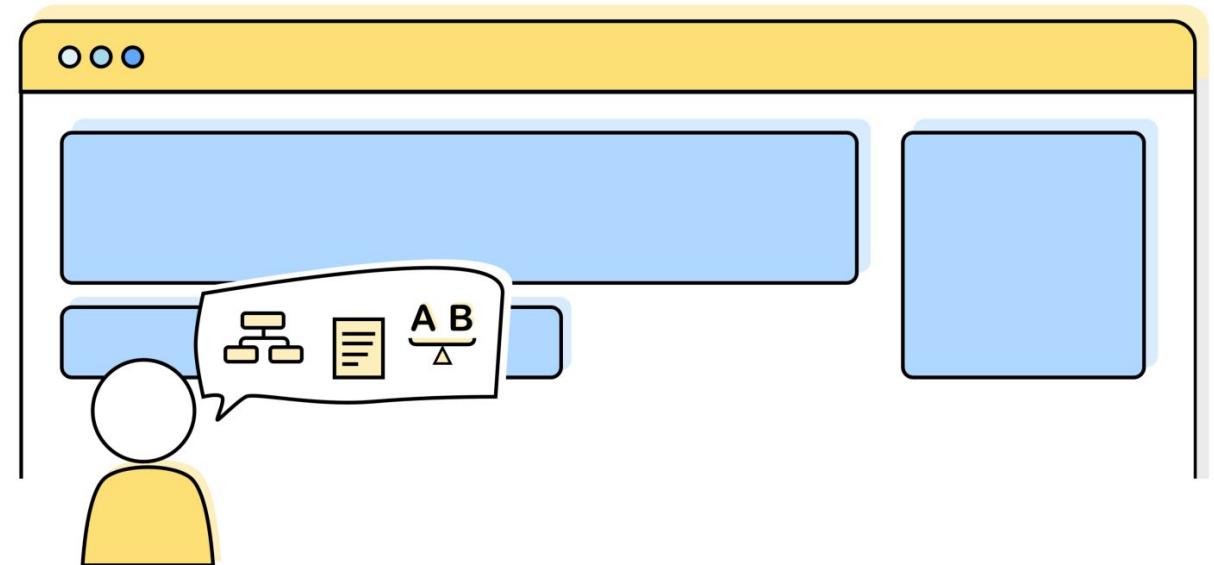




Abstraction

“...Being abstract is something profoundly different from being vague ... The purpose of abstraction is not to be vague, but to create a new semantic level in which one can be absolutely precise....”

Edsger Dijkstra

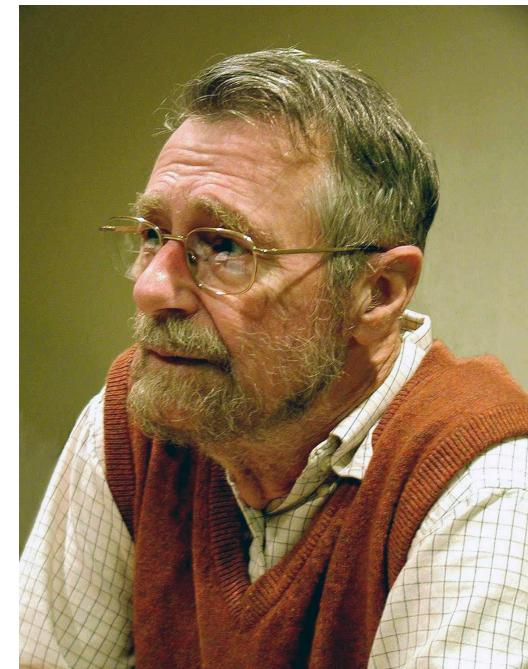



How to express Abstractions

Depending the language

Types

Classes

Methods


Functions

Decorators

Attributes

Modules

Macros

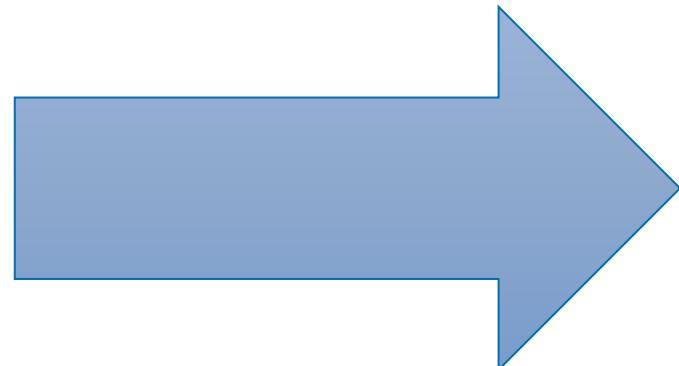


Nouns, verbs and adjectives

(and Spells, Magical incantations, through macros and embedded languages or DSL. But that is for another presentation)



Example abstractions

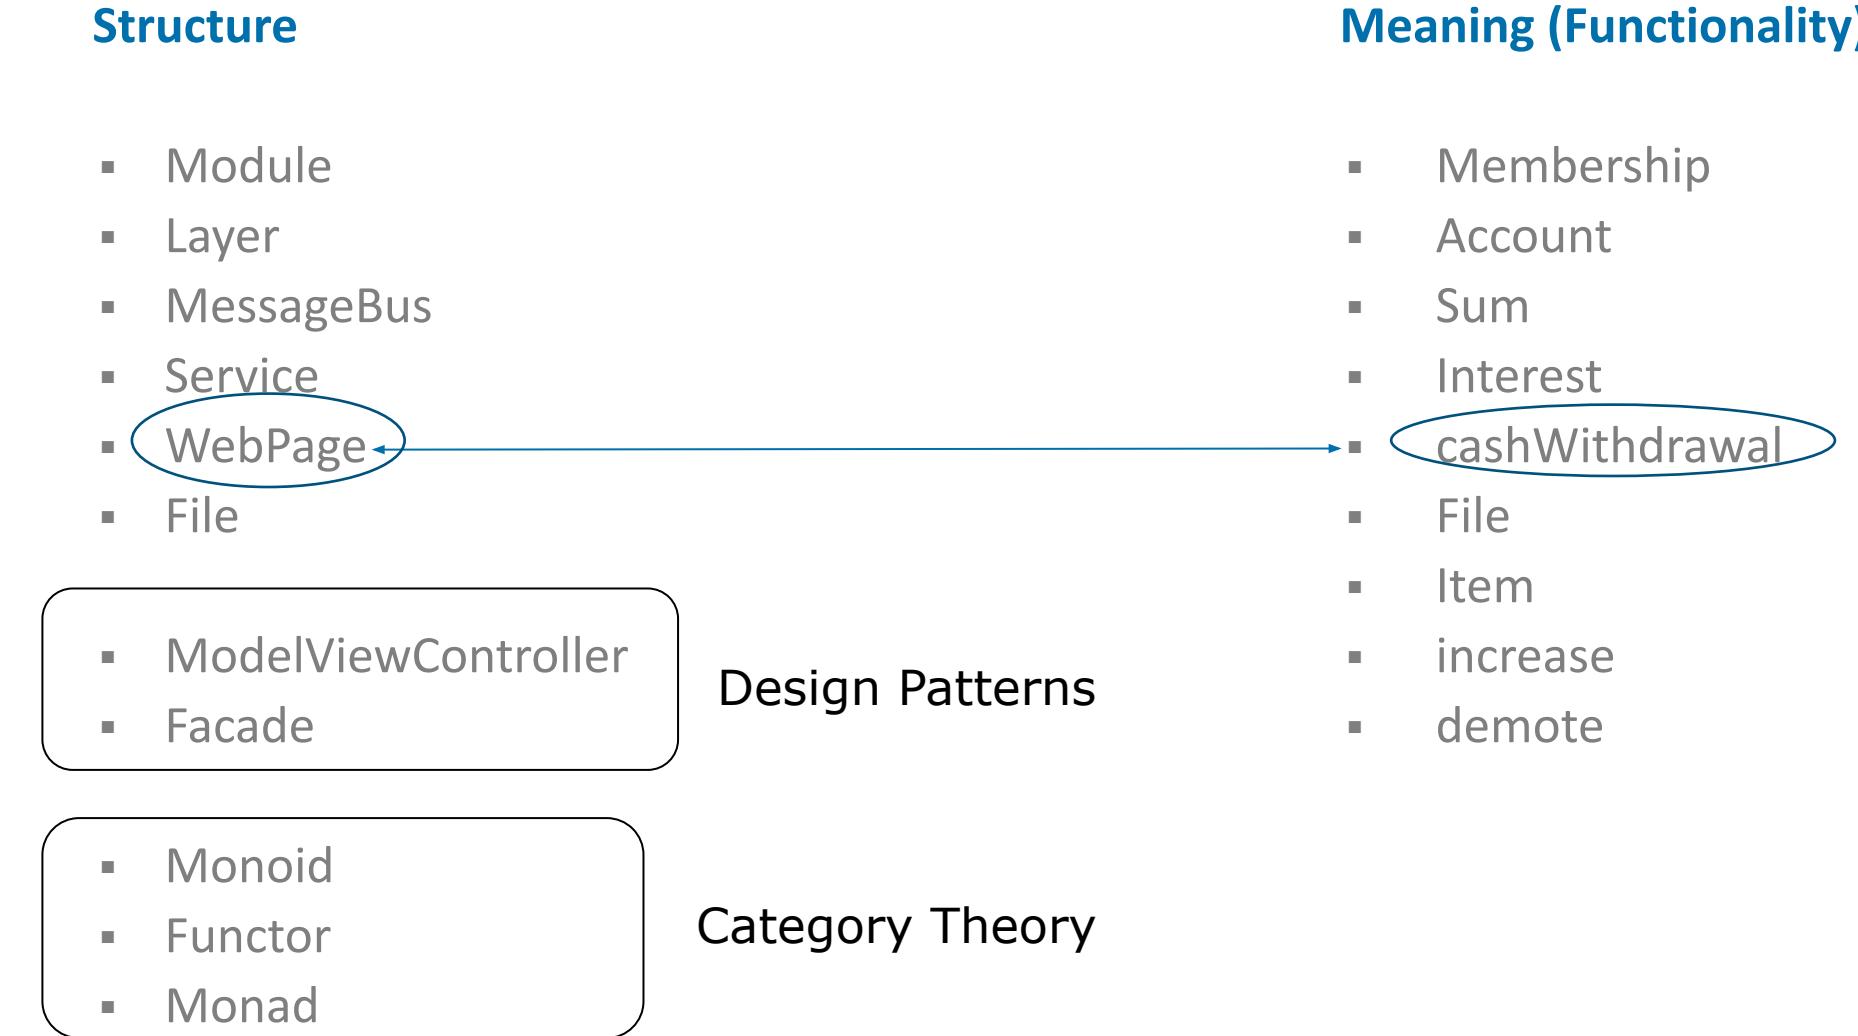



Don't overdo structure

KEEP IT
SIMPLE



It's an engineering discipline...but...

You are not going to "build" physical objects. Focus on meaning and not on structure but do so using Engineering principles



O'REILLY®



Fundamentals of Software Architecture

An Engineering Approach

Mark Richards & Neal Ford



Mindset and Practices





Software Design as Storytelling

An abstraction can be created and combined with others to create a larger abstraction (**composition**). Once an abstraction needs to be detailed and specific it needs to be broken up in smaller components (**decomposition**).

This is the essence of programming....

This can be seen as a technical process. However, due to the intangible nature of software and modelling, it can actually be a linguistic process. Abstractions can consist of metaphors, similes, stories.

Software Design becomes a linguistic process. It becomes akin to telling a story.

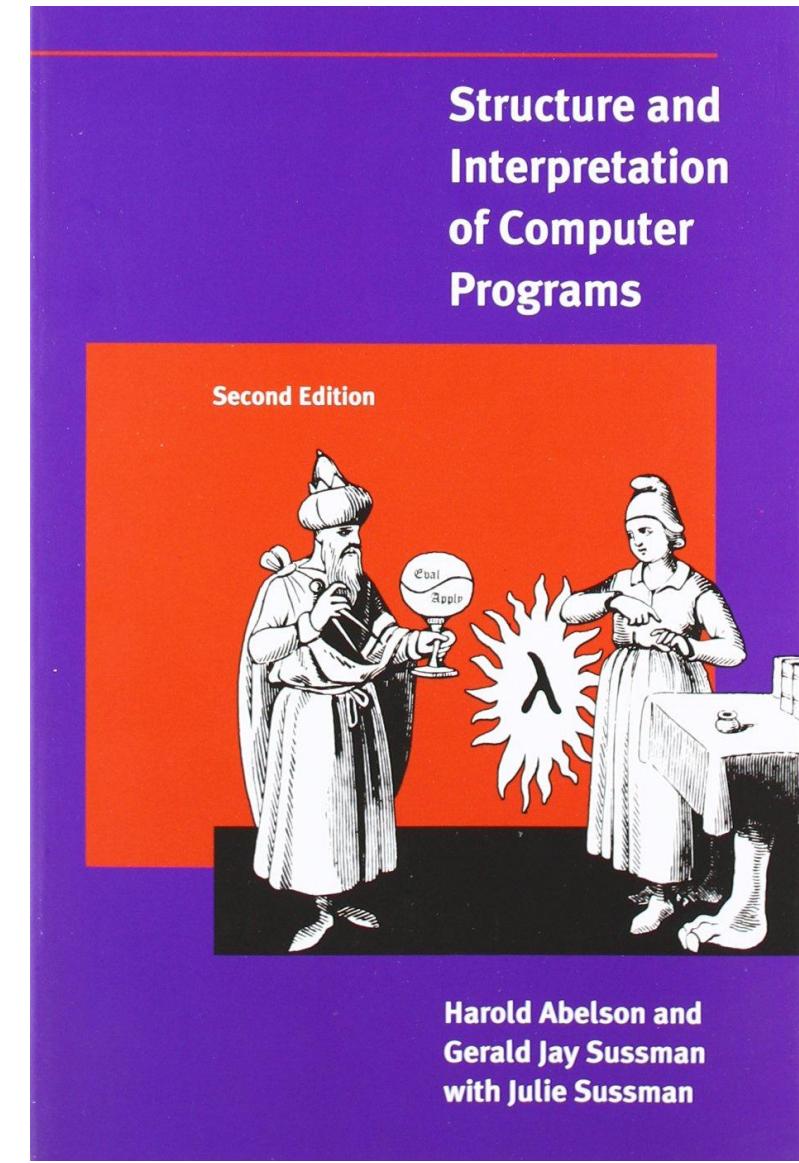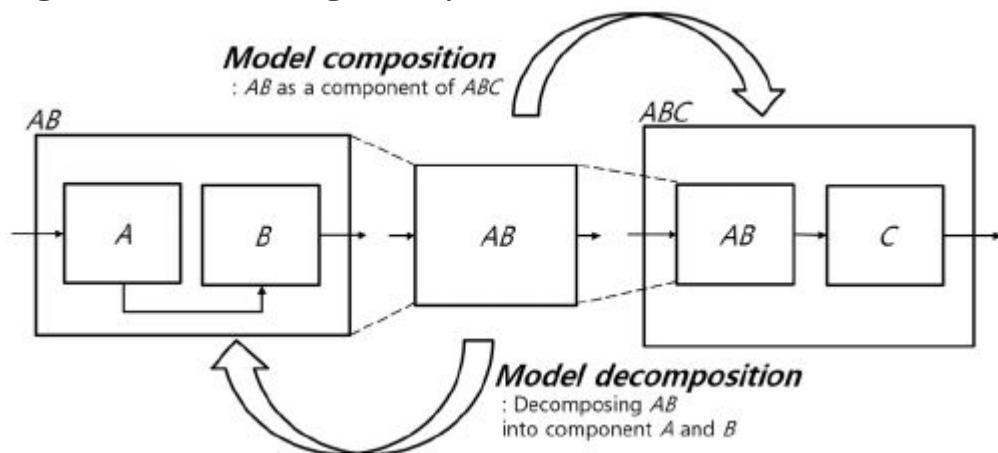

Harold Abelson and
Gerald Jay Sussman
with Julie Sussman



So

How do we **define** and
communicate
this **structure** and
meaning
of the system (to be) build?

By telling a story;
Software Design is
Storytelling with Abstractions



The design is relevant NOT the medium

Defining and communicate the structure and meaning
of the system (to be) build

Telling WHAT to BUILD and HOW it WORKS

Create artifacts as diverse as:



- Wireframing
- User Stories
- Requirement Specs
- Risk Logs
- Prototypes (code, paper, etc)
- Spikes (coding activity)
- Type definitions (code)
- Context Maps
- Flow Charts
- Sequence Diagrams
- etc....





Telling a story with Text, Code & Diagrams

```
1  from typing import List, Dict, Any
2
3  from agents import CoalitionAgent
4  from base import Coalition, Product
5  from communication import CoalitionAction
6
7
8  class MyCoalitionAgent(CoalitionAgent):
9      PROD_TYPE_R1 = "r1"
10     PROD_TYPE_R2 = "r2"
11
12    def __init__(self, name: str, resources: float, products: List[Product]):
13        super(MyCoalitionAgent, self).__init__(name, resources, products)
14
15    def create_single_coalition(self):
16        c = Coalition(self.products)
17        c.set_agent(self, share=self.PROD_TYPE_R1):
18        {
19            Coalition.PROD_CONTRIB: self.resources,
20            Coalition.PROD_VALUE: 0
21        }
22    }
23
24    return c
25
26    def state_announced(self, agents: List[CoalitionAgent], coalitions: List[Coalition]):
27        super().state_announced(agents, coalitions)
28
29    def do_actions(self, messages: List[CoalitionAction] = None):
30        return []
```

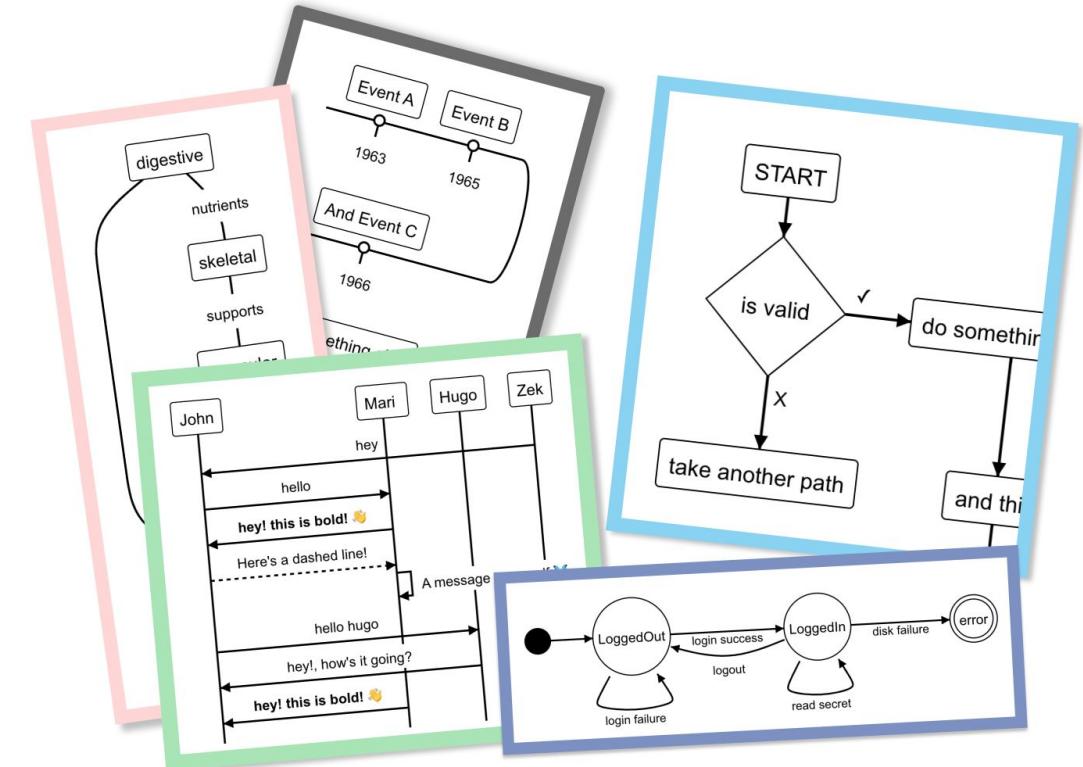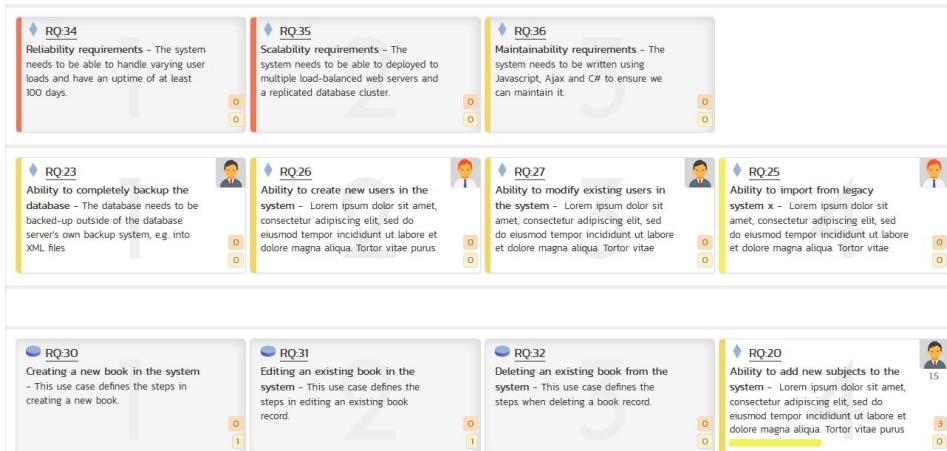




EVERYTHING HAS A NAME

Naming

“...There are only two hard things in Computer Science: cache invalidation and naming things....”

Phil Karlton (Netscape)

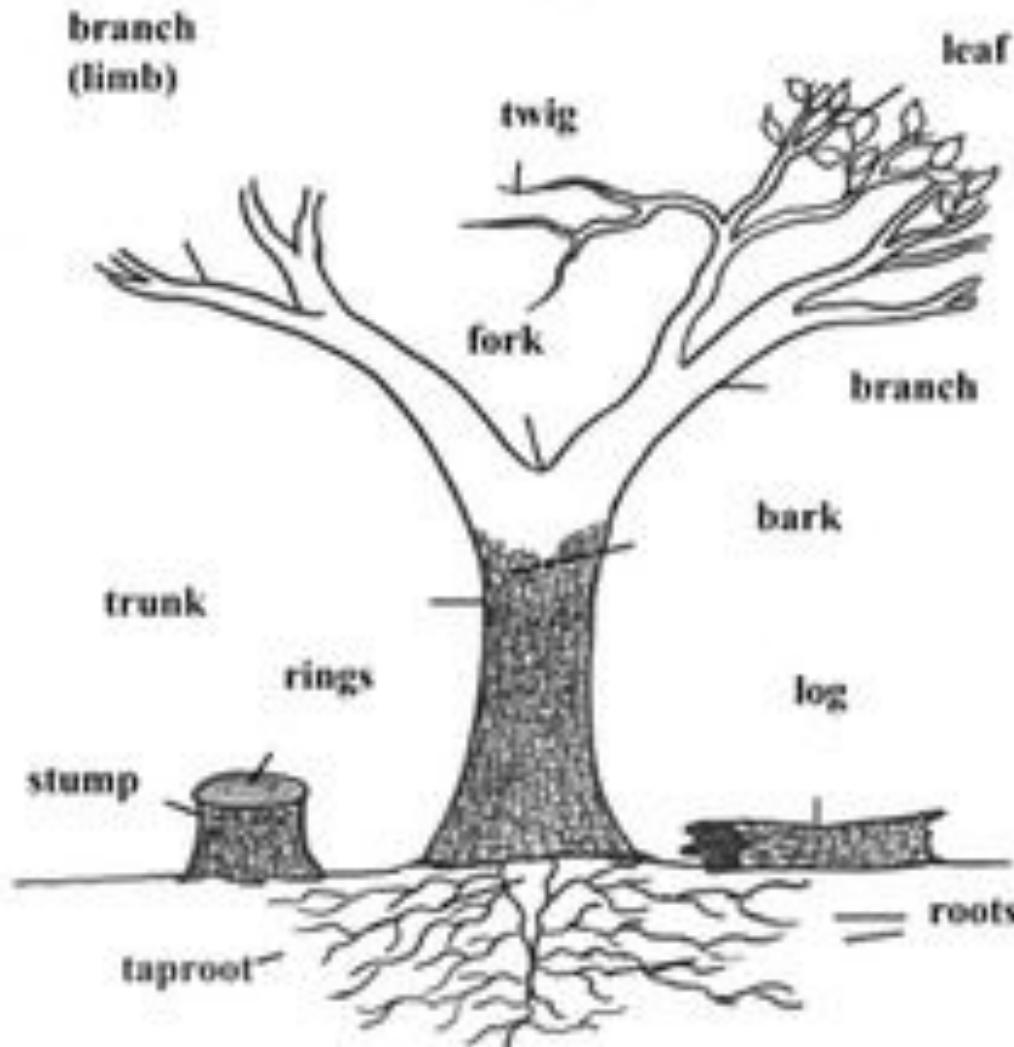


“..If you consider programming to be a subset of writing, and I certainly do

David Heinemeier Hansson (Ruby on Rails / Basecamp)



Simplifying for conciseness

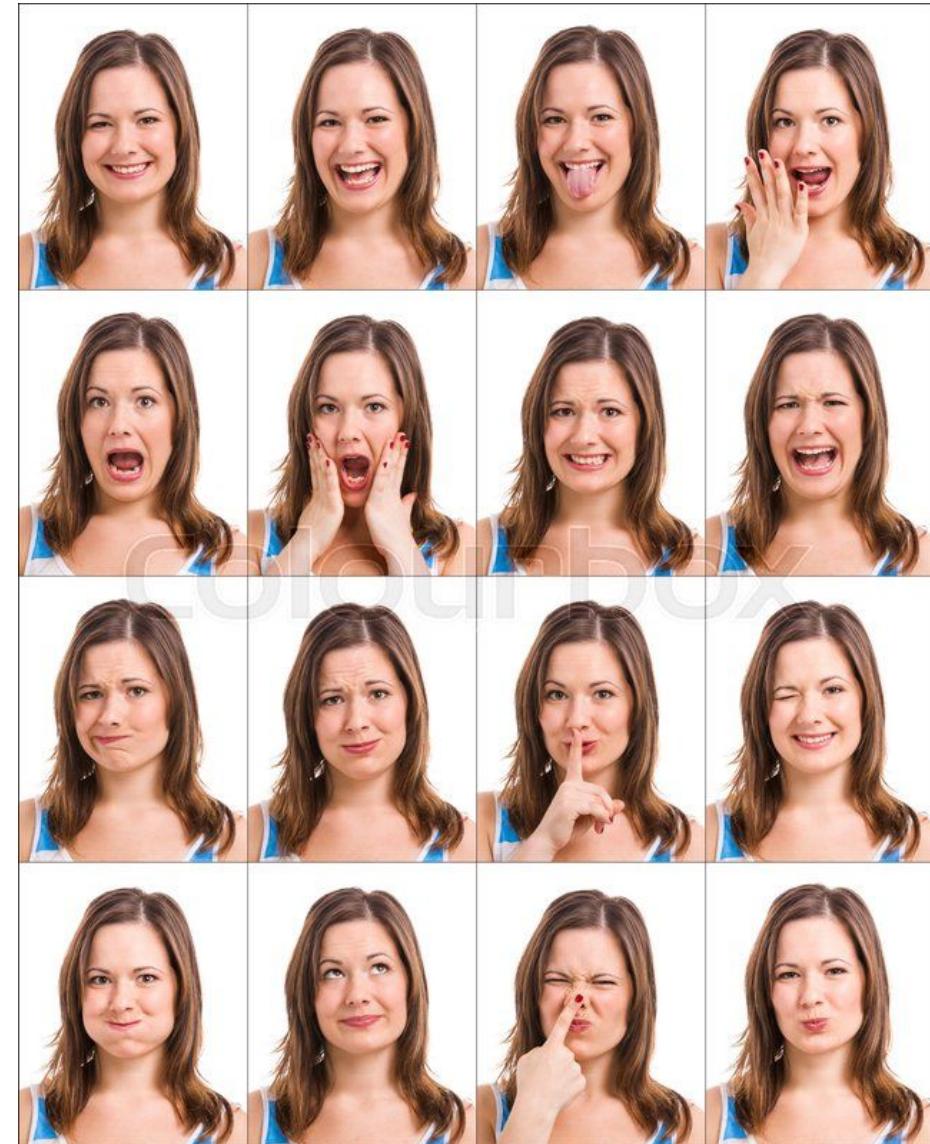



Language and formulas

Gezelligheid (Dutch pronunciation: [\[ɣə'zɛləx̆it\]](#) ([listen](#))) is a [Dutch](#) word which, depending on context, can be translated as '[conviviality](#)', '[coziness](#)', '[fun](#)'. In Spanish it can be translate by combining terms like '[acogedor](#)', '[convivencia](#)', or even '[calidez humana](#)', which can communicate its essence in specific contexts.

It is often used to describe a social and relaxed situation. It can also indicate belonging, time spent with loved ones, catching up with an old friend or just the general togetherness that gives people a warm feeling.

A common trait to all descriptions of *gezelligheid* is a general and abstract sensation of individual well-being that one typically shares with others. All descriptions involve a positive atmosphere, *flow* or vibe that colours the individual personal experience in a favorable way and in one way or another corresponds to social contexts.


Being a vague, abstract notion, the word is considered by some to be an example of [untranslatability](#), and one of their hardest words to translate to [English](#) or [Spanish](#). Some consider the word to encompass the heart of [Dutch culture](#).^[1]

$$F_g = G \frac{m_1 m_2}{r^2}$$



Metaphor

Factory
Abstract Factory
Observer Facade
Strategy
Singleton
Adapter

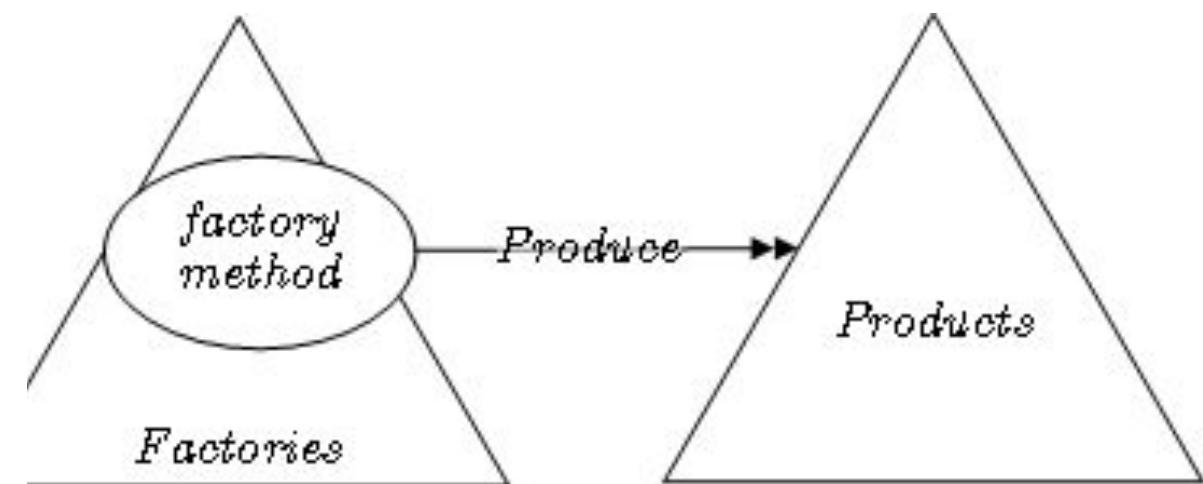



Abstraction: representing *and* hiding State, Structure and Flow



state
structure
& flow

The *structure* of the code and in-memory representation.



The *state* or particular condition that a program is in at a specific time. The total of all data in all variables in a particular system.

The flow or transition or transformation of one particular state to another.

Examples: Queue, Stream, Workflow




Representing concepts, things, structure, behaviour

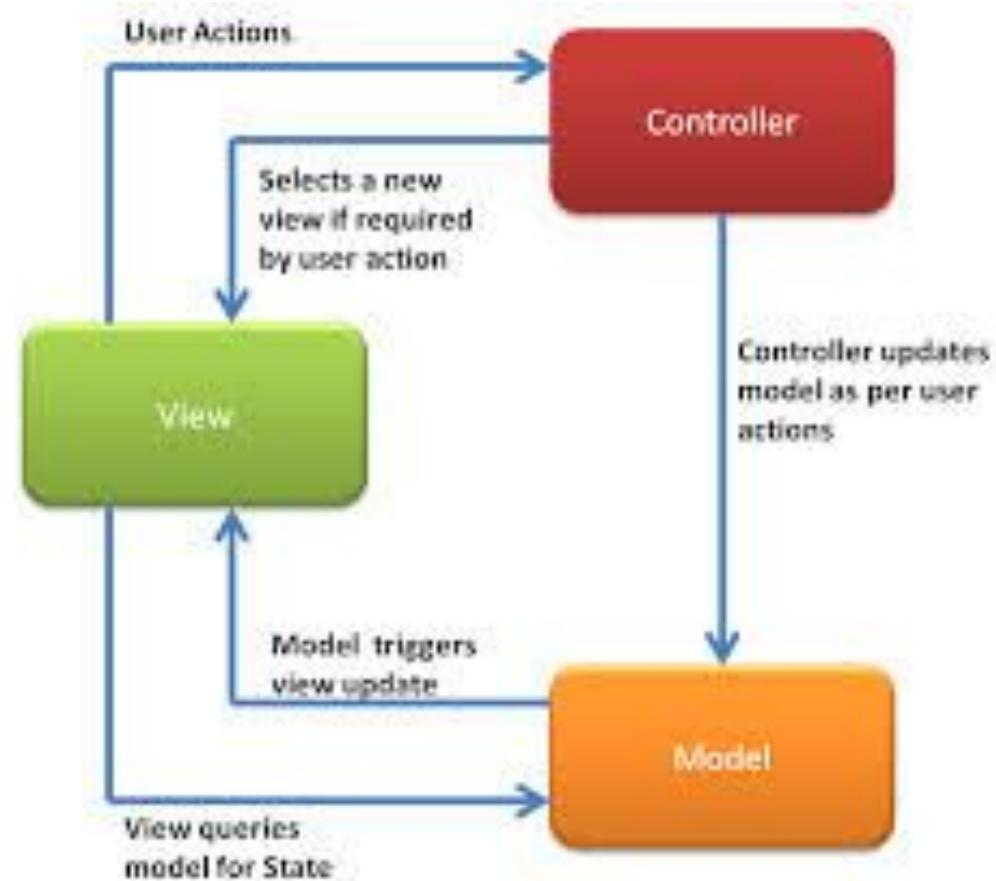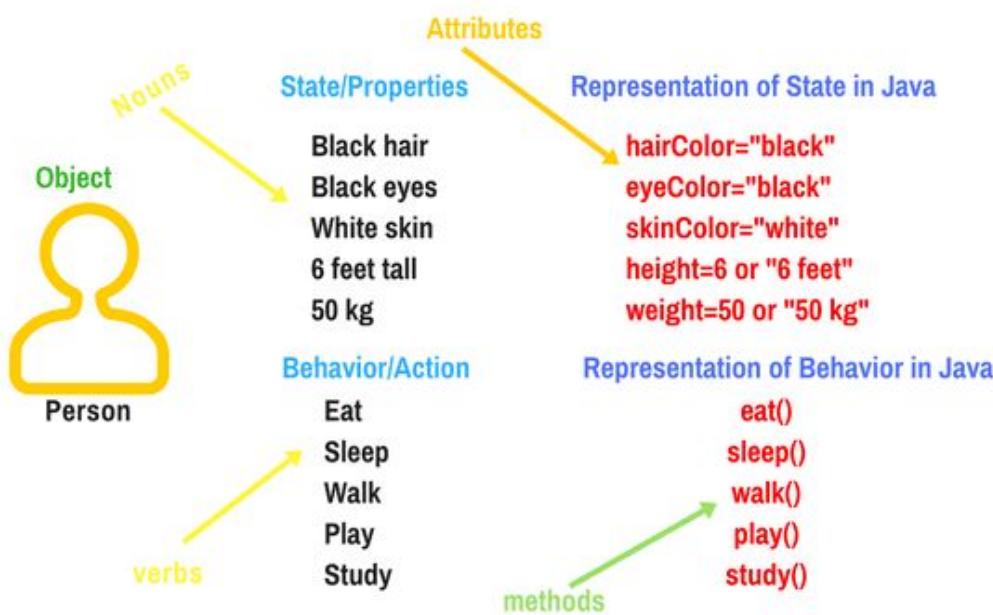



Software design: combining abstractions into larger units or components

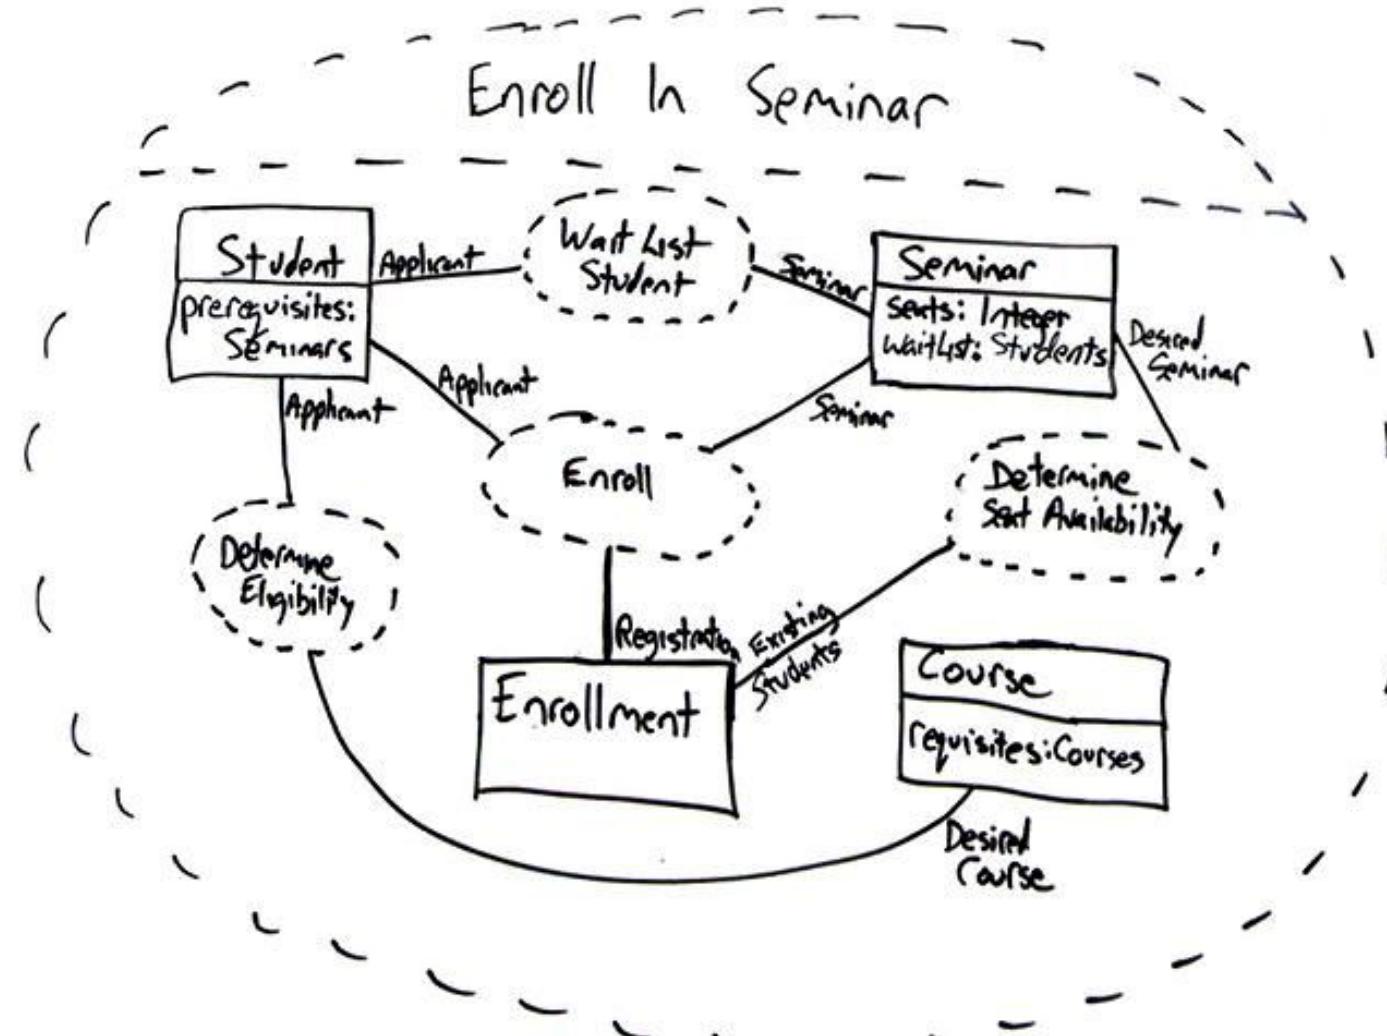



Naming, composition: try to read and write *stories*



```
3 let year = 2020
4 let bonus_ceiling = 5.5
5
6 try {
7     let employees = db.exec("FROM EMPLOYEES SELECT * WHERE ACTIVE=1").toArray()
8     for(let n=0; n < employees.count; n++){
9
10         let employee = employees[n]
11         let bonus = service.EmployeeAppraisal(employee.ID, year)
12         if(bonus <= bonus_ceiling) {
13             db.exec("UPDATE EMPLOYEES " +
14                 "SET bonus = %d" +
15                 "WHERE ID = %i", bonus, employee.ID)
16         }
17     }
18 } catch(error){
19     throw error
20 }
21
22
23
24
25 // or
26 service.updateActiveEmployeesWith(bonus({year: 2020, ceiling: 5.5}));
27
28 //
29 service.updateActiveEmployeesWith(changeGlobalAddress);
30
```





Separation of Concerns

Separation of concerns is a principle for breaking up your program into sections so each of them does a single thing.

Each of your components (modules, classes, etc) should be a grouping of functions (methods, etc) that are related to a single task. Each of the functions in that component should do one thing and do it well. For example, in a User component, have a function to add a user, another to delete, etc. By separating things logically you make them more dependable, portable, and flexible. You reduce dependencies across your components that otherwise would make debugging a nightmare.

Do one thing and do it well.





Compose existing abstractions rather than inventing your own

**Pick and choose existing abstractions,
libraries, frameworks**

Design your code when a design is lacking
but don't try to be an "Architect".



"Architecture" is a big upfront expense
and difficult to get right.

So use an existing architecture or
framework which defines how should be
structured.






Use existing Architecture design models (for example Clean or Ports and Adapters)

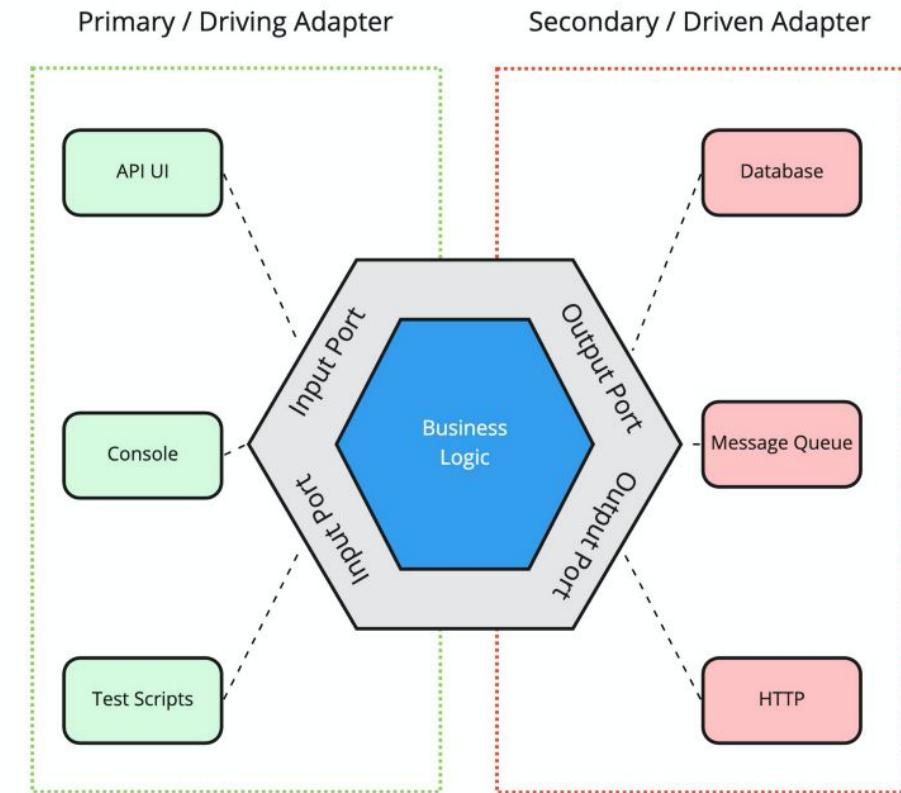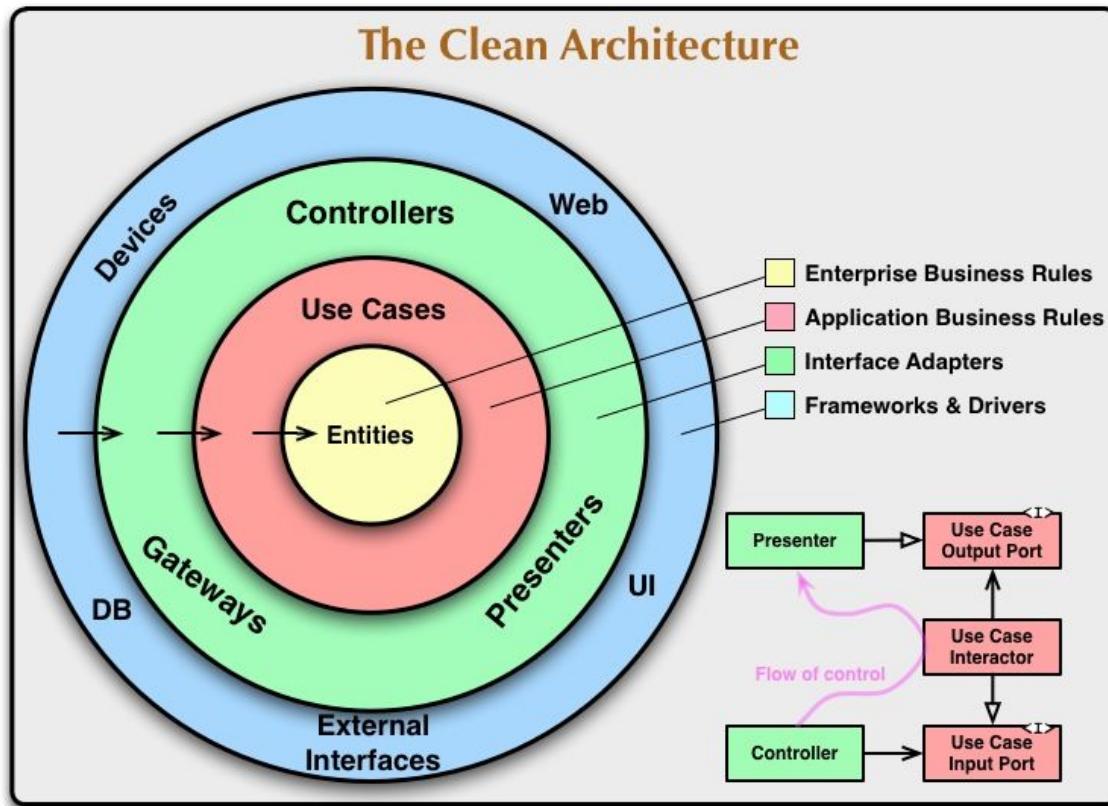



Use existing component architectures (for example React / Redux)

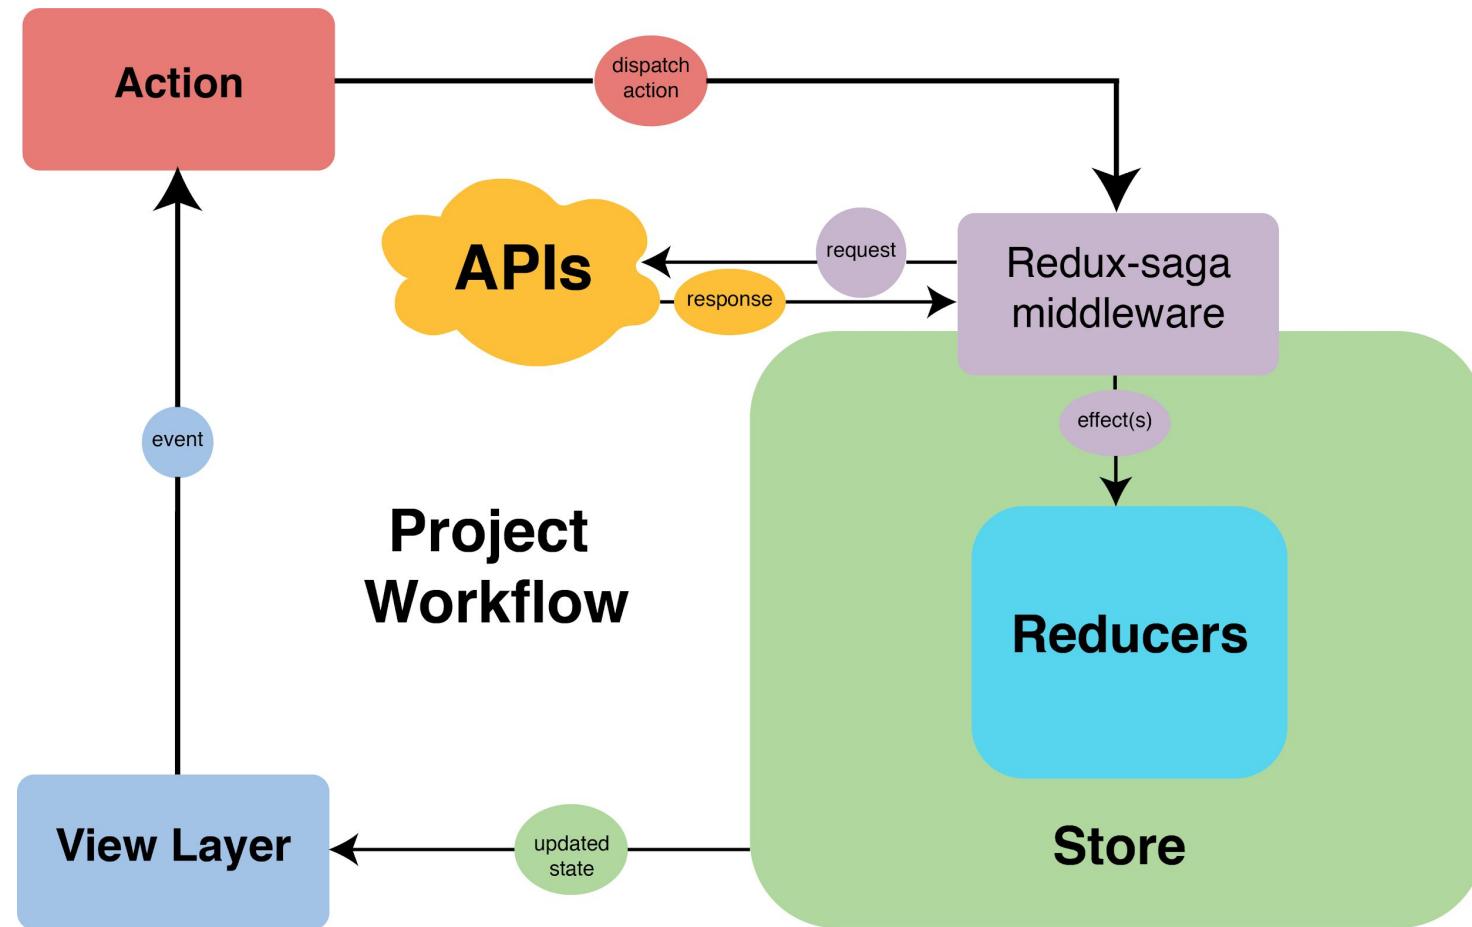


Don't "Program". Or at least postpone it as long as possible But do use "Code"



- Use "off the shelf" products
- Configure
- Design
- Implement Stories
- Use libraries



"programming" is expensive (time, effort) and error prone

Code to test, to investigate, to play around, to design

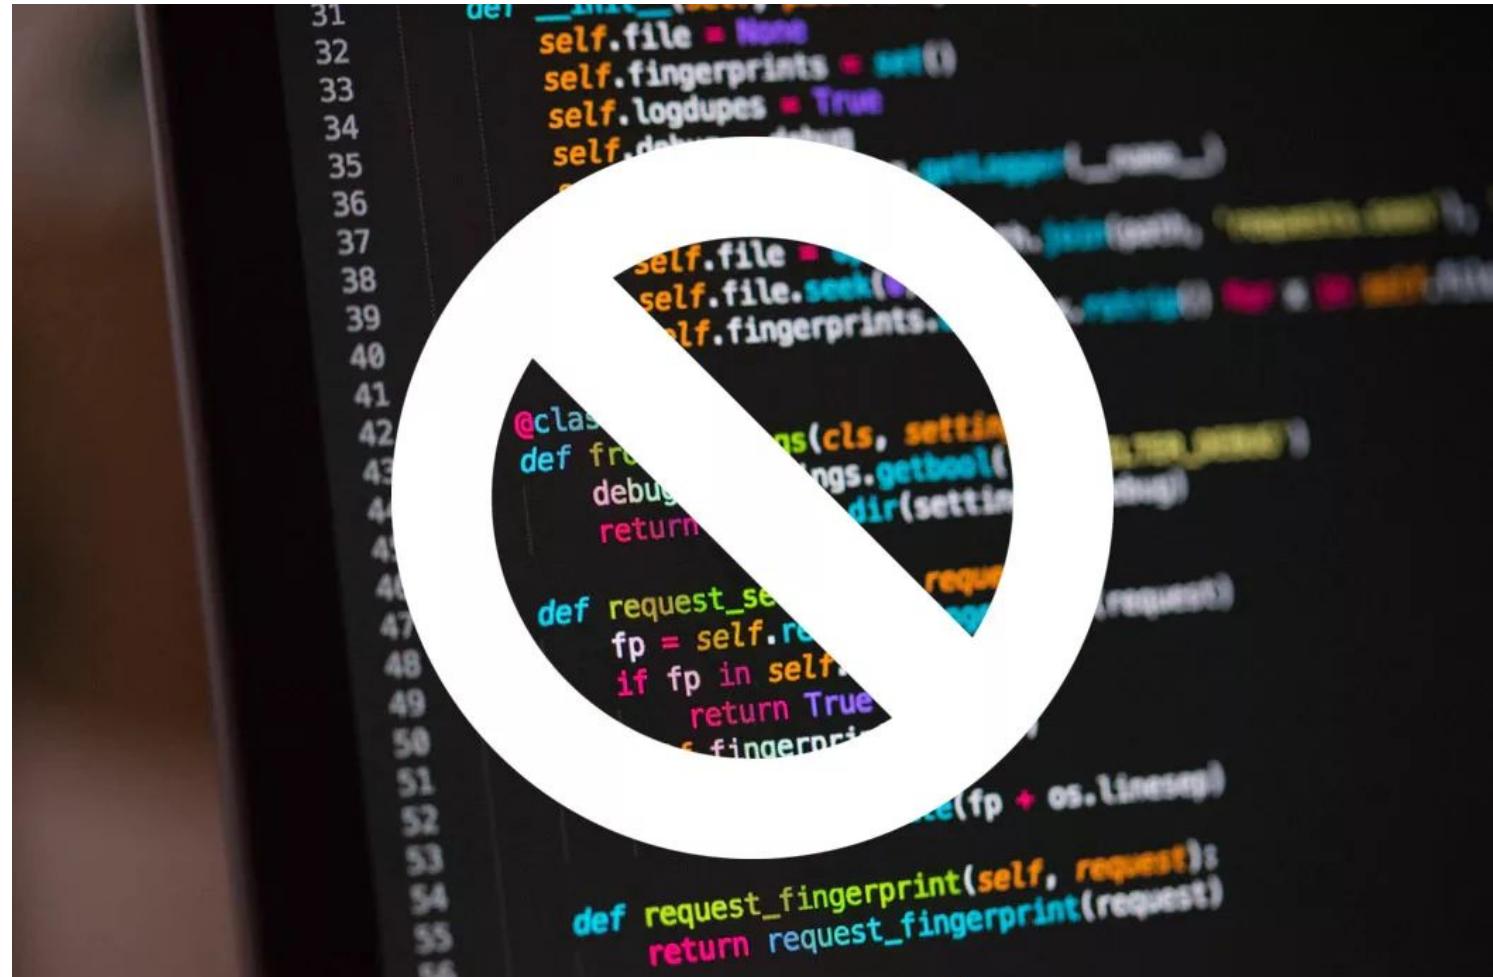



Code to experiment, test, prototype to gain knowledge and take away uncertainty

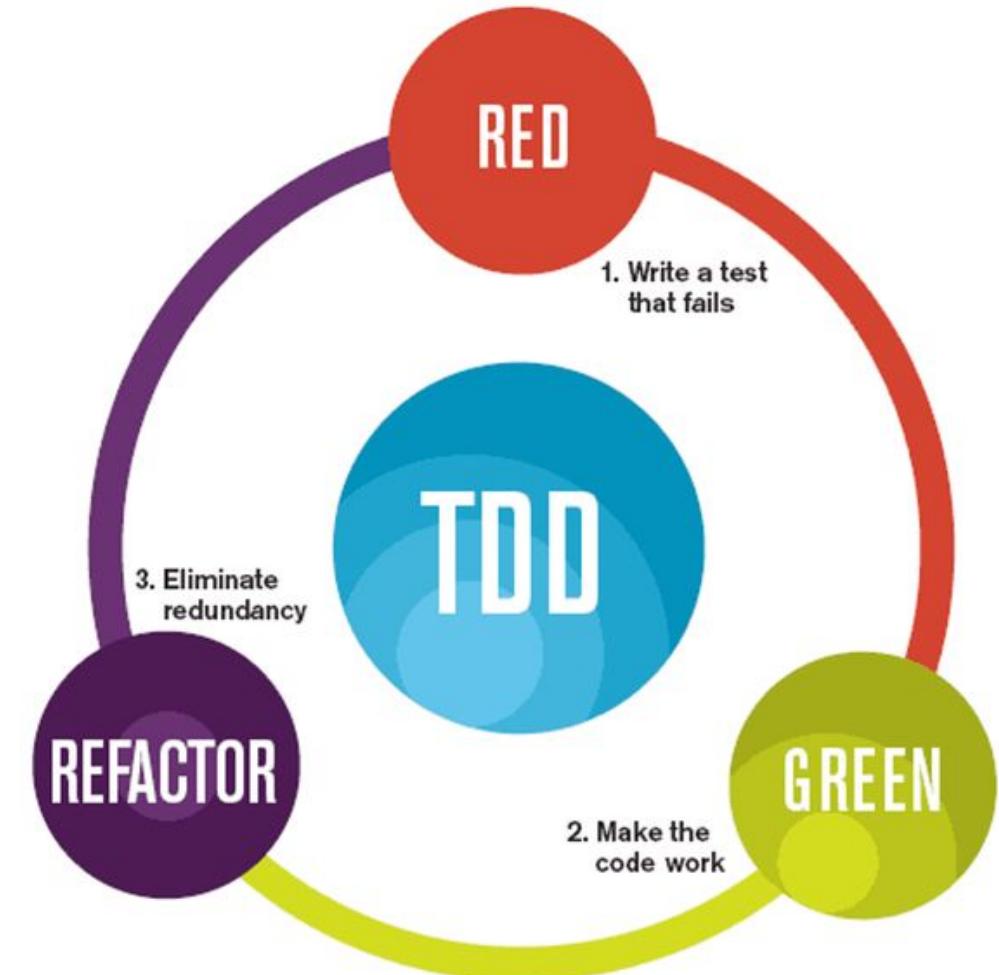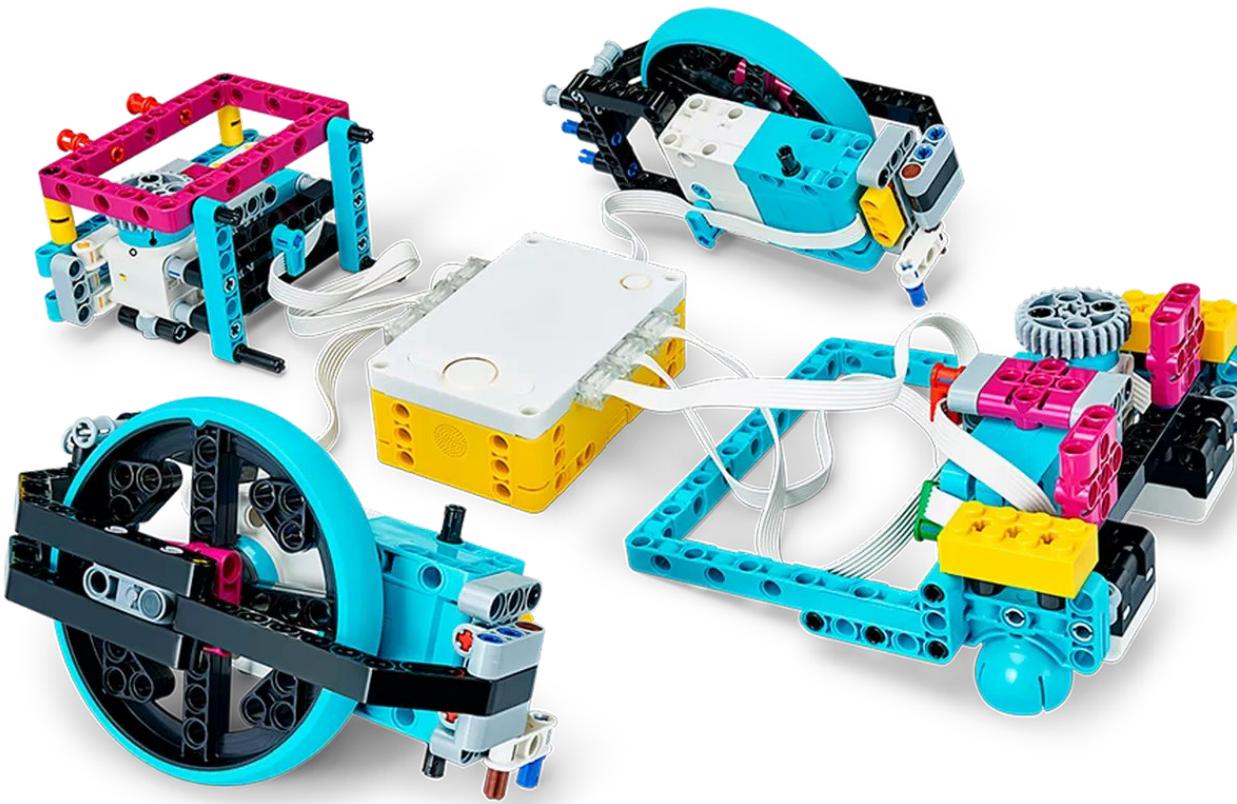

The mantra of Test-Driven Development (TDD) is “red, green, refactor.”



Code prototyping / Type Driven Development example

Flash sales, left-over sales, launch day sales, holiday sales and limited inventory sales are all high volume, high velocity events. Here we call them "Markets". The following User Stories help to define the general scope:

As a client of a market I want to receive a notification so I can bid for items temporarily available on that market

As a client I want to receive a notification whether a bid for an item has been overbid so I can make a counter bid if so required

As a Client I want to receive the final status of a bid so that I can arrange for the post-sale process (etc)

```
type AvailableItemsHandler = fn(_:[&Item]);
type ProcessedBidHandler = fn(_:&Bid, _:BidStatus);

enum BidStatus {
    OverBid = 0,
    Canceled,
    Succeeded
}

trait Market {
    fn register_bid(_:Item, _:Bid);
    fn notify_available_items(_:AvailableItemsHandler);
    fn notify_bid_action(_:ProcessedBidHandler);
}

struct FleaMarket {

    bids: Vec<Item>
    //... more data
}


impl Market for FleaMarket {

    fn register_bid(item: Item, bid: Bid) { /* code here */ }
    fn notify_available_items(handler: AvailableItemsHandler){ /* code here */ }
    fn notify_bid_action(handler: ProcessedBidHandler){/* code here */ }
}
```





Use code to define, "Type", to design data models, interfaces, functions etc

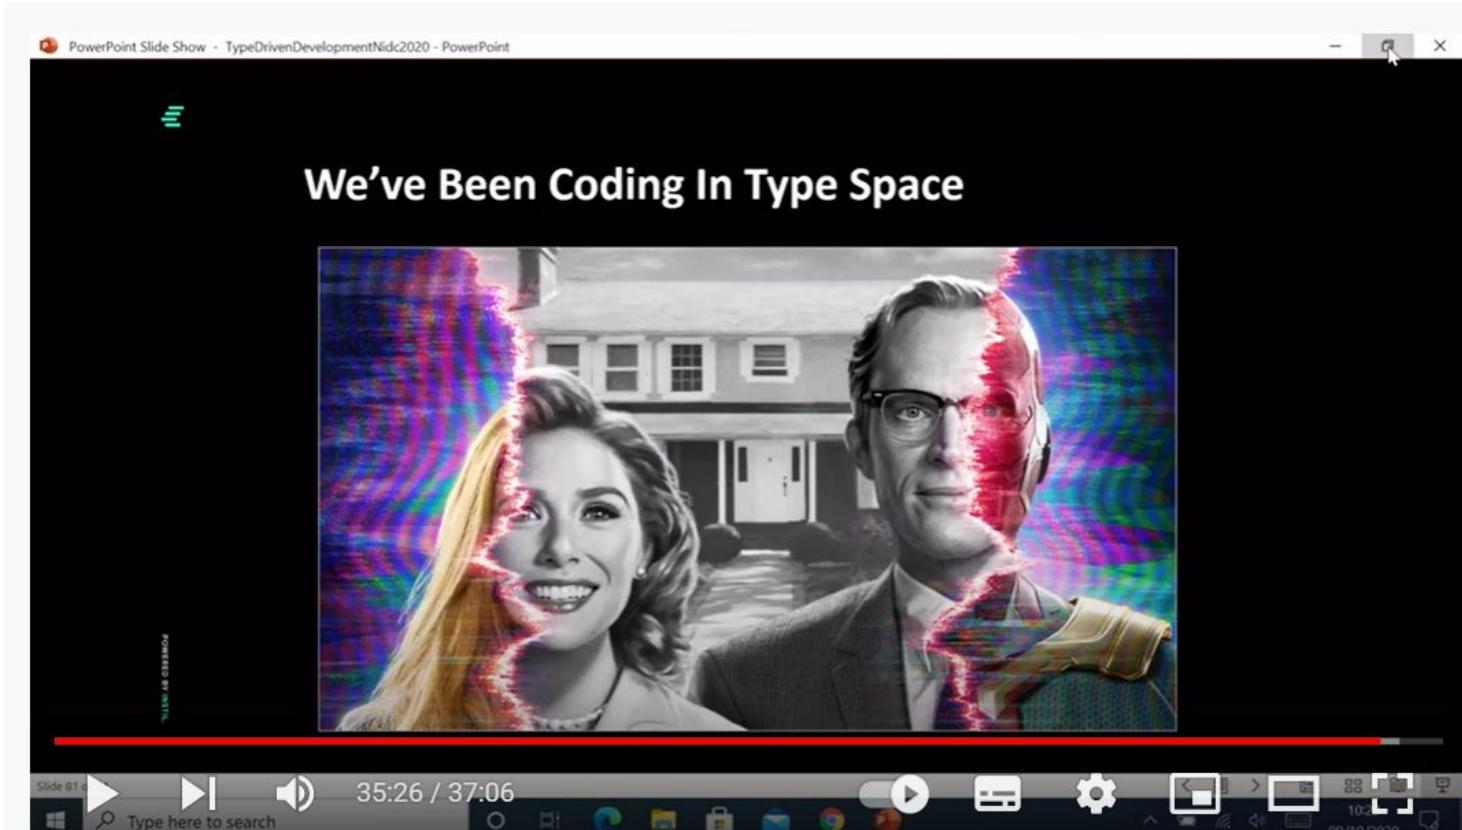

Not Your Mother's TDD: Type Driven Development in TypeScript - G Gilmour & R Gibson -
NIDC2020

<https://youtu.be/YidUm-CO9kk>

<https://www.slideshare.net/ggilmour/type-driven-development-with-typescript>



Type Driven Design



"Type-Driven API Design in Rust" by Will Crichton
<https://youtu.be/bnnaclegg6k>



Type-Driven API Design in Rust
by Will Crichton
@wcrichton
(sit close to the screen!)

```
1: 0 [strangeloop-talk]intro.txt All Text Projectiles strangeloop-talk:rust-cargo+  
Wrote /Users/will/Code/strangeloop-talk/intro.txt
```

Domain Modeling Made Functional

```
type Contact = {  
    FirstName: string  
    MiddleInitial: string  
    LastName: string  
  
    EmailAddress: string  
    IsEmailVerified: bool  
} // true if ownership of  
// email address is confirmed
```

Find out soon!

How many things are wrong with this design?



Domain Modeling Made Functional - Scott Wlaschin
<https://youtu.be/Up7LcbGZFu0>

Get, grasp, grok, understand the problem and the solution



It is critical that you fully understand the underlying architecture, concepts, patterns in order to be able to use them competently. **At the level of the abstractions, not the “internals”.** In order to be able to drive a car you need to know the mechanics of driving and the traffic rules, not the internals of the car engine....



And when you Code, it should tell the story, reflect the Design

src > system.clj

```
1
2 (system social-security-benefit-upload
3   (component
4     (security :config "/config/security.conf" :cert-store "/config/cert.cer"))
5   (component
6     (view upload-service)
7     (logic upload)
8     (data item-store-dao log-data)))
9   (component
10    (view report-service)
11    (logic reporting)
12    (data jasper-reports item-store-dao log-data)))
```





But....

- Not all people find textual representation readable for all aspects of the design (especially relationships)
- Most programming languages cannot adequately express the whole software design satisfactorily - their syntax is not sufficiently expressive, flexible or extensible enough to viably communicate the wider architecture concerns
- We therefore reach for models and diagrams, representing the code




Draw it; model it. But trace it back to the code

If you cannot draw a system or component you probably have not been able to proper model it; or did not think enough about it.

You can use any modeling methodology but the more important thing is conveying meaning in a concise and clear way.


The structure of the architecture and your code should be directly mapped to the model and vice versa.

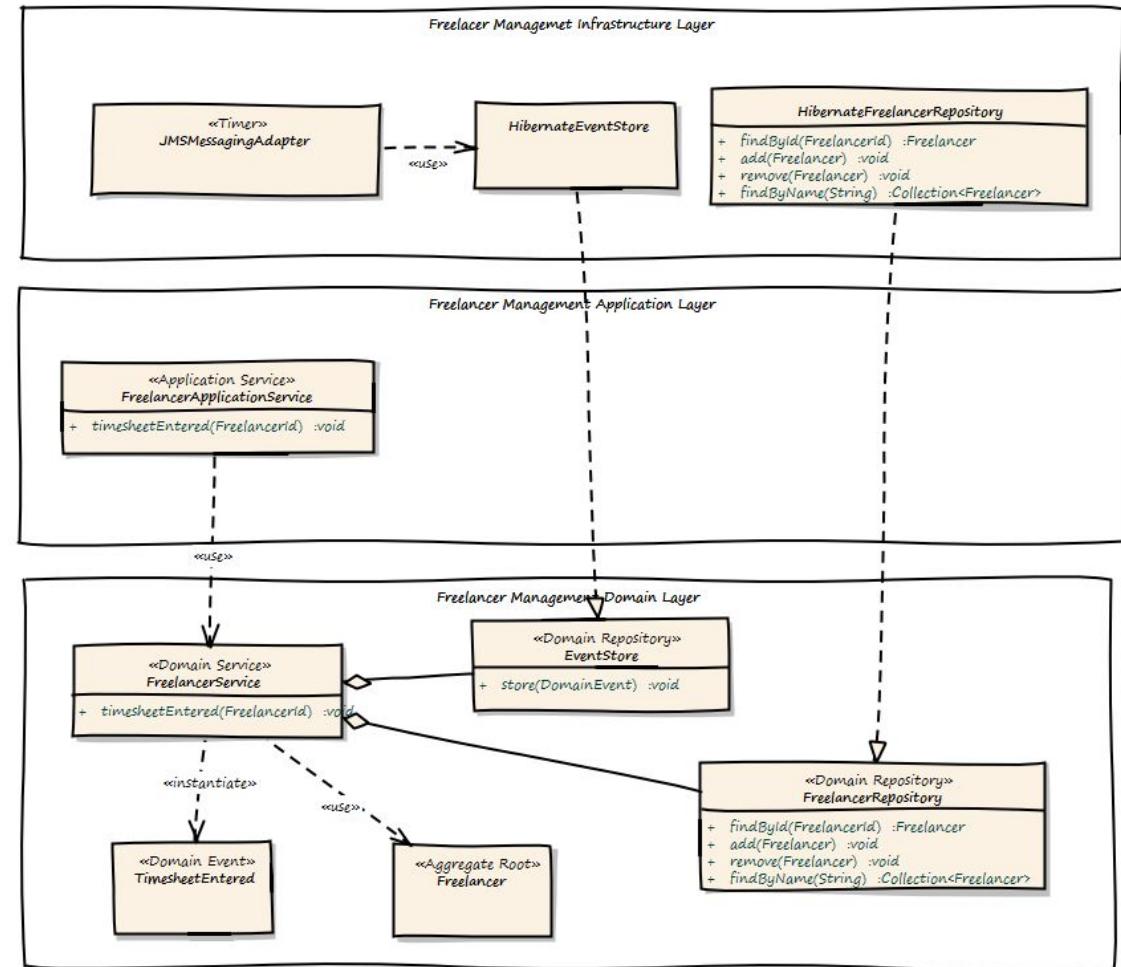



The advent of AI Augmented Software Engineering does not change the essence of programming as a linguistic process of abstraction, composition, and decomposition, enhanced by storytelling.

This shift makes it feasible for software engineering to evolve into a process where design maintains its primacy as a human-led activity, while AI efficiently handles the more repetitive task of writing code, allowing humans to focus on creativity and strategic thinking.

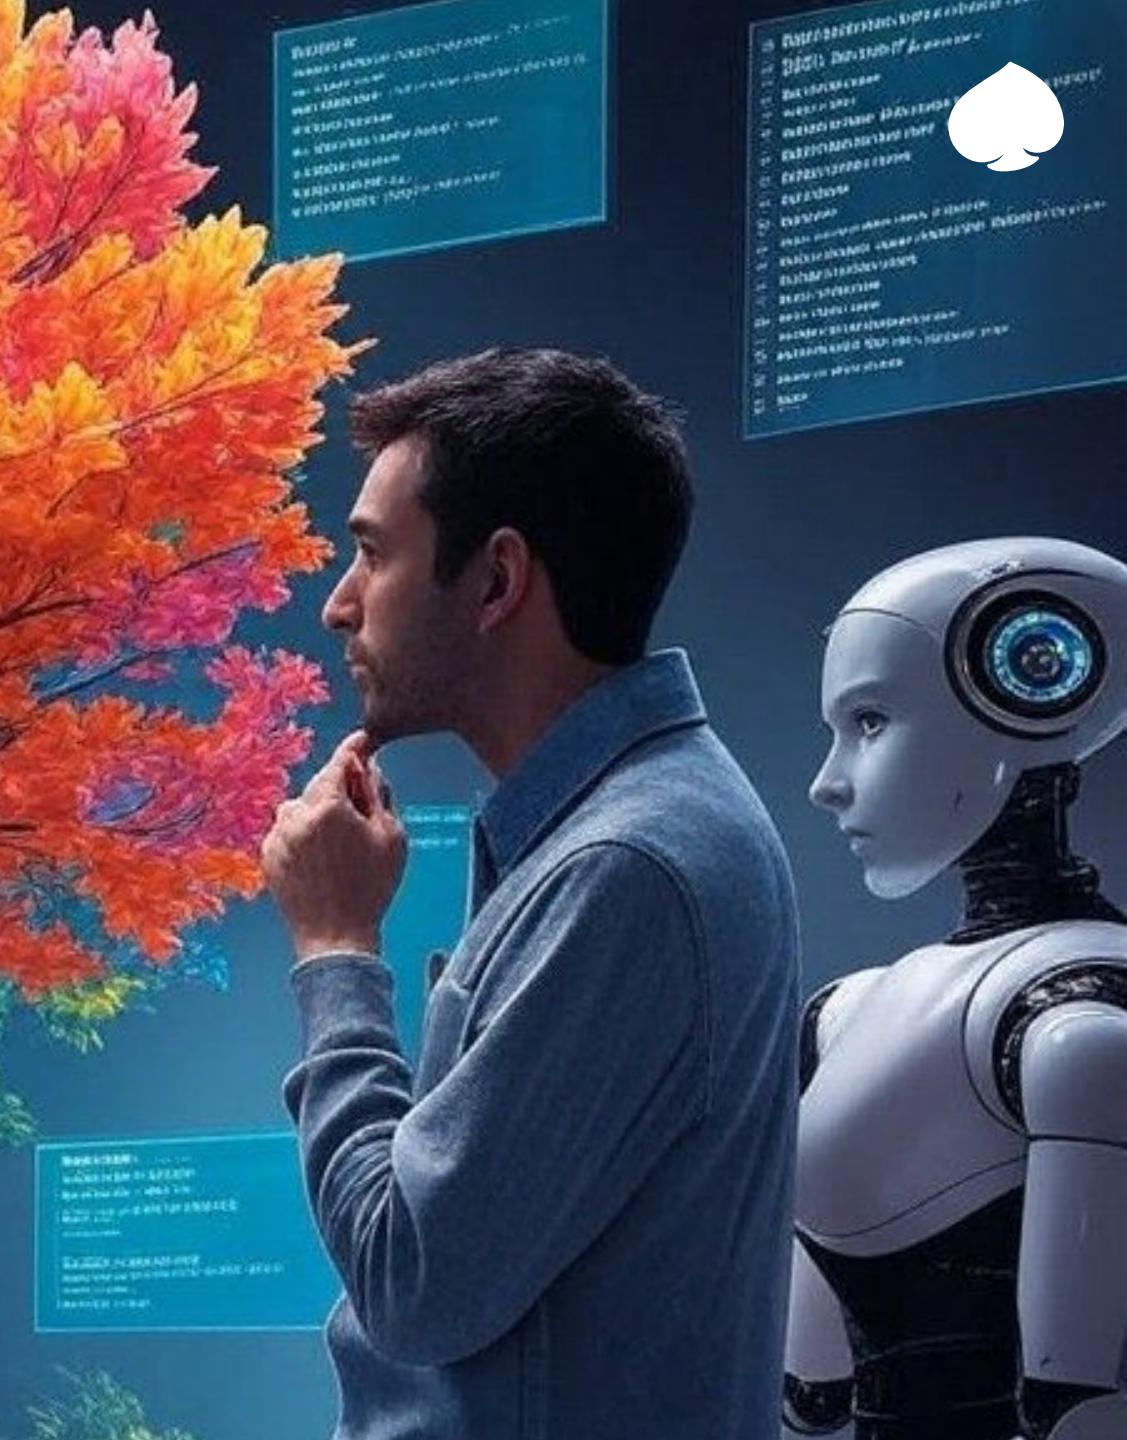



1 Architecture and Software Design

2 Mindset and practices

3 Models

4 How to Design

5 Next Steps &
Further reading and viewing...

Next Session



A Practical Guide to Collaborative Software Design

2025 edition - Session 2



1 Architecture and Software Design

2 Mindset and practices

3 Models

4 How to Design

5 Next Steps &
Further reading and viewing...



Today



Models







We can create models using paradigms like the 4+1 architectural view model

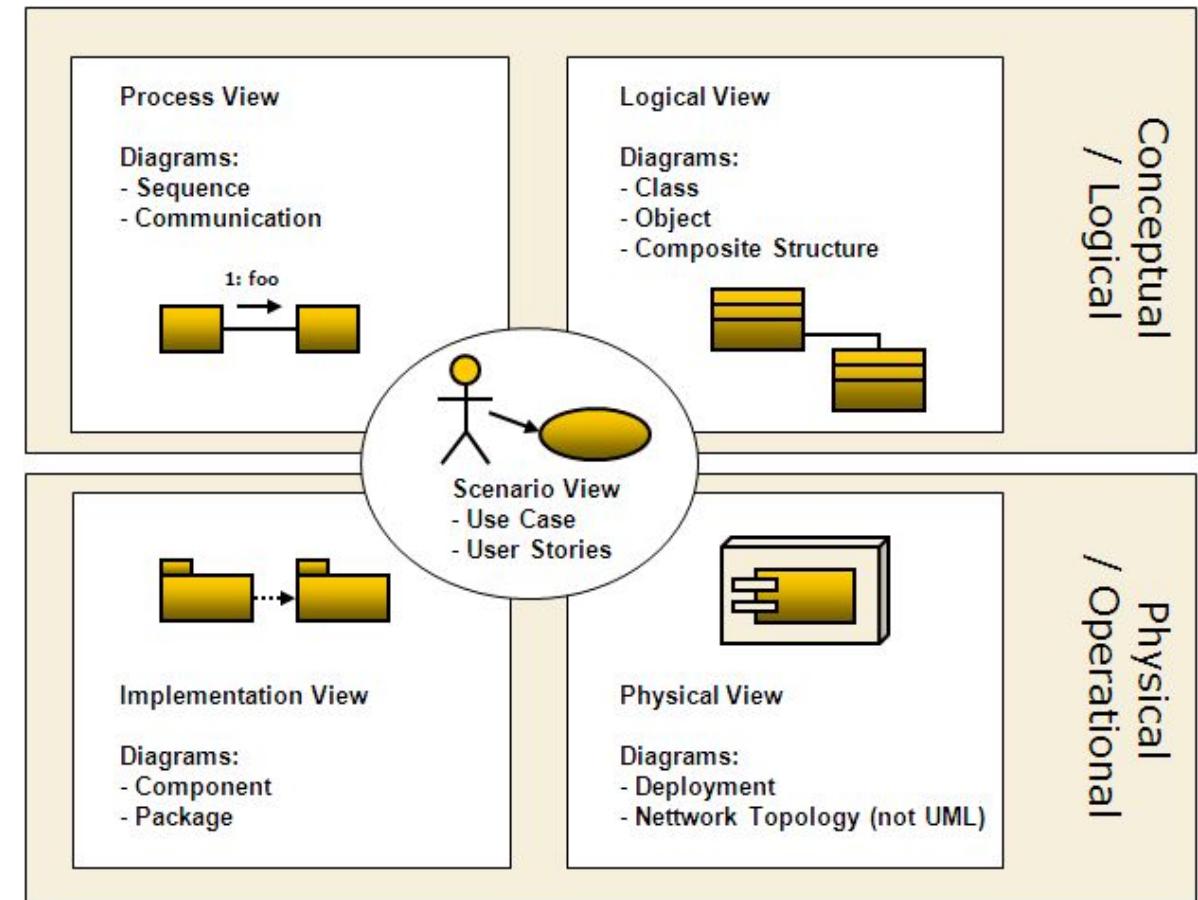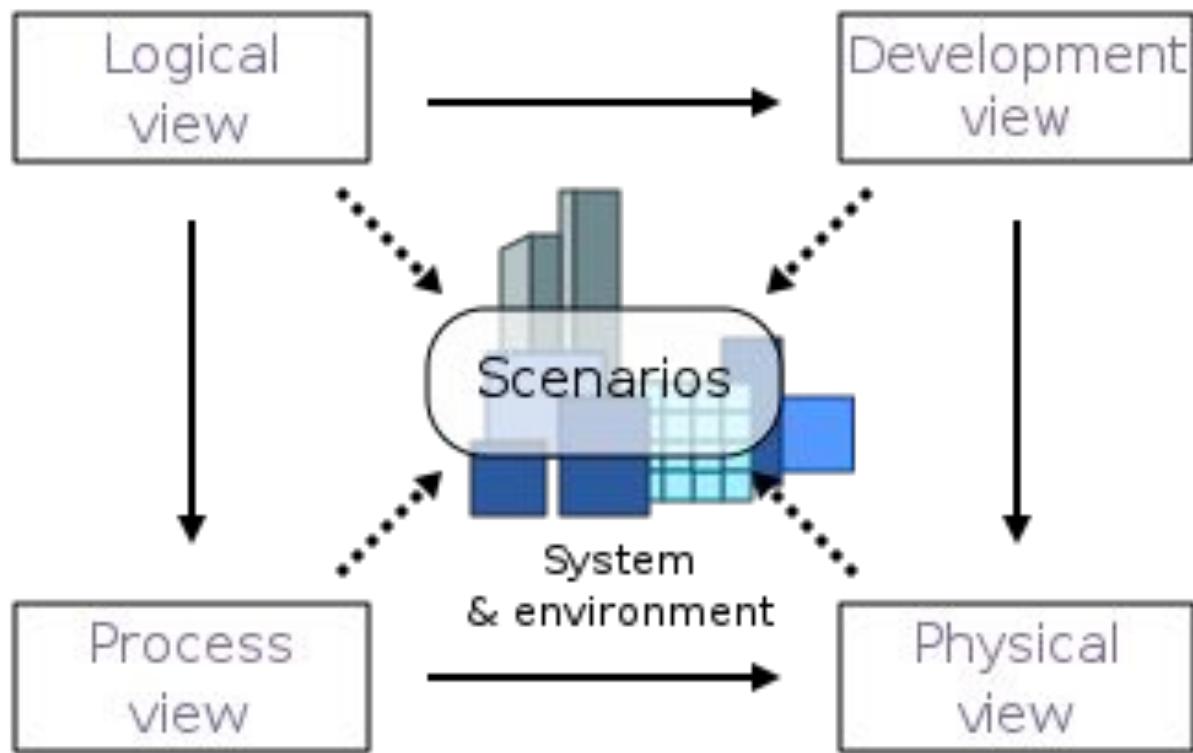



Unified Modeling Language (UML)

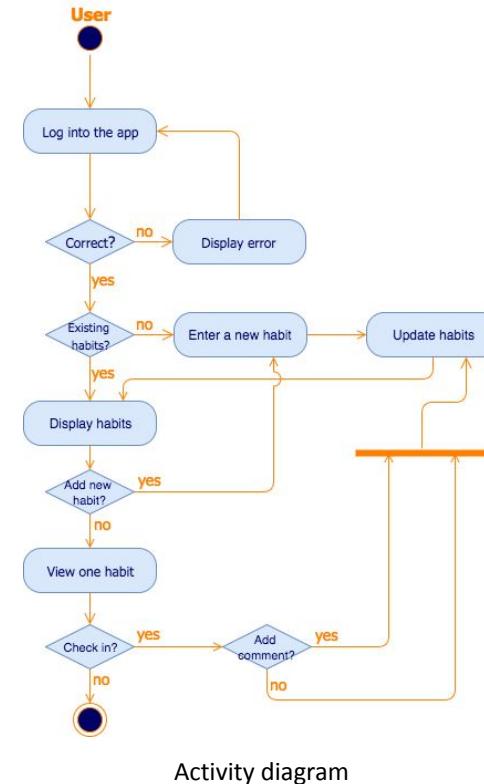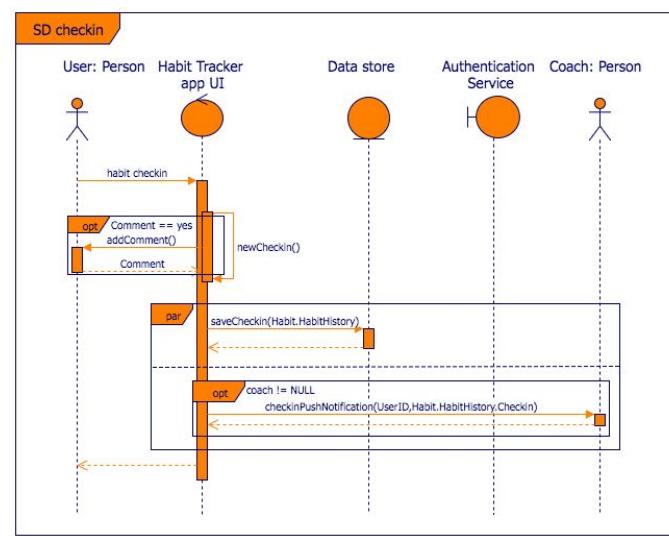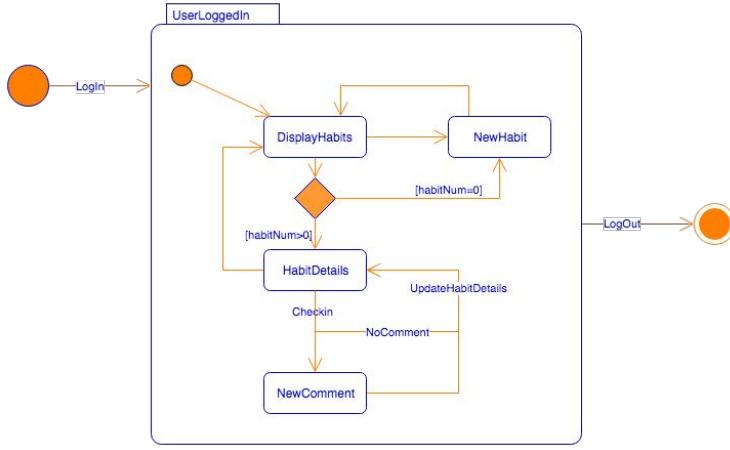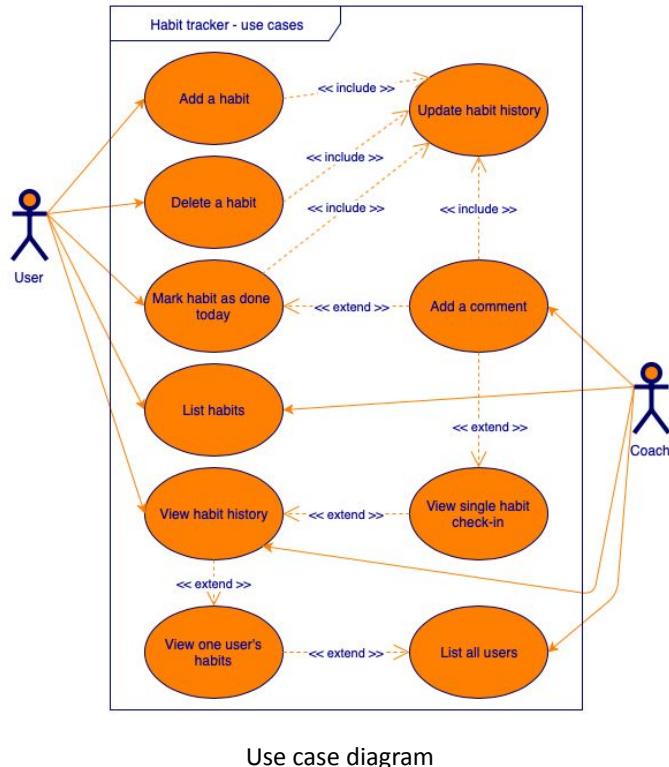



Unified Modeling Language (UML)


- Standard notation
- Good variety in diagrams
- Great tool support (see PlantUML for usage in VSCode)

But...

- Low level
- Limited expressiveness (needs OCL)
- Too complex
- Not very suitable for programming paradigms which are not “OOP”
- “Nobody uses UML”

Associated with “Big Design up-front”, “Waterfall”

Not being taught at University anymore

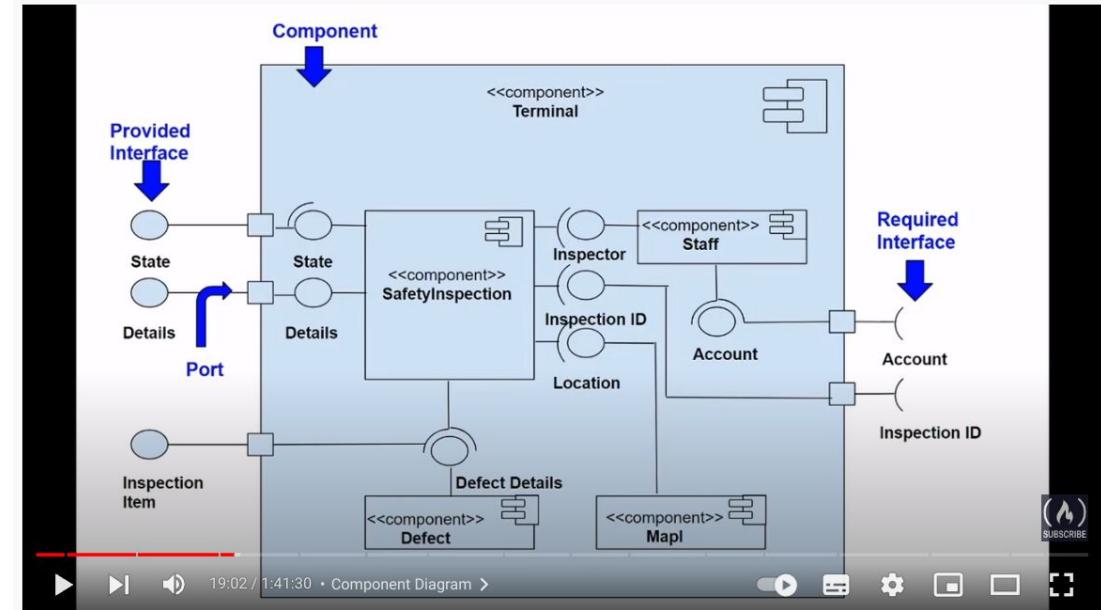

UML Diagrams Full Course (Unified Modeling Language)

<https://youtu.be/WnMQ8HlmeXc>

As many diagram types as there are designs




Google

software architecture diagram




All Images Videos Shopping News More Settings Tools Collections SafeSearch ▾

software architecture design example deployment uml azure visio draw application level visualising powerpoint rational software component templates static architecture design >

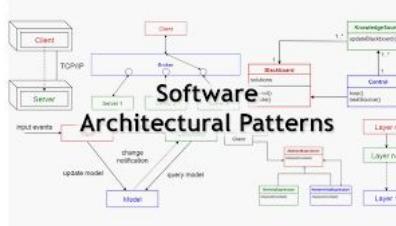

Software Architectural Patterns ...
towardsdatascience.com

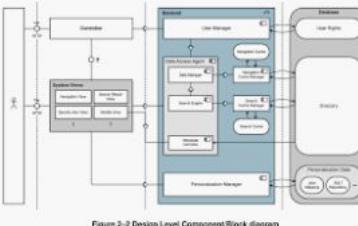

Software Architecture Modelling ...
softwareengineering.stackexchange.com






diagram software architecture ...
quora.com




A Software Architect's View On Diagrams ...
slideshare.net

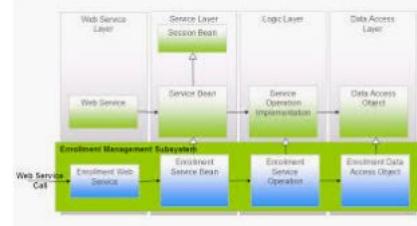


Examples of well designed software ...
graphicdesign.stackexchange.com




Software Architecture Examples ...
edrawsoft.com




A Software Architect's Vie...
slideshare.net

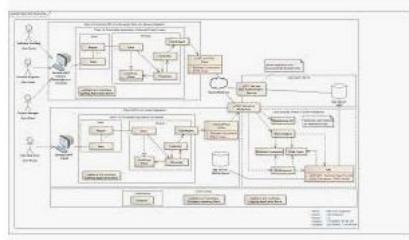


What is Software Architecure
predic8.com




block diagram shows how ...
researchgate.net

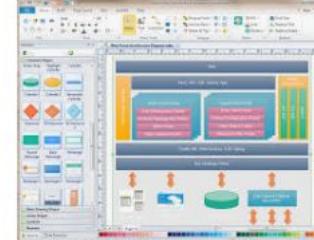


Easy Architecture Diagram Software
edrawsoft.com

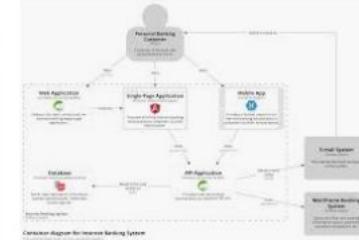


Structurizr




Block Diagram of the Software ...
researchgate.net




A Software Architect's View On Diagrams ...
slideshare.net




model for visualising software architect...
c4model.com

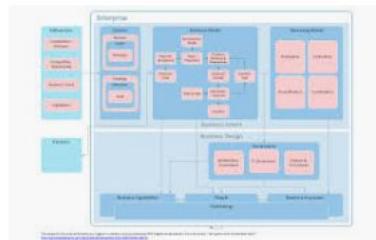

Computer Software Microsoft Visio ...
kisspng.com

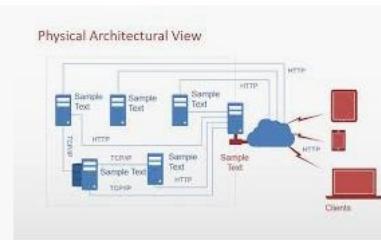

Software Diagrams for PowerPoint ...
slidemodel.com

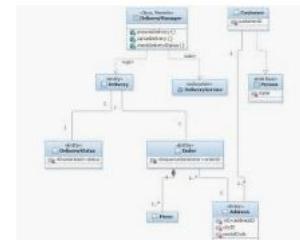


Rational Software Architect ...
ibm.com



Web Portal Static Software Architecture ...
slidemodel.com



Software architecture diagram - software ...
ricksnursery.com

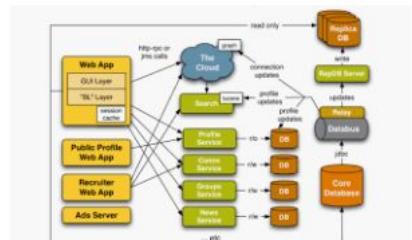

technical architecture diagram ...
softwareengineering.stackexchange.com

Model-code gap

“...Your architecture models and your source code will not show the same things. The difference between them is the *model-code gap*. Your architecture models include some abstract concepts, like components, that your programming language does not, but could. Beyond that, architecture models include intentional elements, like design decisions and constraints, that cannot be expressed in procedural source code at all.

Consequently, the relationship between the architecture model and source code is complicated

JUST ENOUGH SOFTWARE ARCHITECTURE

A RISK-DRIVEN APPROACH

GEORGE FAIRBANKS

FOREWORD BY DAVID GARLAN





Visualise, document and explore your software architecture - Simon Brown



Premium ES


Search



NDC { London }

16-20 January 2017

Inspiring Software Developers
since 2008

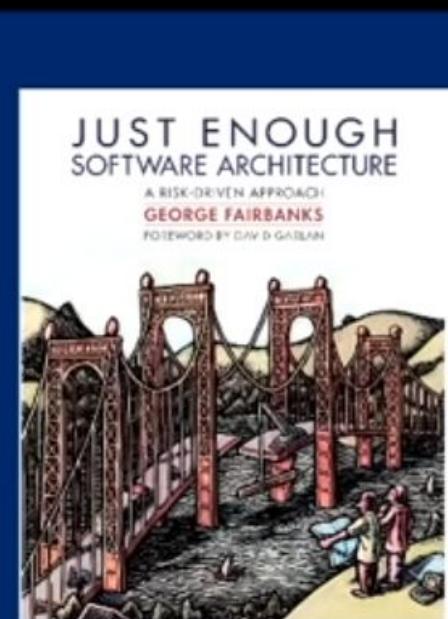

The image shows the front cover of the book "JUST ENOUGH SOFTWARE ARCHITECTURE: A RISK-DRIVEN APPROACH" by George Fairbanks, with a foreword by David Guban. The cover features a colorful illustration of a suspension bridge over a river, with two figures standing on the bank in the foreground.

Model-code gap. Your architecture models and your source code will not show the same things. The difference between them is the *model-code gap*. Your architecture models include some abstract concepts, like components, that your programming language does not, but could. Beyond that, architecture models include intensional elements, like design decisions and constraints, that cannot be expressed in procedural source code at all.

Consequently, the relationship between the architecture model and source code is complicated. It is mostly a refinement relationship, where the extensional elements in the architecture model are refined into extensional elements in source code. This is shown in Figure 10.3. However, intensional elements are not refined into corresponding elements in source code.

Upon learning about the model-code gap, your first instinct may be to avoid it. But reflecting on the origins of the gap gives little hope of a general solution in the short term: architecture models help you reason about complexity and scale because they are abstract and intensional; source code executes on machines because it is concrete and extensional.

"model-code gap"



The C4 model for visualising software architecture

Context, Containers, Components and Code

Abstractions Core diagrams Supplementary diagrams Notation
Examples FAQ Diagramming vs modelling Training Tooling

⌚ In a hurry? Read the 5 minute introduction to the C4 model at InfoQ:

The C4 model for software architecture




O modelo C4 de documentação para Arquitetura de Software

用于软件架构的C4模型


ソフトウェアアーキテクチャのためのC4モデル

Introduction

Ask somebody in the building industry to visually communicate the architecture of a building and you'll be presented with site plans, floor plans, elevation views, cross-section views and detail drawings. In contrast, ask a software developer to communicate the software architecture of a software system using diagrams and you'll likely get a confused mess of boxes and lines ... inconsistent notation (colour coding, shapes, line styles, etc), ambiguous naming, unlabelled relationships, generic terminology, missing technology choices, mixed abstractions, etc.

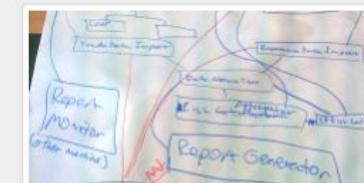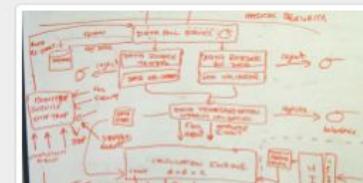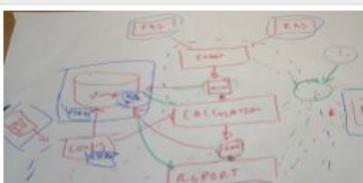

Diagrams are maps

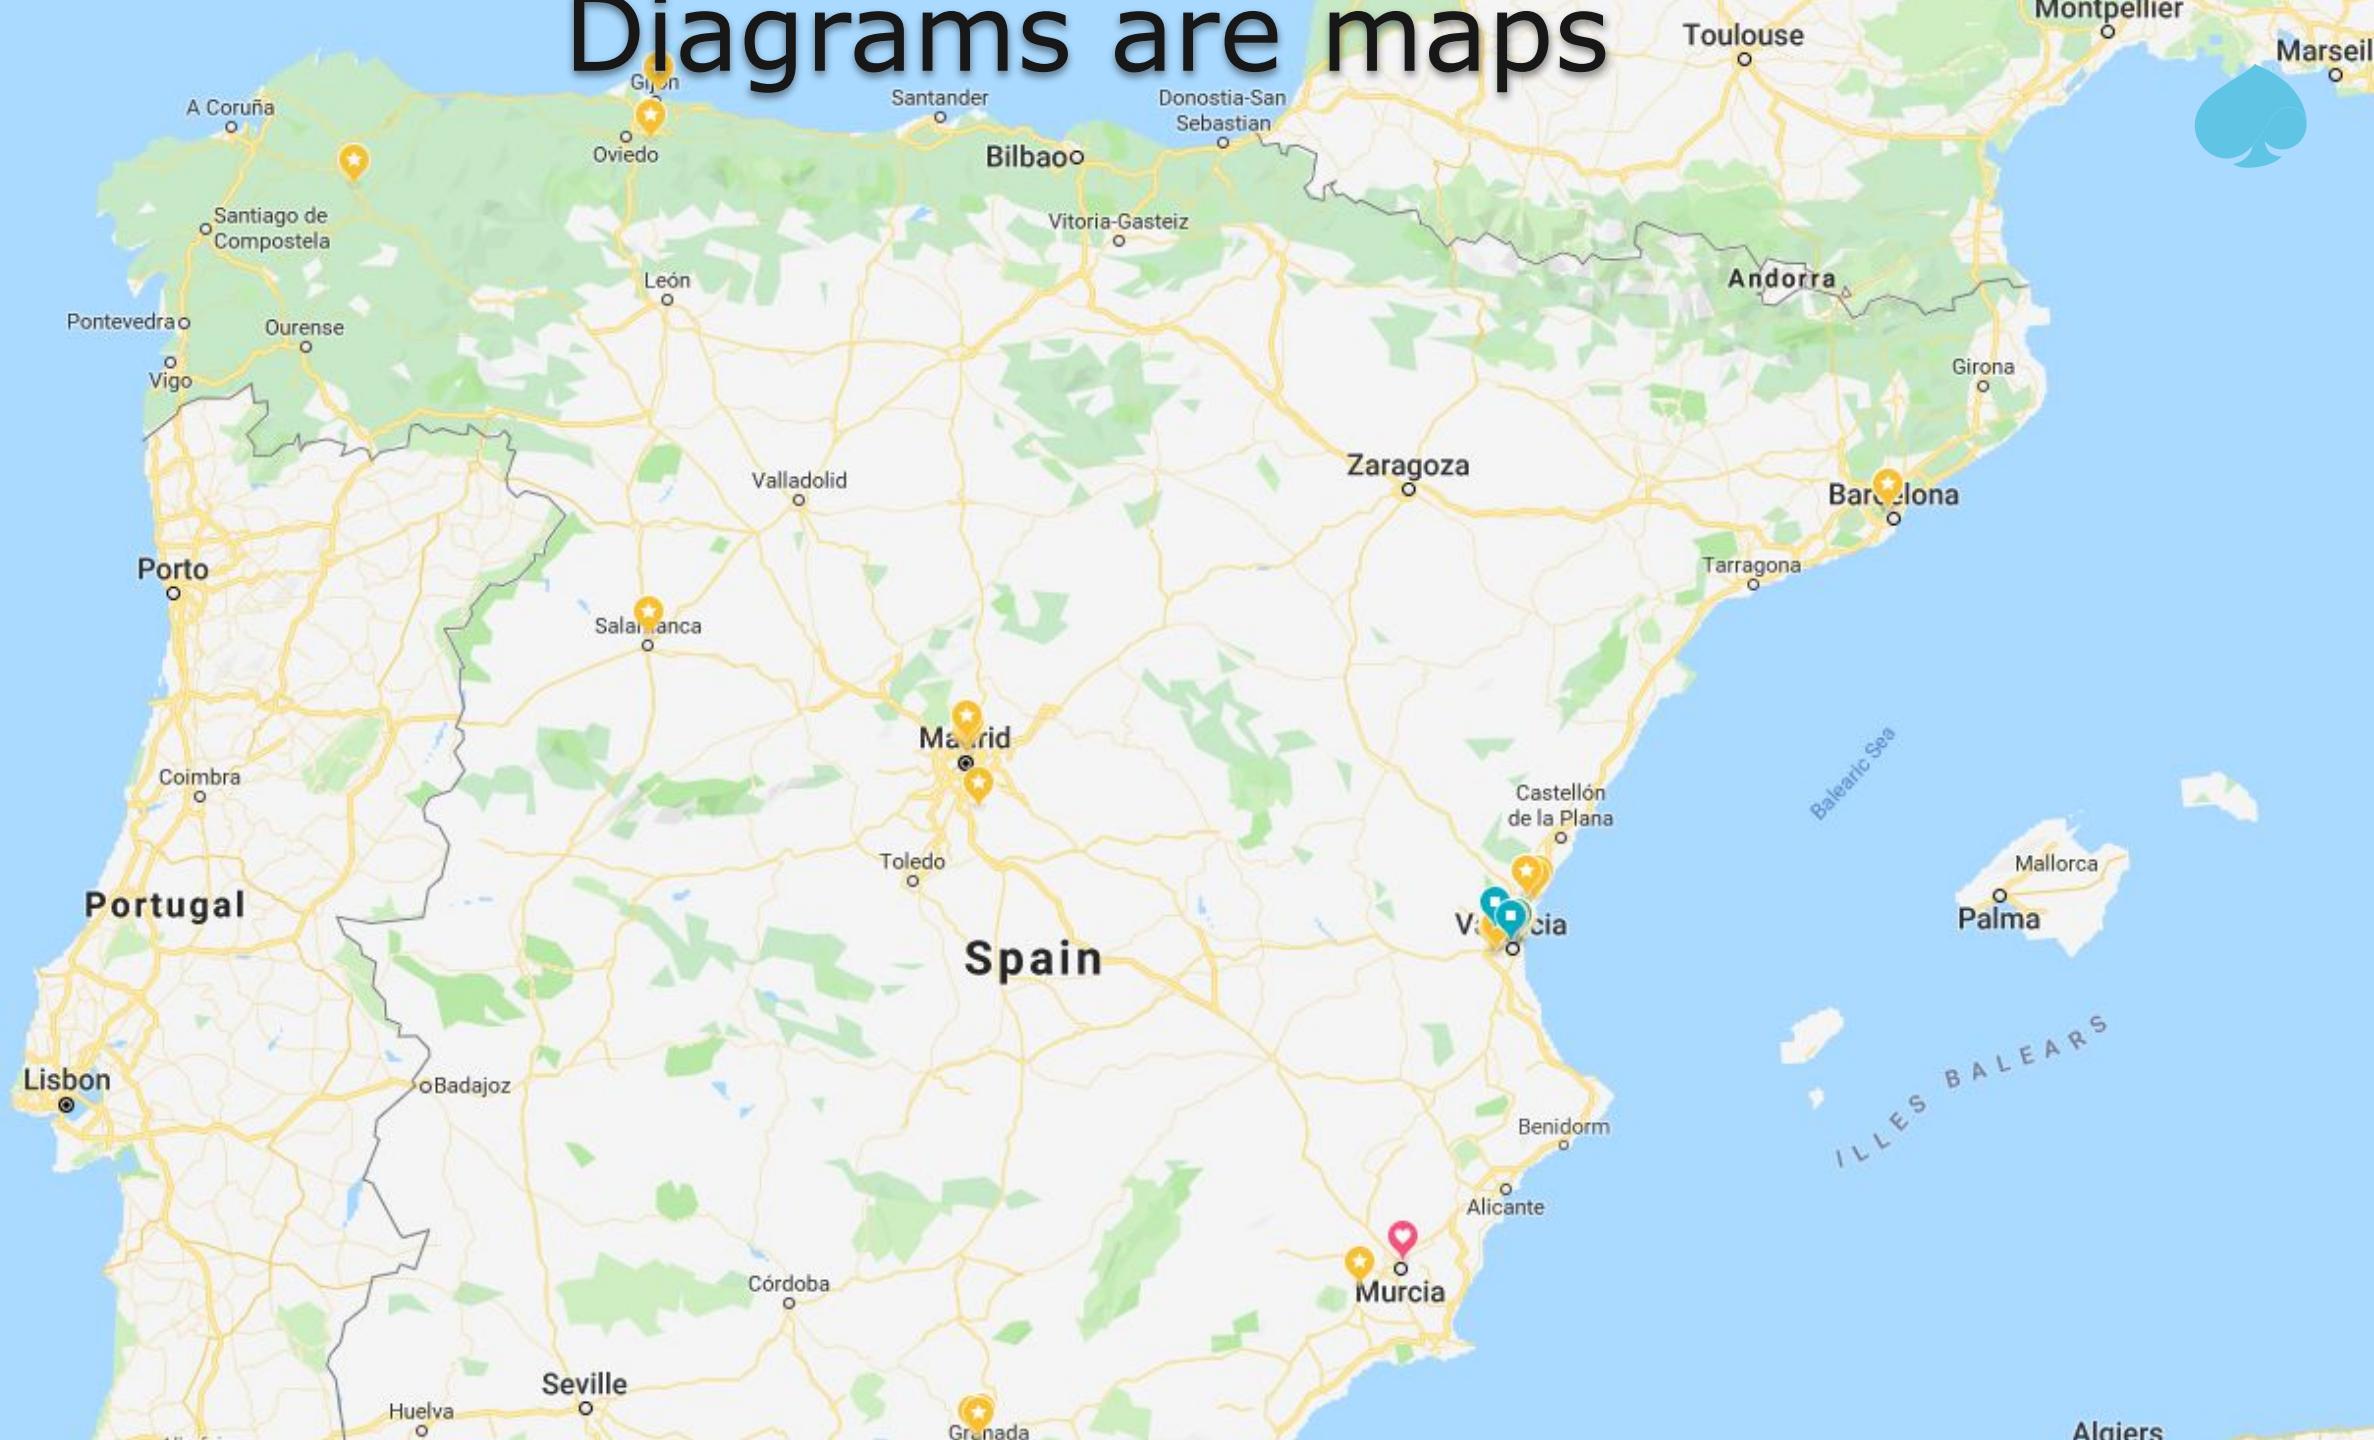


Diagrams are maps

Diagrams are maps




Diagrams are maps

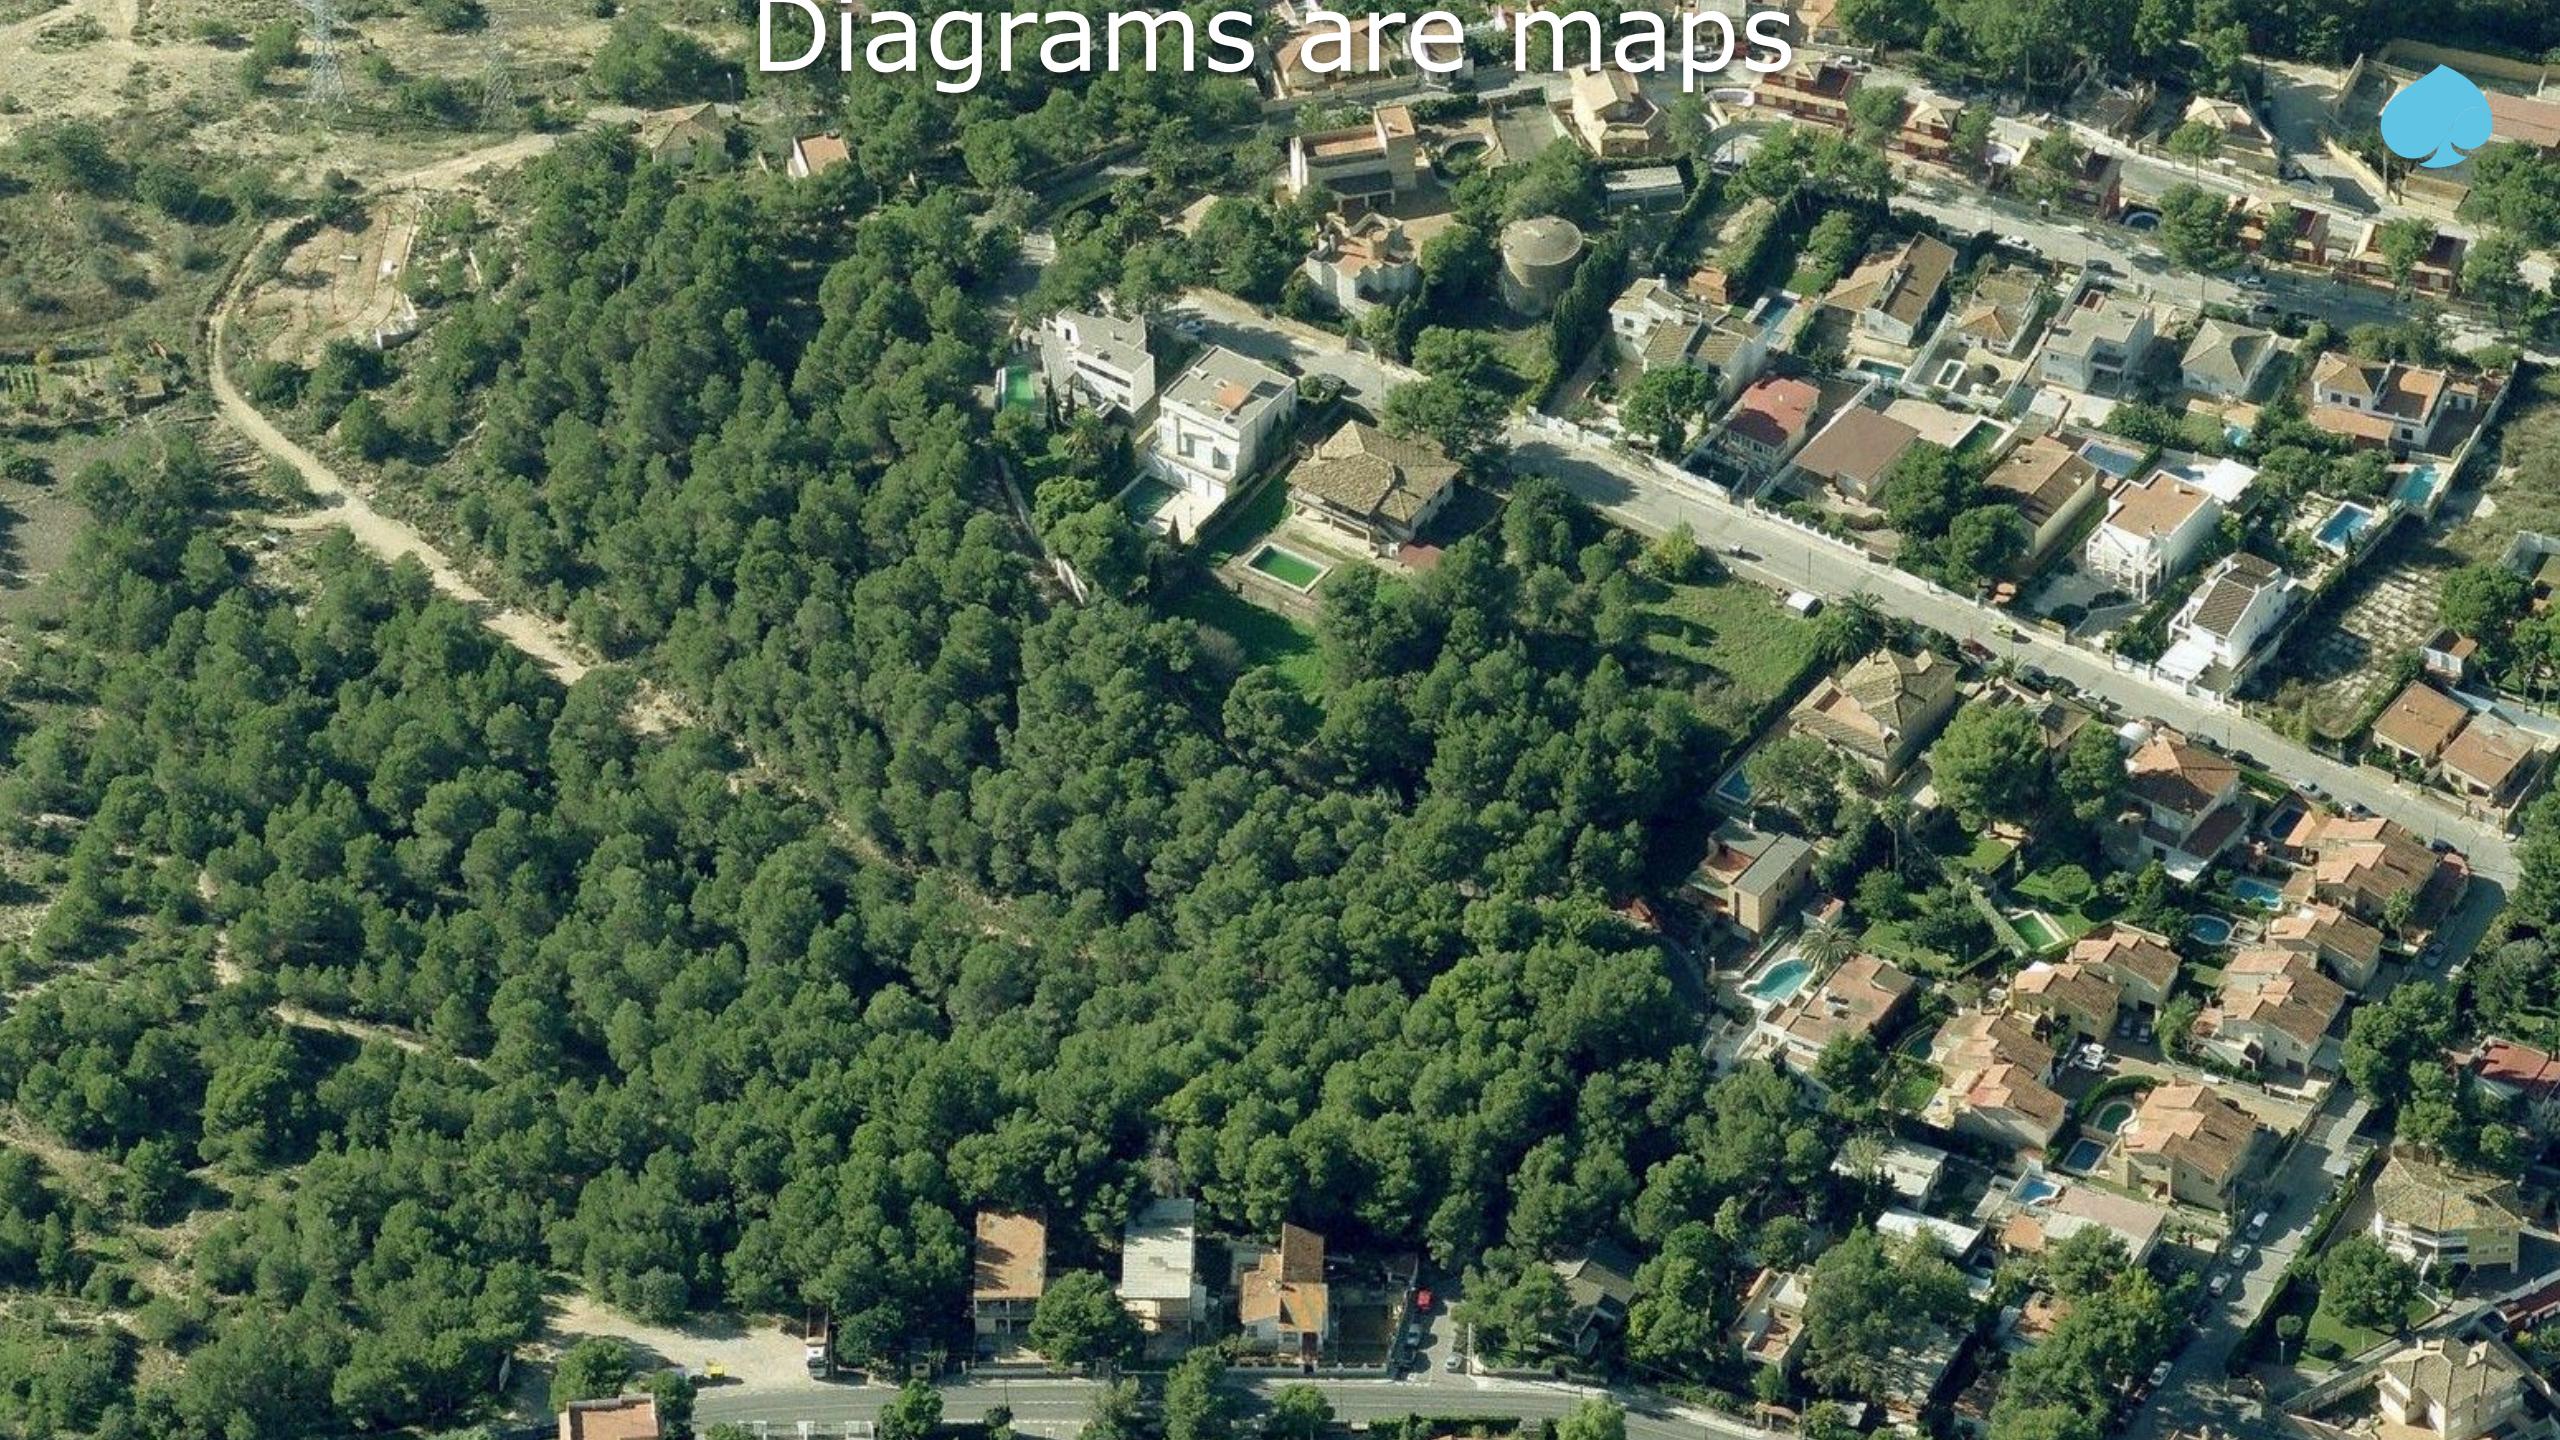



Software System

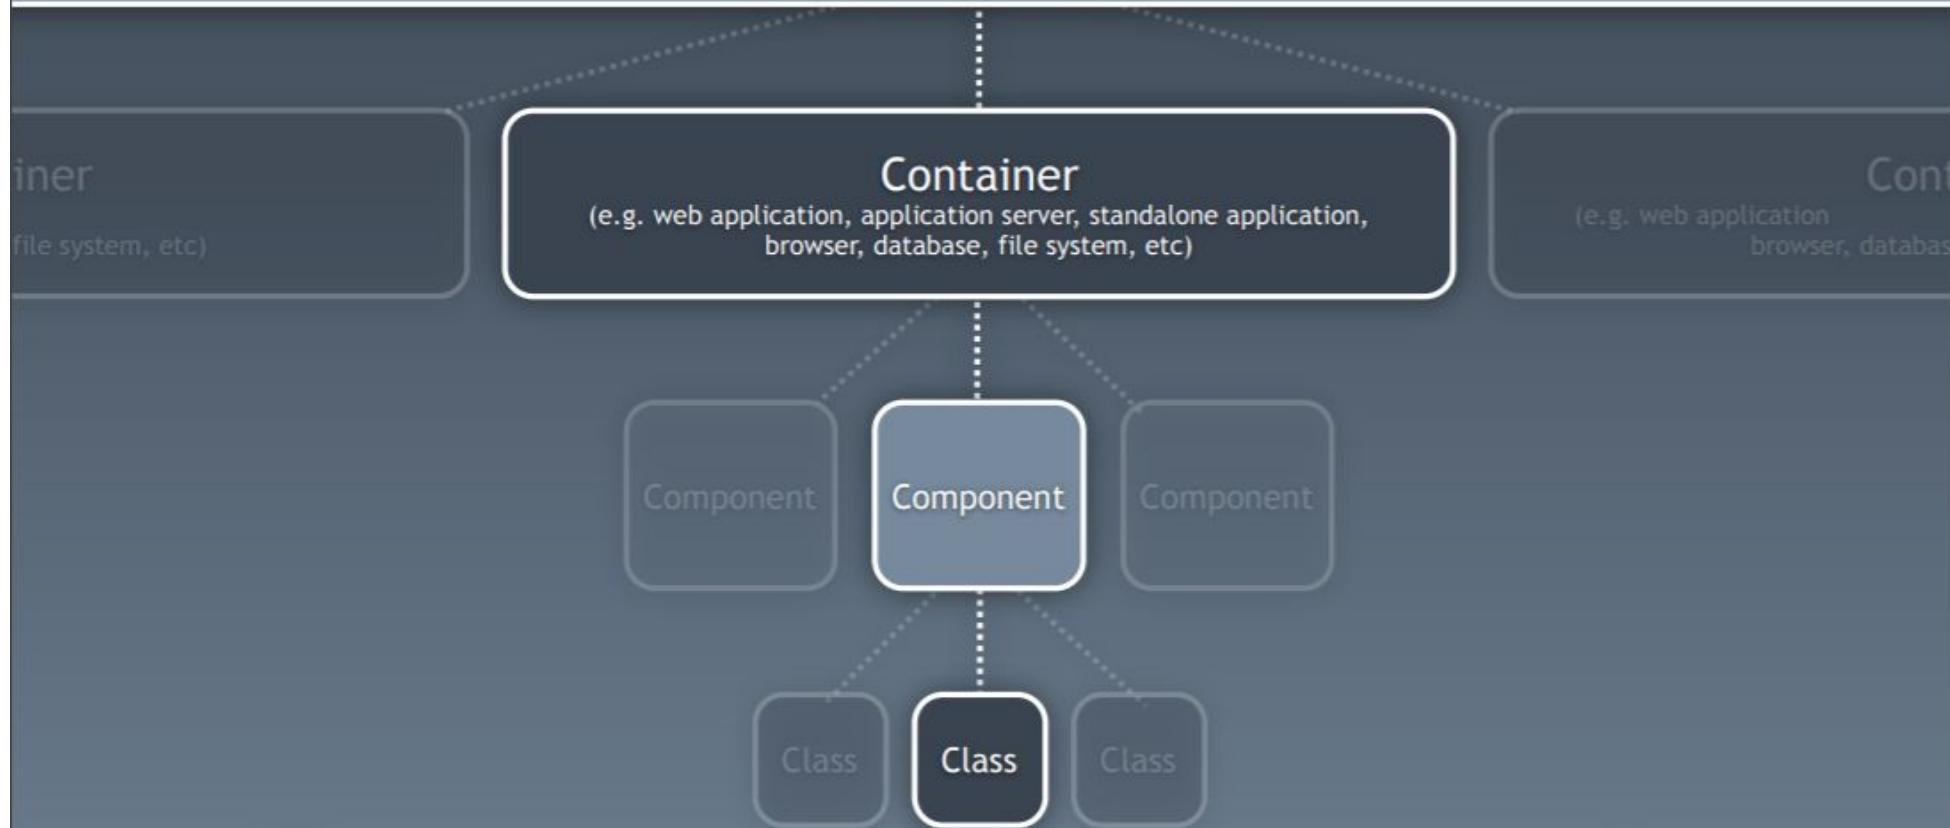

A **software system** is made up of one or more **containers**,
each of which contains one or more **components**,
which in turn are implemented by one or more **classes**.



The C4 model



System Context

The system plus users and system dependencies



Containers

The overall shape of the architecture and technology choices



Components

Components and their interactions within a container



Classes (or Code)


Component implementation details



Compose

Tell the story


Decompose






A Hierarchy of Models

The C4 diagrams

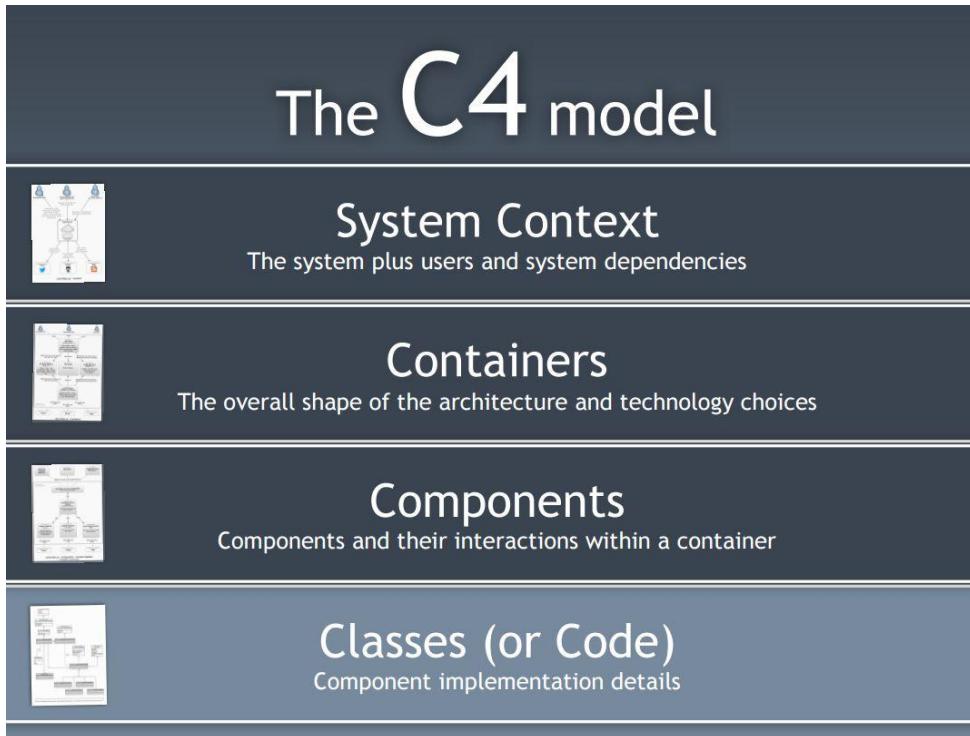

- UX/UI prototype
- UML
(Sequence, State, Class etc)
- Flow diagrams
- Sketches and drawings
- Interfaces
- Code fragments
- etc...

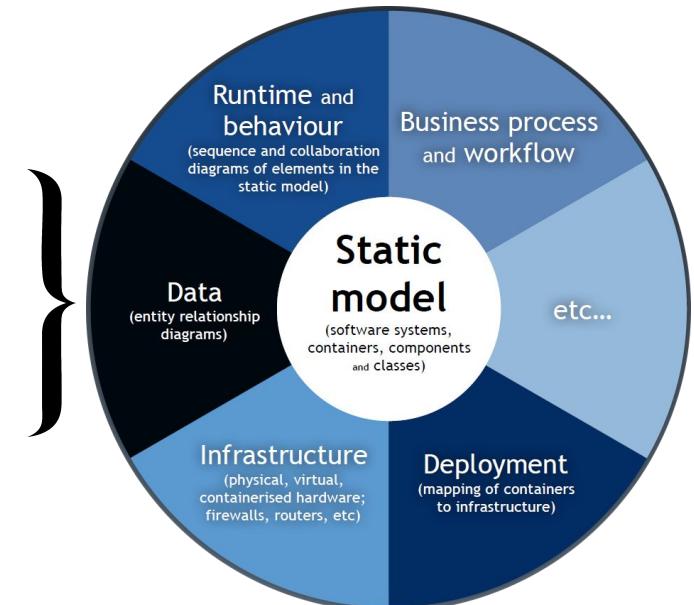



How to Design



C4 and UML in Visual Studio Code, Jetbrains editors etc using PlantUML

The screenshot shows a code editor with a C4 System Landscape diagram for Big Bank plc. The diagram is titled "System Landscape diagram for Big Bank plc". It includes a boundary box for "Big Bank plc [Enterprise]" and various internal components: ATM, Customer Service Staff, Internet Banking System, Mainframe Banking System, E-mail system, and Back Office Staff. External systems like Personal Banking Customer, Banking System, and Mail System are connected to the internal components via relationships like "Withdraws cash using", "Allows customers to withdraw cash", "Uses", "Sends e-mails to", and "Asks questions to". A legend at the bottom defines symbols for person, system, and boundary.

```
graph TD; subgraph Boundary [Big Bank plc]; ATM[ATM]; CSS[Customer Service Staff]; IBS[Internet Banking System]; MBS[Mainframe Banking System]; ESS[E-mail system]; BO[Back Office Staff]; end; subgraph External [ ]; PBC[Personal Banking Customer]; BS[Banking System]; M[Mail System]; end; PBC -- "Asks questions to" --> Boundary; PBC -- "Withdraws cash using" --> ATM; ATM -- "Allows customers to withdraw cash" --> PBC; ATM -- "Uses" --> IBS; ATM -- "Uses" --> MBS; ATM -- "Uses" --> ESS; ATM -- "Uses" --> BO; IBS -- "Sends e-mails to" --> M; IBS -- "Sends e-mails to" --> BO; IBS -- "Asks questions to" --> PBC; MBS -- "Stores all of the core banking information about customers, accounts, transactions, etc." --> IBS; ESS -- "Sends e-mail using" --> M; ESS -- "Sends e-mail using" --> BO; ESS -- "Asks questions to" --> PBC;
```


The screenshot shows a code editor with a C4 SocialSecurity Component Diagram Sample.puml file. The diagram is titled "Component diagram for Social Security Use Case - Processor". It features a Kafka Queue component that serves as a main backbone for information processing. A Processor (Kafka consumer) component listens for events and responds to them. An Event Controller (Kafka Consumer) receives events from the Kafka queue and dispatches them to the correct service. The File Upload Service processes uploaded files. The Report Service generates reports. The File Storage Service stores files in various data stores. The Email Service sends emails through an external email service. The File System stores files on an NTFS file server cluster. The Backoffice connects to the back office system. The NoSQL Data Store stores files and reports in MongoDB. A JasperReports based Report Generator generates reports using JasperReports 7.2.0. A legend at the bottom defines symbols for person, system, and boundary.

```
graph TD; subgraph Boundary [Processor]; KafkaQueue[Kafka Queue] -- "Listens for and responds to events" --> Processor[Processor Kafka consumer]; end; subgraph External [ ]; EventController[Event Controller Kafka consumer]; end; subgraph Internal [ ]; FileUploadService[File Upload Service Spring Bean]; ReportService[Report Service Generated report]; FileStorageService[File Storage Service Spring Bean]; EmailService[Email Service Spring Bean]; FileSystem[File System File Server Cluster NTFS Stores Files for batch processing by backoffice]; BackOffice[Backoffice]; NoSQLDataStore[NoSQL Data Store MongoDB 3.0.6 Stores Files uploaded and reports for retrieval by admin user]; JasperReports[ JasperReports based Report Generator Reports generated by JasperReports 7.2.0 Reporting Service with JasperReports 7.2.0]; end; KafkaQueue -- "Container(queue, Kafka Queue)" --> Processor; EventController -- "Container(reportgen, JasperReports)" --> ReportService; EventController -- "Container(filestorage, File Storage Service)" --> FileStorageService; EventController -- "Container(backoffice, BackOffice)" --> BackOffice; EventController -- "Container(filesystem, File System)" --> FileSystem; EventController -- "Container(nosqldb, NoSQL Data Store)" --> NoSQLDataStore; EventController -- "Container(jasperreports, JasperReports based Report Generator)" --> JasperReports; FileUploadService -- "Processes Uploaded file()" --> ReportService; ReportService -- "Stores Report" --> EmailService; ReportService -- "Send Report by email" --> EMail[E-mail]; FileStorageService -- "Obtains info to BackOffice" --> BackOffice; FileStorageService -- "Stores File" --> NoSQLDataStore; FileSystem -- "Writes info to BackOffice" --> BackOffice; FileSystem -- "Saves File on File System" --> NoSQLDataStore; BackOffice -- "Connects to BackOffice system" --> NoSQLDataStore; NoSQLDataStore -- "Saves File in File Storage in MongoDB" --> EMail; EmailService -- "Send mail through external email service" --> EMail;
```

<https://github.com/plantuml-stdlib/C4-PlantUML>


C4 and UML in Diagrams.net (ex-draw.io)

Single use and collaborative

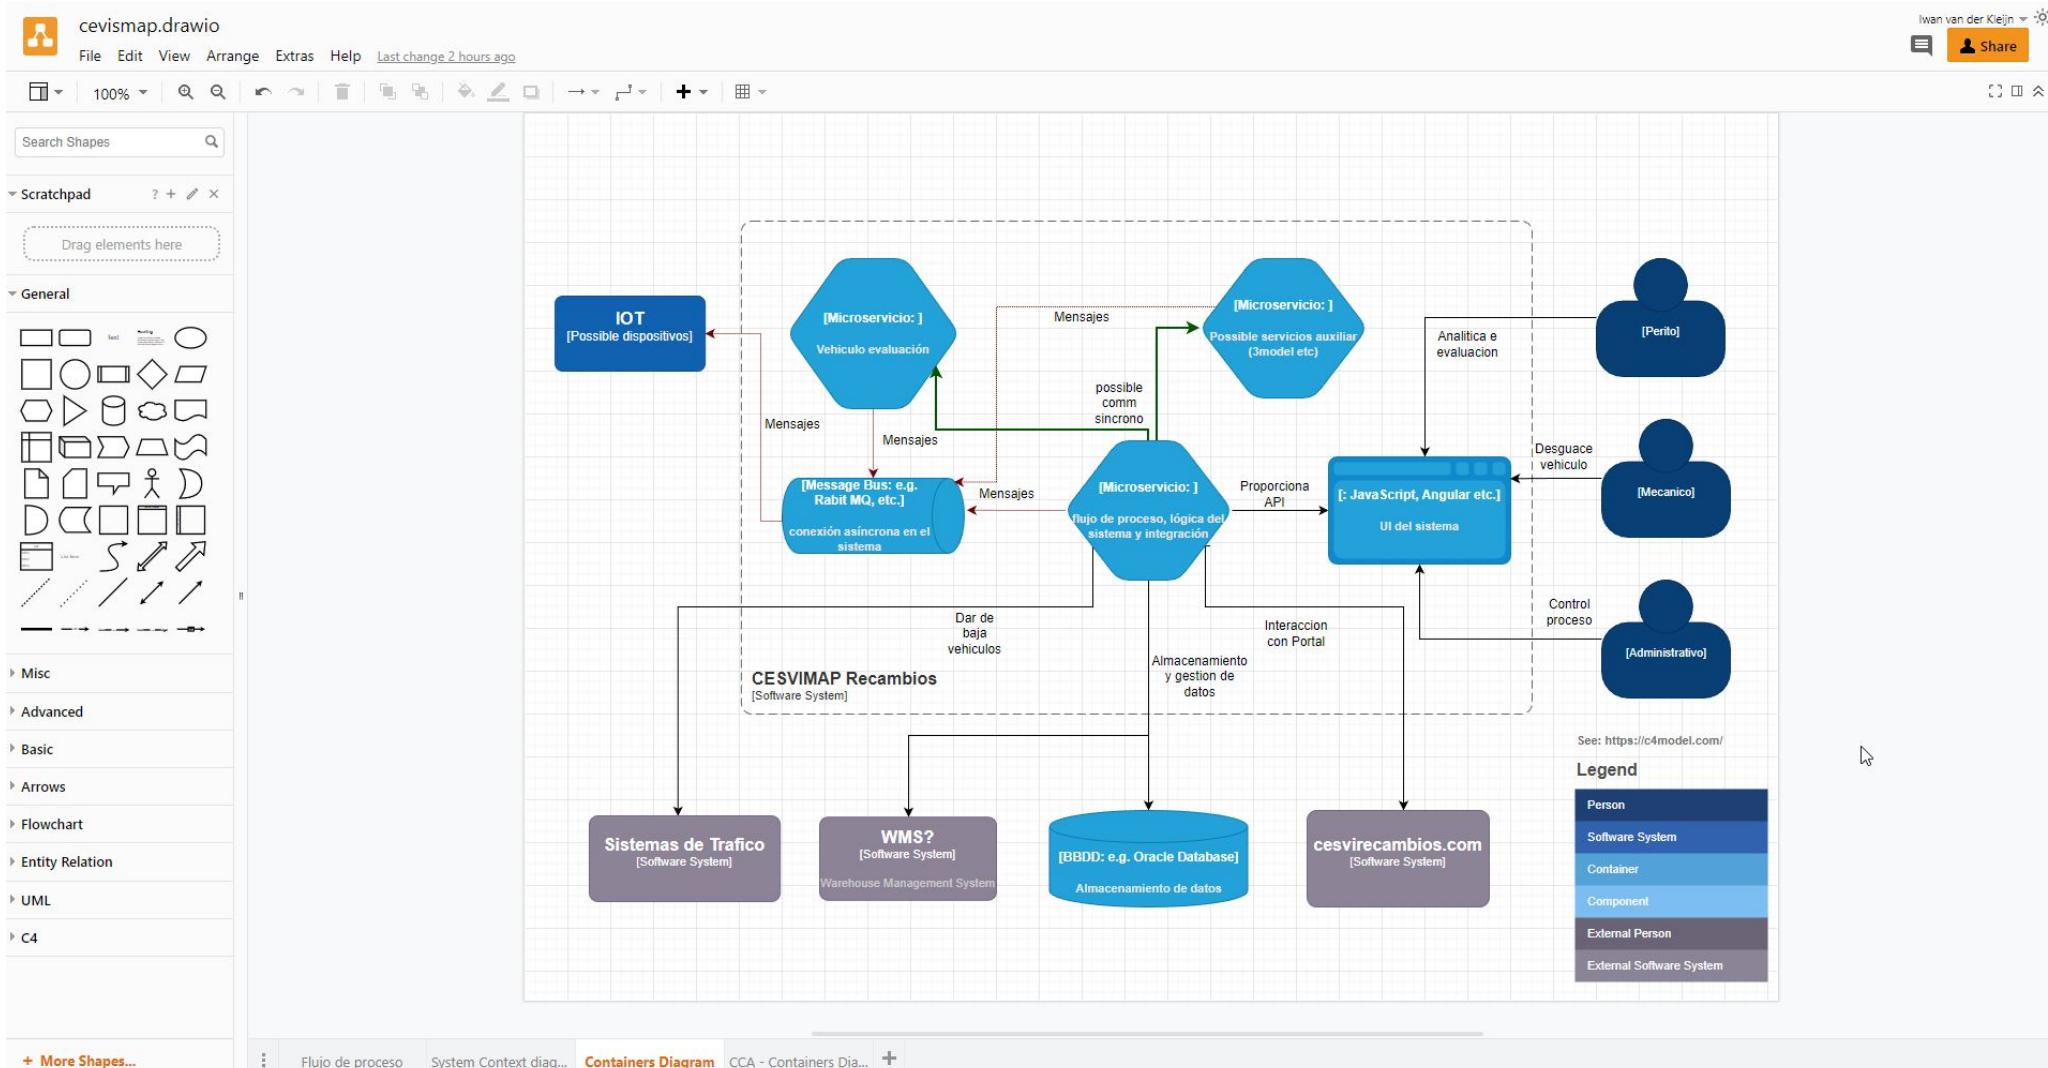



Collaborative Design (using Mural)

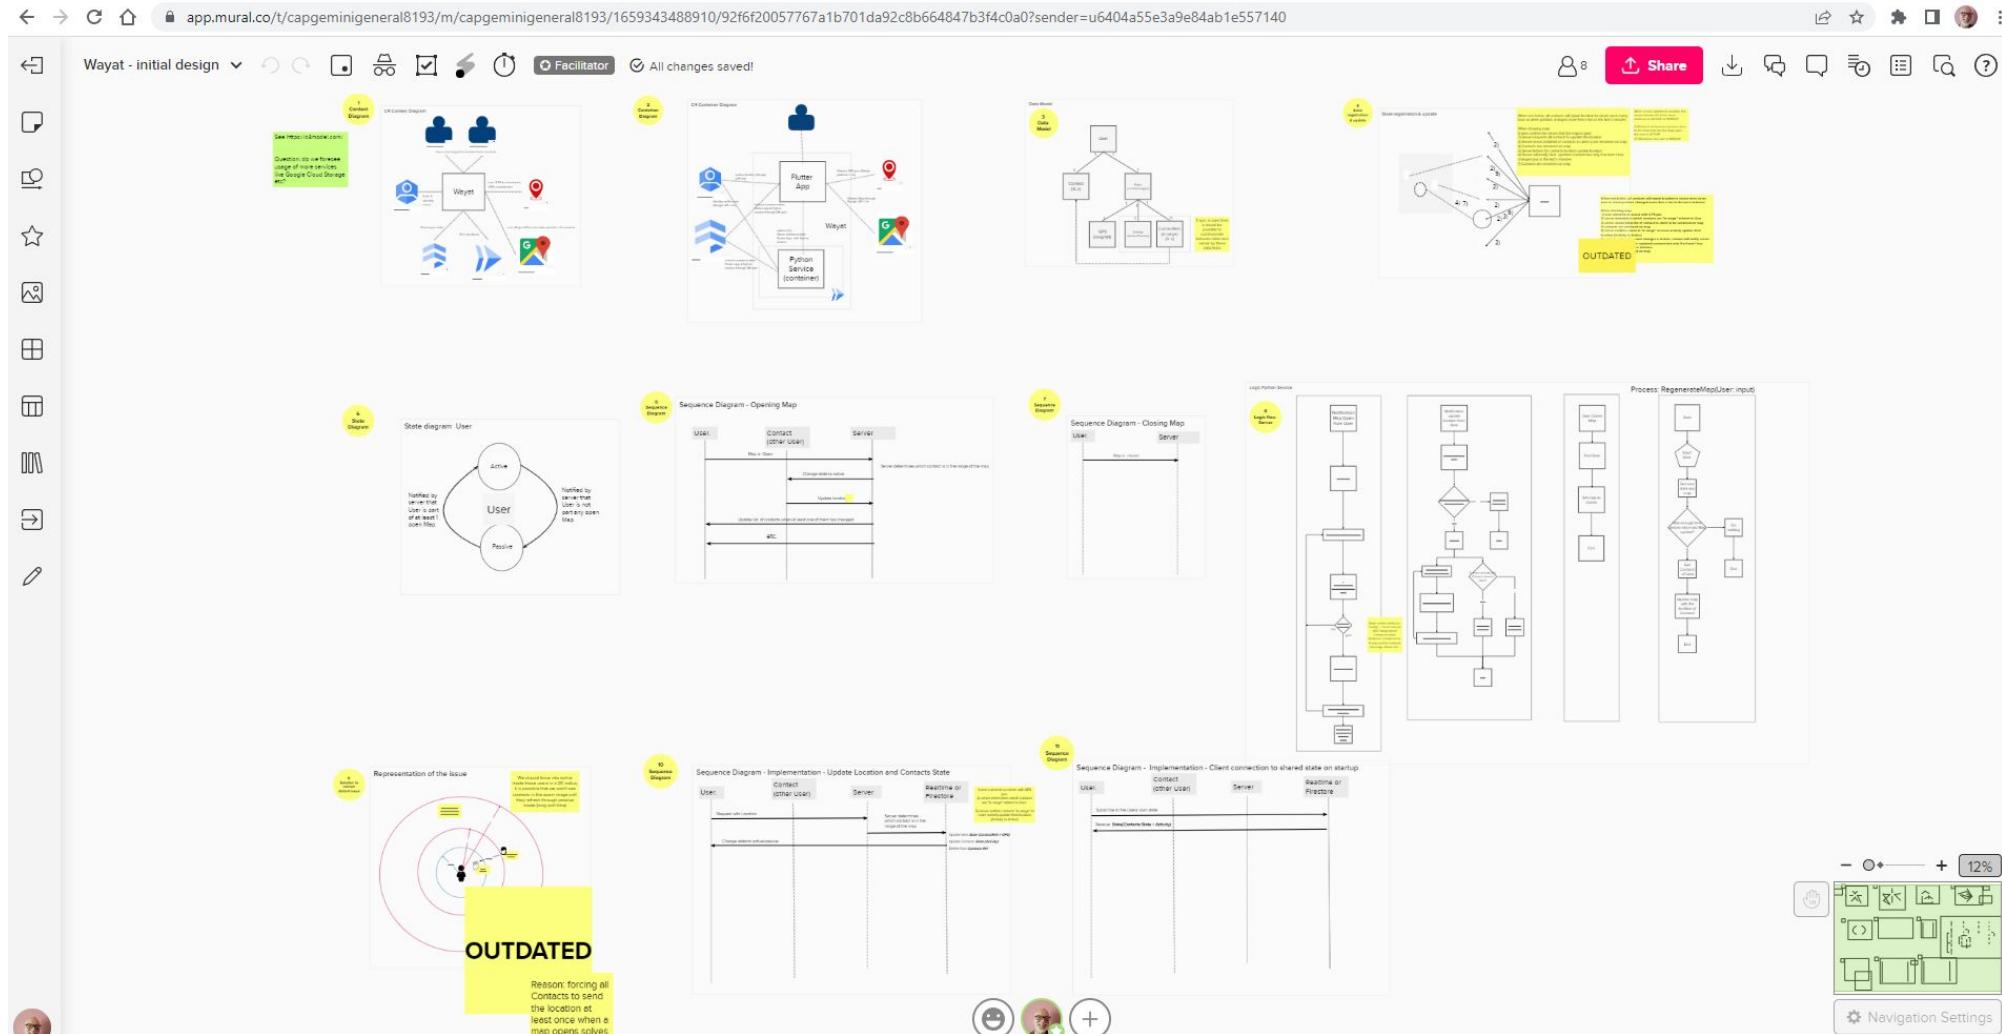



Social Security Example

The application is used to give benefit recipients the option of uploading 'supporting documents' (documents such as pay slips) that prove a working relationship.


If a benefit claimant has a working relationship with an employer, this has an impact on the benefit. These supporting documents are checked and it is checked whether the data is in accordance with the data made available to the Social Security from the employers.

The application can also be used to obtain an official, signed, report about any change of the benefit requested by or granted to the benefit claimant.

The Social Security Officer responsible for the case of the claimant should be able to access the information through an internal application.

System Context


System Context diagram for Social Security Use Case

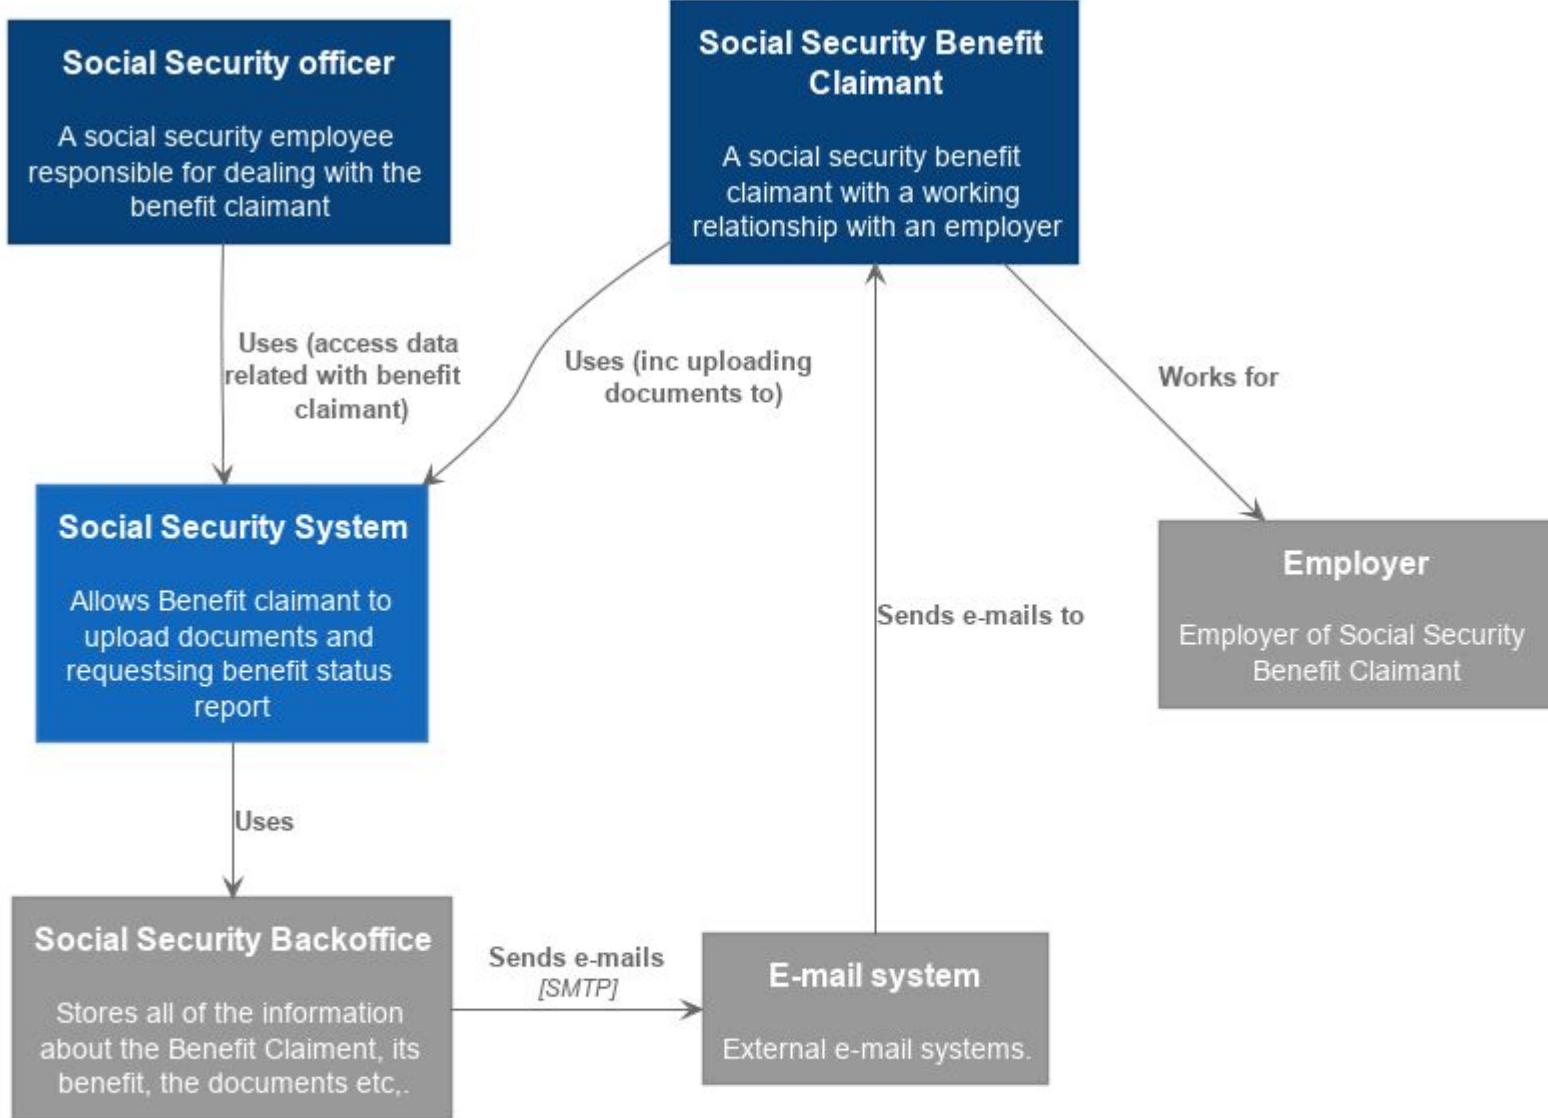

Type
person
external person
system
external system

Containers

Container Diagram for Social Security Use Case

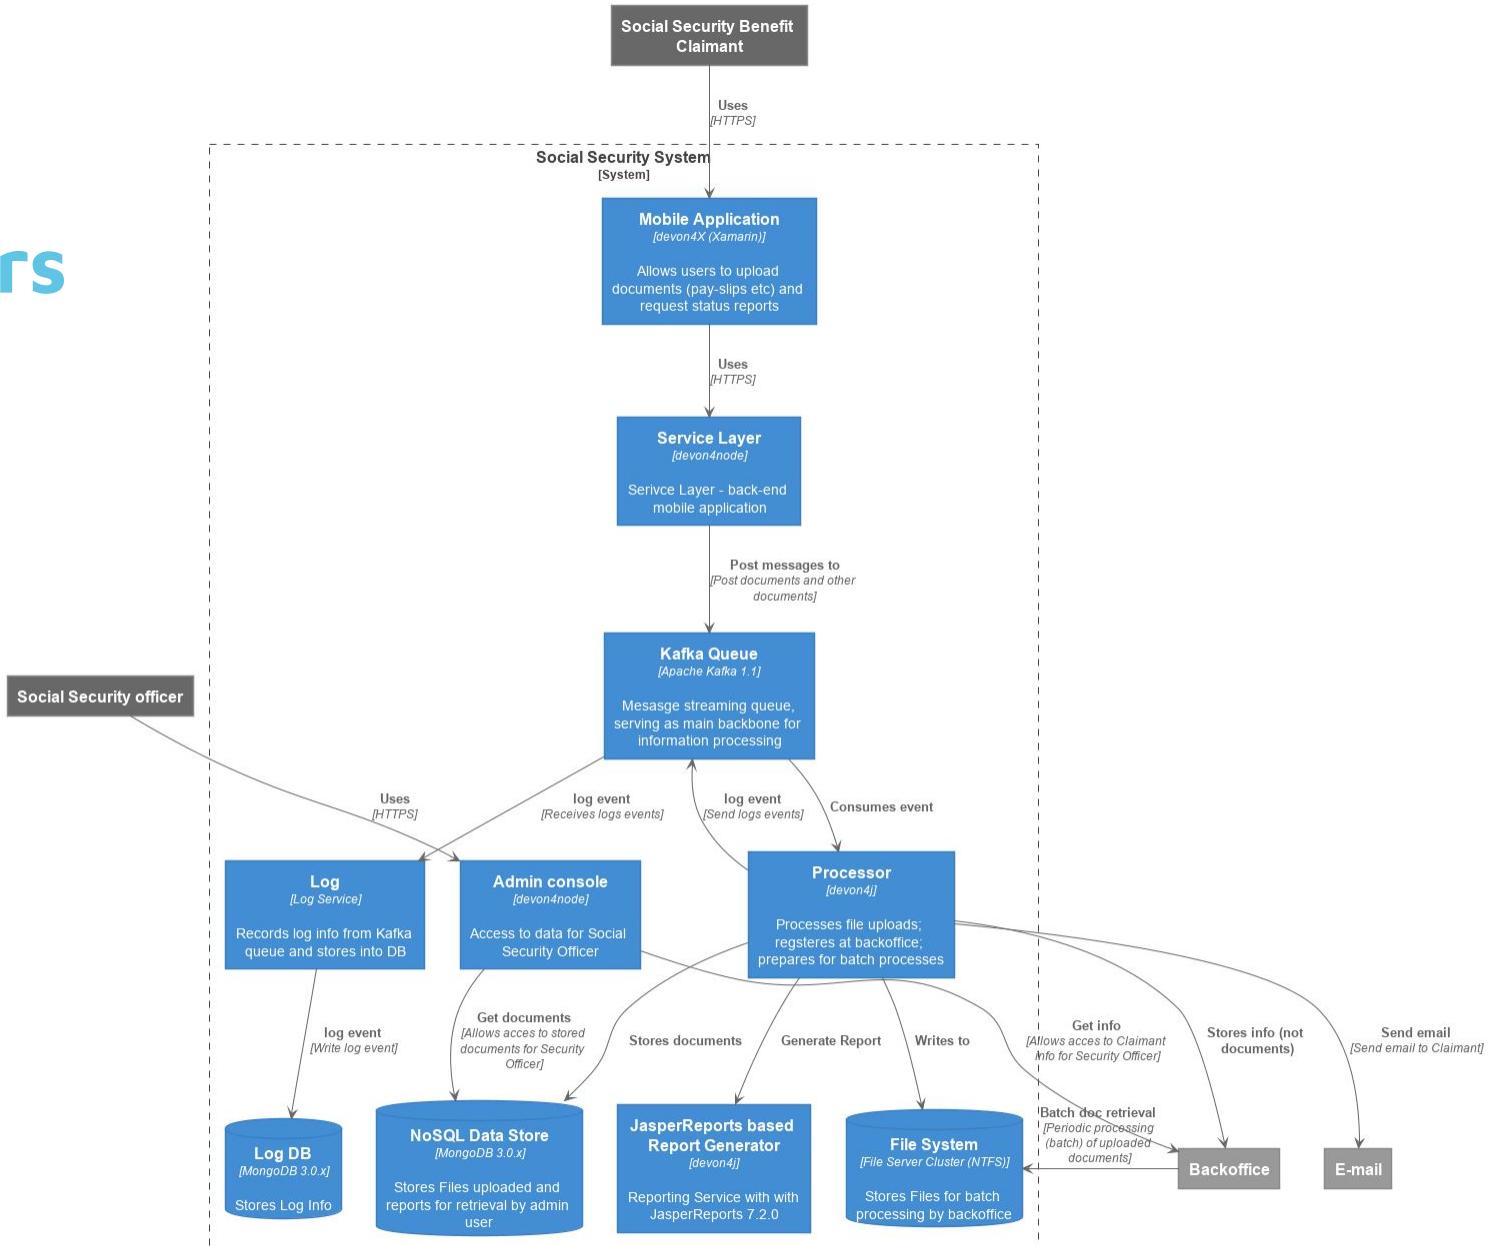


Type
person
external person
system
external system
container



Components



Component diagram for Social Security Use Case - Processor

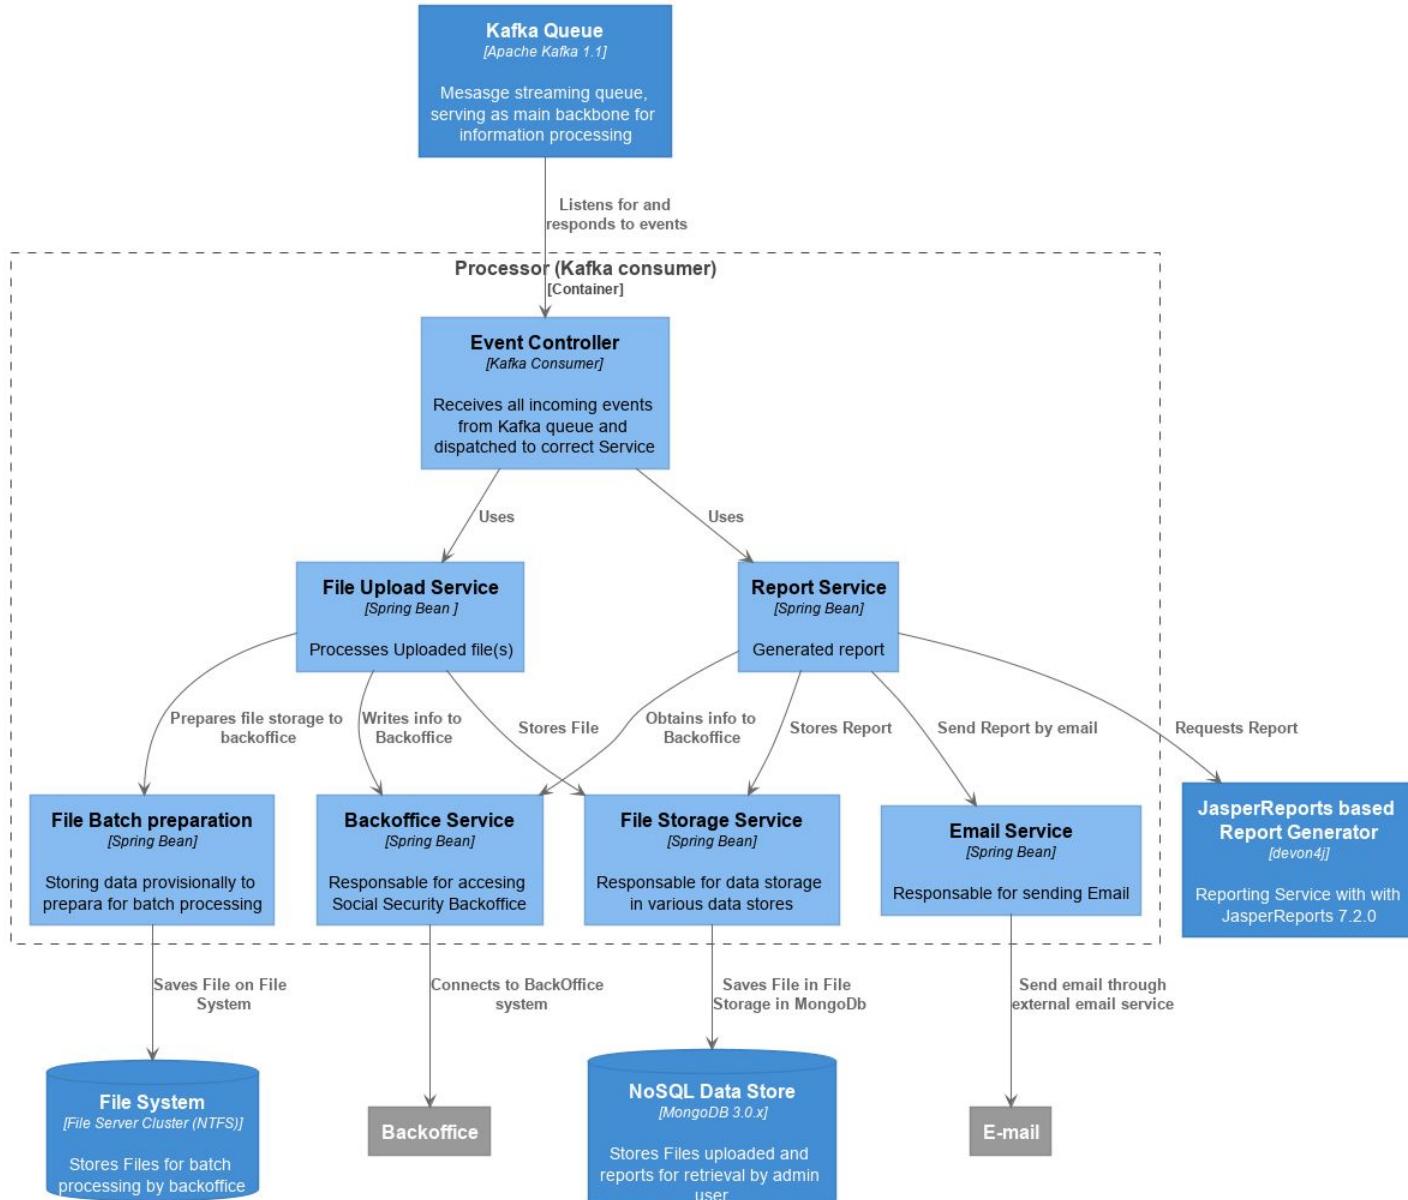


Type
person
external person
system
external system
container
component



Extend the model


Based on the static model, the Design can be enriched with other diagram types.

UML and other (in)formal standards (ERD) can play a very useful role

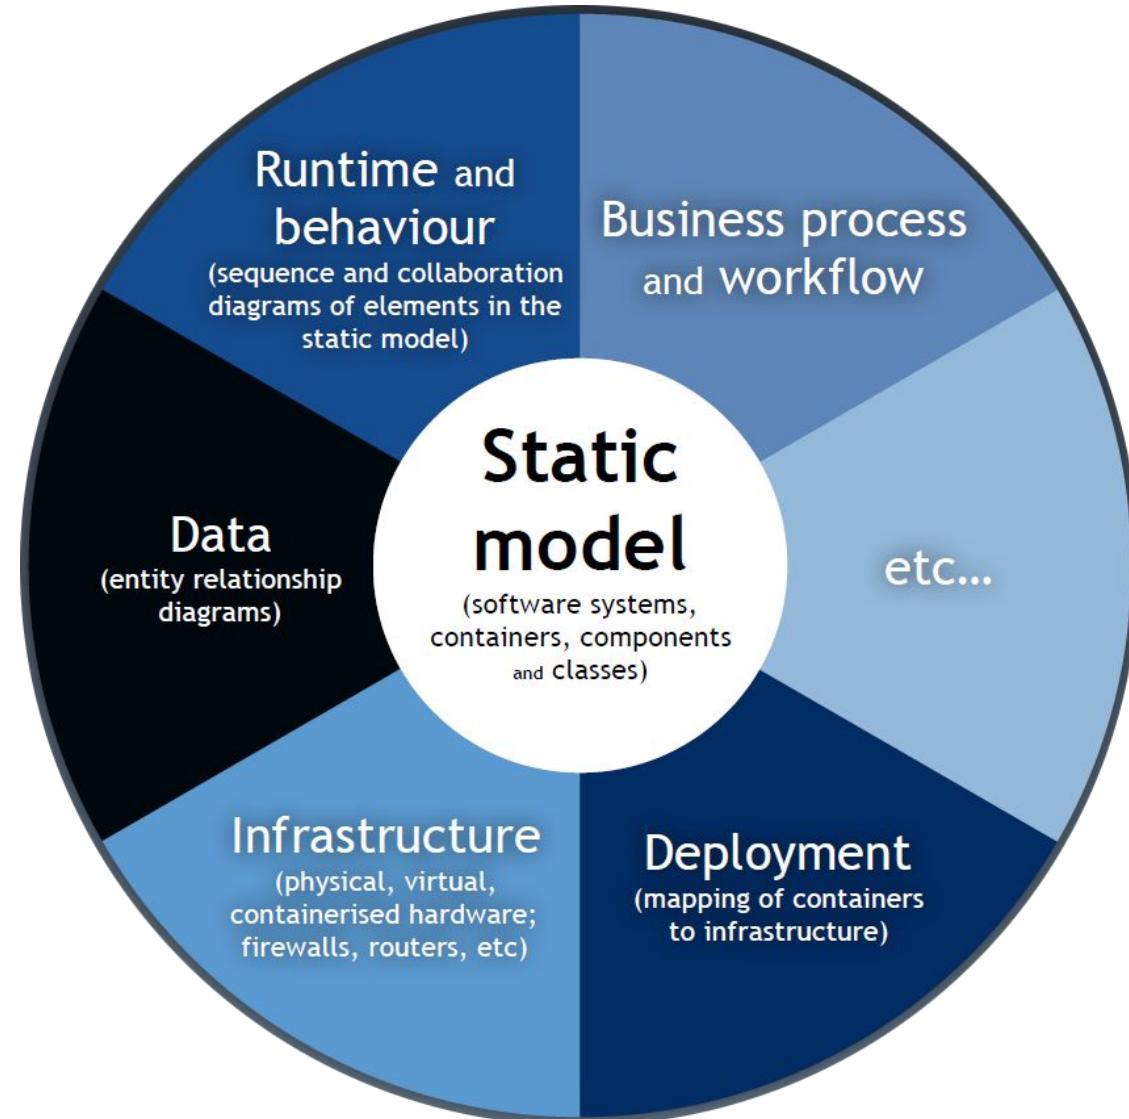




How to design a Component

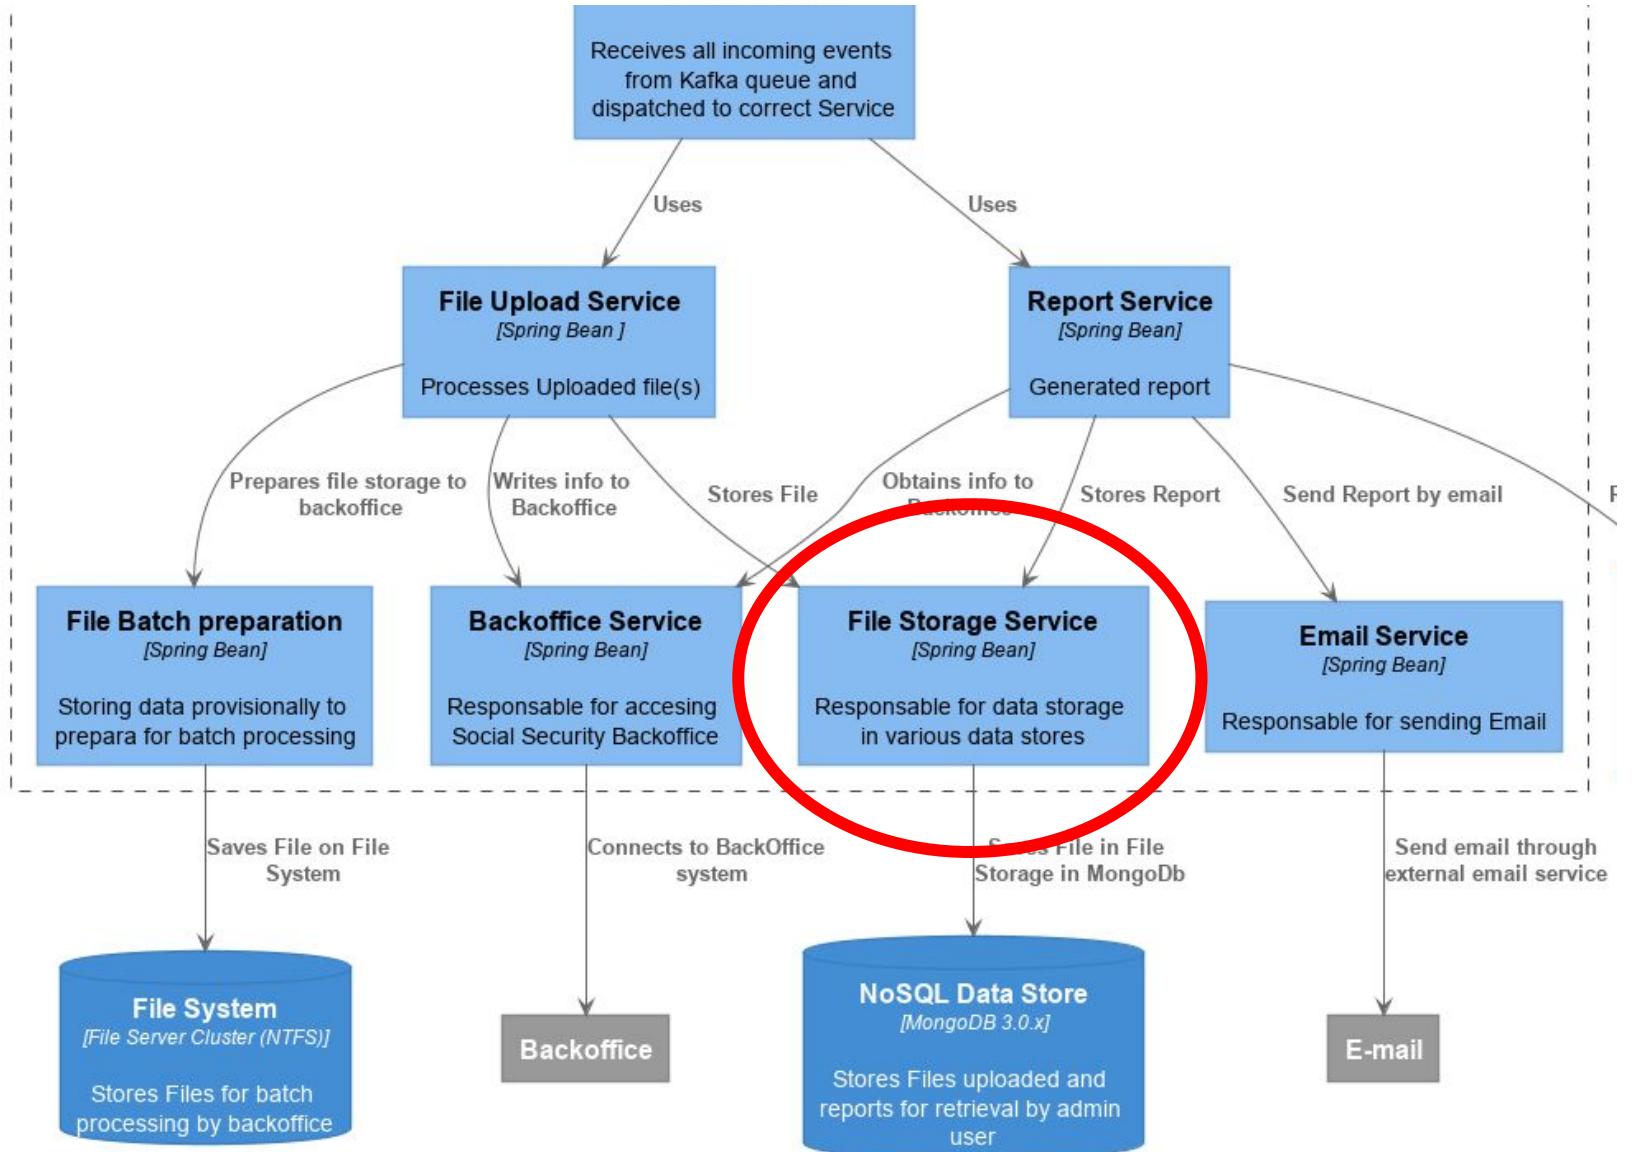



Component

- Definition of a component in the C4 model
- Should be the smallest building block of the “Architecture”
- It should contain a clearly defined API / **Interface**
- Will typically consist of multiple classes and functions
- A component should restrict access to its subcomponents (i.e.. Java packages, .NET Assemblies, ECMAScript/TypeScript modules etc)
- “Visible as” Angular Service, Spring Bean, Node module
- It should typically be a global singleton and not Support instantiation (multiple instances)
- Should have a Functional or Service Oriented Interface rather than OOP (no maintaining of state between invocations!)

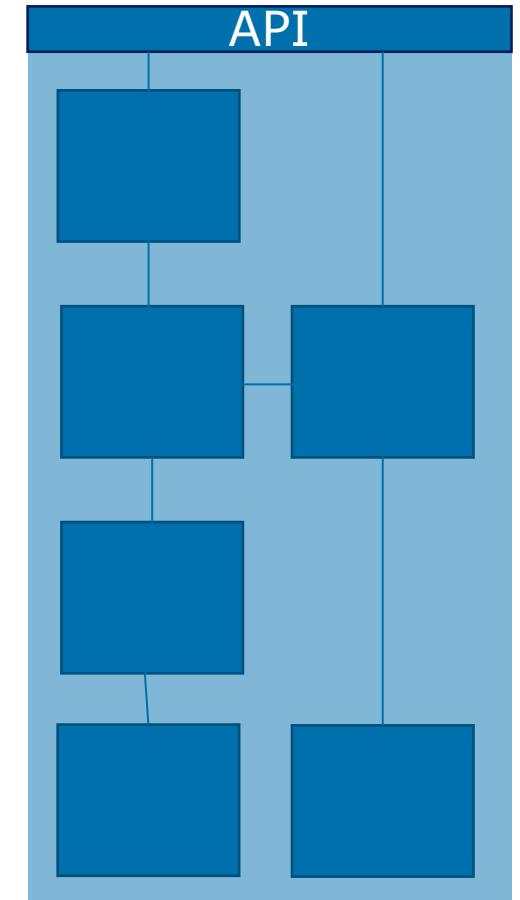




Create abstractions to define meaning (functionality)

Apart from the structure of the system, the design also needs to describe the functionality of the system.

The basis for this form the Functional Requirements for the applications as contained in the Specifications like Use Cases or User Stories.

As with the “Structure” of the Architecture, there needs to be a clear link to defined functionality and Code.

And telling the story works here as well....

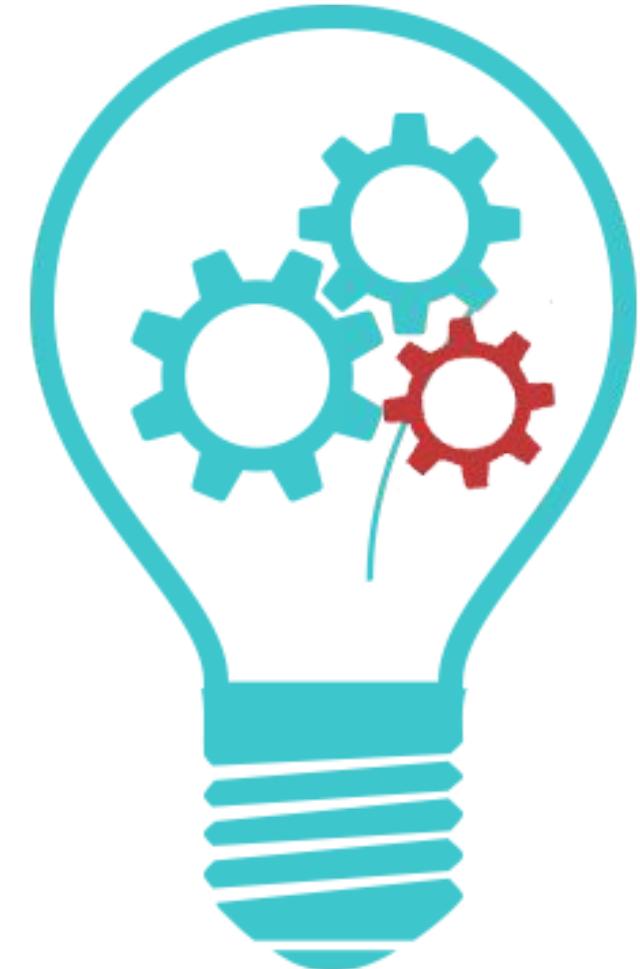



System Design as a story

As a user generating a **document**,
I need to be able to **store** the document,
so that it can be **retrieved** at any later moment by
myself or other parties

“I can have a **storage unit** when I can **store** documents.
I or other parties can **retrieve** documents from the store
For this the stored document needs to be represented by a **unique ID**”

Use abstractions!
Postpone the “definitions” of these concepts

```
interface Storage {  
    save(arg0: Store, arg1: Document) : ID;  
    get(arg0: Store, arg1: ID): Document;  
}
```



Elaborating the Story

“I can have **storage unit** when I can **store and retrieve documents of an undeterminable length and/or varying size**. Basically I should consider them to be a **stream of data**.”

“This stream of data can be either a **stream of bytes** or a **stream of utf-8 encoded text**. As the stream does not represent a “Document” I can accompany it with a corresponding set of **Document attributes**”

```
type Data = Text | Binary
interface Storage {

    save(arg0: Store, arg1: Stream<Data>, arg2: DocumentAttrs) : ID;
    get(arg0: Store, arg1: ID): Stream<Data>;
    getAttr(arg0: Store, arg1: ID): DocumentAttrs;
}
```



Refining the Story

“I can have **storage unit** when I can **store** and **retrieve documents of an undeterminable length and/or varying size without having to wait for the completion of the operation”**


“I need to be able to **initiate an asynchronous operation**. In case of both an asynchronous as well as a synchronous operation, I need to be **advised of the success of the operation.”**

```
interface Storage {  
  
    save(arg0: Store, arg1: Stream<Data>, arg2: DocumentAttrs) : Promise<ID>;  
    get(arg0: Store, arg1: ID): Promise<Stream<Data>>;  
    getAttr(arg0: Store, arg1: ID): Result<DocumentAttrs>;  
  
    remove(arg0: ID): Result<void>  
}
```

“Finally, I should be able to **remove the stored document.”**



The Storage Interface

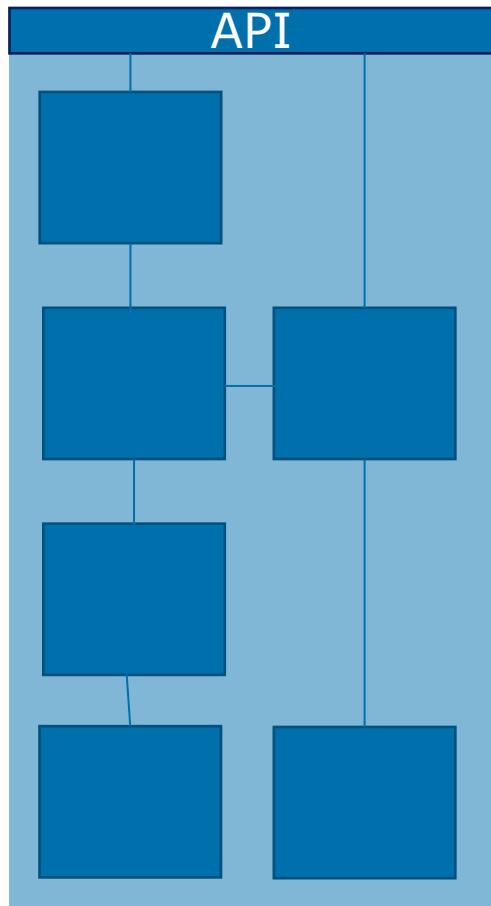

```
interface Storage {  
    save(arg0: Store, arg1: Stream<Data>, arg2: DocumentAttrs) : async<ID>;  
    get(arg0: Store, arg1: ID): async<Stream<Data>>;  
    getAttr(arg0: Store, arg1: ID): Result<DocumentAttrs>;  
  
    remove(arg0: ID): Result<void>  
}
```

By having begun as an abstraction, the component is assured to be fully decoupled of – i.e. have no dependencies on – any underlying storage mechanism. In that way:

- It is generic enough to be used by different storage mechanism (File system, Sharepoint, Mongo, etc etc)
- It is testable
- And “pluggable”



Further reading and Viewing...

The lost art of software design by Simon Brown



The lost art of software design




Simon Brown
Twitter: @simonbrown

<https://youtu.be/36OTe7LNd6M>

Software Architecture in Practice

THIRD EDITION

Building Evolutionary Architectures

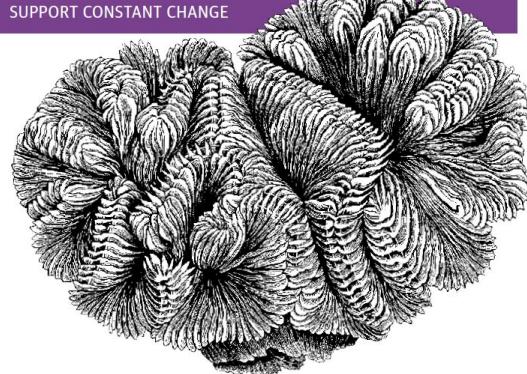

Neal Ford, Rebecca Parsons & Patrick Kua

O'REILLY®



Fundamentals of Software Architecture

An Engineering Approach

Mark Richards & Neal Ford

Further reading

PATTERNS OF ENTERPRISE APPLICATION ARCHITECTURE

MARTIN FOWLER
WITH CONTRIBUTIONS BY
DAVID RAES,
MATTHEW FOONAMEL,
EDWARD HIBEST,
ROBERT MEIR, AND
RANDY STAFFORD



Robert C. Martin Series

Clean Architecture

A Craftsman's Guide to Software Structure and Design

Robert C. Martin

Foreword by Kevin Henney
Afterword by Jason Gorman

PRENTICE HALL

O'REILLY®

Building Microservices

DESIGNING FINE-GRAINED SYSTEMS



Sam Newman

Domain-Driven DESIGN

Tackling Complexity in the Heart of Software



Eric Evans

Foreword by Martin Fowler




Domain Driven Design

A established, relatively formal, methodology for such language driven design is **Domain Driven Design** as introduced by Eric Evans in the 2000's

See: Domain Driven Design by Jimmy Bogard


<https://www.youtube.com/watch?v=U6CeaA-Phqo>

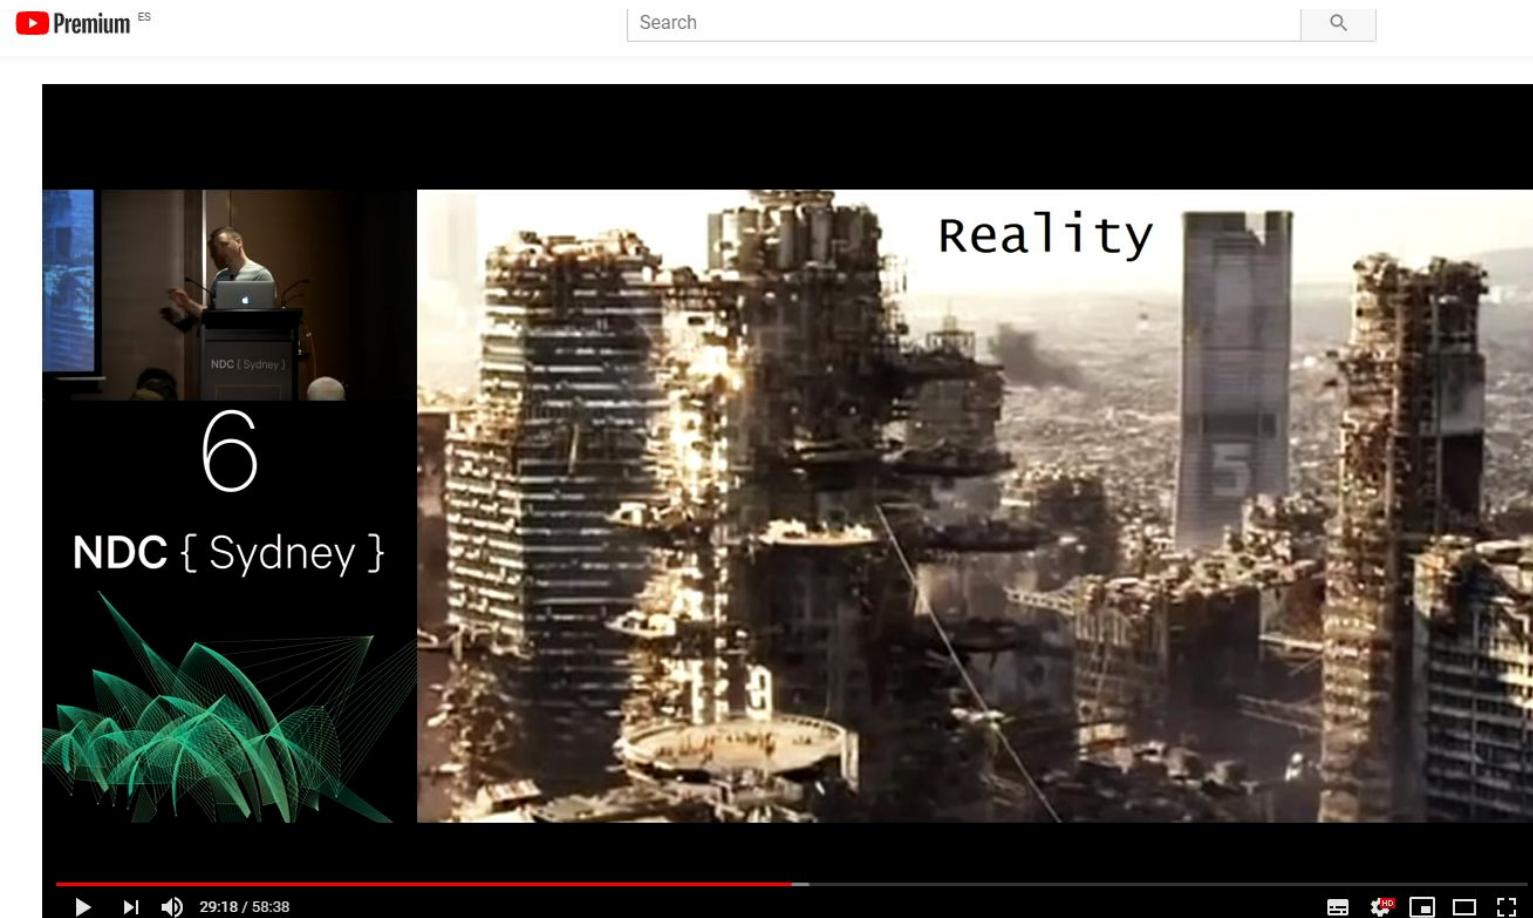

Domain Driven Design: The Good Parts - Jimmy Bogard



Ports and Adapters

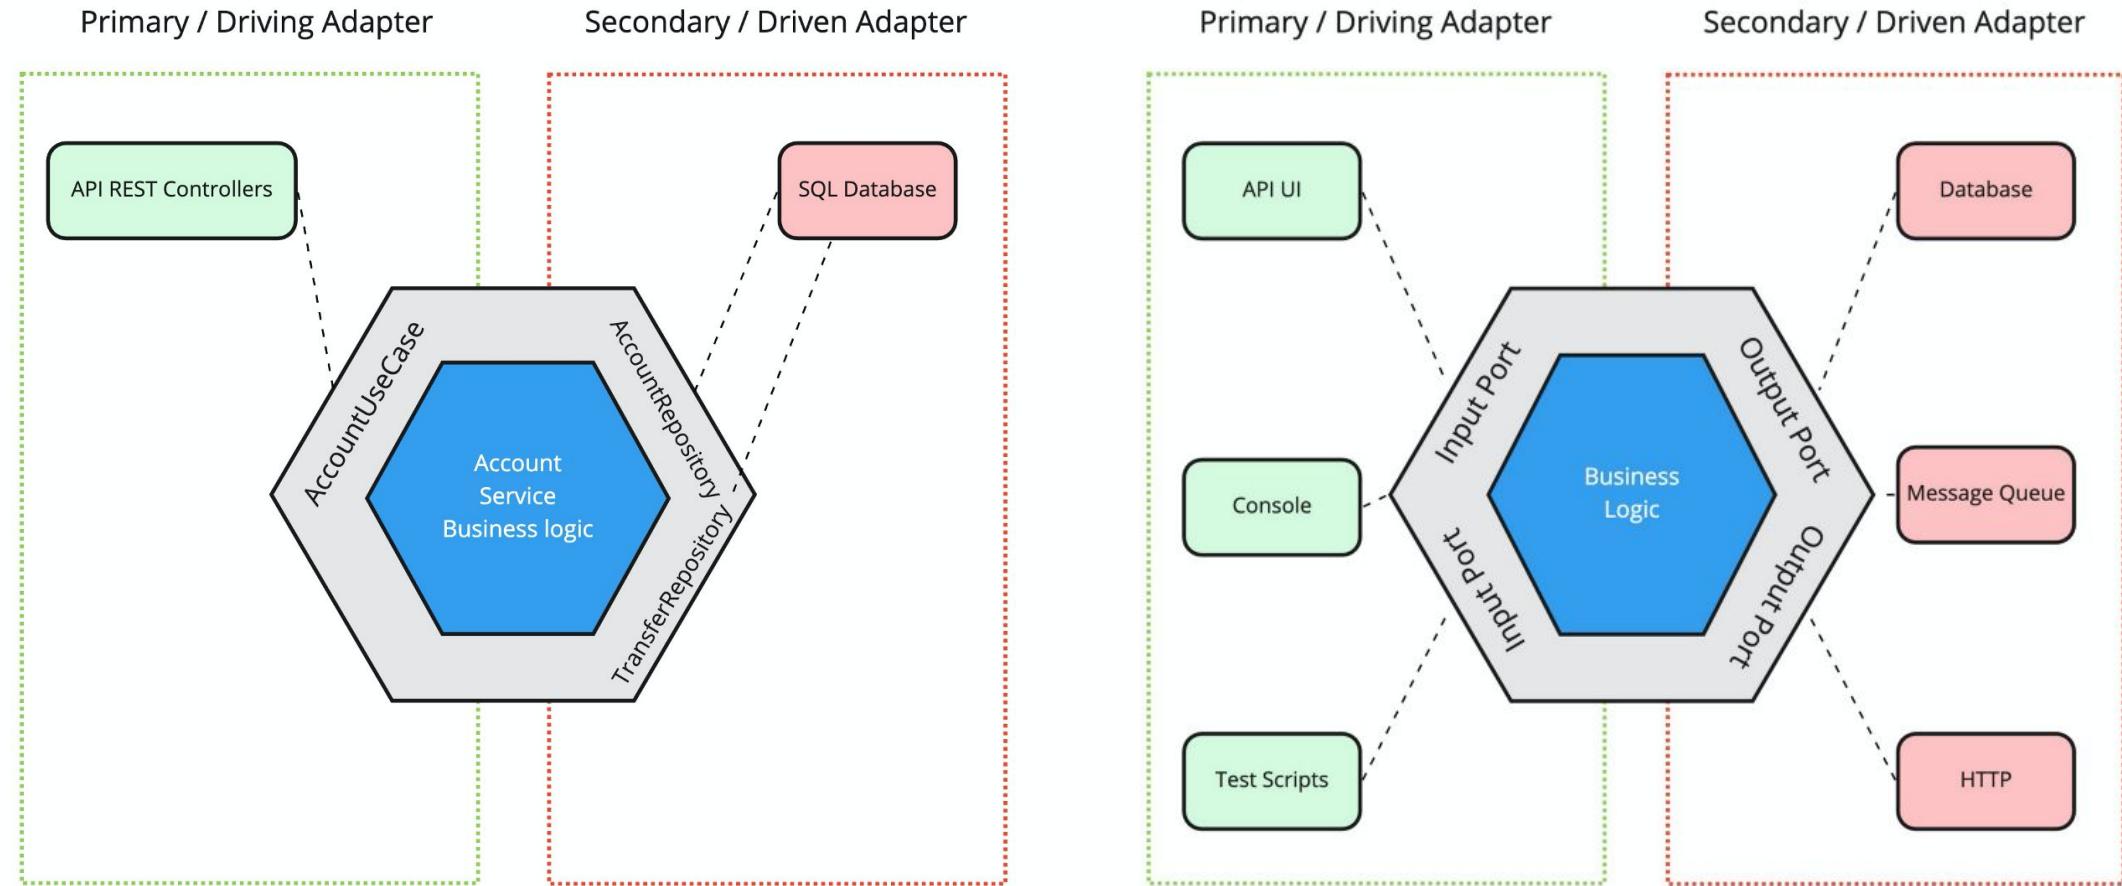

<https://medium.com/idealo-tech-blog/hexagonal-ports-adapters-architecture-e3617bcf00a0>



Next Steps for those in a hurry

Facilitating The Spread Of Knowledge And Innovation In Professional Software Development | More



En | 中文 | 日本 | Fr | Br
1,274,004 May unique visitors

Development

Architecture & Design

AI, ML and Data Engineering

Culture & Methods

FEATURED: Streaming Machine Learning Reactive Microservices Containers Observability Docker

InfoQ Homepage > Articles > Architecture As Language: A Story

Architecture as Language: A story



LIKE



10



BOOKMARKS



FEB 27, 2008 • 32 MIN READ

by

Markus Völter

[FOLLOW](#)

Abstract

Architecture is typically either a very non-tangible, conceptual aspect of a software system that can primarily be found in Word documents, or it is entirely driven by technology ("we use an XML architecture"). Both are bad: the former makes it hard to work with, and the latter hides architectural concepts behind technology hype.

What can be done? As you develop the architecture, evolve a language that allows you to describe systems based on this architecture. Based on my experience in a number of real-world projects, this makes the architecture tangible and provides an unambiguous description of the architectural building blocks as well as the concrete system while still staying away from technology decisions (which then can be made consciously in a separate step).

The first part of this paper illustrates the idea using a real-world story. The second part summarizes the key points of the approach.

<https://www.infoq.com/articles/architecture-as-language-a-story/>



Summary – Next Steps



Watch the videos

Read up on the **C4 Model**

Install and play around with **PlantUML**

Try to model an **imaginary system** with the **C4 Model**

Try to define the interfaces for the internal components

Rinse – Repeat

Read up on **UML** and try to play with it

Read up on **DDD** and try to play with it

Read about **Ports and Adapters**

Try to do the exercise (Appendix)



Deeper...

The Language of the System – Rich Hickey https://www.youtube.com/watch?v=ROor6_NGIWU

The image is a composite of three parts. On the left, a man with glasses and a white shirt stands behind a wooden podium with a Sheraton Raleigh logo, speaking. In the center, a presentation slide has a dark background. It features a large blue and green circular logo at the top left. Below it, the word "relevance" is written next to a small logo. To the right of the logo, the year "2012" is displayed. At the bottom of the slide, there is a photograph of a man with curly hair and a white shirt, gesturing with his right hand. To the right of the slide, the text "Welcome to the Machine" is written in large, white, sans-serif capital letters. Below this text is a photograph of a complex industrial machine. The machine is primarily blue and white, with various mechanical components, pipes, and a control panel labeled with Chinese characters. A red and yellow component is also visible on the left side of the machine.

- Machines apply force to accomplish work
- That's what systems do!



Appendix

An exercise...



Cognitive Canvas

Collaborative Design and Documentation Platform

Overview

Cognitive Canvas is a collaborative tool designed for software architects and developers, extending the capabilities of Excalidraw (an open-source whiteboard) with added functionality for project management, real-time collaboration, AI-assisted design, and Markdown-based documentation. It aims to streamline workflows by integrating drawing, chat, documents, and AI-generated content into a single, cohesive interface.

Key Features

- **Project Management:** Organize drawings, documents, and team chats under unified projects.
- **Collaborative Drawing:** Real-time editing powered by Excalidraw.
- **AI-Enhanced Design:** Analyze and modify drawings, assist documentation, and summarize project details using AI.
- **Integrated Documentation:** Combine drawings, documents, and AI content into cohesive reports using a Markdown editor (CodeMirror).
- **Extensible Backend:** Modular services for projects, chats, documents, and AI, designed to scale easily.
- **Code Generation:** Graphical elements and metadata are interpreted as software structures, enabling AI to generate starter code.


System Design Principles

- **Developer-Oriented:** Prioritizes modularity and extensibility for seamless integration with existing systems.
- **Scalability:** Built to grow with organizational needs, leveraging modern cloud-native solutions.
- **Open-Source Friendly:** Integrates existing components like Excalidraw, CodeMirror, and real-time libraries (e.g., Socket.IO).



Cognitive Canvas

Collaborative Design and Documentation Platform

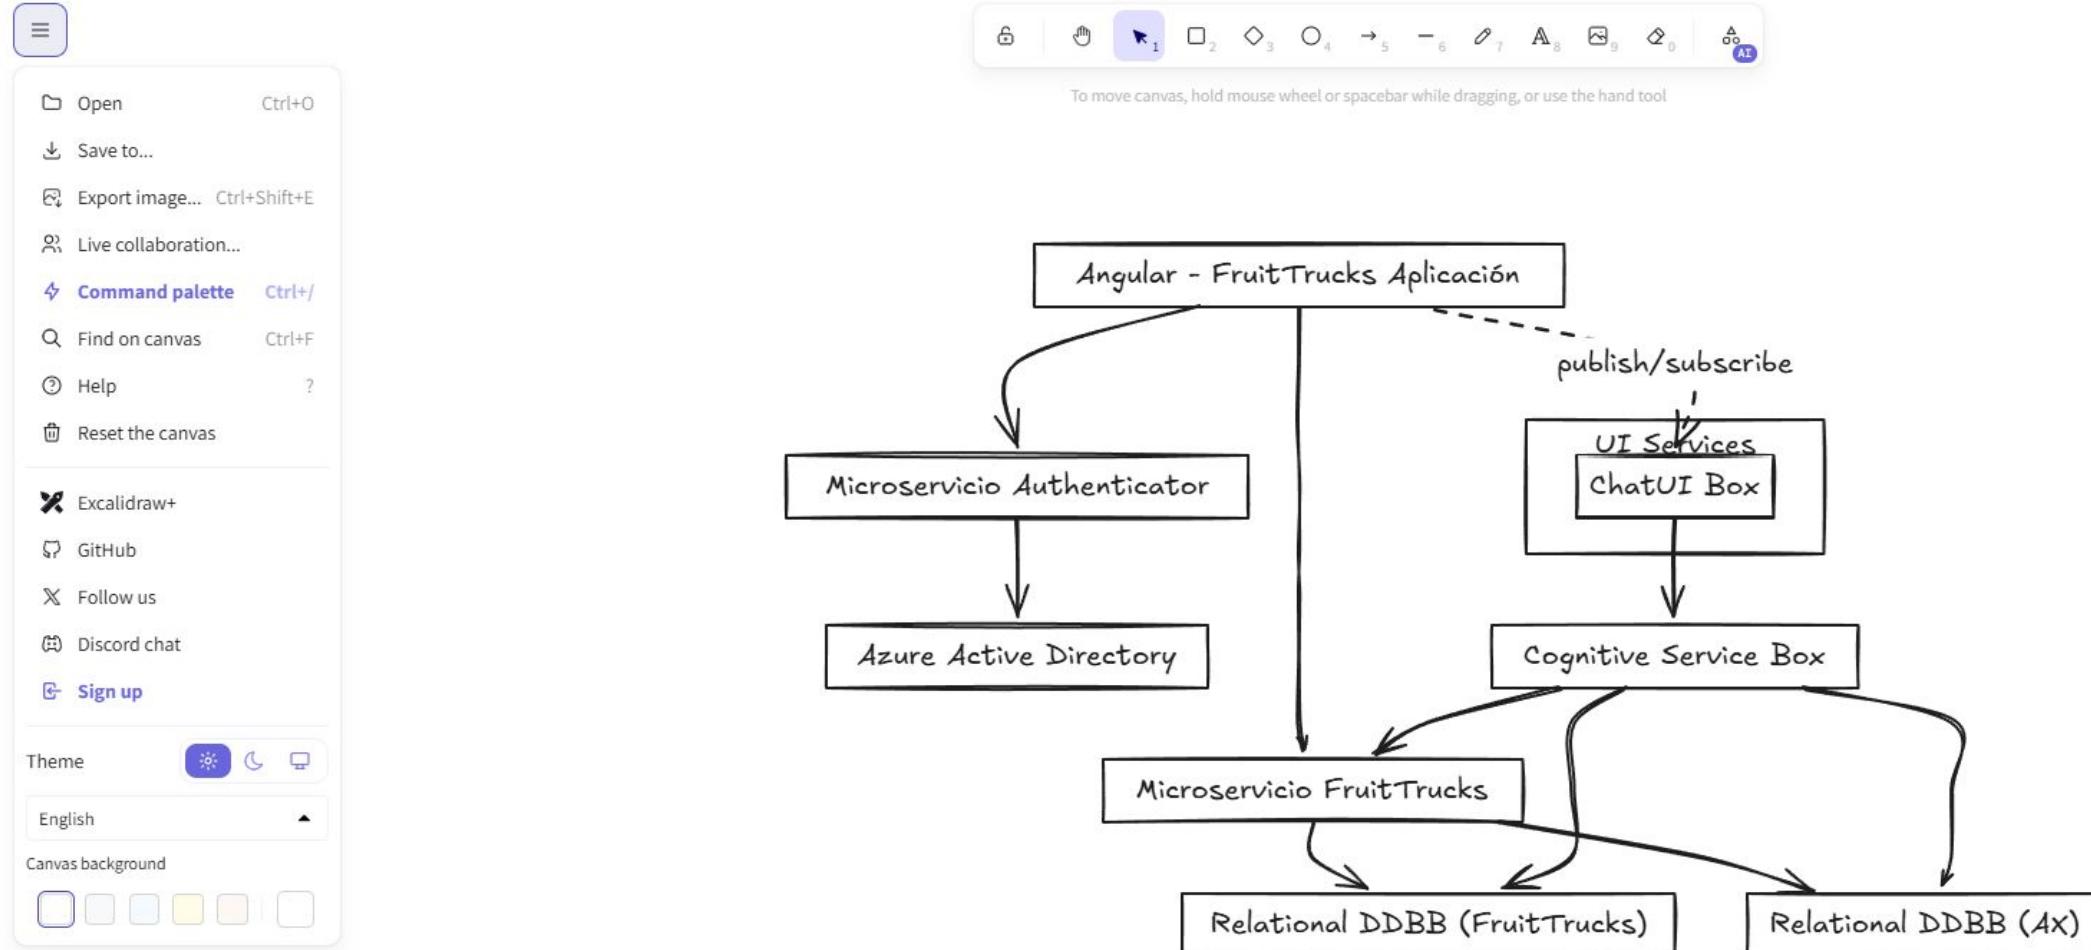


Screenshot Excalidraw




Cognitive Canvas

Collaborative Design and Documentation Platform

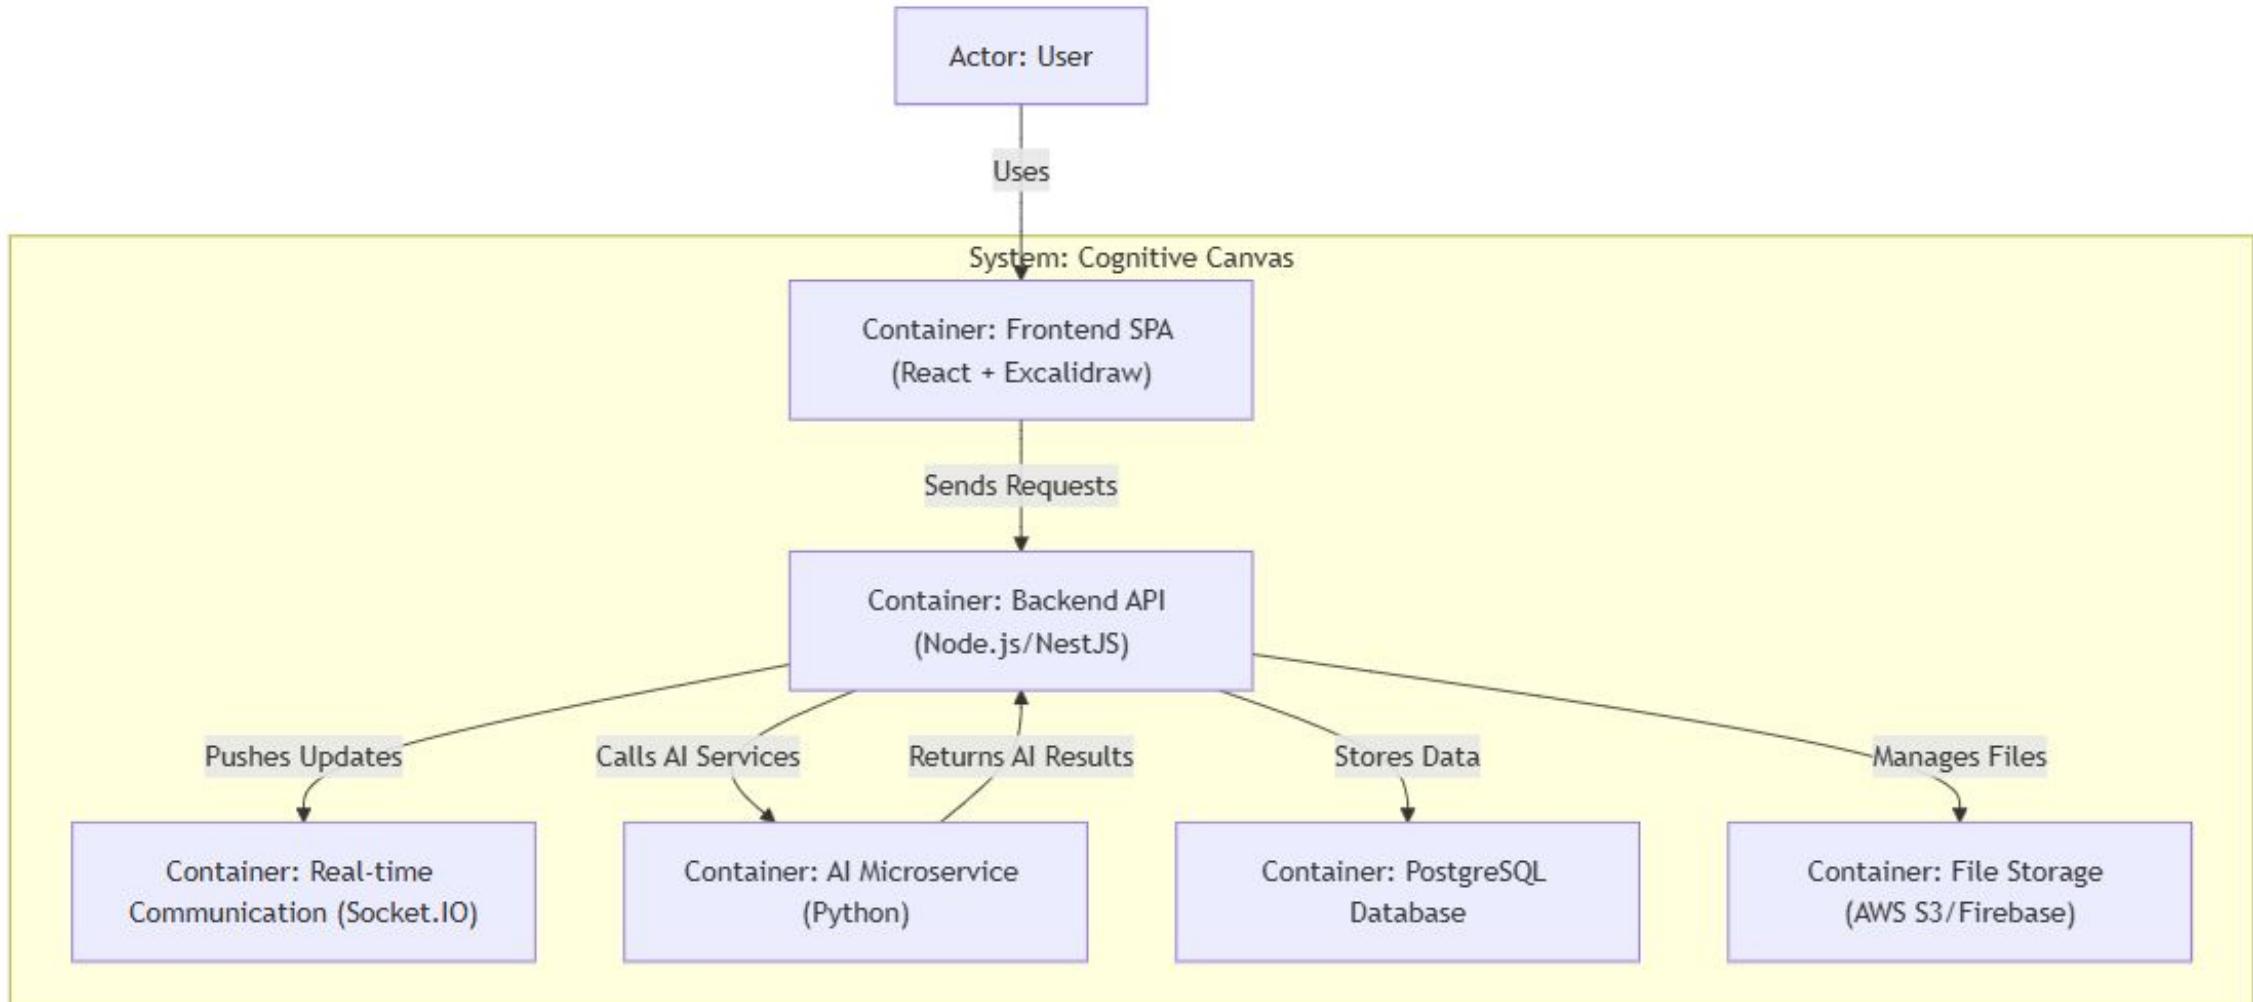

Draft solution sketch (incomplete)

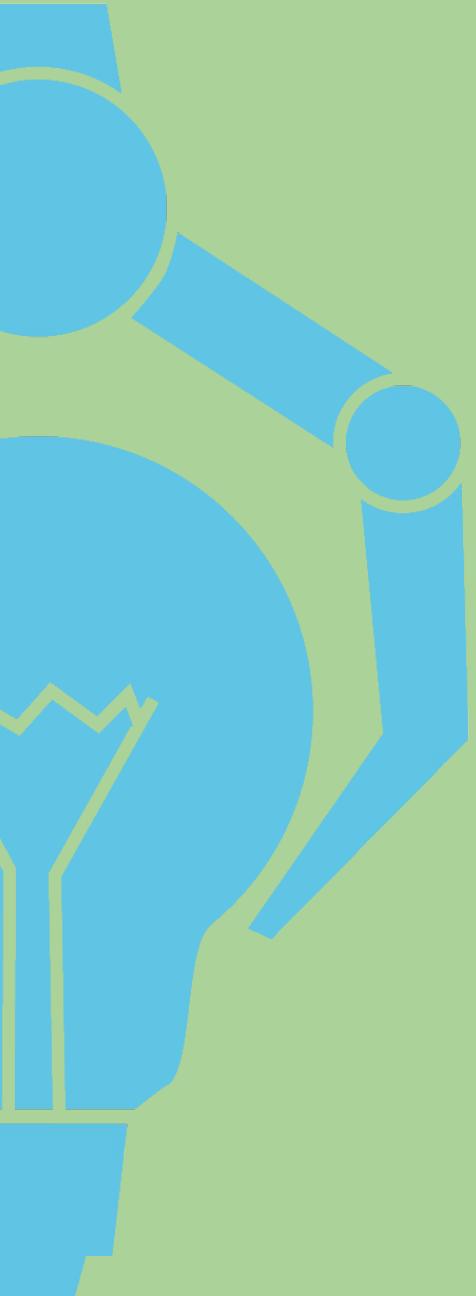

Capgemini



Capgemini is a global leader in partnering with companies to transform and manage their business by harnessing the power of technology. The Group is guided everyday by its purpose of unleashing human energy through technology for an inclusive and sustainable future. It is a responsible and diverse organization of over 300,000 team members in nearly 50 countries. With its strong 50-year heritage and deep industry expertise, Capgemini is trusted by its clients to address the entire breadth of their business needs, from strategy and design to operations, fuelled by the fast evolving and innovative world of cloud, data, AI, connectivity, software, digital engineering and platforms. The Group reported in 2020 global revenues of €16 billion.



Get The Future You Want | www.capgemini.com

This presentation contains information that may be privileged or confidential and is the property of the Capgemini Group.

Copyright © 2022 Capgemini. All rights reserved.