
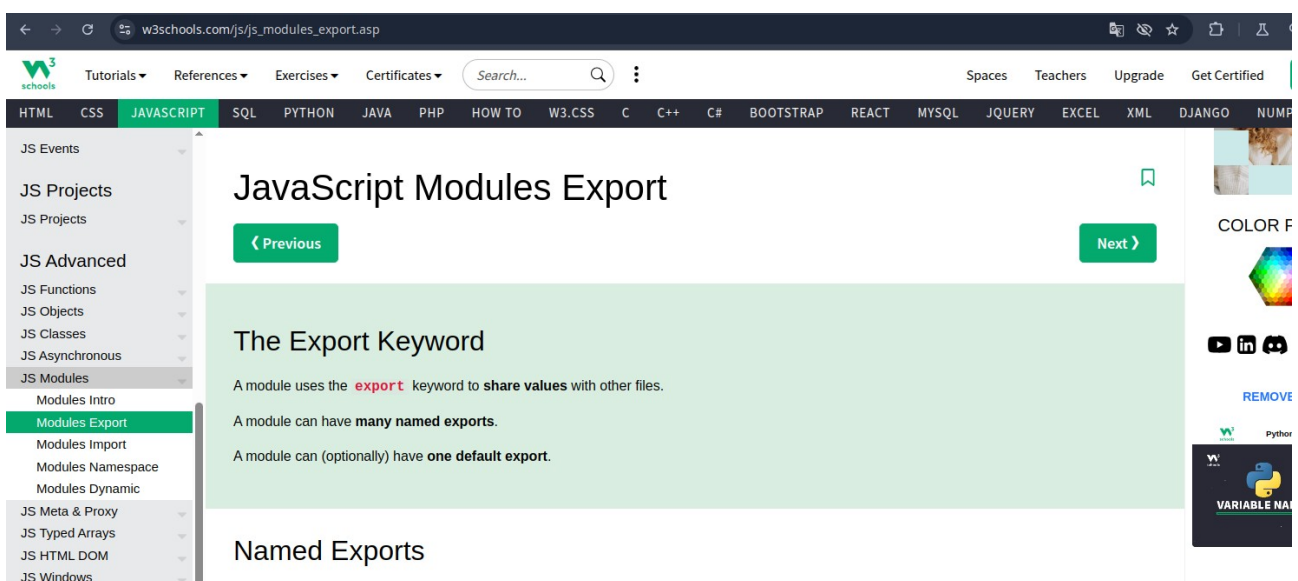


Actividad 5-16: Capturas - Modules - Meta & Proxy

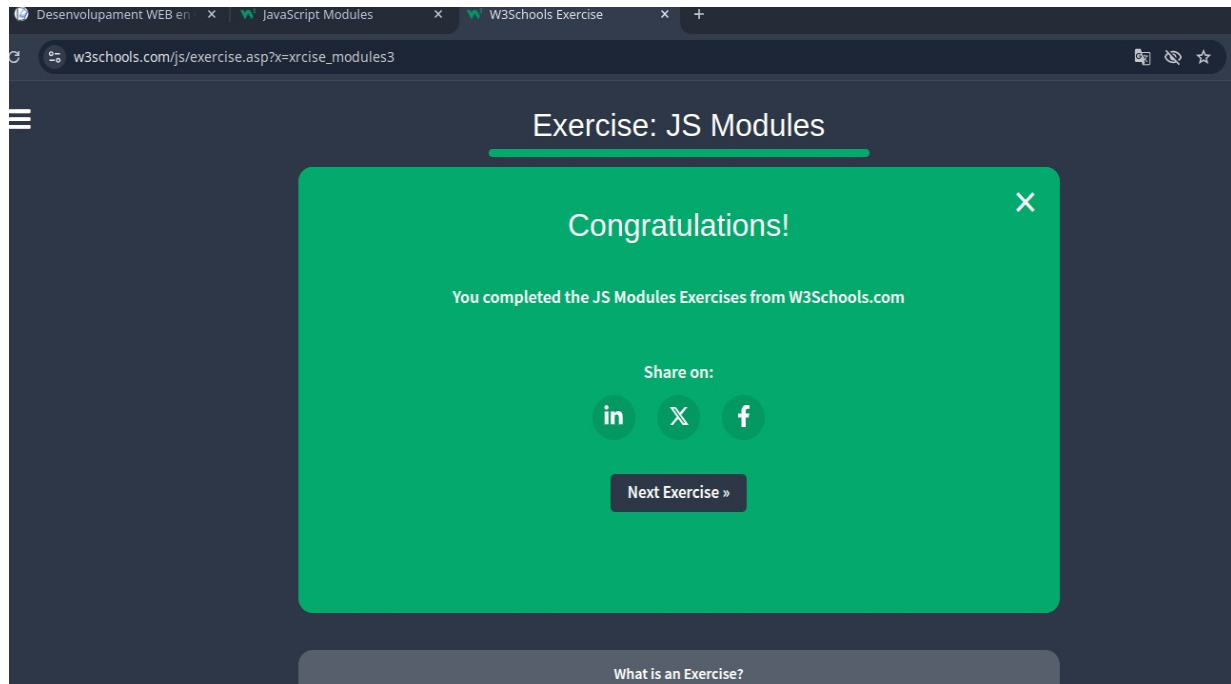

The screenshot shows the w3schools.com website with the URL `w3schools.com/js/js_modules_import.asp` in the browser's address bar. The page title is "JavaScript Modules Import". The left sidebar contains a navigation menu with categories like "JS Projects", "JS Advanced", and "JS Modules". The "JS Modules" category is expanded, showing sub-items like "Modules Intro", "Modules Export", "Modules Import" (which is highlighted), "Modules Namespace", and "Modules Dynamic". The main content area has a heading "JavaScript Modules Import" and a sub-heading "Import". Below the sub-heading, it states: "You can **import modules** in two ways, based on if they are **named exports** or **default exports**." A code block shows the syntax for named imports: `import { name, age } from './person.js';`. The right sidebar features a "COLOR F" section with a rainbow color picker and social media icons for YouTube, LinkedIn, and Discord.

JavaScript Modules Import

Previous Next

Import

You can **import modules** in two ways, based on if they are **named exports** or **default exports**.

Named imports are constructed using curly braces:

```
import { name, age } from './person.js';
```

Default exports are not:

The screenshot shows the w3schools.com website with the URL `w3schools.com/js/js_modules_namespace.asp` in the browser's address bar. The page title is "JS Module Namespace". The left sidebar contains a navigation menu with categories like "JS Projects", "JS Advanced", and "JS Modules". The "JS Modules" category is expanded, showing sub-items like "Modules Intro", "Modules Export", "Modules Import", "Modules Namespace" (which is highlighted), and "Modules Dynamic". The main content area has a heading "JS Module Namespace" and a sub-heading "The Module Namespace Object". Below the sub-heading, it states: "When you use the syntax:" followed by a code block showing the syntax for namespace imports: `import * as name from "module";`. Below the code block, it states: "JavaScript creates a module **namespace object**. This is an immutable object that contains all the exported bindings from that module." The right sidebar features a "COLOR F" section with a rainbow color picker and social media icons for YouTube, LinkedIn, and Discord.

JS Module Namespace

Previous Next

The Module Namespace Object

When you use the syntax:

```
import * as name from "module";
```

JavaScript creates a module **namespace object**. This is an immutable object that contains all the exported bindings from that module.

JavaScript Dynamic Modules

JavaScript Dynamic Import

Dynamic Import uses the syntax:

```
import(module);
```

Dynamic Import was introduced in [ECMAScript 2020](#)

Dynamic Import is a way to **load JavaScript modules at runtime**, rather than at the start of your program.

JavaScript Meta Programming

Metaprogramming

Metaprogramming refers to a number of ways a **program can manipulate itself**:

- Modify objects at runtime
- Inspect objects at runtime
- Control objects at runtime
- Intercept running operations
- Modify functions, and classes
- Generate dynamic code

← → ↻ w3schools.com/js/js_meta_reflect.asp

W3schools Tutorials References Exercises Certificates Search... Spaces Teachers Upgrade Get Certified

HTML CSS **JAVASCRIPT** SQL PYTHON JAVA PHP HOW TO W3.CSS C C++ C# BOOTSTRAP REACT MYSQL JQUERY EXCEL XML DJANGO NUMPY

JS Projects
JS Projects
JS Advanced
JS Functions
JS Objects
JS Classes
JS Asynchronous
JS Modules
JS Meta & Proxy
Meta Programming
Meta Reflect
Meta Proxy
Meta Reference
JS Typed Arrays
JS HTML DOM
JS Windows
JS Web APIs
JS AJAX

JavaScript Reflect

← Previous Next →

The Reflect Object

Reflect is a object with **methods for low-level operations** on JavaScript objects.

With the **Reflect object** you can get, set, delete, and check object properties in a consistent way.

Reflect was added to JavaScript in [ES6 \(2015\)](#).

Your Toolbox

COLOR F
REMOVE
Python

← → ↻ w3schools.com/js/js_meta_proxy.asp

W3schools Tutorials References Exercises Certificates Search... Spaces Teachers Upgrade Get Certified

HTML CSS **JAVASCRIPT** SQL PYTHON JAVA PHP HOW TO W3.CSS C C++ C# BOOTSTRAP REACT MYSQL JQUERY EXCEL XML DJANGO NUMPY

JS Projects
JS Projects
JS Advanced
JS Functions
JS Objects
JS Classes
JS Asynchronous
JS Modules
JS Meta & Proxy
Meta Programming
Meta Reflect
Meta Proxy
Meta Reference
JS Typed Arrays
JS HTML DOM
JS Windows
JS Web APIs
JS AJAX
JS JSON

JavaScript Proxy

← Previous Next →

What is a Proxy?

A **Proxy** is an JavaScript object that can **wrap other objects**.

A **Proxy** lets you **control operations** on other objects.

A **Proxy** can **trap and intercept code** when someone is:

- Reading a property (get)
- Setting a property (set)
- Deleting a property (deleteProperty)
- Checking if a property exists (has)
- Calling a function (apply)

COLOR F
REMOVE
Python

← → ↻ w3schools.com/js/js_meta_reference.asp

W3schools Tutorials References Exercises Certificates Search... Spaces Teachers Upgrade Get Certified

HTML CSS **JAVASCRIPT** SQL PYTHON JAVA PHP HOW TO W3.CSS C C++ C# BOOTSTRAP REACT MYSQL JQUERY EXCEL XML DJANGO NUMPY

JS Projects
JS Projects
JS Advanced
JS Functions
JS Objects
JS Classes
JS Asynchronous
JS Modules
JS Meta & Proxy
Meta Programming
Meta Reflect
Meta Proxy
Meta Reference
JS Typed Arrays
JS HTML DOM
JS Windows
JS Web APIs
JS AJAX
JS JSON
JS jQuery

Reflect & Proxy Reference

← Previous Next →

Complete Reflect Reference

Revised December 2025

Method	Description
<code>Reflect.apply()</code>	Call a function
<code>Reflect.construct()</code>	Create object (like new)
<code>Reflect.defineProperty()</code>	Define a property
<code>Reflect.deleteProperty()</code>	Delete a property
<code>Reflect.get()</code>	Get a property

COLOR F
REMOVE
Python