

Category Theory by Example

Ivan Murashko

September 2, 2018

Contents

1	Base definitions	9
1.1	Definitions	9
1.1.1	Object	9
1.1.2	Morphism	10
1.1.3	Category	12
1.2	Examples	13
1.2.1	Set category	14
1.2.2	Programming languages	18
1.2.3	Quantum mechanics	21
2	Objects and morphisms	25
2.1	Equality	25
2.2	Initial and terminal objects	26
2.3	Product and sum	28
2.4	Category as monoid	28
2.5	Exponential	29
2.6	Programming languages and algebraic data types	29
2.7	Examples	29
2.7.1	Set category	29
2.7.2	Programming languages	30
2.7.3	Quantum mechanics	33
3	Functors	35
3.1	Definitions	35
3.2	Curry-Howard-Lambek correspondence	37
3.3	Examples	37
3.3.1	Set category	37
3.3.2	Programming languages	37
3.3.3	Quantum mechanics	38

4	Natural transformation	39
4.1	Definitions	39
4.2	Operations with natural transformations	41
4.3	Polymorphism and natural transformation	43
4.3.1	Hask category	44
4.4	Examples	46
4.4.1	Set category	46
4.4.2	Programming languages	46
5	Monads	47
5.1	Monoidal category	47
5.2	Category of endofunctors	48
5.3	Kleisli category. Monads in programming languages	48
5.4	Examples	48
5.4.1	Programming languages	48
5.4.2	Quantum mechanics	49
6	Yoneda's lemma	51
6.1	Examples	51
6.1.1	Quantum mechanics	51
	Index	53

Notations

$[\mathbf{C}, \mathbf{D}]$ **Fun** category (Example 4.2)

$\alpha \circ \beta$ Vertical composition of natural transformations (dot)

$\alpha \star \beta$ Horizontal composition of natural transformations (circle dot)

αH Left whiskering

α, β Natural transformation (Greek small letters)

$\alpha : F \rightrightarrows G$ Natural transformation (arrow with dot)

\mathbf{C} Category (bold capital Latin letter)

$1_{\mathbf{C} \Rightarrow \mathbf{C}}$ Identity functor

$1_{a \rightarrow a}$ Identity morphism

$1_{F \rightrightarrows F}$ Identity natural transformation

$a \cong b$ there is an Isomorphism between a and b

a, b Objects (Latin small letters)

$F \circ G$ Functor composition (circle dot)

$f \circ g$ Morphism composition (circle dot)

F, G Functor (capital Latin letter)

f, g, h Morphism (Latin small letter)

$F : \mathbf{C} \Rightarrow \mathbf{D}$ Functor (double arrow)

$f : a \rightarrow b$ Morphism (simple arrow)

$H\alpha$ Right whiskering

Introduction

You just looked at yet another introduction to Category Theory. The subject mostly consists of a lot of definitions that are related each others and I wrote the book to collect all of them in one place to be easy checked and updated in future when I decide to refresh my knowledge about the field of math. Therefore the book was written mostly for my category theory studying purposes but I will appreciate if somebody else find it useful.

The topics(chapters) cover the base definitions ([Object](#), [Morphism](#) and [Category](#)), [Functor](#), [Natural transformation](#), [Monad](#) and also include important results from the category theory such as Yoneda's lemma and Curry-Howard-Lambek correspondence.

There are a lot of examples in each chapter. The examples covers different category theory application areas. I assume that the reader is familiar with the corresponding area and the example(s) can be passed if not. I.e. anyone can choose the suitable example(s) for (s)he.

The most important examples are related to the set theory. The set theory and category theory are very close related. Each one can be considered as an alternative view to another one.

There are a lot of examples from programming languages which include Haskell, Scala, C++. The source files for programming languages examples (Haskell, C++, Scala) can be found on github repository [\[5\]](#).

The examples from physics are related to quantum mechanics that is the most known for me. For the examples I am inspired by the Bob Coecke article [\[1\]](#).

Chapter 1

Base definitions

1.1 Definitions

1.1.1 Object

Definition 1.1 (Class). A class is a collection of sets (or sometimes other mathematical objects) that can be unambiguously defined by a property that all its members share.

Definition 1.2 (Object). In category theory object is considered as something that does not have internal structure (aka point) but has a property that makes different objects belong to the same [Class](#)

Remark 1.3 (Class of Objects). The [Class](#) of [Objects](#) will be marked as $\text{ob}(\mathbf{C})$ (see fig. 1.1).



Figure 1.1: Class of objects $\text{ob}(\mathbf{C}) = \{a, b, c, d\}$

1.1.2 Morphism

Morphism is a kind of relation between 2 **Objects**.

Definition 1.4 (Morphism). A relation between two **Objects** a and b

$$f_{ab} : a \rightarrow b$$

is called *morphism*. Morphism assumes a direction i.e. one **Object** (a) is called *source* and another one (b) *target*.

The **Set** of all morphisms between objects a and b is called as $\text{hom}(a, b)$.

Definition 1.5 (Domain). Given a **Morphism** $f : a \rightarrow b$, the **Object** a is called domain and is denoted as $\text{dom } a$.

Definition 1.6 (Codomain). Given a **Morphism** $f : a \rightarrow b$, the **Object** b is called codomain and is denoted as $\text{cod } a$.

Morphisms have several properties.¹

Axiom 1.7 (Composition). If we have 3 **Objects** a, b and c and 2 **Morphisms**

$$f_{ab} : a \rightarrow b$$

and

$$f_{bc} : b \rightarrow c$$

then there exists **Morphism**

$$f_{ac} : a \rightarrow c$$

such that

$$f_{ac} = f_{bc} \circ f_{ab}$$

Remark 1.8 (Composition). The equation

$$f_{ac} = f_{bc} \circ f_{ab}$$

means that we apply f_{ab} first and then we apply f_{bc} to the result of the application i.e. if our objects are sets and $x \in a$ then

$$f_{ac}(x) = f_{bc}(f_{ab}(x)),$$

where $f_{ab}(x) \in b$.

¹The properties don't have any proof and postulated as axioms

Axiom 1.9 (Associativity). The *Morphisms Composition* (Axiom 1.7) should follow associativity property:

$$f_{ce} \circ (f_{bc} \circ f_{ab}) = (f_{ce} \circ f_{bc}) \circ f_{ab} = f_{ce} \circ f_{bc} \circ f_{ab}.$$

Definition 1.10 (Identity morphism). For every *Object* a we define a special *Morphism* $\mathbf{1}_{a \rightarrow a} : a \rightarrow a$ with the following properties: $\forall f_{ab} : a \rightarrow b$

$$\mathbf{1}_{a \rightarrow a} \circ f_{ab} = f_{ab} \quad (1.1)$$

and $\forall f_{ba} : b \rightarrow a$


$$f_{ba} \circ \mathbf{1}_{a \rightarrow a} = f_{ba}. \quad (1.2)$$

This morphism is called *identity morphism*.

Note that *Identity morphism* is unique, see *Identity is unique* (Theorem 2.3) below.

Definition 1.11 (Commutative diagram). A commutative diagram is a diagram of *Objects* (also known as vertices) and *Morphisms* (also known as arrows or edges) such that all directed paths in the diagram with the same start and endpoints lead to the same result by composition

The following diagram commutes if $f_{ab} = f_{cb} \circ f_{ac}$.

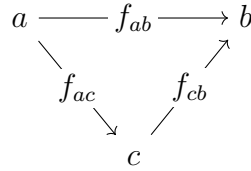

Remark 1.12 (Class of Morphisms). The *Class* of *Morphisms* will be marked as $\text{hom}(\mathbf{C})$ (see fig. 1.2)

Definition 1.13 (Monomorphism). If $\forall g_1, g_2$ the equation

$$f \circ g_1 = f \circ g_2$$

leads to

$$g_1 = g_2$$

then f is called *monomorphism*.



Figure 1.2: Class of morphisms $\text{hom}(\mathbf{C}) = \{f, g, h\}$, where $h = f \circ g$

Definition 1.14 (Epimorphism). If $\forall g_1, g_2$ the equation

$$g_1 \circ f = g_2 \circ f$$

leads to

$$g_1 = g_2$$

then f is called *epimorphism*.

Definition 1.15 (Isomorphism). A **Morphism** $f : a \rightarrow b$ is called *isomorphism* if $\exists g : b \rightarrow a$ such that $f \circ g = \mathbf{1}_{a \rightarrow a}$ and $g \circ f = \mathbf{1}_{b \rightarrow b}$. If there is an isomorphism between objects a and b then it is denoted as $a \cong b$.

Remark 1.16 (Isomorphism). There are can be many different **Isomorphisms** between 2 **Objects**.

If there is an unique isomorphism between 2 objects then the objects can be treated as the same object.

1.1.3 Category

Definition 1.17 (Category). A category \mathbf{C} consists of

- **Class** of **Objects** $\text{ob}(\mathbf{C})$
- **Class** of **Morphisms** $\text{hom}(\mathbf{C})$ defined for $\text{ob}(\mathbf{C})$, i.e. each morphism f_{ab} from $\text{hom}(\mathbf{C})$ has both source a and target b from $\text{ob}(\mathbf{C})$

For any **Object** a there should be unique **Identity morphism** $\mathbf{1}_{a \rightarrow a}$. Any morphism should satisfy **Composition** (**Axiom 1.7**) and **Associativity** (**Axiom 1.9**) properties. See fig. 1.3



Figure 1.3: Category \mathbf{C} . It consists of 4 objects $\text{ob}(\mathbf{C}) = \{a, b, c, d\}$ and 7 morphisms $\text{hom}(\mathbf{C}) = \{f, g, h = f \circ g, 1_{a \rightarrow a}, 1_{b \rightarrow b}, 1_{c \rightarrow c}, 1_{d \rightarrow d}\}$

The [Category](#) can be considered as a way to represent a structured data. [Morphisms](#) are the ones to form the structure.

Definition 1.18 (Opposite category). If \mathbf{C} is a [Category](#) then opposite (or dual) category \mathbf{C}^{op} is constructed in the following way: [Objects](#) are the same, but the [Morphisms](#) are inverted i.e. if $f \in \text{hom}(\mathbf{C})$ and $\text{dom } f = a, \text{cod } f = b$, then the corresponding morphism $f^{op} \in \text{hom}(\mathbf{C}^{op})$ has $\text{dom } f^{op} = b, \text{cod } f^{op} = a$ (see fig. 1.4)

Remark 1.19. Composition on \mathbf{C}^{op} As you can see from fig. 1.4 the [Composition](#) ([Axiom 1.7](#)) is reverted for [Opposite category](#). If $f, g, h = f \circ g \in \text{hom}(\mathbf{C})$ then $f \circ g$ translated into $g^{op} \circ f^{op}$ in opposite category.

Definition 1.20 (Small category). A category \mathbf{C} is called *small* if both $\text{ob}(\mathbf{C})$ and $\text{hom}(\mathbf{C})$ are [Sets](#)

Definition 1.21 (Large category). A category \mathbf{C} is not [Small category](#) then it is called *large*. The example of large category is [Set category](#) ([Example 1.25](#))

1.2 Examples

There are several examples of categories that will also be used later



Figure 1.4: Opposite category C^{op} to the category from fig. 1.3 . It consists of 4 objects $\text{ob}(C^{op}) = \text{ob}(C) = \{a, b, c, d\}$ and 7 morphisms $\text{hom}(C^{op}) = \{f^{op}, g^{op}, h^{op} = g^{op} \circ f^{op}, 1_{a \rightarrow a}, 1_{b \rightarrow b}, 1_{c \rightarrow c}, 1_{d \rightarrow d}\}$

1.2.1 Set category

Definition 1.22 (Set). Set is a collection of distinct object. The objects are called the elements of the set.

Definition 1.23 (Binary relation). If A and B are 2 Sets then a subset of $A \times B$ is called binary relation R between the 2 sets, i.e. $R \subset A \times B$.

Definition 1.24 (Function). Function f is a special type of Binary relation. I.e. if A and B are 2 Sets then a subset of $A \times B$ is called function f between the 2 sets if $\forall a \in A \exists! b \in B$ such that $(a, b) \in f$. In other words function does not allowed “multi value”.

Example 1.25 (Set category). In the set category we consider a Set of Sets where Objects are the Sets and Morphisms are Functions between the sets.

The Identity morphism is trivial function such that $\forall x \in X : 1_{[\rightarrow X]}(x) = x$.

In general case when we say **Set** category we assume the set of all sets. But the result is inconsistent because famous Russell’s paradox [11] can be applied. To avoid such situations we assume the some kind of limitations are applied on our construction, for instance ZFC [12]. If we apply the limitation we have that set of all sets is not a set itself and as result the **Set** category is a Large category

Remark 1.26 (Set vs Category). There is an interesting relation between sets and categories. In both we consider objects(sets) and relations between them(morphisms/functions).



Figure 1.5: A surjective (non-injective) function from domain X to codomain Y

In the set theory we can get info about functions by looking inside the objects(sets) aka use “microscope” [4]

Contrary in the category theory we initially don’t have info about object internal structure but can get it using the relation between the objects i.e. using [Morphisms](#). In other words we can use “telescope” [4] there.

Definition 1.27 (Singleton). The *singleton* is a [Set](#) with only one element.

Definition 1.28 (Domain). Given a function $f : X \rightarrow Y$, the set X is the domain.

Definition 1.29 (Codomain). Given a function $f : X \rightarrow Y$, the set Y is the codomain.

Definition 1.30 (Surjection). The function $f : X \rightarrow Y$ is surjective (or onto) if $\forall y \in Y, \exists x \in X$ such that $f(x) = y$ (see figs. 1.5 and 1.9).

Remark 1.31 (Surjection vs Epimorphism). [Surjection](#) and [Epimorphism](#) are related each other. Consider a non-surjective function $f : X \rightarrow Y' \subset Y$ (see fig. 1.6). One can conclude that there is not an [Epimorphism](#) because $\exists g_1 : Y' \rightarrow Y'$ and $g_2 : Y \rightarrow Y$ such that $g_1 \neq g_2$ because they operates on different [Domains](#) but from other hand $g_1(Y') = g_2(Y')$. For instance we can choose $g_1 = \mathbf{1}_{[\rightarrow Y']}$, $g_2 = \mathbf{1}_{[\rightarrow Y]}$. As soon as Y' is [Codomain](#) of f we always have $g_1(f(X)) = g_2(f(X))$.

As result we can say that an [Surjection](#) is a [Epimorphism](#) in [Set](#) category. Moreover there is a proof [9] of that fact.

Definition 1.32 (Injection). The function $f : X \rightarrow Y$ is injective (or one-to-one function) if $\forall x_1, x_2 \in X$, such that $x_1 \neq x_2$ then $f(x_1) \neq f(x_2)$ (see figs. 1.7 and 1.9).



Figure 1.6: A non-surjective function f from domain X to codomain $Y' \subset Y$. $\exists g_1 : Y' \rightarrow Y', g_2 : Y \rightarrow Y$ such that $g_1(Y') = g_2(Y')$, but as soon as $Y' \neq Y$ we have $g_1 \neq g_2$. Using the fact that Y' is codomain of f we got $g_1 \circ f = g_2 \circ f$. I.e. the function f is not epimorphism.



Figure 1.7: A injective (non-surjective) function from domain X to codomain Y



Figure 1.8: A non-injective function f from domain X to codomain Y . $\exists g_1 : A \rightarrow X, g_2 : B \rightarrow X$ such that $g_1 \neq g_2$ but $f \circ g_1 = f \circ g_2$. I.e. the function f is not monomorphism.

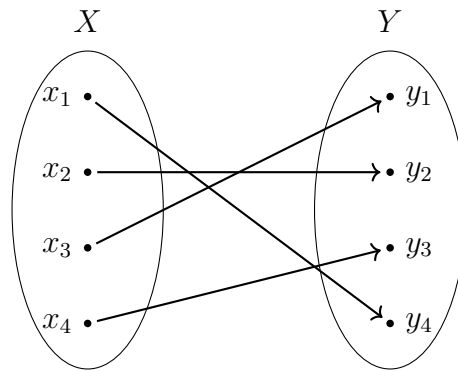


Figure 1.9: An injective and surjective function (bijection)

Remark 1.33 (Injection vs Monomorphism). [Injection](#) and [Monomorphism](#) are related each other. Consider a non-injective function $f : X \rightarrow Y$ (see fig. 1.8). One can conclude that it is not monomorphism because $\exists g_1, g_2$ such that $g_1 \neq g_2$ and $f(g_1(a_1)) = y_3 = f(g_2(b_1))$.

As result we can say that an [Injection](#) is a [Monomorphism](#) in **Set** category. Moreover there is a proof [8] of that fact.

Definition 1.34 (Bijection). The function $f : X \rightarrow Y$ is bijective (or one-to-one correspondence) if it is an [Injection](#) and a [Surjection](#) (see fig. 1.9).

There is a question what's analog of a single [Set](#). Main characteristic of a category is a structure but the set by definition does not have a structure. Which category does not have any structure? The answer is [Discrete](#)

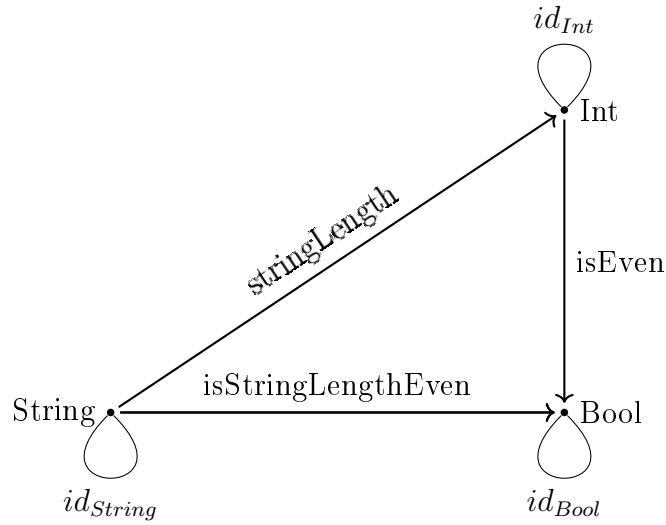


Figure 1.10: Programming language category example. Objects are types: Int, Bool, String. Morphisms are several functions

category.

Definition 1.35 (Discrete category). Discrete category is a [Category](#) where [Morphisms](#) are only [Identity morphisms](#).

1.2.2 Programming languages

In the programming languages we consider types as [Objects](#) and functions as [Morphisms](#). The critical requirements for such consideration is that the functions have to be pure function (without side effects). This requirement mainly is satisfied by functional languages such as Haskell and Scala. From other side the functional languages use lazy evaluation to improve the performance. The laziness can also make category theory axiom invalid (see [Haskell lazy evaluation](#) ([Remark 1.37](#))).

Strictly speaking neither Haskell (pure functional language) nor C++ can be considered as a category in general. As a first approximation the functional language (Haskell, Scala) can be considered as a category if we avoid to use functions with side effects (mainly for Scala) and use strict (for both Haskell and Scala) evaluations.

In any case we can construct a simple toy category that can be easy implemented in any language. Particularly we will look into category with 3 objects that are types: Int, Bool, String. There are also several functions between them (see [fig. 1.10](#)).

Hask category

Example 1.36 (Hask category). Types in Haskell are considered as [Objects](#). Functions are considered as [Morphisms](#). We are going to implement [Category](#) from fig. 1.10.

The function `isEven` that converts `Int` type into `Bool`.

```
isEven :: Int -> Bool
isEven x = x `mod` 2 == 0
```

There is also [Identity morphism](#) that is defined as follows

```
id :: a -> a
id x = x
```

If we have an additional function

```
stringLength :: String -> Int
stringLength x = length x
```

then we can create a [Composition](#) ([Axiom 1.7](#))

```
isStringLengthEven :: String -> Bool
isStringLengthEven = isEven . stringLength
```

Remark 1.37 (Haskell lazy evaluation). Each Haskell type has a special value \perp . The value presents and lazy evaluations make several category law invalid, for instance [Identity morphism](#) behaviour become invalid in specific cases:

The following code

```
seq undefined True
```

produces *undefined* But the following

```
seq (id.undefined) True
seq (undefined.id) True
```

produces *True* in both cases. As result we have (we cannot compare compare functions in Haskell, but if we could we can get the following)

```
id . undefined /= undefined
undefined . id /= undefined,
```

i.e. [\(1.1\)](#) and [\(1.2\)](#) are not satisfied.

C++ category

Example 1.38 (C++ category). We will use the same trick as in [Hask category](#) ([Example 1.36](#)) and will assume types in C++ as [Objects](#), functions as [Morphisms](#). We also are going to implement [Category](#) from [fig. 1.10](#).

We also define 2 functions:

```
auto isEven = [](int x) {
    return x % 2 == 0;
};

auto stringLength = [](std::string s) {
    return static_cast<int>(s.size());
};
```

Composition can be defined as follows:

```
// h = g . f
template <typename A, typename B>
auto compose(A g, B f) {
    auto h = [f, g](auto a) {
        auto b = f(a);
        auto c = g(b);
        return c;
    };
    return h;
};
```

The [Identity morphism](#):

```
auto id = [](auto x) { return x; };
```

The usage examples are the following:

```
auto isStringLengthEven = compose<>(isEven, stringLength);

auto isStringLengthEvenL = compose<>(id, isStringLengthEven);

auto isStringLengthEvenR = compose<>(isStringLengthEven, id);
```

Such construction will always provides us the category as soon as we use pure function (functions without effects).

Scala category

Example 1.39 (Scala category). We will use the same trick as in [Hask category](#) (Example 1.36) and will assume types in Scala as [Objects](#), functions as [Morphisms](#). We also are going to implement [Category](#) from fig. 1.10.

```
object Category {
  def id[A]: A => A = a => a
  def compose[A, B, C](g: B => C, f: A => B):
    A => C = g compose f

  val isEven = (i: Int) => i % 2 == 0
  val stringLength = (s: String) => s.length
  val isStringLengthEven = (s: String) =>
    compose(isEven, stringLength)(s)
}
```

The usage example is below

```
class CategorySpec extends Properties("Category") {
  import Category._
  import Prop.forAll

  property("composition") = forAll { (s: String) =>
    isStringLengthEven(s) == isEven(stringLength(s))
  }

  property("right id") = forAll { (i: Int) =>
    isEven(i) == compose(isEven, id[Int])(i)
  }

  property("left id") = forAll { (i: Int) =>
    isEven(i) == compose(id[Boolean], isEven)(i)
  }
}
```

1.2.3 Quantum mechanics

The most critical property of quantum system is superposition principle. The [Set category](#) (Example 1.25) cannot be used for it because it does not satisfied the principle.

A simple modification of the [Set](#) category can satisfy the principle.

Example 1.40 (**Rel** category). We will consider a set of sets (same as **Set** category (Example 1.25)) i.e. **Sets** as **Objects**. Instead of **Functions** we will use **Binary relations** as **Morphisms**.

The **Rel** category is similar to the finite dimensional Hilber space especially because it assumes some kind of superposition. Really consider $\mathbf{C_R}$ - the **Rel** category. $X, Y \in \text{ob}(\mathbf{C_R})$ - 2 sets which consists of different elements. Let $f : X \rightarrow Y$ - **Morphism**. Each element $x \in X$ is mapped to a subset $Y' \subset Y$. The Y' can be **Singleton** (in this case no differences with **Set** category (Example 1.25)) but there can be a situation when Y' consists of several elements. In the case we will get some kind of superposition that is analogiest to quantum mechanics.

In the quantum mechanics we say about Hilber spaces.

Definition 1.41 (Hilbert space). The Hilbert space a complex vector space with an inner product as a complex number (\mathbb{C}).

Later we will consider only finite dimensional Hilber spaces. We will denote a Hilber space of dimensional n as \mathcal{H}_n . Obviously $\mathcal{H}_1 = \mathbb{C}$.

Definition 1.42 (Dual space). Each Hilber space \mathcal{H} has an associated with it so called dual space \mathcal{H}^* that consists of linear functionals

Example 1.43 (Dirac notation). Consider a so called ket-vector $|\psi\rangle \in \mathcal{H}$. Then the corresponding vector from **Dual space** is called bra-vector $\langle\psi| \in \mathcal{H}^*$. From the definition of dual space the bra-vector is a linear functional i.e.

$$\langle\psi| : \mathcal{H} \rightarrow \mathbb{C},$$

$\forall |\phi\rangle \in \mathcal{H}$ we have $\langle\psi|(|\phi\rangle) = (\langle\psi|, |\phi\rangle)$ - inner product that is often written as $\langle\psi|\phi\rangle$.

The transformation between 2 **Hilbert spaces** that preserves the structure is called linear map or linear transformations.

Definition 1.44 (Linear map). The linear map between 2 **Hilbert spaces** \mathcal{A} and \mathcal{B} is a mapping $f : \mathcal{A} \rightarrow \mathcal{B}$ that preserves additions

$$f(a_1 + a_2) = f(a_1) + f(a_2),$$

and scalar multiplications:

$$f(c \cdot a) = c \cdot f(a)$$

where $a, a_{1,2} \in \mathcal{A}$ and $f(a), f(a_{1,2}) \in \mathcal{B}$.

Table 1.1: Relations between **Set**, **Rel** and **FdHilb** categories

	Set	Rel	FdHilb
Object	Set	Set	finite dimensional Hilbert space
Morphism	Function	Binary relation	Linear map
Initial object	empty set	empty set	trivial Hilbert space of dimensional 0
Terminal object	Singleton	Singleton	\mathbb{C}
Product	Cartesian product	Cartesian product	Direct sum of Hilber spaces
Sum	Sum (Example 2.14)	Sum (Example 2.14)	Direct sum of Hilber spaces

If we want to combine 2 Hilbert spaces into one we use a notion of direct sum.

Definition 1.45 (Direct sum of Hilber spaces). Let \mathcal{A}, \mathcal{B} are 2 Hilber spaces. The direct sum $\mathcal{A} \oplus \mathcal{B}$ is defined as follows

$$\mathcal{A} \oplus \mathcal{B} = \{a \oplus b | a \in \mathcal{A}, b \in \mathcal{B}\}.$$

The inner product is defined as follows

$$\langle a_1 \oplus b_1 | a_2 \oplus b_2 \rangle = \langle a_1 | a_2 \rangle + \langle b_1 | b_2 \rangle.$$

Example 1.46 (**FdHilb** category). Most common case in quantum mechanics is the case of quantum states in the finite dimensional Hilbert space. We can consider the set of all finite dimensional Hilbert spaces as a category. The **Objects** in the category are finite dimensional Hilbert spaces and **Morphisms** are Linear maps. The category is denoted as **FdHilb**. It is very similar to **Rel category** (Example 1.40). The brief relation is described in the table 1.1.


Example 1.47 (Rabi oscillations). For our example we consider a 2 level atom with states $|a\rangle$ - excited and $|b\rangle$ - ground. As soon as we consider a 2-level system we are in the 2 dimensional Hilbert space i.e. have only one **Object**. Lets call it as $|\psi\rangle$. The category will be called as **R**. I.e. $\text{ob}(\mathbf{R}) = \mathcal{H}_2\{|\psi\rangle\}$.

The atom interacts with light beam of frequency $\omega = \omega_{ab}$. The state of the system is described by the following equation [13]:

$$|\psi\rangle = \cos \frac{\omega_R t}{2} |a\rangle - i \sin \frac{\omega_R t}{2} |b\rangle,$$

where ω_R - Rabi frequency [13].

The interaction time t is fixed and corresponds to $\omega_R t = \pi$ i.e. the interaction can be described a linear operator \hat{L} .

Figure 1.11: Rabi oscillations as a category **R**

There are 4 different states and as result 4 [Morphisms](#):

$$\begin{aligned}
 |\psi\rangle_0 &= |a\rangle, \\
 |\psi\rangle_1 &= \hat{L} |\psi\rangle_0 = -i |b\rangle, \\
 |\psi\rangle_2 &= \hat{L}^2 |\psi\rangle_0 = -|a\rangle, \\
 |\psi\rangle_3 &= \hat{L}^3 |\psi\rangle_0 = i |b\rangle,
 \end{aligned}$$

Chapter 2

Objects and morphisms

2.1 Equality

The important question is how can we decide whenever an object/morphism is equal to another object/morphism? The trivial answer is possible for if an **Object** is a **Set**. In this case we can say that 2 objects are equal if they contains the same elements. Unfortunately we cannot do the same for default objects as soon as they don't have any internal structure. We can use the same trick as in **Set vs Category** (**Remark 1.26**) : if we cannot use “microscope” lets use “telescope” and define the equality of objects and morphisms of a category \mathbf{C} in the terms of whole $\text{hom}(\mathbf{C})$.

Definition 2.1 (Objects equality). Two **Objects** a and b in **Category** C are equal if there exists an unique **Isomorphism** $f : a \rightarrow b$. This also means that also exist unique isomorphism $g : b \rightarrow a$. These two **Morphisms** are related each other via the following equations: $f \circ g = \mathbf{1}_{a \rightarrow a}$ and $g \circ f = \mathbf{1}_{b \rightarrow b}$.

Unlike **Functions** between **Sets** we don't have any additional info ¹ about **Morphisms** except category theory axioms which the morphisms satisfied [2]. This leads us to the following definition for morphisms equality:

Definition 2.2 (Morphisms equality). Two **Morphisms** f and g in **Category** C are equal if the equality can be derived from the base axioms:

- **Composition** (**Axiom 1.7**)
- **Associativity** (**Axiom 1.9**)
- **Identity morphism**: (1.1), (1.2)

¹ for instance info about sets internals. i.e. which elements of the sets are connected by the considered functions

or [Commutative diagrams](#) which postulate the equality.

As an example lets proof the following theorem

Theorem 2.3 (Identity is unique). *The [Identity morphism](#) is unique.*

Proof. Consider an [Object](#) a and it's [Identity morphism](#) $1_{a \rightarrow a}$. Let $\exists f : a \rightarrow a$ such that f is also identity. In the case (1.1) for f as identity gives

$$f \circ 1_{a \rightarrow a} = 1_{a \rightarrow a}.$$

From other side (1.2) for $1_{a \rightarrow a}$ satisfied

$$f \circ 1_{a \rightarrow a} = f$$

i.e. $f = 1_{a \rightarrow a}$. □

2.2 Initial and terminal objects

Definition 2.4 (Initial object). Let \mathbf{C} is a [Category](#), the [Object](#) $i \in \text{ob}(\mathbf{C})$ is called *initial object* if $\forall x \in \text{ob}(\mathbf{C}) \exists ! f_x : i \rightarrow x \in \text{hom}(\mathbf{C})$.

Definition 2.5 (Terminal object). Let \mathbf{C} is a [Category](#), the [Object](#) $t \in \text{ob}(\mathbf{C})$ is called *terminal object* if $\forall x \in \text{ob}(\mathbf{C}) \exists ! g_x : x \rightarrow t \in \text{hom}(\mathbf{C})$.

As you can see the initial and terminal objects are opposite each other. I.e. if i is an [Initial object](#) in \mathbf{C} then it will be [Terminal object](#) in the [Opposite category](#) \mathbf{C}^{op} .

Theorem 2.6 (Initial object is unique). *Let \mathbf{C} is a category and $i, i' \in \text{ob}(\mathbf{C})$ two [Initial objects](#) then there exists an unique [Isomorphism](#) $u : i \rightarrow i'$ (see [Objects equality](#))*

Proof. Consider the following [Commutative diagram](#) (see fig. 2.1) □

Theorem 2.7 (Terminal object is unique). *Let \mathbf{C} is a category and $t, t' \in \text{ob}(\mathbf{C})$ two [Terminal objects](#) then there exists an unique [Isomorphism](#) $v : t' \rightarrow t$ (see [Objects equality](#))*

Proof. Just got to the [Opposite category](#) and revert arrows in fig. 2.1. The result shown on fig. 2.2 and it proofs the theorem statement. □

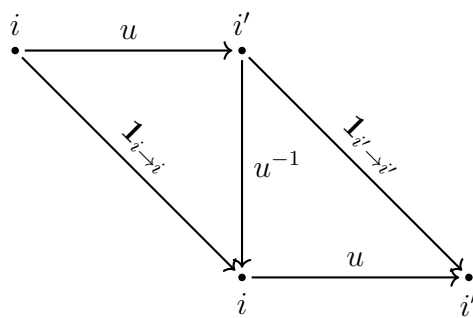


Figure 2.1: Commutative diagram for initial object unique proof

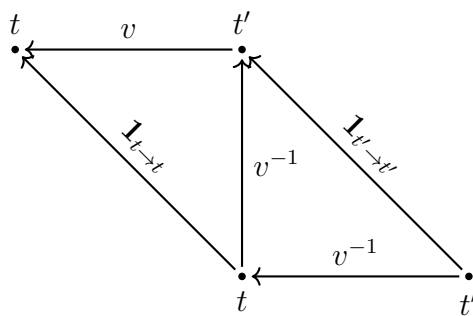


Figure 2.2: Commutative diagram for terminal object unique proof

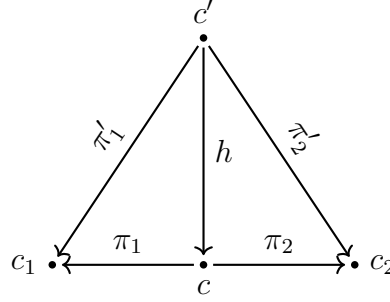


Figure 2.3: Product $c = c_1 \times c_2$. $\forall c, \exists! h \in \text{hom}(\mathbf{C}) : \pi'_1 = \pi_1 \circ h, \pi'_2 = \pi_2 \circ h$.

2.3 Product and sum

The pair of 2 objects is defined via so called universal property in the following way:

Definition 2.8 (Product). Let we have a category \mathbf{C} and $c_1, c_2 \in \text{ob}(\mathbf{C})$ -two **Objects** the product of the objects c_1, c_2 is another object in \mathbf{C} $c = c_1 \times c_2$ with 2 **Morphisms** π_1, π_2 such that $a = g_a c, b = g_b c$ and the following universal property is satisfied: $\forall c' \in \text{ob}(\mathbf{C})$ and morphisms $\pi'_1 : \pi'_2 c' = c_1, \pi'_2 : \pi'_2 c' = c_2$, exists unique morphism h such that the following diagram (see fig. 2.3) commutes, i.e. $\pi'_1 = \pi_1 \circ h, \pi'_2 = \pi_2 \circ h$. In other words h factorizes $\pi'_{1,2}$.

If we invert arrows in **Product** we will got another object definition that is called sum

Definition 2.9 (Sum). Let we have a category \mathbf{C} and $c_1, c_2 \in \text{ob}(\mathbf{C})$ -two **Objects** the sum of the objects c_1, c_2 is another object in \mathbf{C} $c = c_1 \oplus c_2$ with 2 **Morphisms** i_1, i_2 such that $c = i_1 c_1, c = i_2 c_2$ and the following universal property is satisfied: $\forall c' \in \text{ob}(\mathbf{C})$ and morphisms $i'_1 : i'_1 x_1 = c', i'_2 : i'_2 x_2 = c'$, exists unique morphism h such that the following diagram (see fig. 2.4) commutes, i.e. $i'_1 = h \circ i_1, i'_2 = h \circ i_2$. In other words h factorizes $i'_{1,2}$.

2.4 Category as monoid

Consider the following definition from abstract algebra

Definition 2.10 (Monoid). The set of elements M with defined binary operation \circ we will call as a monoid if the following conditions are satisfied.

1. Closure: $\forall a, b \in M: a \circ b \in M$



Figure 2.4: Sum $c = c_1 \oplus c_2$. $\forall c, \exists! h \in \text{hom}(\mathbf{C}) : i'_1 = h \circ i_1, i'_2 = h \circ i_2$.

2. Associativity: $\forall a, b, c \in M: a \circ (b \circ c) = (a \circ b) \circ c$

3. Identity element: $\exists e \in M$ such that $\forall a \in M: e \circ a = a \circ e = a$

We can consider 2 **Monoids**. The first one has **Product** as the binary operation and **Terminal object** as the identity element. As result we just got an analog of multiplication in the category theory. This is why the terminal object is often called as **1** and the operation as the product.

Another one is additional **Monoid** that has **Initial object** as the identity element and the **Sum** as the binary operation. The initial object in that case is often called as **0**. I.e. we can see a direct connection with addition in algebra.

2.5 Exponential

TBD

2.6 Programming languages and algebraic data types

TBD

2.7 Examples

2.7.1 Set category

Example 2.11 (Initial object). **[Set]** Note that there is only one function from empty set to any other sets [7] that makes the empty set as the **Initial**

object in **Set** category (Example 1.25) .

Example 2.12 (Terminal object). **[Set]** Terminal object in **Set** category (Example 1.25) is a set with one element i.e Singleton.

Example 2.13 (Product). **[Set]** The Product of two sets A and B in **Set** category (Example 1.25) is defined as a Cartesian product: $A \times B = \{(a, b) | a \in A, b \in B\}$.

Example 2.14 (Sum). **[Set]** The Sum of two sets A and B in **Set** category (Example 1.25) is defined as disjoint union [10]. Let $\{A_i : i \in I\}$ be a family of sets indexed by I . The disjoint union of this family is the set

$$\sqcup_{i \in I} A_i = \cup_{i \in I} \{(x, i) : x \in A_i\}.$$

The elements of the disjoint union are ordered pairs (x, i) . Here i serves as an auxiliary index that indicates which A_i the element x came from.

2.7.2 Programming languages

In our toy example fig. 1.10 the type `String` is Initial object and type `Bool` is the Terminal object. From other side there are types in different programming languages that satisfies the definitions of initial and terminal objects.

Hask category

Example 2.15 (Initial object). **[Hask]** If we avoid lazy evaluations in Haskell (see Haskell lazy evaluation (Remark 1.37)) then we can found the following types as candidates for initial and terminal object in haskell. Initial object in **Hask** category (Example 1.36) is a type without values

```
data Void
```

i.e. you cannot construct a object of the type.

There is only one function from the initial object:

```
absurd :: Void -> a
```

The function is called absurd because it does absurd action. Nobody can proof that it does not exist. For the existence proof can be used the following absurd argument: “Just provide me an object type `Void` and I will provide you the result of evaluation”.

There is no function in opposite direction because it would had been used for the `Void` object creation.

Example 2.16 (Terminal object). `[Hask]` Terminal object (unit) in `Hask category` (Example 1.36) keeps only one element

```
data () = ()
```

i.e. you can create only one element of the type. You can use the following function for the creation:

```
unit :: a -> ()
unit _ = ()
```

Example 2.17 (Product). `[Hask]` The `Product` in `Hask category` (Example 1.36) keeps a pair and the constructor defined as follows

```
(,) :: a -> b -> (a, b)
(,) x y = (x, y)
```

There are 2 projectors:

```
fst :: (a, b) -> a
fst (x, _) = x
snd :: (a, b) -> b
snd (_, y) = y
```

Example 2.18 (Sum). `[Hask]` The `Sum` in `Hask category` (Example 1.36) defined as follows

```
data Either a b = Left a | Right b
```

The typical usage is via pattern matching for instance

```
factor :: (a -> c) -> (b -> c) -> Either a b -> c
factor f _ (Left x) = f x
factor _ g (Right y) = g y
```

C++ category

Example 2.19 (Initial object). `[C++]` In C++ exists a special type that does not hold any values and as result that cannot be created: `void`. You cannot create an object of that type: you will get a compiler error if you try.

Example 2.20 (Terminal object). `[C++]` C++ 17 introduced a special type that keeps only one value - `std::monostate`:

```
namespace std {
    struct monostate {};
}
```

Example 2.21 (Product). [C++] The **Product** in **C++ category** (Example 1.38) keeps a pair and the constructor defined as follows

```
namespace std {
    template< class A, class B > struct pair {
        T1 first;
        T2 second;
    };
}
```

There is a simple usage example

```
std::pair<int, bool> p(0, false);

std::cout << "First projector: " << p.first << std::endl;
std::cout << "Second projector: " << p.second << std::endl;
```

Really any **struct** or **class** can be considered as the product.

Example 2.22 (Sum). [C++] If we consider **Objects** as types then **Sum** is an object that can be either one or another type. The corresponding C/C++ construction that provides an ability to keep one of two types is **union**.

C++17 suggests **std::variant** as a safe replacement for **union**. The example of the factor function is below

```
template <typename A, typename B, typename C, typename D>
auto factor(A f, B g, const std::variant<C, D>& either) {
    try {
        return f(std::get<C>(either));
    }
    catch(...) {
        return g(std::get<D>(either));
    }
};
```

The simple usage as follows:

```
std::variant<std::string, int> var = std::string("abc");
std::cout << "String length:" <<
factor<>(stringLength, id, var) << std::endl;
var = 4;
std::cout << "id(int):" <<
factor<>(stringLength, id, var) << std::endl;
```

TBD

Scala category

Example 2.23 (Initial object). [Scala] We used a same trick as for [Initial object](#) ([Example 2.15](#)) and define [Initial object](#) in **Scala** category ([Example 1.39](#)) as a type without values

```
sealed trait Void
```

i.e. you cannot construct a object of the type.

Example 2.24 (Terminal object). [Scala] We used a same trick as for [Terminal object](#) ([Example 2.16](#)) and define [Terminal object](#) in **Scala** category ([Example 1.39](#)) as a type with only one value

```
abstract final class Unit extends AnyVal
```

TBD i.e. you can create only one element of the type.

TBD

2.7.3 Quantum mechanics

Example 2.25 (Initial object). [FdHilb] We will use a Hilber space of dimensional 0 as the [Initial object](#). I.e. the set that does not have any states in it.

Example 2.26 (Terminal object). [FdHilb] We will use a Hilber space of dimensional 1 as the [Terminal object](#). I.e. the set of complex numbers \mathbb{C} .

Example 2.27 (Product). [FdHilb] The [Product](#) in **FdHilb** category ([Example 1.46](#)) is a [Direct sum of Hilber spaces](#).

Example 2.28 (Sum). [FdHilb] The [Sum](#) in **FdHilb** category ([Example 1.46](#)) is a [Direct sum of Hilber spaces](#).

TBD

Chapter 3

Functors

3.1 Definitions

Definition 3.1 (Functor). Let \mathbf{C} and \mathbf{D} are 2 categories. A mapping $F : \mathbf{C} \rightarrow \mathbf{D}$ between the categories is called *functor* is it preserves the internal structure (see fig. 3.1):

- $\forall a_C \in \text{ob}(\mathbf{C}), \exists a_D \in \text{ob}(\mathbf{D})$ such that $a_D = F(a_C)$
- $\forall f_C \in \text{hom}(\mathbf{C}), \exists f_D \in \text{hom}(\mathbf{D})$ such that $\text{dom } f_D = F(\text{dom } f_C), \text{cod } f_D = F(\text{cod } f_C)$. We will use the following notation later: $f_D = F(f_C)$.
- $\forall f_C, g_C$ the following equation holds:

$$F(f_C \circ g_C) = F(f_C) \circ F(g_C) = f_D \circ g_D.$$

- $\forall x \in \text{ob}(\mathbf{C}) : F(1_{x \rightarrow x}) = 1_{F(x) \rightarrow F(x)}$.



Figure 3.1: Functor $F : \mathbf{C} \Rightarrow \mathbf{D}$ definition

Remark 3.2 (Functor). When we say that functor preserve internal structure means that functor is not just mapping between **Objects** but also between **Morphisms**.

Thus functor is something that allows map one category into another. The initial category can be considered as a pattern thus the mapping is some kind of searching of the pattern inside another category.

Definition 3.3 (Endofunctor). Let \mathbf{C} is a **Category**. The **Functor** $E : \mathbf{C} \Rightarrow \mathbf{C}$ i.e. the functor from a category to the same category is called *endofunctor*.

Definition 3.4 (Identity functor). Let \mathbf{C} is a **Category**. The **Functor** $1_{\mathbf{C} \Rightarrow \mathbf{C}} : \mathbf{C} \Rightarrow \mathbf{C}$ is called *identity functor* if for every object $a \in \text{ob}(\mathbf{C})$

$$1_{\mathbf{C} \Rightarrow \mathbf{C}}(a) = a$$

and for every **Morphism** $f \in \text{hom}(\mathbf{C})$

$$1_{\mathbf{C} \Rightarrow \mathbf{C}}(f) = f$$

Remark 3.5 (Identity functor). First of all notice that **Identity functor** is an **Endofunctor**.

There is difference between identity functor and **Identity morphism** because the first one has deal with both **Objects** and **Morphisms** while the second one with the objects only.

Definition 3.6 (Category Composition). TBD

Definition 3.7 (Category Identity). TBD

Definition 3.8 (Cat category). TBD

As an extension of Cartesian product is used so called Category product

Definition 3.9 (Category Product). If we have 2 categories \mathbf{C} and \mathbf{D} then we can construct a new category $\mathbf{C} \times \mathbf{D}$ with the following components:

- **Objects** are the pairs (c, d) where $c \in \text{ob}(\mathbf{C})$ and $d \in \text{ob}(\mathbf{D})$
- **Morphisms** are the pair (f, g) where $f \in \text{hom}(\mathbf{C})$ and $g \in \text{hom}(\mathbf{D})$
- **Composition** (**Axiom 1.7**) is defined as follows $(f_1, g_1) \circ (f_2, g_2) = (f_1 \circ f_2, g_1 \circ g_2)$
- Identity is defined as follows: $1_{\mathbf{C} \times \mathbf{D} \rightarrow \mathbf{C} \times \mathbf{D}} = (1_{\mathbf{C} \rightarrow \mathbf{C}}, 1_{\mathbf{D} \rightarrow \mathbf{D}})$

Definition 3.10 (Bifunctor). Bifunctor is a **Functor** whose **Domain** is a **Category Product**.

Definition 3.11 (Terminal object in **Cat** category). Let consider Δ_c is a trivial functor from **Category A** to category **C** such that $\forall a \in \text{ob}(\mathbf{A}) : \Delta_c a = c$ -fixed object in **C** and $\forall f \in \text{hom}(\mathbf{A}) : \Delta_c f = \mathbf{1}_{c \rightarrow c}$.

Definition 3.12 (Contravariant functor). If we have a categories **C** and **D** then the **Functor** $\mathbf{C}^{\text{op}} \Rightarrow \mathbf{D}$ is called *contravariant functor*.

Definition 3.13 (Profunctor). If we have a category **C** then the **Bifunctor** $\mathbf{C}^{\text{op}} \times \mathbf{C} \Rightarrow \mathbf{C}$ is called *profunctor*.

3.2 Curry-Howard-Lambek correspondence

There is an interesting correspondence between computer programs and mathematical proofs.

TBD

3.3 Examples

3.3.1 Set category

TBD

3.3.2 Programming languages

Hask category

The functor can be defined in Haskell as follows ¹

Example 3.14 (Functor). [**Hask**]

```
class Functor f where
    fmap :: (a -> b) -> f a -> f b
```

Example 3.15 (Terminal object in **Cat** category). [**Hask**]

```
data Const c a = Const c
fmap :: (a -> b) -> Const c a -> Const c b
fmap f (Const c a) = Const c
```

¹the real definition is quite different from the current one

Example 3.16 (Maybe as a functor). [Hask] Lets show how the **Maybe** a type can be constructed from different **Functors** and as result show that the **Maybe** a is also **Functor**.

```
data Maybe a = Nothing | Just a
-- This is equivalent to
data Maybe a = Either () (Identity a)
-- Either is a bifunctor and () == Const () a
-- Thus Maybe is a composition of 2 functors
```

Example 3.17 (Contravariant functor). [Hask] TBD

```
class Contravariant f where
    contramap :: (a -> b) -> f b -> f a
```

Example 3.18 (Profunctor). [Hask] TBD

```
class Profunctor p where
    dimap :: (a' -> a) -> ( b -> b' ) -> p a b -> p a' b'
    -- p a b == a -> b
    dimap f g h = g . h . f
```

C++ category

TBD

Scala category

The functor can be defined in Haskell as follows ²

Example 3.19 (Functor). [Scala]

```
trait Functor[F[_]] {
    def fmap[A, B](f: A => B): F[A] => F[B]
```

TBD

3.3.3 Quantum mechanics

TBD

²the real definition is quite different from the current one

Chapter 4

Natural transformation

Natural transformation is the most important part of the category theory. It provides a possibility to compare **Functors** via a standard tool.

4.1 Definitions

The natural transformation is not an easy concept compare other one and requires some additional preparations before we can give the formal definition.

Consider 2 categories \mathbf{C}, \mathbf{D} and 2 **Functors** $F : \mathbf{C} \Rightarrow \mathbf{D}$ and $G : \mathbf{C} \Rightarrow \mathbf{D}$. If we have an **Object** $a \in \text{ob}(\mathbf{C})$ then it will be translated by different functors into different objects of category \mathbf{D} : $a_F = Fa, a_G = Ga \in \text{ob}(\mathbf{D})$ (see fig. 4.1). There are 2 options possible

1. There is not any **Morphism** that connects a_F and a_G .
2. $\exists \alpha_a \in \text{hom}(a_F, a_G) \subset \text{hom}(\mathbf{D})$.



Figure 4.1: Natural transformation: object mapping



Figure 4.2: Natural transformation: morphisms mapping




Figure 4.3: Natural transformation: commutative diagram

We can of course to create an artificial morphism that connects the objects but if we use *natural* morphisms¹ then we can get a special characteristic of the considered functors and categories. For instance if we have such morphisms then we can say that the considered functors are related each other. Opposite example if there is no such morphisms then the functors can be considered as unrelated each other. Another example if the morphisms are [Isomorphisms](#) then the functors can be considered as equal.

The functor is not just the object mapping but also the morphisms mapping. If we have 2 objects a and b in the category \mathbf{C} then we potentially can have a morphism $f \in \text{hom}(a, b)$. In this case the morphism is mapped by the functors F and G into 2 morphisms f_f and f_G in the category \mathbf{D} . As result we have 4 morphisms: $\alpha_a, \alpha_b, f_F, f_G \in \text{hom}(\mathbf{D})$. It is natural to impose additional conditions on the morphisms especially that they form a [Commutative diagram](#):

$$f_f \circ \alpha_b = \alpha_a \circ f_G.$$

¹the word natural means that already existent morphisms from category \mathbf{D} are used

Definition 4.1 (Natural transformation). Let F and G are 2 **Functors** from category \mathbf{C} to the category \mathbf{D} . The *natural transformation* is a set of **Morphisms** $\alpha \subset \text{hom}(\mathbf{D})$ that satisfied the following conditions:

- For every **Object** $a \in \text{ob}(\mathbf{C})$ $\exists \alpha_a \in \text{hom}(F(a), G(a))$ - **Morphism** in category \mathbf{D} . The morphism α_a is called the component of the natural transformation.
- For every morphism $f \in \text{hom}(\mathbf{C})$ that connects 2 objects a and b , i.e. $f \in \text{hom}(a, b)$ the corresponding components of the natural transformation $\alpha_a, \alpha_b \in \alpha$ should satisfy the following conditions

$$f_G \circ \alpha_a = \alpha_b \circ f_F, \quad (4.1)$$

where $f_F = F(f), f_G = G(f)$. In other words the morphisms the morphisms form a **Commutative diagram** shown on the fig. 4.3.

We use the following notation (arrow with a dot) for the natural transformation between functors F and G : $\alpha : F \rightarrowtail G$.

4.2 Operations with natural transformations

Example 4.2 (**Fun** category). The functors can be considered as objects in a special category **Fun**. The morphisms in the category are **Natural transformations**.

To define a category we need to define composition operation that satisfied **Composition** (Axiom 1.7), identity morphism and verify **Associativity** (Axiom 1.9).

For the composition consider 2 **Natural transformations** α, β and consider how they act on an object $a \in \text{ob}(\mathbf{C})$ (see fig. 4.4). We always can construct the composition $\beta_a \circ \alpha_a$ i.e. we can define the composition of natural transformations α, β as $\beta \circ \alpha = \{\beta_a \circ \alpha_a | a \in \text{ob}(\mathbf{C})\}$.

The natural transformation is not just object mapping but also morphism mapping. We will require that all morphisms (see fig. 4.5) commutes. The composition defined in the such way is called **Vertical composition**.

The functor category between categories \mathbf{C} and \mathbf{D} is denoted as $[\mathbf{C}, \mathbf{D}]$.


Definition 4.3 (Vertical composition). Let F, G, H are functors between categories \mathbf{C} and \mathbf{D} . Also we have $\alpha : F \rightarrowtail G, \beta : G \rightarrowtail H$ - natural transformations. We can compose the α and β as follows

$$\alpha \circ \beta : F \rightarrowtail H.$$

This composition is called *vertical composition*.



Figure 4.4: Natural transformation vertical composition: object mapping

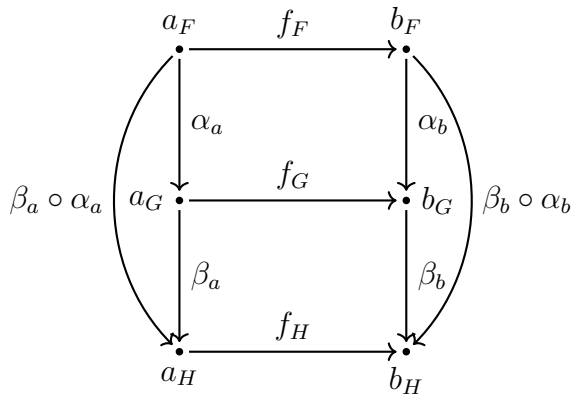Figure 4.5: Natural transformation vertical composition: morphism mapping
- commutative diagram

Definition 4.4 (Horizontal composition). If we have 2 pairs of functors. The first one $F, G : \mathbf{C} \rightarrow \mathbf{D}$ and another one $J, K : \mathbf{D} \Rightarrow \mathbf{E}$. If we have a natural transformation between each pair: $\alpha : F \rightrightarrows G$ for the first one and $\beta : J \rightrightarrows K$ for the second one. We can create a new transformation

$$\alpha \star \beta : F \circ J \rightrightarrows G \circ K$$

that is called *horizontal composition*. Note that we use a special symbol \star for the composition.

Definition 4.5 (Left whiskering). If we have 3 categories $\mathbf{B}, \mathbf{C}, \mathbf{D}$, **Functors** $F, G : \mathbf{C} \Rightarrow \mathbf{D}$, $H : \mathbf{B} \rightarrow \mathbf{C}$ and **Natural transformation** $\alpha : F \rightrightarrows G$ then we can construct a new natural transformations:

$$\alpha H : F \circ H \rightrightarrows G \circ H$$

that is called *left whiskering* of functor and natural transformation [6].

Definition 4.6 (Right whiskering). If we have 3 categories $\mathbf{C}, \mathbf{D}, \mathbf{E}$, **Functors** $F, G : \mathbf{C} \Rightarrow \mathbf{D}$, $H : \mathbf{D} \rightarrow \mathbf{E}$ and **Natural transformation** $\alpha : F \rightrightarrows G$ then we can construct a new natural transformations:

$$H\alpha : H \circ F \rightrightarrows H \circ G$$

that is called *right whiskering* of functor and natural transformation [6].

Definition 4.7 (Identity natural transformation). If $F : \mathbf{C} \Rightarrow \mathbf{D}$ is a **Functor** then we can define *identity natural transformation* $\mathbf{1}_{F \rightrightarrows F}$ that maps any **Object** $a \in \text{ob}(\mathbf{C})$ into **Identity morphism** $\mathbf{1}_{F(a) \rightarrow F(a)} \in \text{hom}(\mathbf{D})$.

Remark 4.8 (Whiskering). With **Identity natural transformation** we can redefine **Left whiskering** and **Right whiskering** via **Horizontal composition** as follows.

For left whiskering:

$$\alpha H = \alpha \star \mathbf{1}_{H \rightrightarrows H}$$

For right whiskering:

$$H\alpha = \mathbf{1}_{H \rightrightarrows H} \star \alpha$$

4.3 Polymorphism and natural transformation

Polymorphism plays a certain role in programming languages. Category theory provides several facts about polymorphic functions which are very important.

Definition 4.9 (Parametrically polymorphic function). Polymorphism is parametric if all function instances behave uniformly i.e. have the same realization. The functions which satisfy the parametric polymorphism requirements are parametrically polymorphic.

Definition 4.10 (Ad-hoc polymorphism). Polymorphism is parametric if the function instances can behave differently dependently on the type they are being instantiated with.

Theorem 4.11 (Reynolds). *Parametrically polymorphic functions are Natural transformations*

Proof. TBD □

4.3.1 Hask category

In Haskell the most functions are [Parametrically polymorphic functions](#)².

Example 4.12 (Parametrically polymorphic function). **[Hask]** Consider the following function

```
safeHead :: [a] -> Maybe a
safeHead [] = Nothing
safeHead (x:xs) = Just x
```

The function is parametrically polymorphic and by [Reynolds](#) ([Theorem 4.11](#)) is [Natural transformation](#) (see [fig. 4.6](#)).

From the definition of the natural transformation we have [\(4.1\)](#) therefore `fmap f . safeHead = safeHead . fmap f`. I.e. it does not matter if we initially apply `fmap f` and then `safeHead` to the result or initially `safeHead` and then `fmap f`.

The statement can be verified directly. For empty list we have

```
fmap f . safeHead []
-- equivalent to
fmap f Nothing
-- equivalent to
Nothing
```

from other side

²really in the run-time the functions are not [Parametrically polymorphic functions](#)



Figure 4.6: Haskell parametric polymorphism as a natural transformation

```
safeHead . fmap f []
-- equivalent to
safeHead []
-- equivalent to
Nothing
```

For a non empty list we have

```
fmap f . safeHead (x:xs)
-- equivalent to
fmap f (Just x)
-- equivalent to
Just (f x)
```

from other side

```
safeHead . fmap f (x:xs)
-- equivalent to
safeHead (f x : fmap f xs )
-- equivalent to
Just ( f x )
```

Using the fact that `fmap f` is an expensive operation if it is applied to the list we can conclude that the second approach is more productive. Such transformation allows compiler to optimize the code.³

³It is not directly applied to Haskell because it lazy evaluation that can perform optimization before that one

4.4 Examples

4.4.1 Set category

TBD

4.4.2 Programming languages

TBD

Chapter 5

Monads

Monads are very important for pure functional programming languages such as Haskell. We will start with formal mathematical definition and will continue with programming languages examples later.

5.1 Monoidal category

Definition 5.1 (Monoidal category). A category \mathbf{C} is called *monoidal category* if it is equipped with a **Monoid** structure i.e. there are

- **Bifunctor** $\otimes : \mathbf{C} \times \mathbf{C} \Rightarrow \mathbf{C}$ called *monoidal product*
- an **Object** id called unit object or identity object

The elements should satisfy (up to **Isomorphism**) several conditions: associativity:

$$A \otimes (B \otimes C) \cong (A \otimes B) \otimes C$$

and id can be treated as left and right identity:

$$\begin{aligned} id \otimes A &\cong A, \\ A \otimes id &\cong A \end{aligned}$$

Definition 5.2 (Strict monoidal category). TBD A **Monoidal category** is said to be strict if the associator, left unitor and right unitors are all identity morphisms.

Remark 5.3 (Monoidal product). The monoidal product is a binary operation that specifies the exact monoidal structure. Often it is called as *tensor product* but we will avoid the naming because it is not always the same as the **Tensor product** as it is introduced for **Hilbert spaces**

Definition 5.4 (Tensor product). TBD

5.2 Category of endofunctors

The **Fun** category (Example 4.2) is an example of a category. We can apply additional limitation and consider only **Endofunctors** i.e. we will look at the category $[\mathbf{C}, \mathbf{C}]$ - category of functors from category \mathbf{C} to the same category. One of the most popular math definition of a monad is the following: “All told, a monad in \mathbf{X} is just a monoid in the category of endofunctors of \mathbf{X} ”[3]. Later we will give an explanation for that one.

Definition 5.5 (Monad). The monad M is an **Endofunctor** with 2 **Natural transformations**:

1. $\eta : \mathbf{1}_{\mathbf{C} \Rightarrow \mathbf{C}} \rightarrow M$
2. $\mu : M \circ M \rightarrow M$

where $\mathbf{1}_{\mathbf{C} \Rightarrow \mathbf{C}}$ is **Identity functor**.

The η, μ should satisfy the following conditions:

$$\begin{aligned}\mu \circ M\mu &= \mu \circ \mu M, \\ \mu \circ M\eta &= \mu \circ \eta M = \mathbf{1}_{M \rightarrow M},\end{aligned}$$

where $M\mu, M\eta$ - **Right whiskerings**, $\mu M, \eta M$ - **Left whiskerings**, $\mathbf{1}_{M \rightarrow M}$ - **Identity natural transformation** for M . **Vertical composition** is used in the equations (???TBD verify).

TBD

5.3 Kleisli category. Monads in programming languages

TBD

5.4 Examples

5.4.1 Programming languages

Haskell

Example 5.6 (Monad). **[Hask]** In Haskell monad can be defined from **Functor** (Example 3.14) as follows ¹

¹real definition is quite different from the presented one


```
class Functor m => Monad m where
  return :: a -> m a
  (>>=)  :: m a -> (a -> m b) -> m b
```

To show how this one can be get we can start from a definition that is similar to the math definition:

```
class Functor m => Monad m where
  return :: a -> m a
  join   :: m (m a) -> m a
```

where `return` can be treated as η and `join` as μ . In the case the bind operator `>>=` can be implemented as follows

```
(>>=) :: m a -> (a -> m b) -> m b
ma >>= f = join ( f ma )
```

TBD

C++

TBD

Scala

Example 5.7 (Monad). [Scala] The monad concept in Scala is more close to formal math definition for `Monad`. It can be defined as follows ²

```
trait M[A] {
  def flatMap[B](f: A => M[B]): M[B]
}

def unit[A](x: A): M[A]
```

I.e. `flatMap` can be considered as μ and `unit` as η .

TBD

5.4.2 Quantum mechanics

The tensor product in quantum mechanics is used for representing a system that consists of multiple systems. For instance if we have an interaction between an 2 level atom (a is excited state b as a ground state) and one

²real definition is quite different from the presented one

mode light then the atom has its own Hilber space \mathcal{H}_{at} with $|a\rangle$ and $|b\rangle$ as basis vectors. Light also has its own Hilber space \mathcal{H}_f with Fock state $\{|n\rangle\}$ as the basis.³ The result system that describes both atom and light is represented as the tensor product $\mathcal{H}_{at} \otimes \mathcal{H}_f$.

The morphisms of **FdHilb** category have a connection with [Tensor product](#). Consider the so called Hilbert-Schmidt correspondence for finite dimensional Hilbert spaces i.e. for given \mathcal{A} and \mathcal{B} there is a natural isomorphism between the tensor product and linear maps (aka morphisms) between \mathcal{A} and \mathcal{B} :

$$\mathcal{A}^* \otimes \mathcal{B} \cong \text{hom}(\mathcal{A}, \mathcal{B})$$

where \mathcal{A}^* - [Dual space](#).

TBD

³ Really the \mathcal{H}_f is infinite dimensional Hilber space and seems to be out of our assumption about **FdHilb** category as a collection of finite dimensional Hilber spaces only.

Chapter 6

Yoneda's lemma

TBD

6.1 Examples

6.1.1 Quantum mechanics

Flori interpretation of quantum mechanics

TBD

Index

- C++** category
 - example, [20](#)
- C++** category example, [32](#)
- Cat** category
 - definition, [36](#)
- FdHilb** category
 - example, [23](#)
- FdHilb** category example, [33](#)
- Fun** category
 - example, [41](#)
- Fun** category example, [5](#), [48](#)
- Hask** category
 - example, [19](#)
- Hask** category example, [20](#), [21](#), [30](#), [31](#)
- Rel** category
 - example, [22](#)
- Rel** category example, [23](#)
- Scala** category
 - example, [21](#)
- Scala** category example, [33](#)
- Set** category
 - example, [14](#)
- Set** category example, [13](#), [21](#), [22](#), [30](#)
- Ad-hoc polymorphism
 - definition, [44](#)
- Associativity axiom, [12](#), [25](#), [41](#)
 - declaration, [11](#)
- Bifunctor, [37](#), [47](#)
 - definition, [37](#)
- Bijection
 - definition, [17](#)
- Binary relation, [14](#), [22](#), [23](#)
 - definition, [14](#)
- Category, [5](#), [7](#), [13](#), [18–21](#), [25](#), [26](#), [36](#), [37](#)
 - Fun** example, [41](#)
 - Set** example, [14](#)
 - definition, [12](#)
 - dual, [13](#)
 - large, [13](#), [14](#)
 - opposite, [13](#)
 - small, [13](#)
- Category Composition
 - definition, [36](#)
- Category Identity
 - definition, [36](#)
- Category Product, [37](#)
 - definition, [36](#)
- Class, [9](#), [11](#), [12](#)
 - definition, [9](#)
- Class of Morphisms
 - remark, [11](#)
- Class of Objects
 - remark, [9](#)
- Codomain, [15](#)
 - definition, [10](#), [15](#)
- Commutative diagram, [26](#), [40](#), [41](#)

- definition, 11
- Composition
 - opposite category, 13
 - remark, 10
- Composition axiom, 11–13, 19, 25, 36, 41
 - declaration, 10
- Contravariant functor
 - Hask** example, 38
 - definition, 37
- Dirac notation
 - example, 22
- Direct sum of Hilber spaces, 23, 33
 - definition, 23
- Discrete category, 18
 - definition, 18
- Disjoint union, 30
- Domain, 15, 37
 - definition, 10, 15
- Dual space, 22, 50
 - definition, 22
- Endofunctor, 36, 48
 - definition, 36
- Epimorphism, 15
 - definition, 12
- Function, 14, 22, 23, 25
 - definition, 14
- Functor, 5, 7, 36–39, 41, 43
 - Hask** example, 37
 - Scala** example, 38
 - definition, 35
 - remark, 36
- Functor example, 48
- Haskell lazy evaluation
 - remark, 19
- Haskell lazy evaluation remark, 18, 30
- Hilbert space, 22, 23, 47
 - definition, 22
- Horizontal composition, 5, 43
 - definition, 43
- Identity functor, 5, 36, 48
 - definition, 36
 - remark, 36
- Identity is unique theorem, 11
 - declaration, 26
- Identity morphism, 5, 11, 12, 14, 18–20, 25, 26, 36, 43
 - definition, 11
- Identity natural transformation, 5, 43, 48
 - definition, 43
- Initial object, 23, 26, 29, 30, 33
 - C++** example, 31
 - FdHilb** example, 33
 - Hask** example, 30
 - Scala** example, 33
 - Set** example, 29
 - definition, 26
- Initial object example, 33
- Initial object is unique theorem
 - declaration, 26
- Injection, 17
 - definition, 15
- Injection vs Monomorphism
 - remark, 17
- Isomorphism, 5, 12, 25, 26, 40, 47
 - definition, 12
 - remark, 12
- Large category, 14
 - definition, 13
- Left whiskering, 5, 43, 48
 - definition, 43
- Linear map, 23
 - definition, 22
- Maybe as a functor
 - Hask** example, 38

- Monad, 7, 49
 - Hask** example, 48
 - Scala** example, 49
 - definition, 48
- Monoid, 29, 47
 - definition, 28
- Monoidal product
 - definition, 47
- Monoidal category, 47
 - definition, 47
- Monoidal product
 - remark, 47
- Monomorphism, 17
 - definition, 11
- Morphism, 5, 7, 10–15, 18–25, 28, 36, 39, 41
 - C++** example, 20
 - FdHilb** example, 23
 - Fun** example, 41
 - Hask** example, 19
 - Rel** example, 22
 - Scala** example, 21
 - Set** example, 14
 - definition, 10
- Morphisms equality
 - definition, 25
- Natural transformation, 5, 7, 41, 43, 44, 48
 - definition, 40
 - Horizontal composition, 43
 - Vertical composition, 41
- Object, 5, 7, 9–14, 18–23, 25, 26, 28, 32, 36, 39, 41, 43, 47
 - C++** example, 20
 - FdHilb** example, 23
 - Fun** example, 41
 - Hask** example, 19
 - Rel** example, 22
 - Scala** example, 21
 - Set** example, 14
 - definition, 9
- Objects equality, 26
 - definition, 25
- Opposite category, 13, 26
 - definition, 13
- Parametric polymorphism, 44
- Parametrically polymorphic
 - function, 44
 - Hask** example, 44
 - definition, 44
- Product, 23, 28–33
 - C++** example, 32
 - FdHilb** example, 33
 - Hask** example, 31
 - Set** example, 30
 - definition, 28
- Profunctor
 - Hask** example, 38
 - definition, 37
- Rabi oscillations
 - example, 23
- Reynolds theorem, 44
 - declaration, 44
- Right whiskering, 5, 43, 48
 - definition, 43
- Set, 10, 14, 15, 17, 22, 23, 25
 - definition, 14
- Set vs Category
 - remark, 14
- Set vs Category remark, 25
- Singleton, 22, 23, 30
 - definition, 15
- Small category, 13
 - definition, 13
- Strict monoidal category
 - definition, 47
- Sum, 23, 29–33
 - C++** example, 32

- FdHilb** example, 33
- Hask** example, 31
- Set** example, 30
 - definition, 28
- Sum example, 23
- Surjection, 15, 17
 - definition, 15
- Surjection vs Epimorphism
 - remark, 15
- Tensor product, 47, 50
 - definition, 47
- Terminal object, 23, 26, 29, 30, 33
 - C++** example, 31
 - FdHilb** example, 33
 - Hask** example, 31
 - Scala** example, 33
 - Set** example, 30
 - Cat** category, 37
 - definition, 26
- Terminal object example, 33
- Terminal object in **Cat** category
 - Hask** example, 37
 - definition, 37
- Terminal object is unique theorem
 - declaration, 26
- Vertical composition, 5, 41, 48
 - definition, 41
- Whiskering
 - remark, 43

Bibliography

- [1] Coecke, B. Introducing categories to the practicing physicist / Bob Coecke. — 2008. — <https://arxiv.org/abs/0808.1032>.
- [2] (https://math.stackexchange.com/users/142355/david_myers), D. M. How should i think about morphism equality? — Mathematics Stack Exchange. — URL:<https://math.stackexchange.com/q/1346167> (version: 2015-07-01). <https://math.stackexchange.com/q/1346167>.
- [3] MacLane, S. Categories for the Working Mathematician / Saunders MacLane. — New York: Springer-Verlag, 1971. — P. ix+262. — Graduate Texts in Mathematics, Vol. 5.
- [4] Milewski, B. Category Theory for Programmers / B. Milewski. — Bartosz Milewski, 2018. — <https://github.com/hmemcpy/milewski-ctfp-pdf/releases/download/v0.7.0/category-theory-for-programmers.pdf>.
- [5] Murashko, I. Category theory. — <https://github.com/ivanmurashko/articles/tree/master/cattheory/src>. — 2018.
- [6] nLab authors. whiskering. — <http://ncatlab.org/nlab/show/whiskering>. — 2018. — Sep. — Revision 11.
- [7] ProofWiki. Empty mapping is unique / ProofWiki. — 2018. — https://proofwiki.org/wiki/Empty_Mapping_is_Unique.
- [8] ProofWiki. Injection iff monomorphism in category of sets / ProofWiki. — 2018. — https://proofwiki.org/wiki/Injection_iff_Monomorphism_in_Category_of_Sets.
- [9] ProofWiki. Surjection iff epimorphism in category of sets / ProofWiki. — 2018. — https://proofwiki.org/wiki/Surjection_iff_Epimorphism_in_Category_of_Sets.

- [10] Wikipedia. Disjoint union — wikipedia, the free encyclopedia. — 2017. — [Online; accessed 13-April-2017]. https://en.wikipedia.org/w/index.php?title=Disjoint_union&oldid=774047863.
- [11] Wikipedia contributors. Russell's paradox — Wikipedia, the free encyclopedia. — 2018. — [Online; accessed 29-July-2018]. https://en.wikipedia.org/w/index.php?title=Russell%27s_paradox&oldid=852430810.
- [12] Wikipedia contributors. Zermelo–fraenkel set theory — Wikipedia, the free encyclopedia. — 2018. — [Online; accessed 29-July-2018]. https://en.wikipedia.org/w/index.php?title=Zermelo%E2%80%9393Fraenkel_set_theory&oldid=852467638.
- [13] Мурашко И. В. Квантовая оптика / Мурашко И. В. — 2018. — <https://github.com/ivanmurashko/lectures/blob/master/pdfs/qo.pdf>.