

# R markdown lecture

*Jeff Leek*

## Contents

Dependencies . . . . .	1
Make the code pretty . . . . .	1
Compiling documents . . . . .	2
Naming code chunks . . . . .	2
Headers . . . . .	3
<b>This is a primary header.</b>	<b>3</b>
This a secondary header . . . . .	3
Lists . . . . .	3
Figures . . . . .	3
Other chunk arguments . . . . .	4
Session information . . . . .	5

## Dependencies

This document depends on the following packages:

```
library(devtools)
```

To install these packages you can use the code (or if you are compiling the document, remove the `eval=FALSE` from the chunk.)

```
install.packages("devtools")
```

## Make the code pretty

Set the color scheme and pch.

```
## Color scheme inspired by the RSkittleBrewer package
## https://github.com/alyssafrazee/RSkittleBrewer
tropical= c('darkorange', 'dodgerblue', 'hotpink', 'limegreen', 'yellow')
palette(tropical)
par(pch=19)
```

Unfortunately for R markdown documents the `pch` won't propagate unless you do something a little more messy. We'll hide this later, but for now this is what you need to do to set the default.

```
## see ch. 10 Hooks of Xie's knitr book
library(knitr)
knit_hooks$set(setPch = function(before, options, envir) {
  if(before) par(pch = 19)
})
opts_chunk$set(setPch = TRUE)
```

We will again hide this in future documents, but this shows how to set a default figure width and height, as well as setting plot margins.

```
knitr::opts_chunk$set(fig.width=5, fig.height=5, size="footnotesize",
  warning=FALSE, message=FALSE)
knitr::knit_hooks$set(small.mar = function(before, options, envir) {
  if (before) graphics::par(mar = c(5,5,1.5,1))
})
```


## Compiling documents

1. Try compiling this document using the “Knit HTML” button. What files are produced?
2. Edit the output to be “pdf\_document” and recompile. What files are produced?
3. Edit the output to be “word\_document” and recompile. What files are produced?

## Naming code chunks

The label “chunk1” tells you which part of the code was running in case you have errors. If you compile this document you’ll see it under the “R markdown” window on R studio.

```
x = rnorm(100)
plot(x,col=3)
```

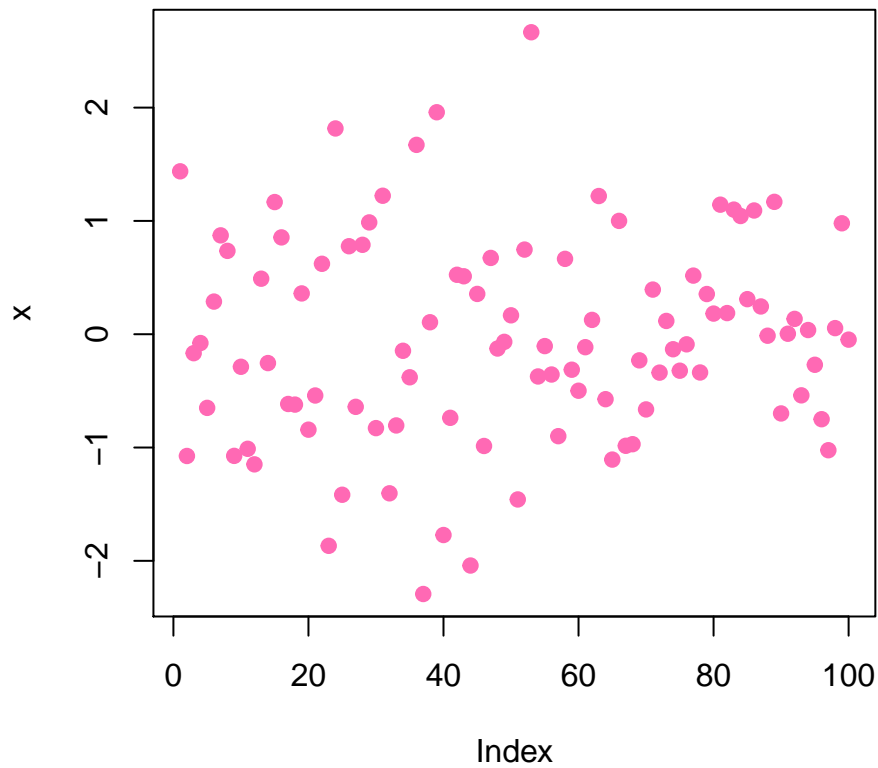

## Headers

**This is a primary header.**

**This a secondary header**

**This is a tertiary header**

## Lists

You can create bulleted and numbered lists in the following way.


- Bullet item 1
- Bullet item 2
- Bullet item 3

1. Numbered item 1
2. Numbered item 2
3. Numbered item 3

## Figures


The main arguments you might want to change are centering and figure height.

```
x = rnorm(100)
plot(x,col=3,pch=19)
```

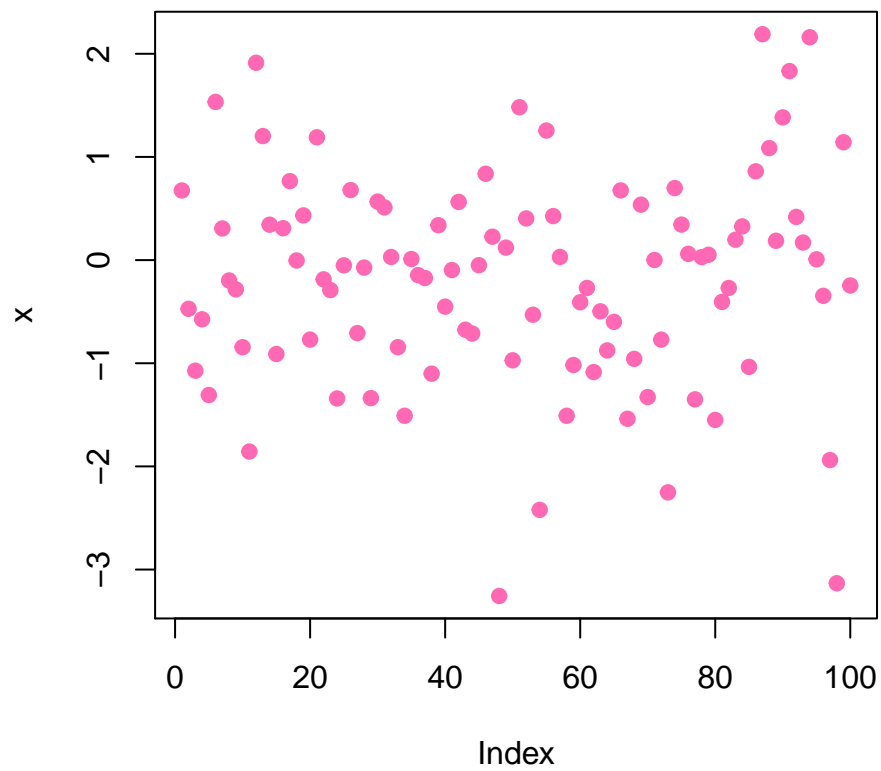

### Other chunk arguments

Add a chunk option of `echo=FALSE` to hide the code.

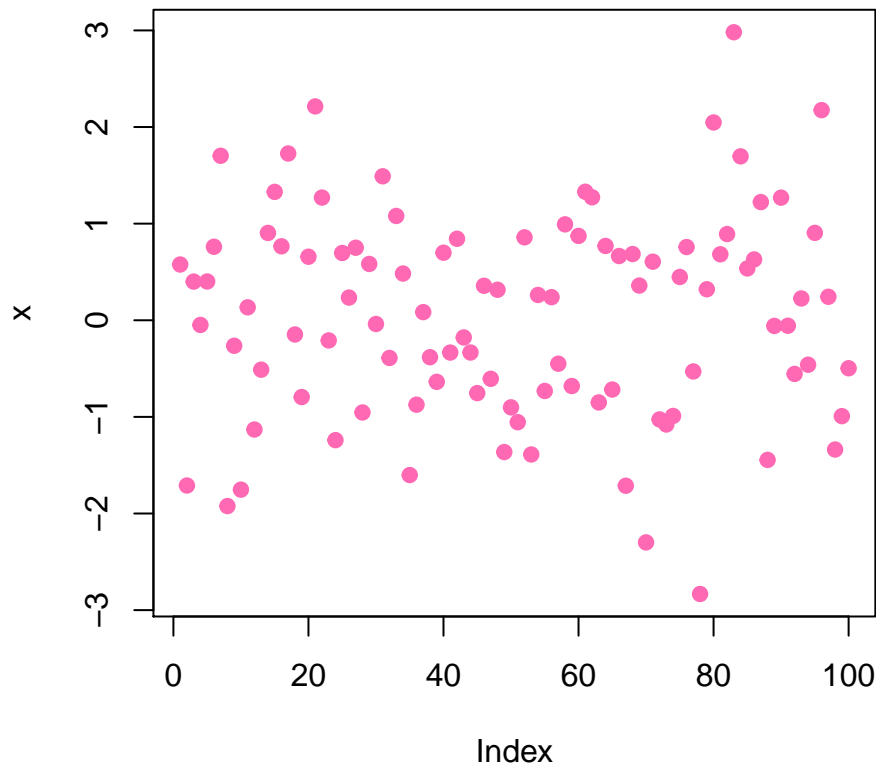

Setting `cache=TRUE` makes it so that the code won't take as long to compile the second time. To see this, uncomment the code below and then run the document twice.

```
#Sys.sleep(10)
```

## Session information

It is very useful to record the session information when performing analyses so you can collaborate with yourself in the future.

```
sessionInfo()
```

```
## R version 3.2.1 (2015-06-18)
## Platform: x86_64-apple-darwin10.8.0 (64-bit)
## Running under: OS X 10.8.5 (Mountain Lion)
##
## locale:
## [1] en_US.UTF-8/en_US.UTF-8/en_US.UTF-8/C/en_US.UTF-8/en_US.UTF-8
##
## attached base packages:
## [1] stats      graphics  grDevices  utils      datasets  methods   base
##
## other attached packages:
## [1] knitr_1.11      devtools_1.8.0
##
## loaded via a namespace (and not attached):
## [1] Rcpp_0.12.0    digest_0.6.8    git2r_0.11.0    formatR_1.2
## [5] magrittr_1.5    evaluate_0.7.2  stringi_0.5-5   curl_0.9.2
```

```
## [9] xml2_0.1.2      rmarkdown_0.7  tools_3.2.1    stringr_1.0.0
## [13] yaml_2.1.13     rversions_1.0.2 memoise_0.2.1  htmltools_0.2.6
```

```
devtools::session_info()
```

```
## setting value
## version R version 3.2.1 (2015-06-18)
## system x86_64, darwin10.8.0
## ui X11
## language (EN)
## collate en_US.UTF-8
## tz America/New_York
##
## package * version date source
## curl 0.9.2 2015-08-08 CRAN (R 3.2.1)
## devtools * 1.8.0 2015-05-09 CRAN (R 3.2.0)
## digest 0.6.8 2014-12-31 CRAN (R 3.2.0)
## evaluate 0.7.2 2015-08-13 CRAN (R 3.2.2)
## formatR 1.2 2015-04-21 CRAN (R 3.2.0)
## git2r 0.11.0 2015-08-12 CRAN (R 3.2.2)
## htmltools 0.2.6 2014-09-08 CRAN (R 3.2.0)
## knitr * 1.11 2015-08-14 CRAN (R 3.2.2)
## magrittr 1.5 2014-11-22 CRAN (R 3.2.0)
## memoise 0.2.1 2014-04-22 CRAN (R 3.2.0)
## Rcpp 0.12.0 2015-07-25 CRAN (R 3.2.1)
## rmarkdown 0.7 2015-06-13 CRAN (R 3.2.1)
## rversions 1.0.2 2015-07-13 CRAN (R 3.2.1)
## stringi 0.5-5 2015-06-29 CRAN (R 3.2.1)
## stringr 1.0.0 2015-04-30 CRAN (R 3.2.0)
## xml2 0.1.2 2015-09-01 CRAN (R 3.2.2)
## yaml 2.1.13 2014-06-12 CRAN (R 3.2.0)
```

It is also useful to compile the time the document was processed. This document was processed on: 2015-09-06.