


Clase 2, GitHub

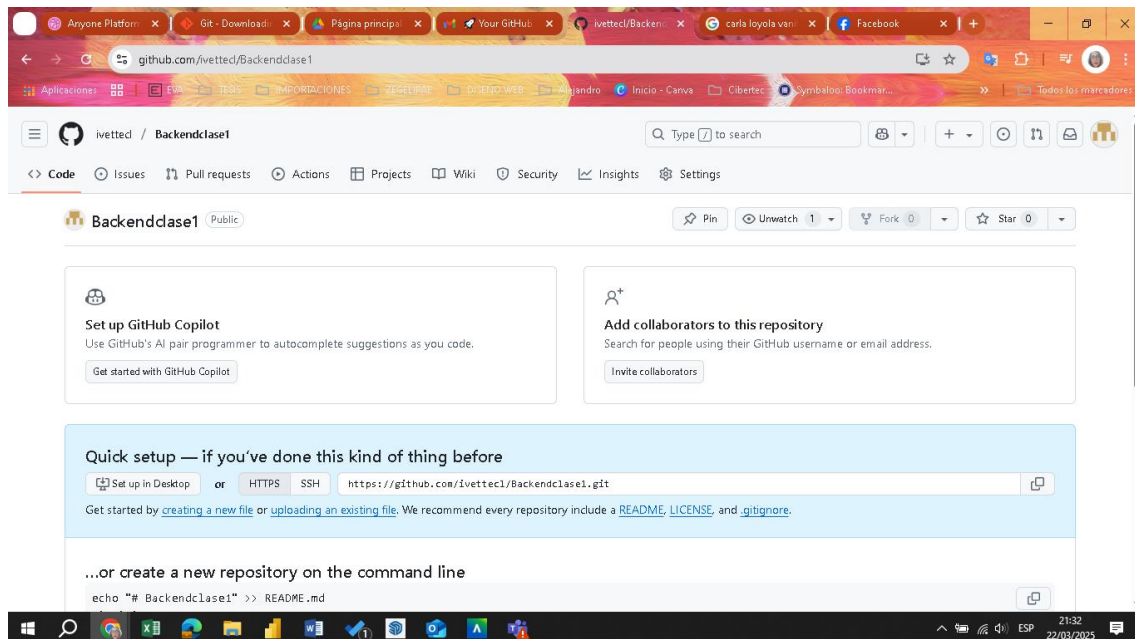

- git config user.name "tuusuariogit"
- git config user.email "tuusuarioemail@gmail.com"
- git remote add origin "https://github.com/usuario/repositorio.git"
- git status
- + • git commit -m "Primer commit: subiendo archivos"
- git push -u origin master

```
MINGW64/c:/Users/ivette/Desktop/project
Ivette@DESKTOP-5AJ3054 MINGW64 ~/Desktop/project (master)
$ git config user.name "ivettecl"
Ivette@DESKTOP-5AJ3054 MINGW64 ~/Desktop/project (master)
$ git config user.email "ivettecarranza@gmail.com"
Ivette@DESKTOP-5AJ3054 MINGW64 ~/Desktop/project (master)
$ git remote add origin "https://github.com/ivettecl/Backendclase1.git"
Ivette@DESKTOP-5AJ3054 MINGW64 ~/Desktop/project (master)
$ git status
On branch master

No commits yet

Untracked files:
  (use "git add <file>..." to include in what will be committed)
  Hola.txt

nothing added to commit but untracked files present (use "git add" to track)
Ivette@DESKTOP-5AJ3054 MINGW64 ~/Desktop/project (master)
$ git add hola.txt
```

```
MINGW64:/c/Users/ivette/Desktop/project
error: switch `m' requires a value

Ivette@DESKTOP-5AJ3054 MINGW64 ~/Desktop/project (master)
$ git commit -m "es una prueba"
[master (root-commit) da9ecea] es una prueba
1 file changed, 1 insertion(+)
create mode 100644 Hola.txt

Ivette@DESKTOP-5AJ3054 MINGW64 ~/Desktop/project (master)
$ git config user.name "ivettecl"

Ivette@DESKTOP-5AJ3054 MINGW64 ~/Desktop/project (master)
$ git push -u origin master
info: please complete authentication in your browser...
Enumerating objects: 3, done.
Counting objects: 100% (3/3), done.
Writing objects: 100% (3/3), 224 bytes | 74.00 KiB/s, done.
Total 3 (delta 0), reused 0 (delta 0), pack-reused 0 (from 0)
To https://github.com/ivettecl/Backendclase1.git
 * [new branch]      master -> master
branch 'master' set up to track 'origin/master'.

Ivette@DESKTOP-5AJ3054 MINGW64 ~/Desktop/project (master)
$
```