




Introduction to Linux

Cybersecurity
Linux 1 Day 1




Class Objectives

By the end of class, you will be able to:

-  Name three of the most important Linux distributions.
-  Navigate the Linux file structure using the command line.
-  Manage processes with the top, ps, and kill commands.
-  Install packages using apt.

So, Why Linux?

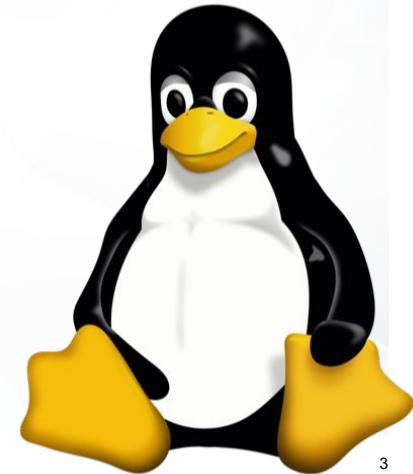



Why Linux

Over 70% of websites run some version of Unix.



Why Linux

Unix refers to Linux and “Linux-like” operating systems.

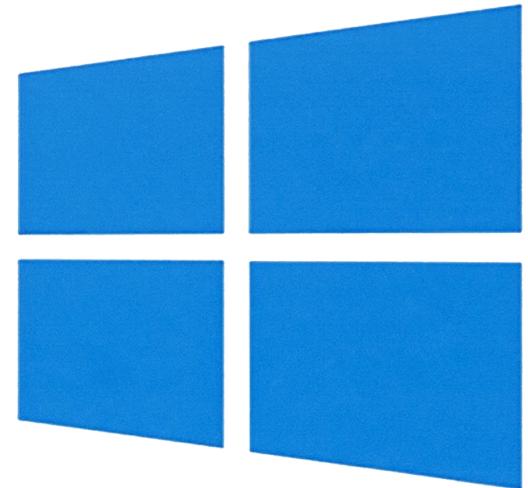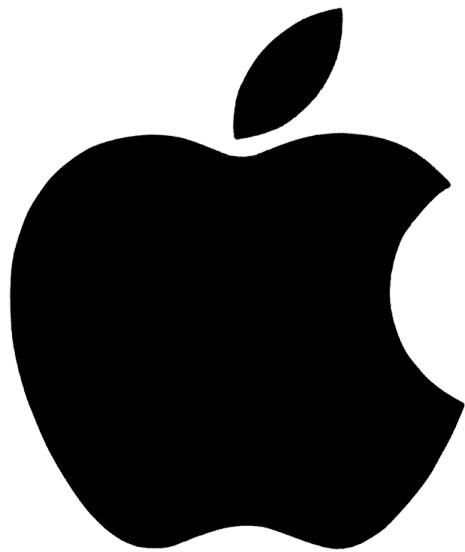

Why Linux

The ubiquity of Linux machines on modern networks makes it a common target for attackers.





Familiarity with the operating system is crucial for cybersecurity professionals.

Linux in a Professional Context

Knowledge is essential for the following technical roles, among others:



Help Desk / IT Support



System Administration



Penetration Testing




Network Forensics

Activity Scenario

Throughout today's exercises, you will:

Investigate a malfunctioning Linux server reported to be running more slowly than usual.

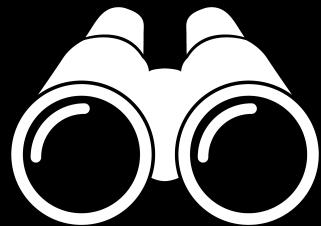

Identify suspicious activity on the system and then contain it.



Methodology will include:


Auditing files

Auditing processes

Installing security packages

Configuring security services


Linux History and Distributions

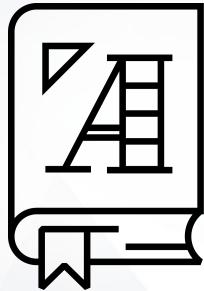

An **operating system (OS)** is a platform that allows users to install and run applications on a machine.

An Introduction to Linux

Windows, Mac OS X, and Linux are all examples of operating systems.

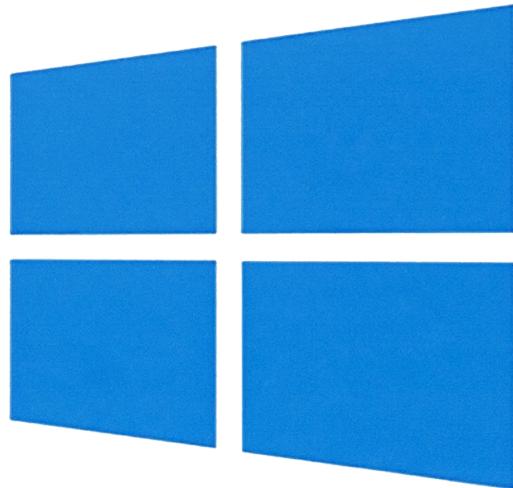



By W3Cook's analysis of Alexa's data, 96.3% of the top one million web servers are running Linux. The remainder is split between Windows, 1.9%, and FreeBSD, 1.8%.

—Steven J. Vaughan-Nichols

Most enterprise networks feature at least one Linux machine.





Unlike Windows and OS X,
Linux is free, open source
software (FOSS).

A wide-angle photograph of a massive crowd of people from a high vantage point, looking down onto a festival or concert ground. The crowd is dense, with many people's heads visible. In the distance, a stage area with colorful lights and structures is visible against a bright, hazy sky.


Anyone can modify the source code.

In the early days of computers, researchers and students needed an inexpensive and accessible operating system to modify and learn from.




Most tools in the hacker / security community are still published as open-source.

Free software and information is prevalent in the industry. Almost all the tools we'll use in class are open source.

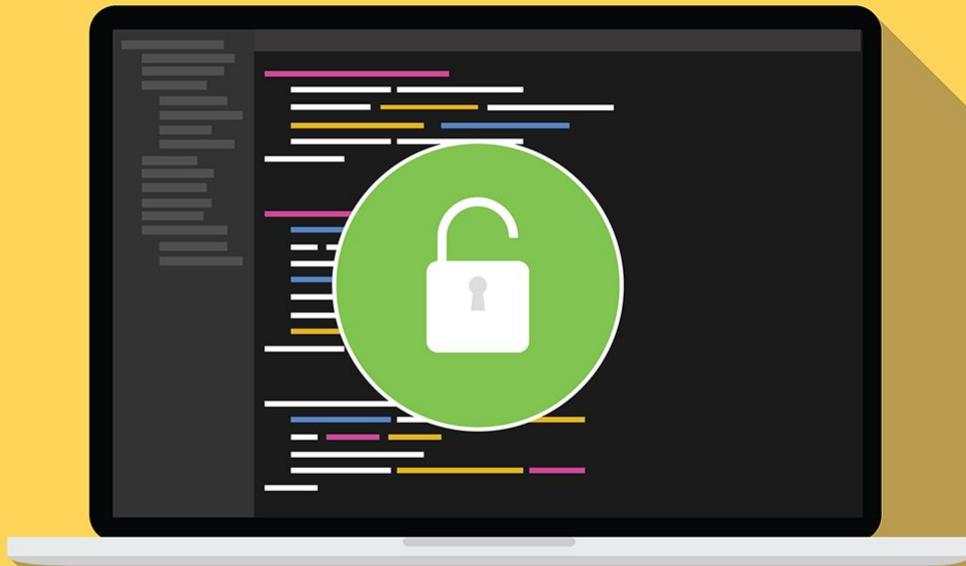

Distributions

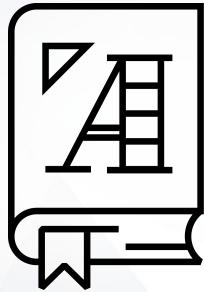

Distributions are special-purpose variants of the operating system

Linux Distributions

In this course, we'll use two distributions: Ubuntu and Kali Linux.

01

Ubuntu

Ubuntu is geared towards general-purpose users.



ubuntu

02

Kali Linux

Kali is designed specifically for security professionals.



KALI

Linux Distributions


Ubuntu and Kali Linux are both specialized versions of a distribution called Debian.



Linux Servers


In order to conserve as many resources as possible, most production Linux servers don't offer a graphical interface.

Therefore knowledge of the command-line is essential for understanding Linux.

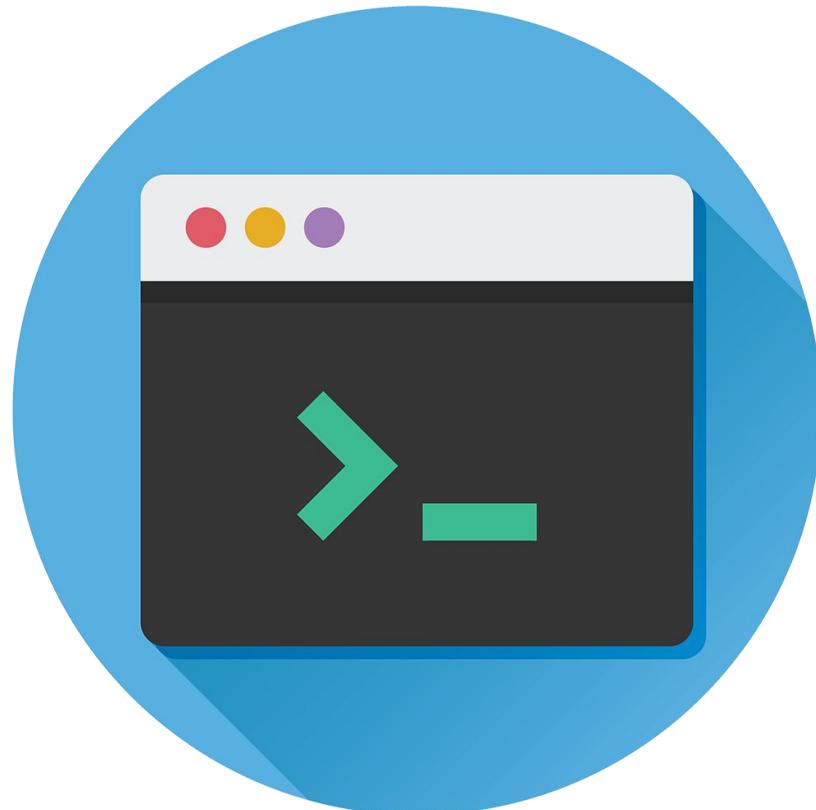

These command-line only
machines are called
headless servers.



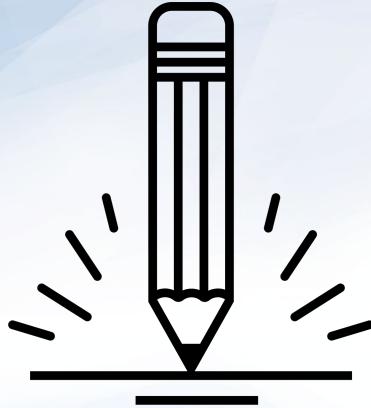

Activity: Distribution Research

You are a system administrator at X Corp, which has recently experienced a number of breaches involving servers running outdated Linux distributions.

- In response, the IT Department has decided to upgrade the affected servers with new versions of Linux.
- You must conduct research to determine which distribution is most appropriate for each machine.

Suggested Time:
10 Minutes





Times Up! Let's Review.

Distribution Research Review

Identify which distribution(s) is most appropriate for each situation.

Central Data Server	
Public Web Server	
IT Audit Workstation	
User Workstation	

Distribution Research Review

Identify which distribution(s) is most appropriate for each situation.

Central Data Server	Stores sensitive human resources data, so should use a secure distribution. Fedora and CentOS use SELinux by default, making them good choices.
Public Web Server	
IT Audit Workstation	
User Workstation	

Distribution Research Review

Identify which distribution(s) is most appropriate for each situation.

Central Data Server	Stores sensitive human resources data, so should use a secure distribution. Fedora and CentOS use SELinux by default, making them good choices.
Public Web Server	
IT Audit Workstation	
User Workstation	

Distribution Research Review

Identify which distribution(s) is most appropriate for each situation.

Central Data Server	Stores sensitive human resources data, so should use a secure distribution. Fedora and CentOS use SELinux by default, making them good choices.
Public Web Server	Needs to run quickly and handle large amounts of traffic. Many distributions could work, but Ubuntu and Fedora are among the best choices because they are well-supported.
IT Audit Workstation	
User Workstation	

Distribution Research Review

Identify which distribution(s) is most appropriate for each situation.

Central Data Server	Stores sensitive human resources data, so should use a secure distribution. Fedora and CentOS use SELinux by default, making them good choices.
Public Web Server	Needs to run quickly and handle large amounts of traffic. Many distributions could work, but Ubuntu and Fedora are among the best choices because they are well-supported.
IT Audit Workstation	
User Workstation	

Distribution Research Review

Identify which distribution(s) is most appropriate for each situation.

Central Data Server	Stores sensitive human resources data, so should use a secure distribution. Fedora and CentOS use SELinux by default, making them good choices.
Public Web Server	Needs to run quickly and handle large amounts of traffic. Many distributions could work, but Ubuntu and Fedora are among the best choices because they are well-supported.
IT Audit Workstation	Should use Kali Linux , because it specifically designed for performing security assessments.
User Workstation	

Distribution Research Review

Identify which distribution(s) is most appropriate for each situation.

Central Data Server	Stores sensitive human resources data, so should use a secure distribution. Fedora and CentOS use SELinux by default, making them good choices.
Public Web Server	Needs to run quickly and handle large amounts of traffic. Many distributions could work, but Ubuntu and Fedora are among the best choices because they are well-supported.
IT Audit Workstation	Should use Kali Linux , because it specifically designed for performing security assessments.
User Workstation	

Distribution Research Review

Identify which distribution(s) is most appropriate for each situation.

Central Data Server	Stores sensitive human resources data, so should use a secure distribution. Fedora and CentOS use SELinux by default, making them good choices.
Public Web Server	Needs to run quickly and handle large amounts of traffic. Many distributions could work, but Ubuntu and Fedora are among the best choices because they are well-supported.
IT Audit Workstation	Should use Kali Linux , because it specifically designed for performing security assessments.
User Workstation	Should use Ubuntu , which comes with a GUI and basic productivity software, such as an email client, web browser, and text editor.



**Which distribution is most flexible
and best suited for day-to-day and
administrative tasks?**

Answer



ubuntu



**Which distribution is built specifically
for penetration testers?**

Answer





Which distribution would you use to set up a web or data server?

Answer

Any will work, but **Ubuntu Server** and **Fedora Server** both have easy-to-configure web services.

You could use **Debian** or **CentOS** for more manual tasks.




**What is the most widely-used
Linux desktop environment?**

Answer



ubuntu

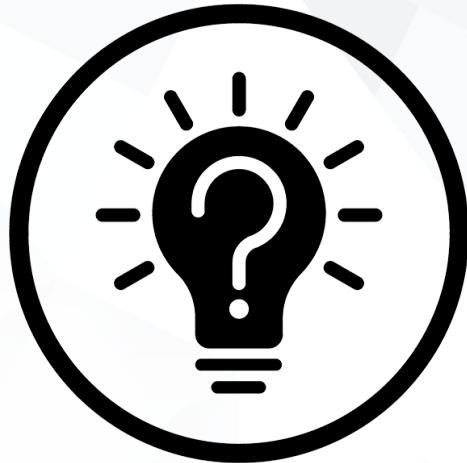


What is a headless server?

Answer

A command-line only server, without a desktop environment.



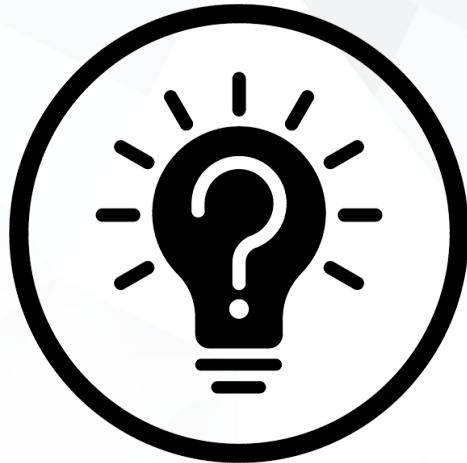


**Does Ubuntu have a headless
server version? Does Fedora? CentOS?**

Answer

Yes, all three distributions provide a headless server version.



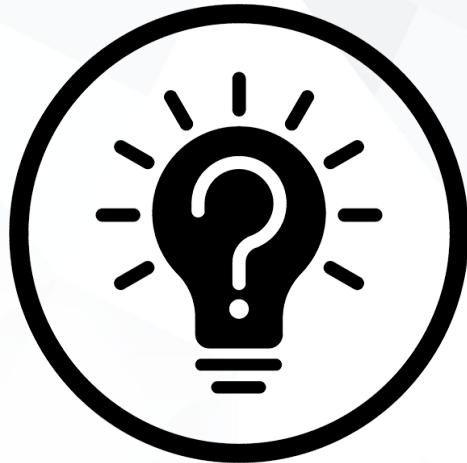

**Which distribution is Ubuntu based on?
What about Kali?**

Answer

They are both based on Debian.





**Which distribution is CentOS based on?
What about Fedora?**

Answer

Both distributions are based on RedHat.




redhat®




What is SELinux?

What is SELinux?

SELinux is a built-in file permission security enhancement developed by the NSA. CentOS and Fedora have it implemented by default.

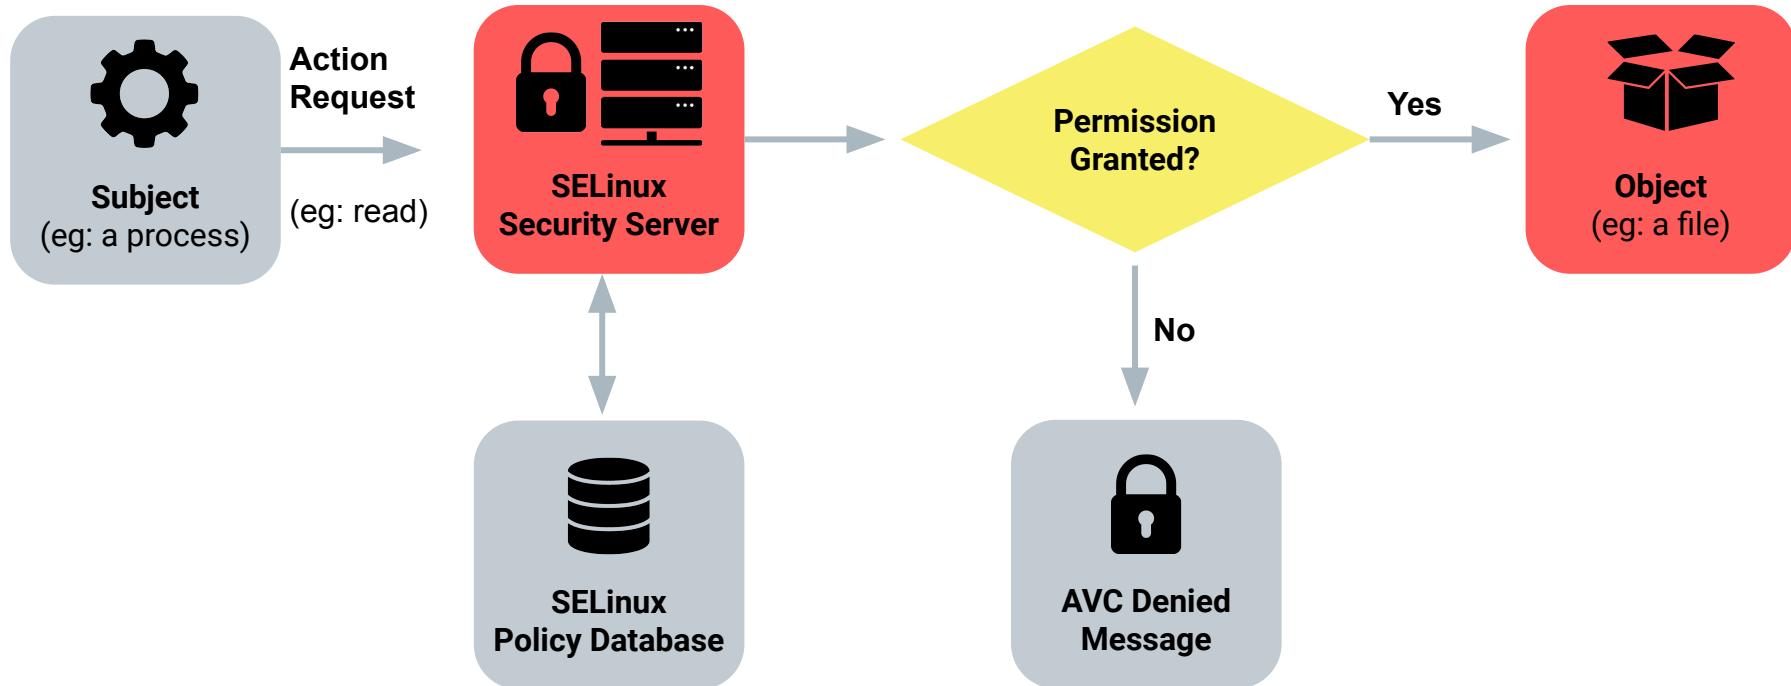

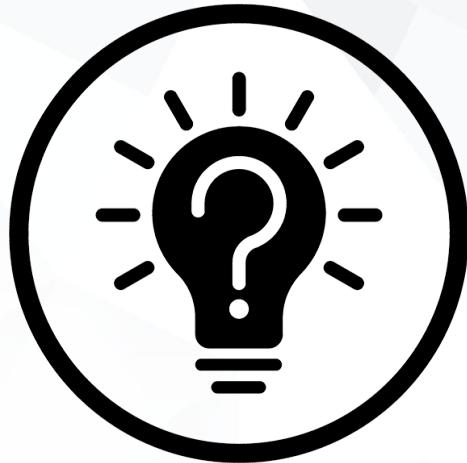


You are deciding between versions of Ubuntu Servers. If you want a version that will remain stable over time, which version do you choose?

Ubuntu Server Versions

You would want to choose the “Long Term Support” (LTS) version. The latest version will have continual updates and changes. The LTS version will remain stable and only change approximately once a year.



ubuntu

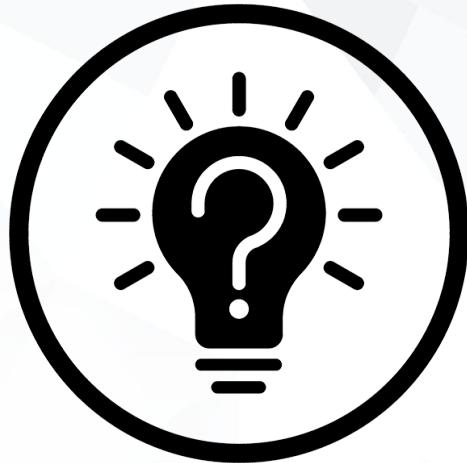

What are some security implications of using free and open source software or forks of popular Linux distributions?



As demonstrated in the Mint OS article, open source means that anyone can contribute. Therefore, a hacker with programming skills will be able to attack somewhat easily. **You must be vigilant of where you download your software.**

Linux File System Structure

File Systems

All operating systems maintain certain conventions for storing files.

/ (root)	The root directory that contains every other directory.
/home	Contains users' private file. Users should not be able to save files elsewhere.
/etc	Contains configuration files, defining how a machine runs and who can use it.
/bin, /sbin	Contain applications such as web browsers and commands like ls.
/var	Contains files that change over time.
/tmp	Contains files that are only needed for a short period of time.

Demo Scenario

Once we master the Linux file system structure, we can better identify files that are in places they do not belong.



Often, misplaced files are an indicator that the system has been compromised.



Demo Scenario

In the following demo, we will:



Ensure that no one has added files to protected directories.



Verify that only registered users are allowed to save files on the machine.




Make sure no suspicious programs have been installed on the system.



Verify the server is saving log files, containing records of suspicious behavior.



Ensure attackers haven't saved malicious files in the temporary files directory.

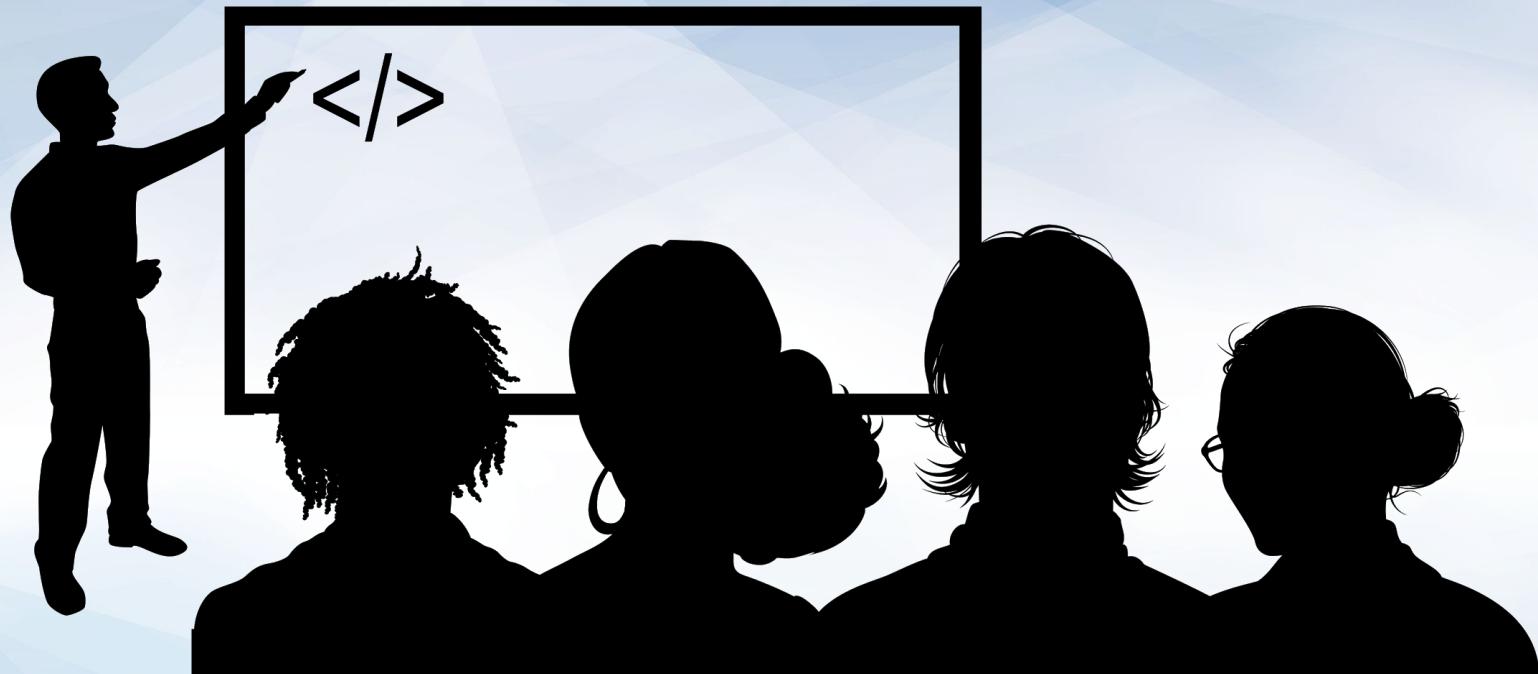


Instructor Demonstration Navigating and Auditing Linux File Structures

Demo Takeaways

The audit took us to the following directories:

/etc	Stores specific, system-wide configuration files, as well as the most sensitive files on a Linux system.
/var	Stores files that are continually updated.
/home	Stores user home folders.
/tmp	Where applications write temporary files that can be deleted on reboot.
/bin and /sbin	Where the system keeps its main binary or program files.

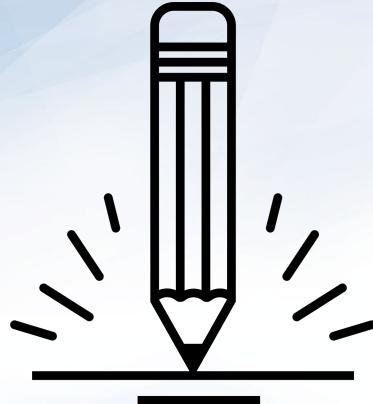

Activity: Linux Landmarks

Most technical roles in cybersecurity require comfort with the command line and familiarity with the structure of a Linux file system.

You will use this knowledge to navigate file systems when looking for suspicious activity or administering the machine.

The next exercise will give you an opportunity to explore the file system and practice using the command-line.

Suggested Time:
20 Minutes





Times Up! Let's Review.

Linux Landmarks

Completing the activity required:

01

Creating a research directory.

02

Inspecting /, /etc, /var, and /home directories.

03

Copying suspicious files with cp.

04

Creating files with >.

05

Finding three suspicious files and copying them to the research folder.

Break



Resources and Processes


Introduction to Processes

In the previous demo, our audit revealed a suspicious script in /tmp. Since scripts are executable programs, we now need to check which programs are running to determine if malicious activity is taking place.

When a program runs, it processes data and potentially makes changes to the file system.

When these programs process, save and modify data, they consume a computer's resources.

- Running programs are called **processes**.
- We'll see that the amount of resources used by a computer can indicate if malicious activity is taking place.
- First, let's get a better understanding of two of the most important resources: **memory** and the **CPU**.

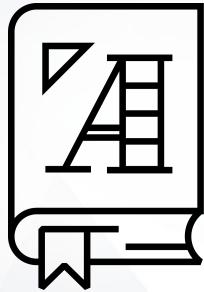

Memory is the space used by a process to save and manipulate data.

Memory

Memory comes in two forms:

01

RAM

Random Access Memory (RAM) is used to run the program's code. RAM is only used while the program is running.

The more work a process does, the more RAM it needs.

02

Disk Space


Disk space is used to save data permanently.

The Central Processing Unit (CPU)

The **Central Processing Unit (CPU)** acts as the brain of the system, determining how much work a process has to do, and how difficult that work is.

A difficult task, such as encrypting a large file, will use a lot of RAM and/or CPU.


Easier tasks, like executing the `ls` command, will require only minimal RAM and/or CPU.

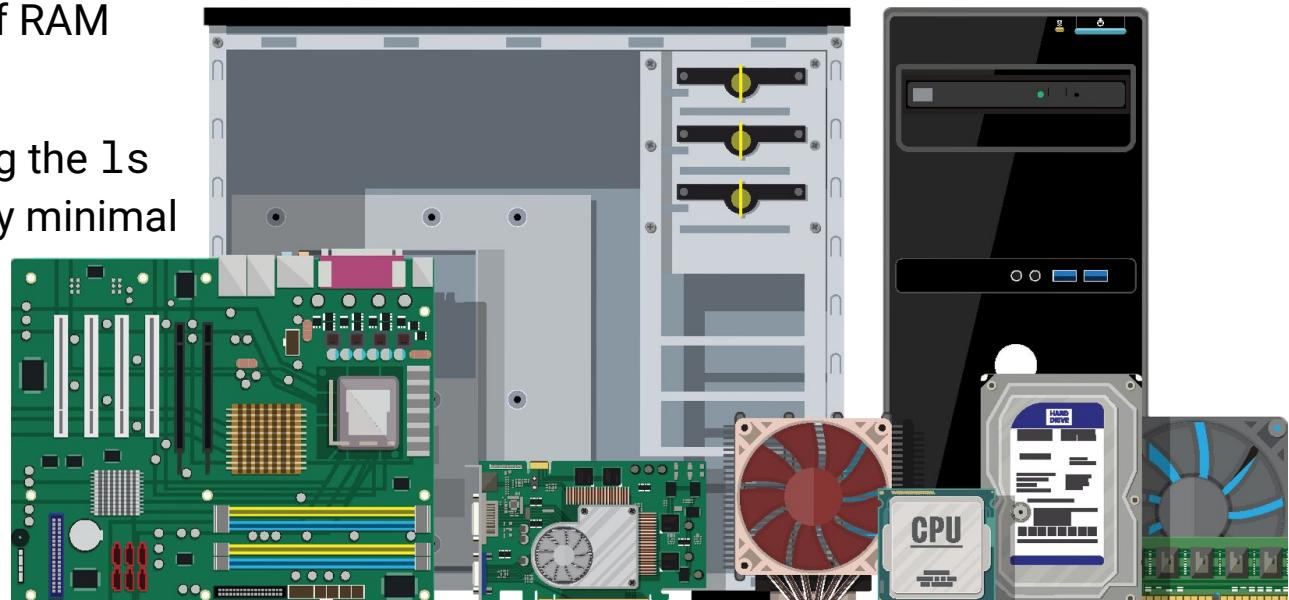

Targeting Resources

Hackers can take advantage of a system's finite resources.

- Hackers can perform denial of service (DoS) attacks by launching processes that eat up memory on a target machine.
- This can slow down or crash the machine, making it unavailable to users, thus denying them service.

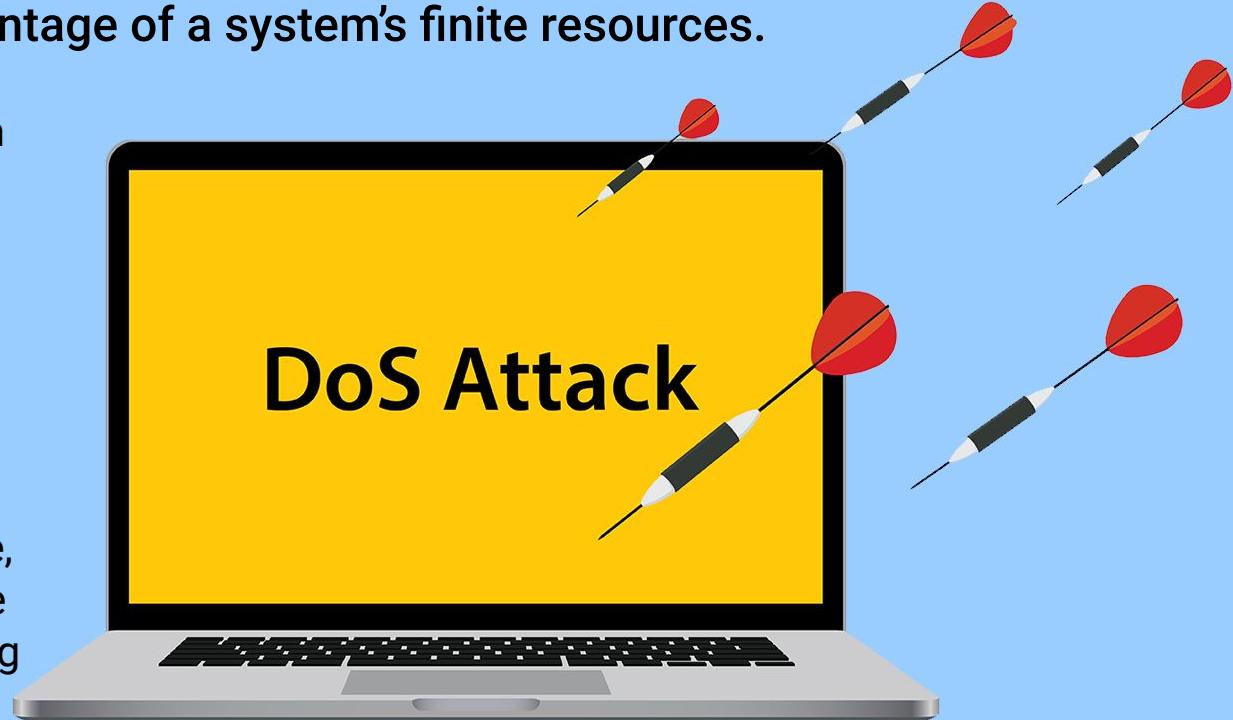

Targeting Resources

Hackers can also start malicious processes that don't use a lot of memory, and are therefore difficult to spot without specifically looking for them.

One example is a **backdoor process**. This allows hackers to break into machines undetected.

These don't use much memory because they make a network connection to the hacker's machine, then listen for instructions.

Managing Processes

Linux has several commands for managing processes:

top


Allows you to see all running processes in real time. It updates every three seconds to show what's happening on the system.

ps

Allows you to take a snapshot of all the running processes on the system. Different arguments allow you to show different subsets of processes and use this output with other commands.

kill

Used to stop processes, usually ones causing problems. `kill` attempts to allow a process to finish before it shuts it down.

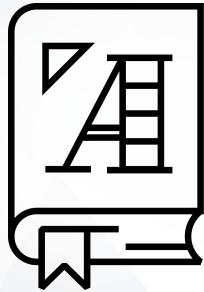


Dynamic analysis is the process of running a potentially malicious script and monitoring its effects.

We can run a potentially malicious script to determine how it affects system health.





Instructor Demonstration Inspecting Malicious Files Demo

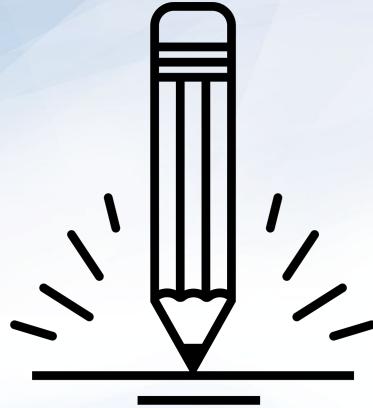

Activity: Processing Investigation

In this activity, you will monitor the system for processes that should not be running.

- Your Senior Admin asked that you record snapshots of processes as well as review processes in real time.
- If you notice anything amiss, kill the process and add your findings to the report.

Suggested Time:
15 Minutes





Times Up! Let's Review.

Monitoring Processes

Completing the activity required:

01

Using top to monitor for suspicious processes.

02

Using ps to see what processes are running.

03

Identifying a suspicious process.

04

Researching signal flags used with the kill command.

05

Using the appropriate kill signal to stop the process.

Installing Packages

Packages

Administrators often install additional software to properly harden the machine.



Linux offers downloadable tools called **packages**.



New packages are installed with a tool called **package manager**.

We'll use the Ubuntu package manager, called **aptitude**. We will use aptitude with the command apt.



Packages

```
sudo apt install <package name>
```



Linux searches databases to find information about <package name>. If found, it will be downloaded.



These databases are known as repositories.



Repositories specifically used to store and distribute packages are known as Personal Package Archives, or PPAs.

Packages

Today, we'll install the following packages.

lynis

Checks that a Linux machine is properly secured.

john


Verifies that users are using strong passwords.

chkrootkit

Scans machines for the presence of a malware called rootkit.

tripwire

Monitors the file system for suspicious changes.

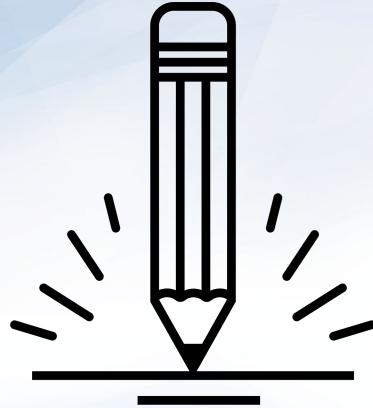

Activity: Installing packages.

In this activity, you will install and configure tripwire, chkrootkit, john, and lynis.

Suggested Time:
15 Minutes





Times Up! Let's Review.

Installing Packages Review

This activity required the following:

01

Using sudo apt to install the three listed packages.

02

Following additional installation steps for Tripwire.

03

Using man pages to find a solution.



This activity gets us ready to implement File Integrity Monitoring.

Today's Objectives

By the end of class, you will be able to:

- Name three of the most important Linux distributions.
- Navigate the Linux file structure using the command line.
- Manage processes with the top, ps, and kill commands.
- Install packages using apt.