Name: Sahil Vikas Karpe Roll no.: 5 SE3
Exp8: Building a Simple Counter App using React Hooks. Use React Hooks (useState, useEffect) to manage state and side effects.

App.css:

```
.container {
  position: relative;
  display: flex;
  flex-direction: column;
  align-items: center;
  gap: 2rem;
  padding: 1rem;
  z-index: 10;
}

.glow-sphere {
  position: absolute;
  top: 50%;
  left: 50%;
  transform: translate(-50%, -50%);
  width: 400px;
  height: 400px;
  background: radial-gradient(circle, var(--primary-glow) 0%, transparent 70%);
  filter: blur(80px);
  z-index: -1;
  pointer-events: none;
}

.counter-card {
  background: var(--card-bg);
  backdrop-filter: blur(20px);
  -webkit-backdrop-filter: blur(20px);
  border: 1px solid var(--card-border);
```

```
  border-radius: 32px;
  padding: 3rem;
  width: 400px;
  text-align: center;
  box-shadow: 0 25px 50px -12px rgba(0, 0, 0, 0.5);
  transition: transform 0.3s ease;
}

.counter-card:hover {
  transform: translateY(-5px);
}

header h1 {
  font-size: 2rem;
  font-weight: 800;
  margin-block: 0.5rem;
  letter-spacing: -0.02em;
}

.badge {
  font-size: 0.75rem;
  text-transform: uppercase;
  letter-spacing: 0.1em;
  color: var(--primary);
  font-weight: 600;
  background: rgba(99, 102, 241, 0.1);
  padding: 4px 12px;
  border-radius: 99px;
  border: 1px solid rgba(99, 102, 241, 0.2);
}
```

```
.session-info {
  font-size: 0.875rem;
  color: var(--text-dim);
}

.display-area {
  margin-block: 3rem;
}

.count-wrapper {
  background: rgba(0, 0, 0, 0.2);
  border-radius: 24px;
  padding: 2rem;
  border: 1px solid rgba(255, 255, 255, 0.05);
}

.count-number {
  font-size: 6rem;
  font-weight: 800;
  line-height: 1;
  background: linear-gradient(to bottom, #fff, #94a3b8);
  -webkit-background-clip: text;
  -webkit-text-fill-color: transparent;
  transition: all 0.3s cubic-bezier(0.175, 0.885, 0.32, 1.275);
}

.controls {
  display: grid;
  grid-template-columns: 1fr 1fr;
  gap: 1rem;
}
```

```
.btn {
  border: none;
  cursor: pointer;
  padding: 1.25rem;
  border-radius: 16px;
  font-family: inherit;
  font-weight: 600;
  font-size: 1rem;
  transition: all 0.2s ease;
  display: flex;
  align-items: center;
  justify-content: center;
}

.btn-primary {
  background: var(--primary);
  color: white;
  box-shadow: 0 10px 15px -3px var(--primary-glow);
}

.btn-primary:hover {
  filter: brightness(1.1);
  transform: scale(1.02);
}

.btn-secondary {
  background: rgba(255, 255, 255, 0.05);
  color: white;
  border: 1px solid rgba(255, 255, 255, 0.1);
}
```

```
.btn-secondary:hover {
  background: rgba(255, 255, 255, 0.1);
}

.btn-ghost {
  grid-column: span 2;
  background: transparent;
  color: var(--text-dim);
  text-decoration: underline;
  text-underline-offset: 4px;
}

.btn-ghost:hover {
  color: white;
}

.footer-note {
  font-size: 0.75rem;
  color: var(--text-dim);
  display: flex;
  gap: 0.5rem;
}

.footer-note span {
  color: var(--primary);
  font-family: 'Courier New', Courier, monospace;
  font-weight: bold;
}

@media (max-width: 480px) {
```

```
  .counter-card {
    width: 100%;
    padding: 2rem 1.5rem;
  }
}
```

App.jsx:

```
import React, { useState, useEffect } from 'react'
import './App.css'

function App() {
  const [count, setCount] = useState(0)
  const [sessionTime, setSessionTime] = useState(0)

  // Side Effect 1: Update Document Title
  useEffect(() => {
    document.title = `Count: ${count}`
  }, [count])

  // Side Effect 2: Session Timer
  useEffect(() => {
    const timer = setInterval(() => {
      setSessionTime(prev => prev + 1)
    }, 1000)

    // Cleanup function
    return () => clearInterval(timer)
  }, [])

  const increment = () => setCount(prev => prev + 1)
  const decrement = () => setCount(prev => (prev > 0 ? prev - 1 : 0))
```

```
  const reset = () => setCount(0)

  const formatTime = (seconds) => {
    const mins = Math.floor(seconds / 60)
    const secs = seconds % 60
    return `${mins}:${secs.toString().padStart(2, '0')}`
  }

  return (
    <div className="container">
      <div className="glow-sphere"></div>

      <main className="counter-card">
        <header>
          <span className="badge">React Hooks Demo</span>
          <h1>Minimalist Counter</h1>
          <p className="session-info">Active for {formatTime(sessionTime)}</p>
        </header>

        <div className="display-area">
          <div className="count-wrapper">
            <span className="count-number">{count}</span>
          </div>
        </div>

        <div className="controls">
          <button className="btn btn-secondary" onClick={decrement} aria-label="Decrease">
            <svg width="24" height="24" fill="none" stroke="currentColor" strokeWidth="2.5"
viewBox="0 0 24 24">
              <path d="M5 12h14" />
            </svg>
```

```
        </button>

        <button className="btn btn-primary" onClick={increment} aria-label="Increase">
          <svg width="24" height="24" fill="none" stroke="currentColor" strokeWidth="2.5"
viewBox="0 0 24 24">
            <path d="M12 5v14M5 12h14" />
          </svg>
        </button>

        <button className="btn btn-ghost" onClick={reset}>Reset</button>
      </div>
    </main>

    <footer className="footer-note">
      Built with <span>useState</span> & <span>useEffect</span>
    </footer>
  </div>
 )
}

export default App
```

index.css:

```
@import
url('https://fonts.googleapis.com/css2?family=Outfit:wght@300;400;600;800&display=swap');

:root {
  --primary: #6366f1;
  --primary-glow: rgba(99, 102, 241, 0.5);
  --bg-gradient: radial-gradient(circle at top left, #0f172a, #000000);
  --card-bg: rgba(255, 255, 255, 0.03);
  --card-border: rgba(255, 255, 255, 0.1);
```

```
  --text-main: #f8fafc;
  --text-dim: #94a3b8;
}

* {
  margin: 0;
  padding: 0;
  box-sizing: border-box;
}

body {
  font-family: 'Outfit', -apple-system, BlinkMacSystemFont, 'Segoe UI', Roboto, sans-serif;
  background: var(--bg-gradient);
  color: var(--text-main);
  min-height: 100vh;
  display: flex;
  justify-content: center;
  align-items: center;
  overflow: hidden;
}

#root {
  width: 100%;
  display: flex;
  justify-content: center;
  align-items: center;
}
```

Main.jsx:

```
import { StrictMode } from 'react'
import { createRoot } from 'react-dom/client'
```

```
import './index.css'
import App from './App.jsx'

createRoot(document.getElementById('root')).render(
  <StrictMode>
    <App />
  </StrictMode>,
)
```
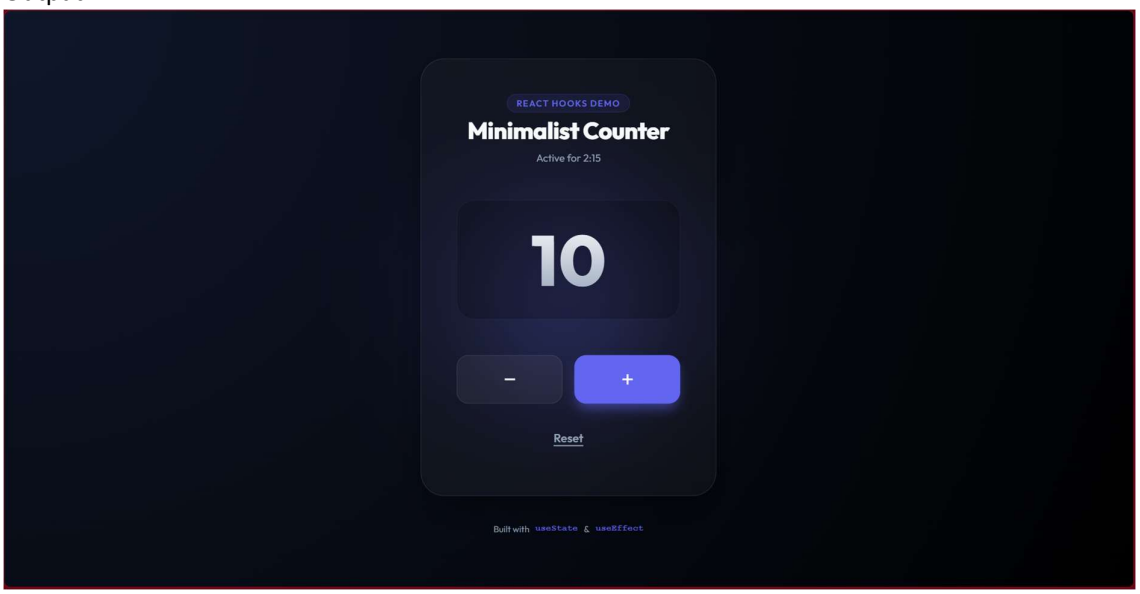
Output: