

Ceiling Diffuser PGP/PGR

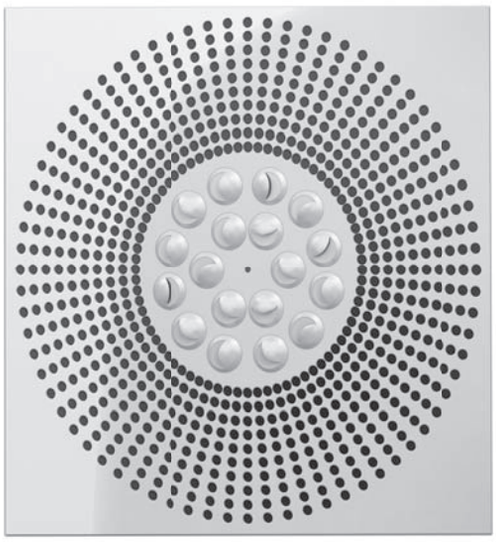

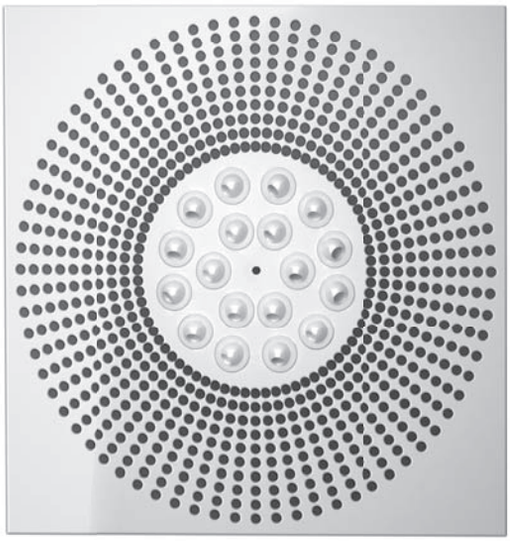

Description
Ceiling diffuser with maneuverable disks/ nozzles and perforated metal sheet, designed for use in crowded areas.

Application
Air supply.


Characteristics
The speaker is equipped with Ø5 mm circular perforations radially arranged and 18 individually maneuverable disks/ nozzles , located in the center of the front.
Specially designed for paneled ceiling size 600 x 600 mm.
The diffuser is supplied with gasket seals, fastening screw and plastic cover for concealment.

Accessories
Insulated/Non-insulated adapter **ADP IZ/N**

Materials and finishing
Pickled steel sheet electrostatic field painted white RAL 9016.
Other RAL colors available on request.
Polypropylene disks/ nozzles.

Technical design

PGP **PGR**

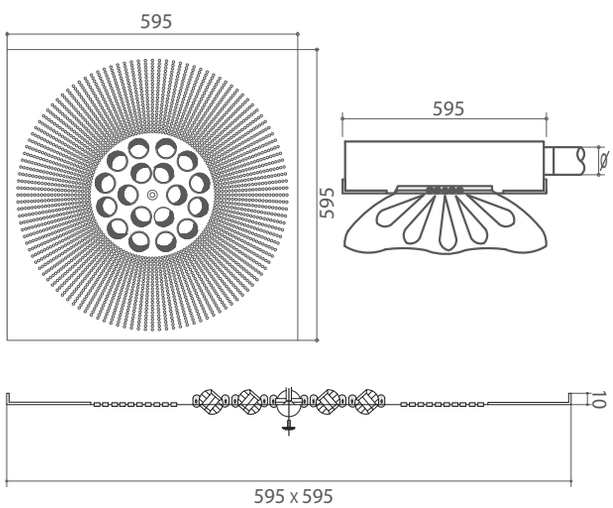

Assembly Methods
Paneled ceiling 600 x 600 mm mounting, fitted with a central screw M6 x 100 mm on mounting traverse of the adapter.

Selection table PGP/PGR

PGP

Q m³/h	595 X 595 Ak [m²]	0.03536
175	Veff (m/s) NR[dB(A)] Pt(Pa) X(m)	1.37 <20 6 0.9
200	Veff (m/s) NR[dB(A)] Pt(Pa) X(m)	1.57 <20 8 1
250	Veff (m/s) NR[dB(A)] Pt(Pa) X(m)	1.96 24 13 1.3
300	Veff (m/s) NR[dB(A)] Pt(Pa) X(m)	2.36 29 19 1.5
350	Veff (m/s) NR[dB(A)] Pt(Pa) X(m)	2.75 34 25 1.8
400	Veff (m/s) NR[dB(A)] Pt(Pa) X(m)	3.14 38 33 2
450	Veff (m/s) NR[dB(A)] Pt(Pa) X(m)	3.54 41 42 2.3
500	Veff (m/s) NR[dB(A)] Pt(Pa) X(m)	3.93 44 52 2.5

ΔT=-10K
H(room height)=2,84 m
Vk=0,2 m/s

PGR

Q m³/h	595 X 595 Ak [m²]	0.0485
400	Veff (m/s) NR[dB(A)] Pt(Pa) X(m)	2.29 31 15 2
600	Veff (m/s) NR[dB(A)] Pt(Pa) X(m)	3.44 44 33 5
800	Veff (m/s) NR[dB(A)] Pt(Pa) X(m)	4.58 53 58 7

ΔT=-10K
Vk=0,25 m/s

Annotation

* Ak [m²] - Free surface
* Veff[m/s] - Air velocity inside diffuser
* NR [dB(A)] - Noise level without the room attenuation
* ΔPt [pa] - Pressure loss
* X [m] - Air jet length
* Vk = velocity at which the air jet length was calculated "x" [m]

Order codes

Type	+	ADP IZ/N	/	Dimensions	/	Nozzles/ disks color	/	0
PGR / PGP		Insulated/Non-insulated adapter		L X H 595 X 595		PGR - white RAL 9016 PGP - white RAL9016 / black RAL9005		**0** Vopsit alb RAL 9016 **R** Vopsit RAL…