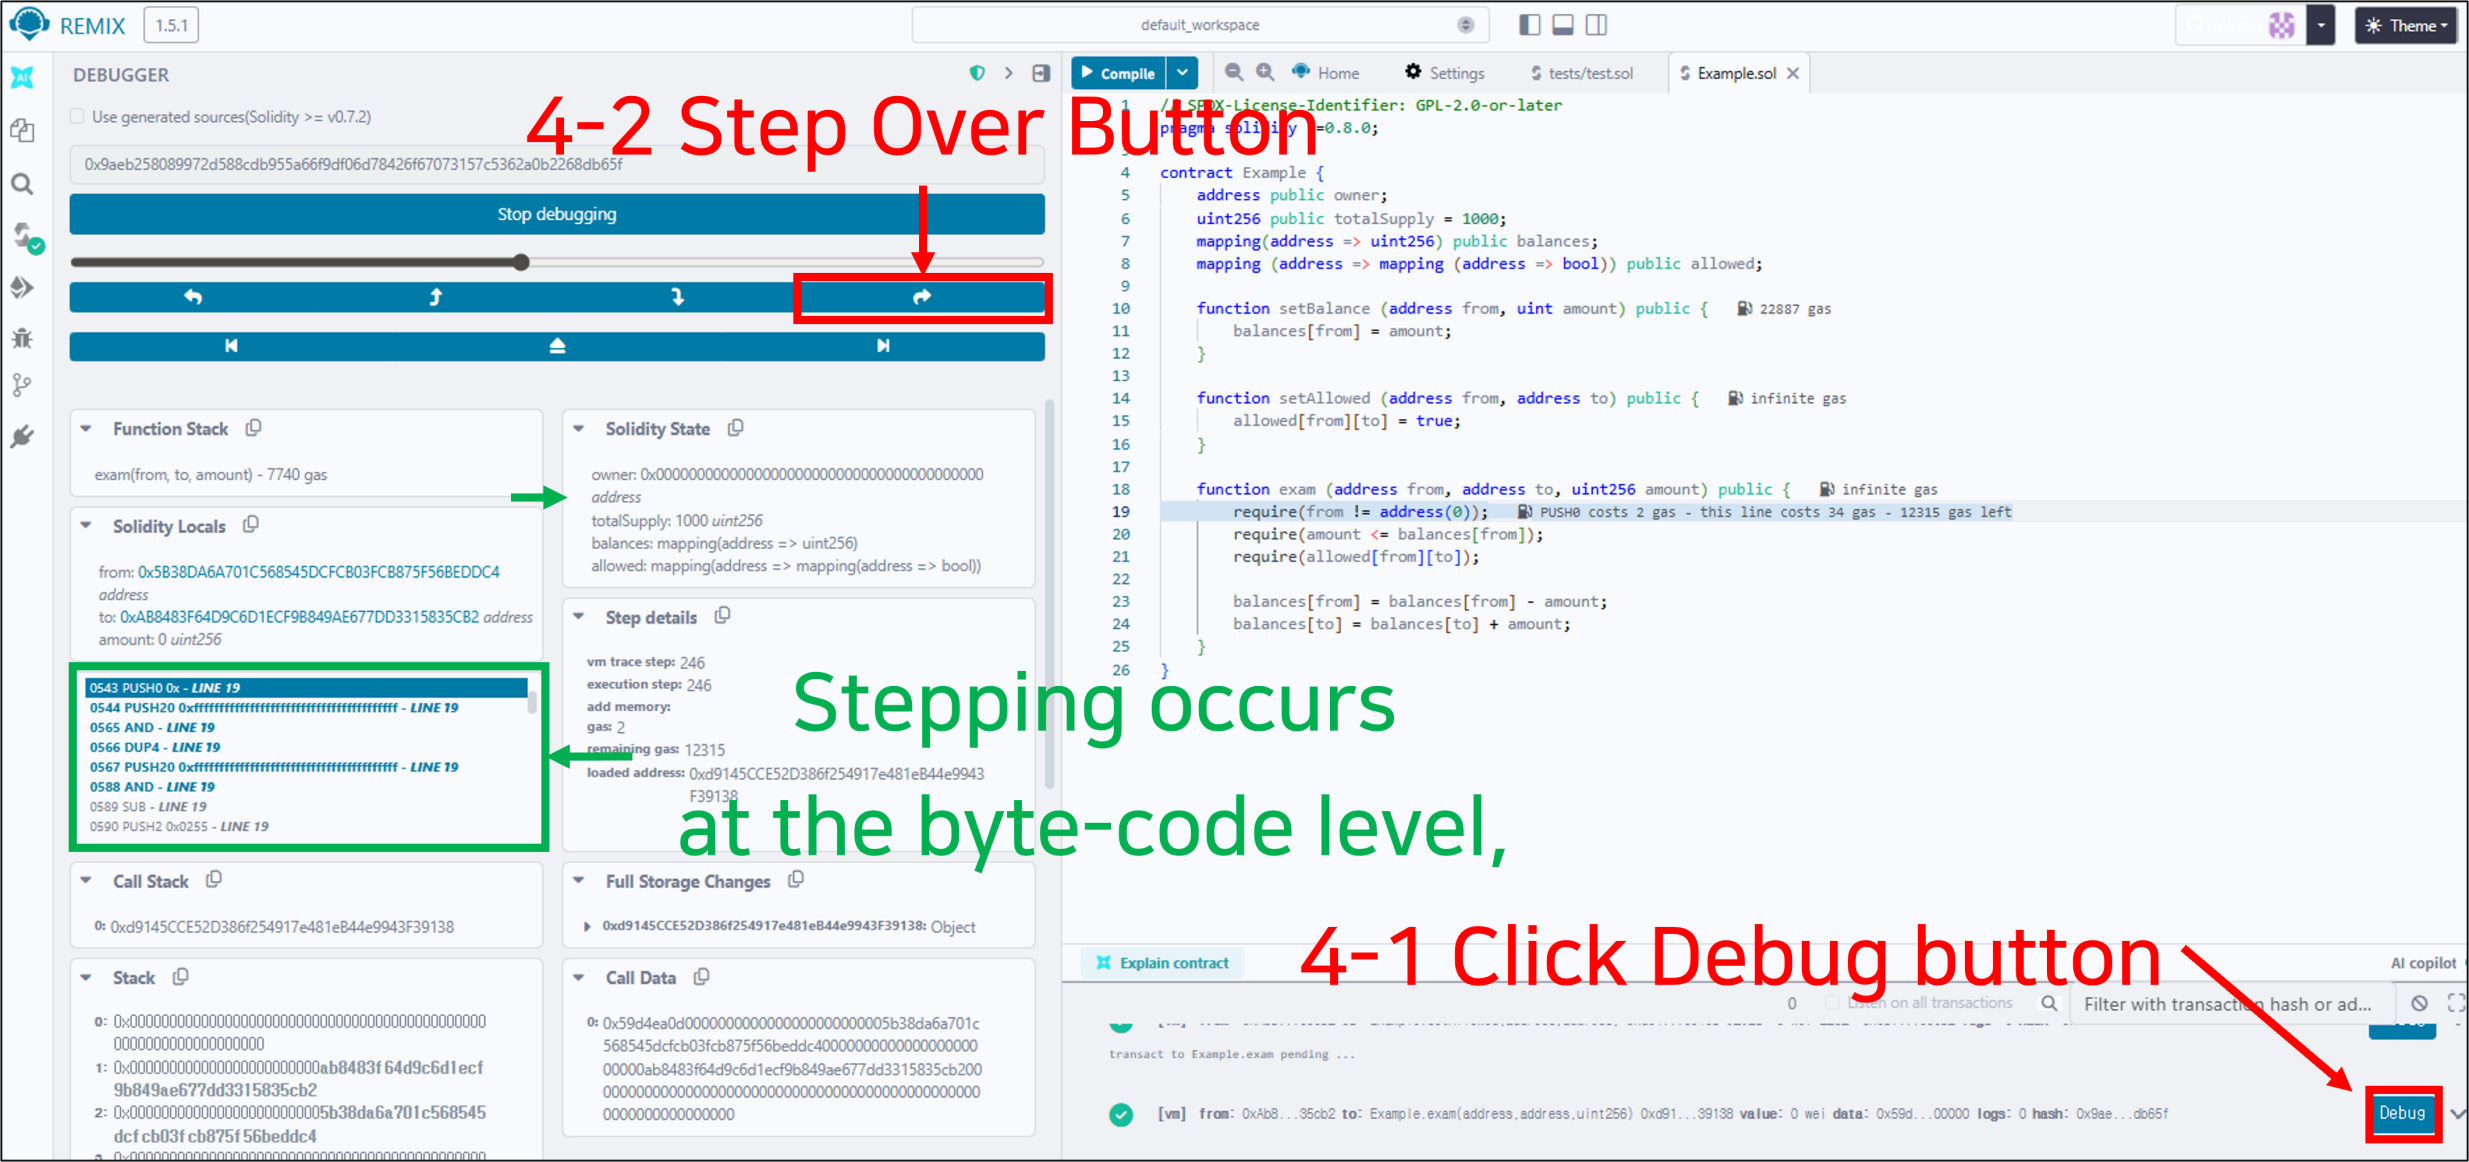

REMIX 1.5.1
default_workspace
Theme
DEBUGGER
Use generated sources(Solidity >= v0.7.2)
0x9aeb258089972d588cdb955a66f9df06d78426f67073157c5362a0b2268db65f
Stop debugging
4-2 Step Over Button
Function Stack
exam(from, to, amount) - 7740 gas
Solidity Locals
from: 0x5B38DA6A701C568545DCFCB03FCB875F56BEDDC4 address
to: 0xAB8483F64D9C6D1ECF9B849AE677DD3315835CB2 address
amount: 0 uint256
0543 PUSH0 0x - LINE 19
0544 PUSH20 0xffffffffffffffffffffffffffffffffffffffff - LINE 19
0565 AND - LINE 19
0566 DUP4 - LINE 19
0567 PUSH20 0xffffffffffffffffffffffffffffffffffffffff - LINE 19
0588 AND - LINE 19
0589 SUB - LINE 19
0590 PUSH2 0x0255 - LINE 19
Call Stack
0: 0xd9145CCE52D386f254917e481eB44e9943F39138
Stack
0: 0x0000000000000000000000000000000000000000000000000000000000000000
1: 0x000000000000000000000000ab8483f64d9c6d1ecf9b849ae677dd3315835cb2
2: 0x0000000000000000000000005b38da6a701c568545dcfcb03fcb875f56beddc4
Solidity State
owner: 0x0000000000000000000000000000000000000000 address
totalSupply: 1000 uint256
balances: mapping(address => uint256)
allowed: mapping(address => mapping(address => bool))
Step details
vm trace step: 246
execution step: 246
add memory:
gas: 2
remaining gas: 12315
loaded address: 0xd9145CCE52D386f254917e481eB44e9943F39138
Full Storage Changes
0xd9145CCE52D386f254917e481eB44e9943F39138: Object
Call Data
0: 0x59d4ea0d0000000000000000000000005b38da6a701c568545dcfcb03fcb875f56beddc4000000000000000000000000ab8483f64d9c6d1ecf9b849ae677dd3315835cb2000000000000000000000000000000000000000000000000000000000000000
Stepping occurs
at the byte-code level,
Compile
Home
Settings
tests/test.sol
Example.sol
1 // SPDX-License-Identifier: GPL-2.0-or-later
2 pragma solidity ^0.8.0;
4 contract Example {
5 address public owner;
6 uint256 public totalSupply = 1000;
7 mapping(address => uint256) public balances;
8 mapping (address => mapping (address => bool)) public allowed;
10 function setBalance (address from, uint amount) public { 22887 gas
11 balances[from] = amount;
12 }
14 function setAllowed (address from, address to) public { infinite gas
15 allowed[from][to] = true;
16 }
18 function exam (address from, address to, uint256 amount) public { infinite gas
19 require(from != address(0)); PUSH0 costs 2 gas - this line costs 34 gas - 12315 gas left
20 require(amount <= balances[from]);
21 require(allowed[from][to]);
23 balances[from] = balances[from] - amount;
24 balances[to] = balances[to] + amount;
25 }
26 }
Explain contract
AI copilot
Filter with transaction hash or ad...
transact to Example.exam pending ...
[vm] from: 0xAb8...35cb2 to: Example.exam(address,address,uint256) 0xd91...39138 value: 0 wei data: 0x59d...00000 logs: 0 hash: 0x9ae...db65f
Debug
4-1 Click Debug button