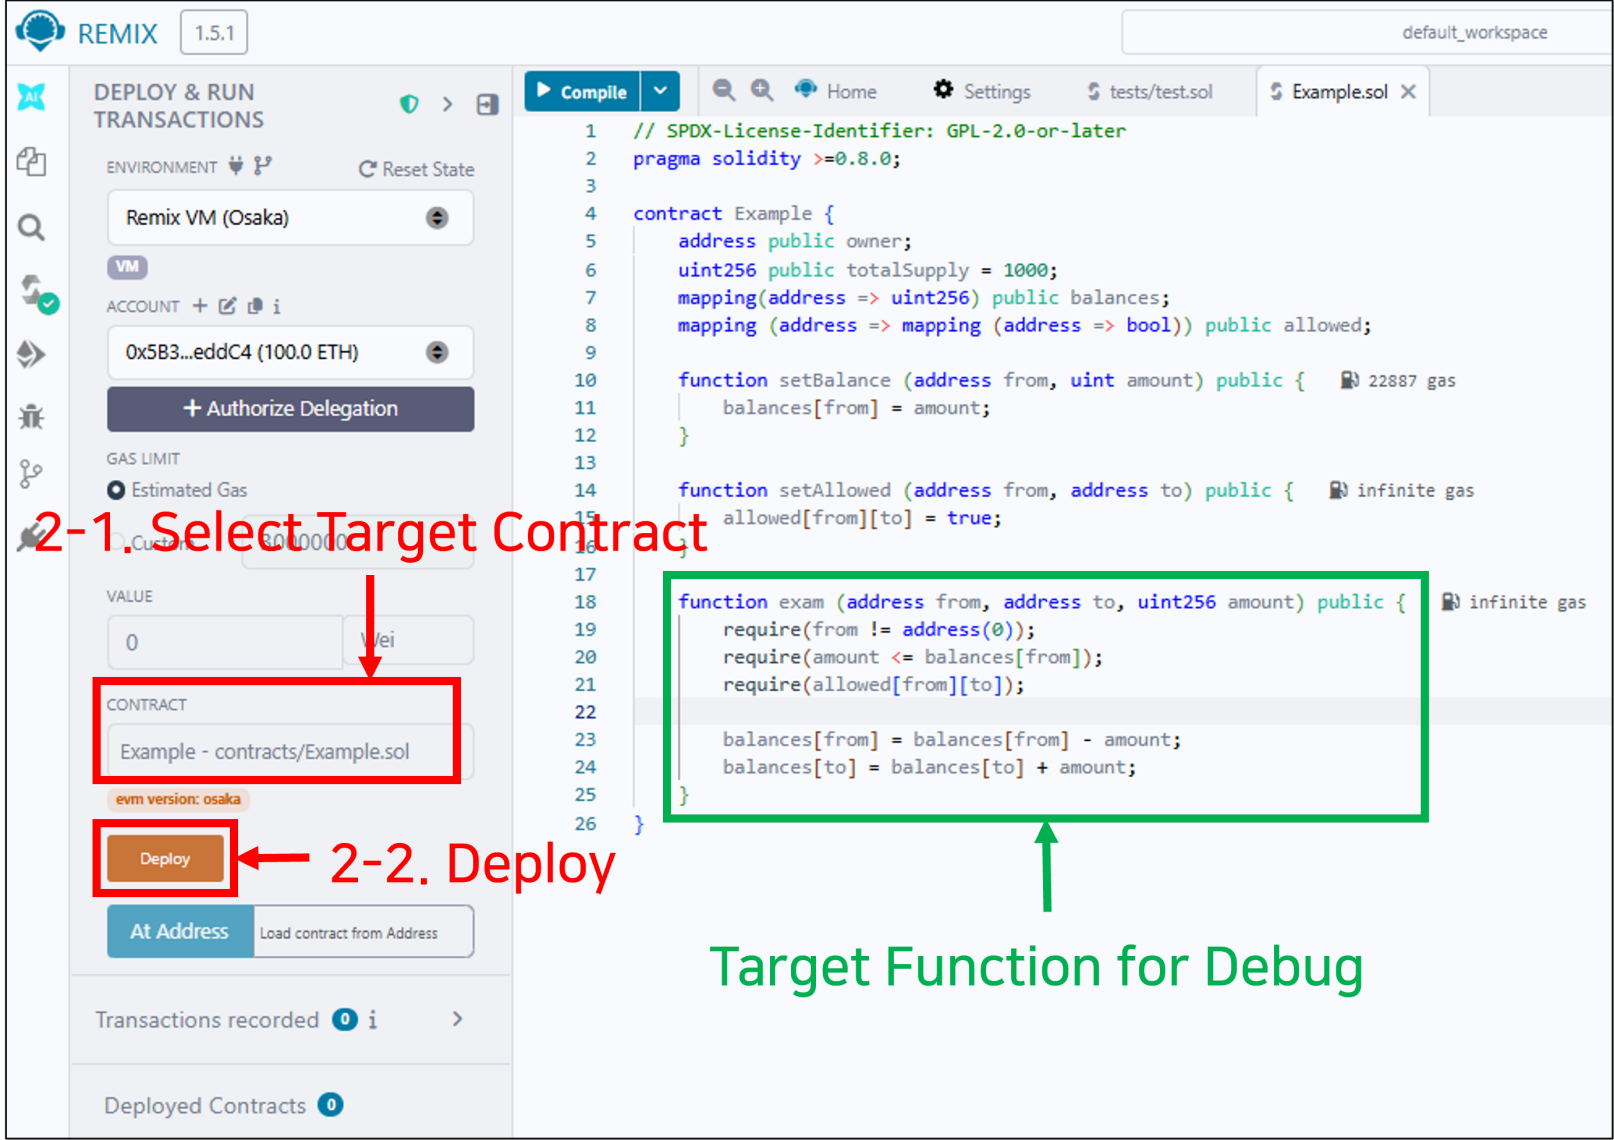

REMIX
1.5.1
default_workspace
DEPLOY & RUN TRANSACTIONS
ENVIRONMENT
Reset State
Remix VM (Osaka)
VM
ACCOUNT
0x5B3...eddC4 (100.0 ETH)
+ Authorize Delegation
GAS LIMIT
Estimated Gas
Custom
3000000
VALUE
0
Wei
CONTRACT
Example - contracts/Example.sol
evm version: osaka
Deploy
At Address
Load contract from Address
Transactions recorded 0
Deployed Contracts 0
Compile
Home
Settings
tests/test.sol
Example.sol
// SPDX-License-Identifier: GPL-2.0-or-later
pragma solidity >=0.8.0;
contract Example {
address public owner;
uint256 public totalSupply = 1000;
mapping(address => uint256) public balances;
mapping (address => mapping (address => bool)) public allowed;
function setBalance (address from, uint amount) public { 22887 gas
balances[from] = amount;
}
function setAllowed (address from, address to) public { infinite gas
allowed[from][to] = true;
}
function exam (address from, address to, uint256 amount) public { infinite gas
require(from != address(0));
require(amount <= balances[from]);
require(allowed[from][to]);
balances[from] = balances[from] - amount;
balances[to] = balances[to] + amount;
}
}
2-1. Select Target Contract
2-2. Deploy
Target Function for Debug