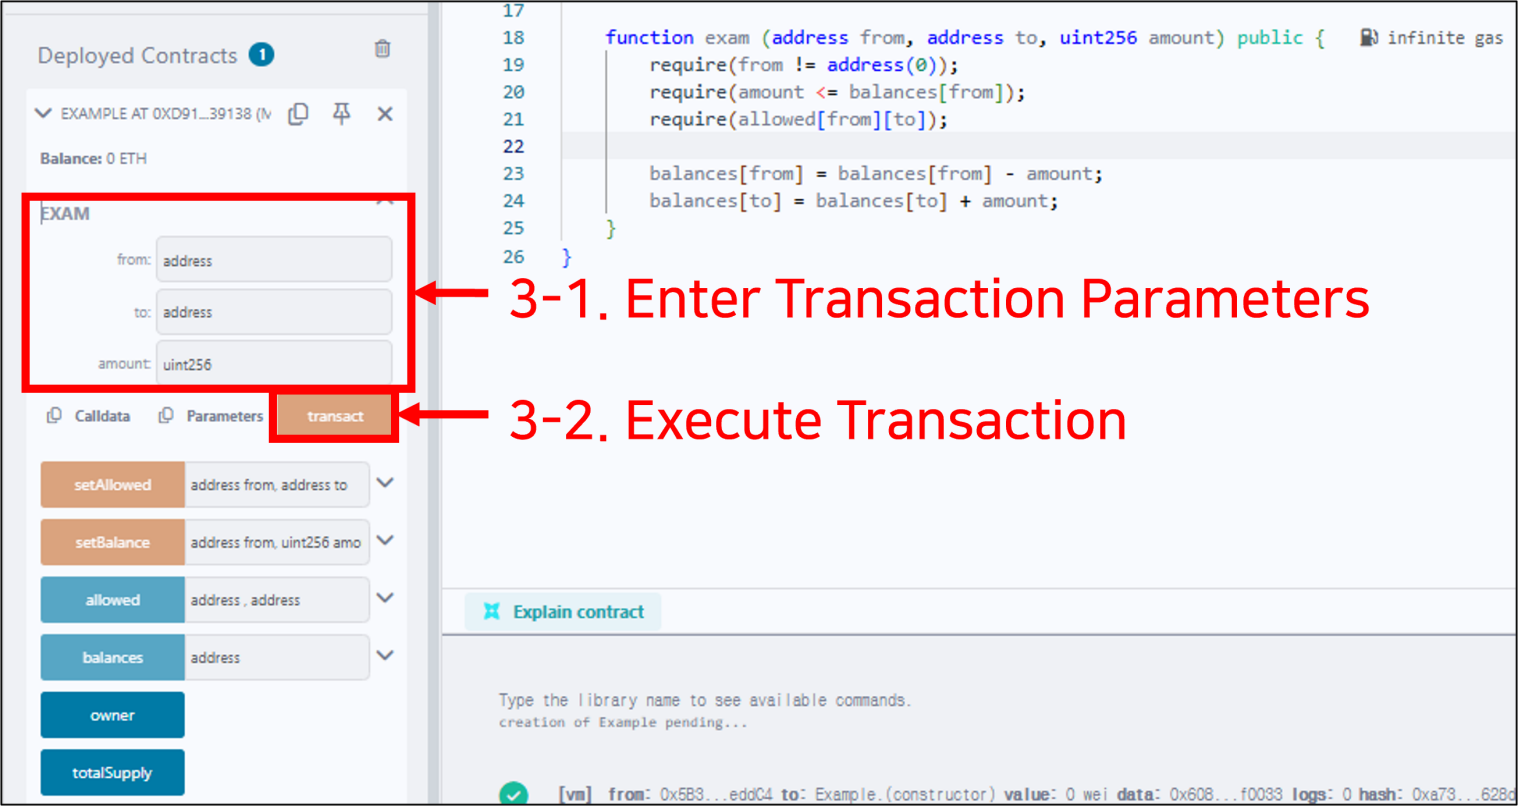

Deployed Contracts 1
EXAMPLE AT 0XD91...39138 (M
Balance: 0 ETH
EXAM
from: address
to: address
amount: uint256
Calldata
Parameters
transact
setAllowed
address from, address to
setBalance
address from, uint256 amo
allowed
address , address
balances
address
owner
totalSupply
17
18 function exam (address from, address to, uint256 amount) public {
19 require(from != address(0));
20 require(amount <= balances[from]);
21 require(allowed[from][to]);
22
23 balances[from] = balances[from] - amount;
24 balances[to] = balances[to] + amount;
25 }
26 }
infinite gas
3-1. Enter Transaction Parameters
3-2. Execute Transaction
Explain contract
Type the library name to see available commands.
creation of Example pending...
[vm] from: 0x5B3...eddC4 to: Example.(constructor) value: 0 wei data: 0x608...f0033 logs: 0 hash: 0xa73...628c