


VIDEO TUTORIAL

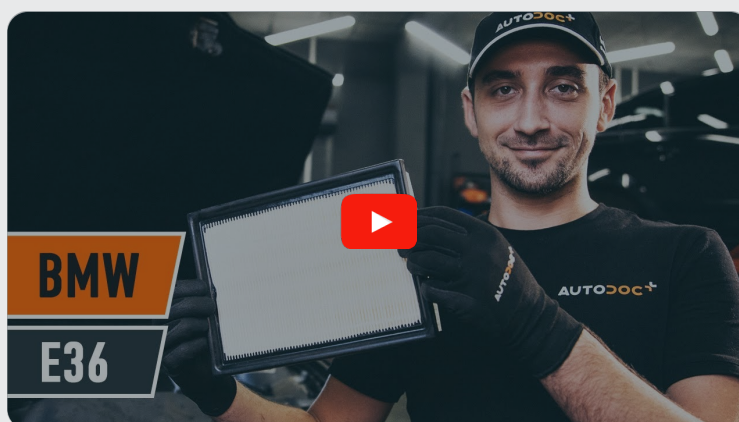

i Important!

This replacement procedure can be used for:

BMW 3 Saloon (E36) 320i 2.0, BMW 3 Coupe (E36) 320i 2.0, BMW 3 Saloon (E36) 325i 2.5, BMW 3 Coupe (E36) 325i 2.5, BMW 3 Convertible (E36) 320i 2.0, BMW 3 Convertible (E36) 325i 2.5, BMW 3 Coupe (E36) M3 3.0, BMW 3 Convertible (E36) M3 3.0, BMW 3 Touring (E36) 320i 2.0, BMW 3 Touring (E36) 328i 2.8, BMW 3 Saloon (E36) 328i 2.8, BMW 3 Coupe (E36) 328i 2.8, BMW 3 Convertible (E36) 328i 2.8, BMW 5 Saloon (E39) 520i 2.0, BMW 5 Saloon (E39) 523i 2.5, (+ 68)

The steps may slightly vary depending on the car design.

REPLACEMENT: AIR FILTER – BMW E36. TOOLS YOU MIGHT NEED:



• Microfibre towel

• Fender cover

BUY TOOLS


Replacement: air filter – BMW E36. AUTODOC recommends:

- Follow the terms, recommendations and requirements of the part operation provided by the manufacturer.
- All work should be done with the engine stopped.

REPLACEMENT: AIR FILTER – BMW E36. TAKE THE FOLLOWING STEPS:

1


Open the hood.

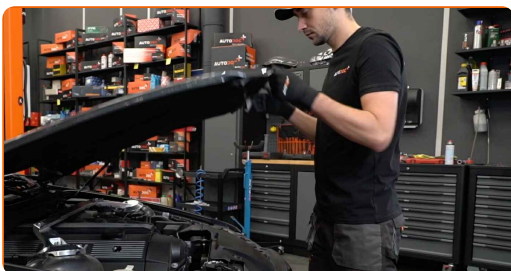**2**

Use a fender protection cover to prevent damaging paintwork and plastic parts of the car.

**3**

Release the air filter cover clips.

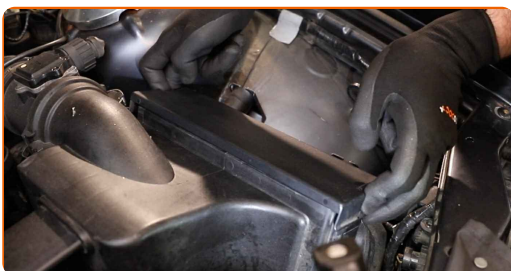

4

Take off the filter lid.



AUTODOC recommends:

- Replacement: air filter – BMW E36. To avoid damaging the part during installation, do not use excessive force.


5

Remove the filter element from the filter housing.




6

Cover the air intake hose with a microfibre towel to prevent dust and dirt from getting into the system.

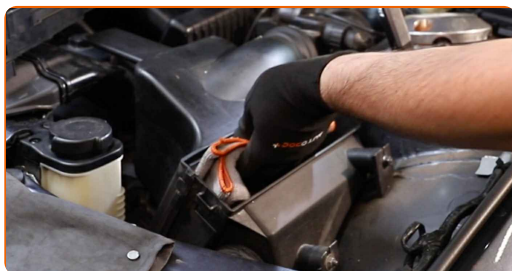

7

Clean the air filter cover and housing.

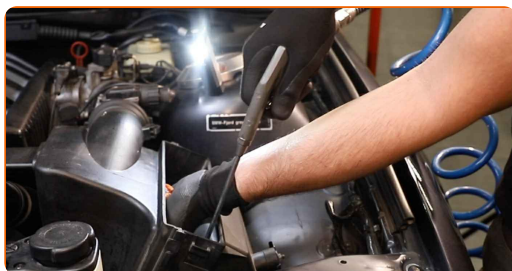


Replacement: air filter – BMW E36. Tip from AUTODOC experts:

- Before cleaning the air filter cover and housing, cover the air duct parts, mass airflow sensor (if available), throttle valve with a clean cloth.

8

Remove the microfibre towel from the air intake hose.

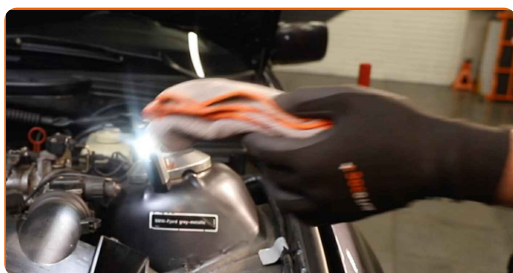

9

Insert a new filter element into the filter housing. Make sure that the filter edge fits tight to the housing.



AUTODOC recommends:

- Replacement: air filter – BMW E36. Be sure to position the filtering element correctly. Avoid misalignment.
- Take care to only use quality filters.
- During installation, make sure to prevent dust and dirt from getting into the air filter housing.

10

Reinstall the air filter cover. Fasten it.



AUTODOC recommends:


- Replacement: air filter – BMW E36. Do not use excessive force during installation. This may damage the part.

11

Press the air filter cover clips into place.

12

Remove the fender protection cover.

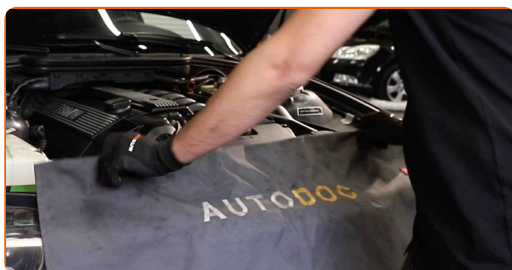

13

Close the hood.



WELL DONE! 👍

VIEW MORE TUTORIALS

AUTODOC – TOP QUALITY AND AFFORDABLE CAR PARTS ONLINE

AUTODOC MOBILE APP: GREAT DEALS AND CONVENIENT SHOPPING



AUTODOC

GET IT ON
Google Play

Download on the
App Store

Download

A GREAT SELECTION OF SPARE PARTS FOR YOUR CAR

BUY SPARE PARTS FOR BMW

AIR FILTER: A WIDE SELECTION