


Procédure GLPI sur Ubuntu server 24.04

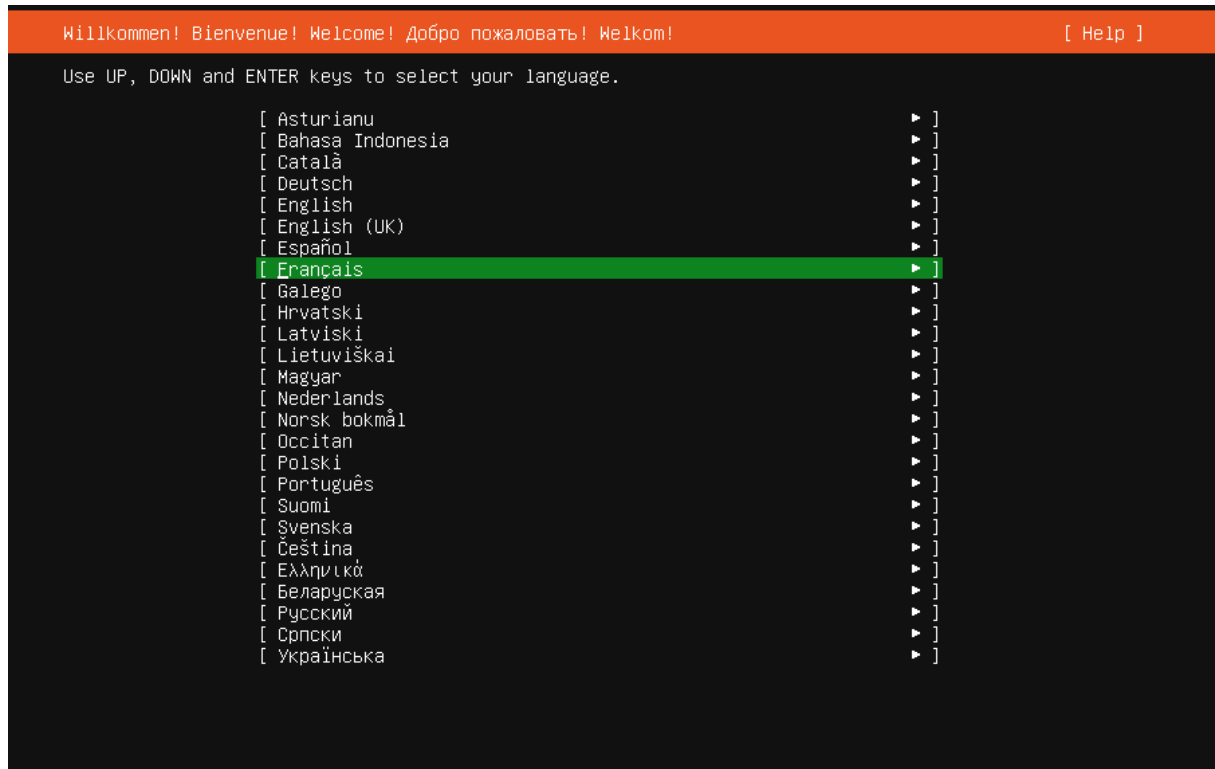

Mise à jour du programme d'installation disponible

Version 24.04.4.1 of the installer is now available (24.04.4 is currently running).

Vous pouvez lire les notes de publication de chaque version sur :

<https://github.com/canonical/subiquity/releases>

If you choose to update, the update will be downloaded and the installation will continue fr

```
[ Mise à jour vers le nouveau programme d'installation ]  
[ Continuer sans mettre à jour ]  
[ Retour ]
```

-appliquer la mise a jour

Please select your keyboard layout below, or select "Identify keyboard" to detect your layout automatically.

Layout: [French ▼]

Variant: [French – French (legacy, alt.) ▼]

[Identify keyboard]

[Done]
[Back]

Choose the base for the installation.

☒ Ubuntu Server

The default install contains a curated set of packages that provide a comfortable experience for operating your server.

☐ Ubuntu Server (minimized)

This version has been customized to have a small runtime footprint in environments where humans are not expected to log in.


Additional options

☐ Search for third-party drivers


This software is subject to license terms included with its documentation. Some is proprietary. Third-party drivers should not be installed on systems that will be used for FIPS or the real-time kernel.

[Done]
[Back]


-clic deux fois

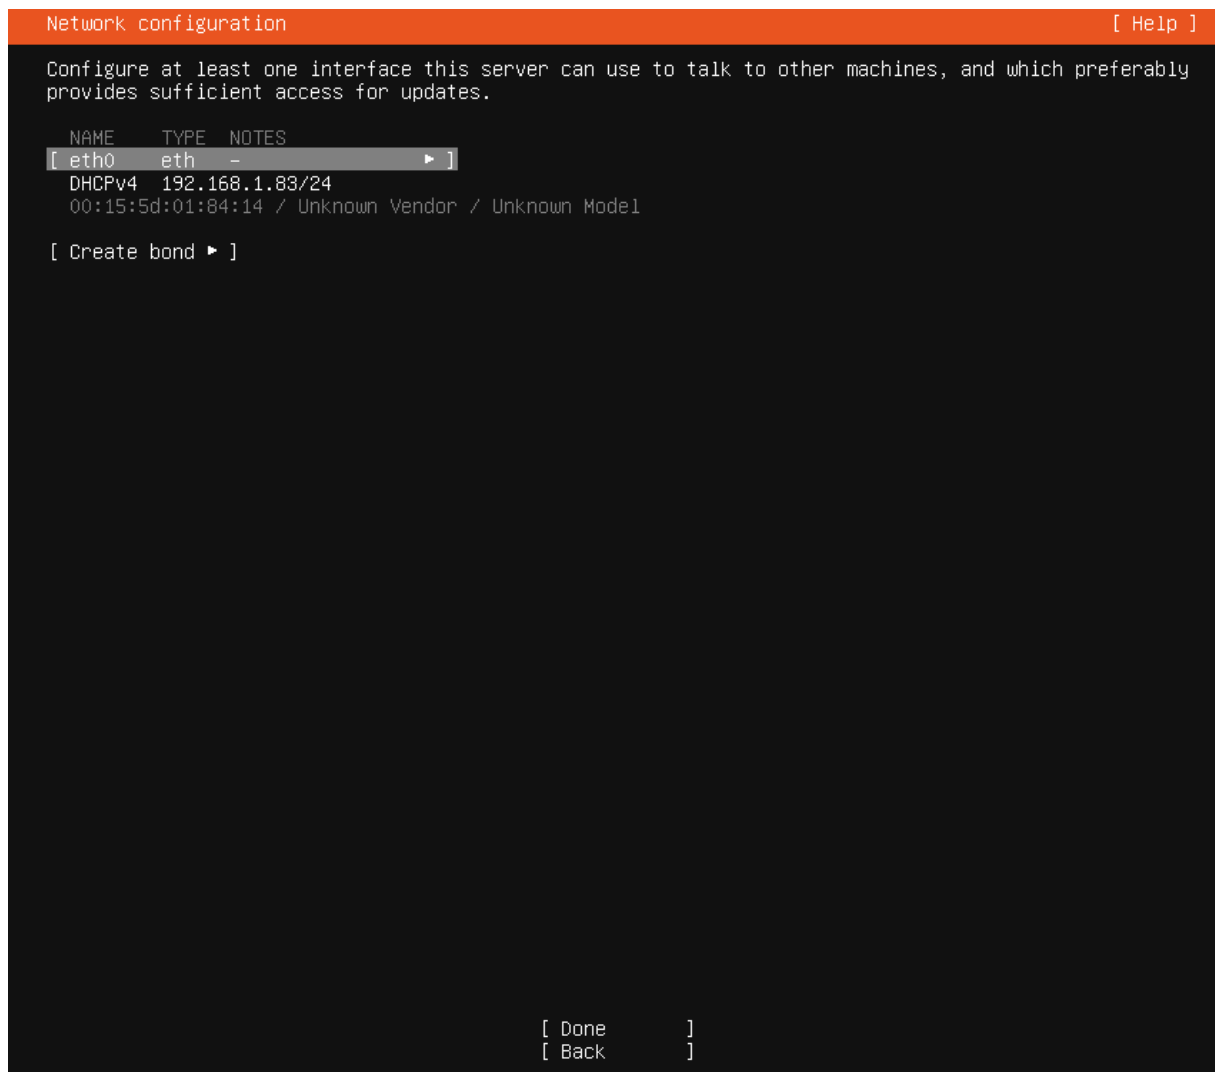

-cliquer edit IPV4

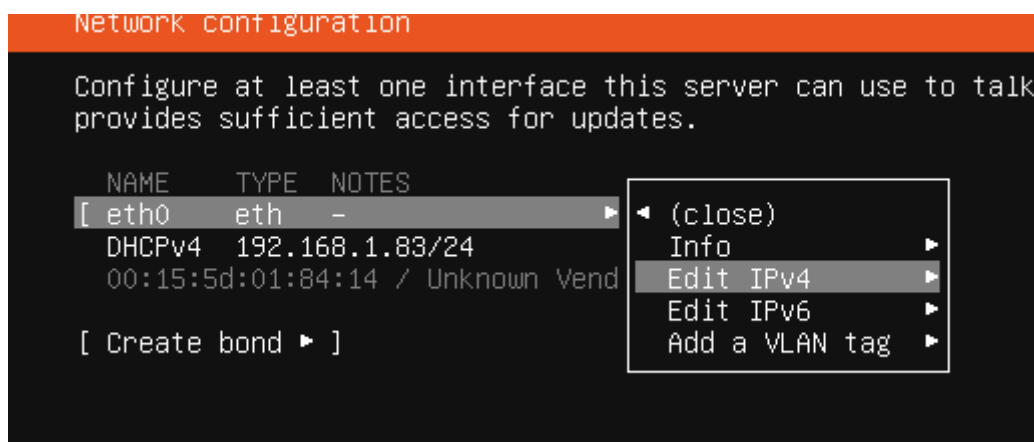

-DHCP manual

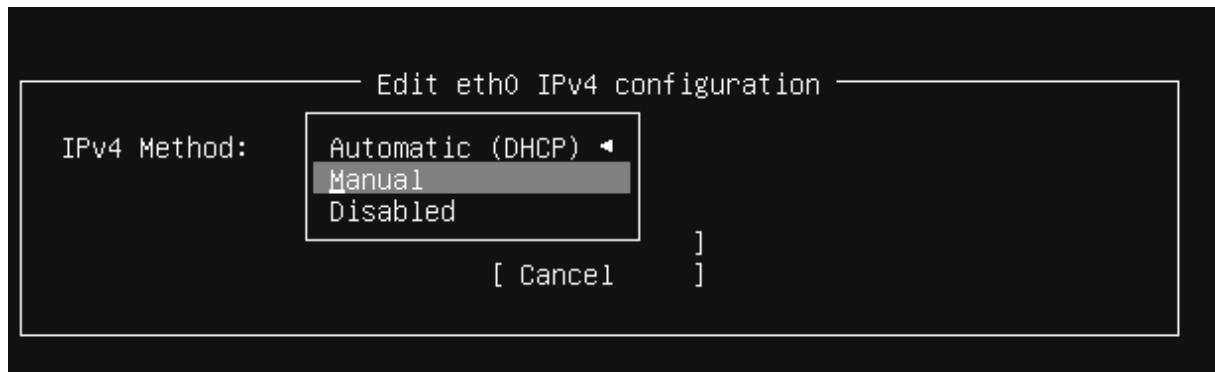


-votre reseau

-l'ip de la machine

-votre passerelle (généralement votre routeur)

-name server=DNS dans mon cas j'ai mis mon AD1

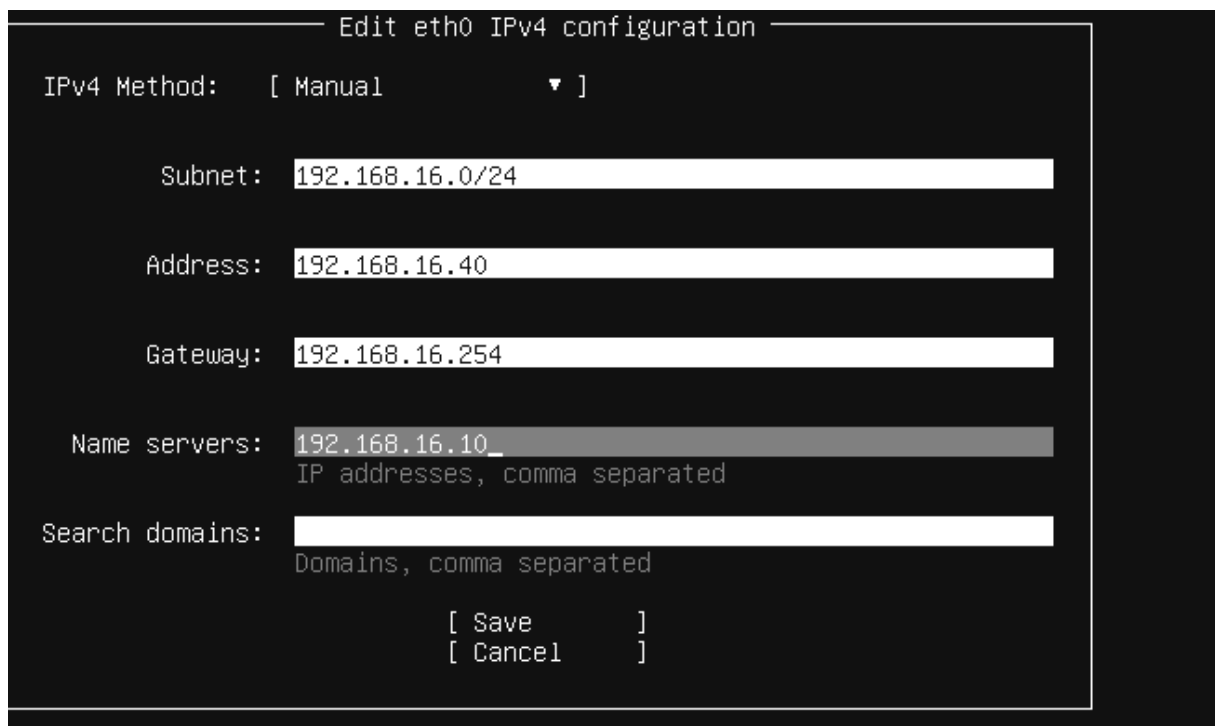

-attendre jusqu'à lecture des listes des paquets s'affiche

Ubuntu archive mirror configuration [Help]

If you use an alternative mirror for Ubuntu, enter its details here.

Mirror address:

You may provide an archive mirror to be used instead of the default.

This mirror location passed tests.

Atteint :1 http://fr.archive.ubuntu.com/ubuntu noble InRelease
Réception de :2 http://fr.archive.ubuntu.com/ubuntu noble-updates InRelease [126 kB]
Réception de :3 http://fr.archive.ubuntu.com/ubuntu noble-backports InRelease [126 kB]
252 ko réceptionnés en 0s (859 ko/s)
Lecture des listes de paquets...

[Done]

[Back]

-faire done

guided storage configuration

Configure a guided storage layout, or create a custom one:

(X) Use an entire disk

[360022480604d9b8f0e80ea701a3dc926 local disk 30.000G ▼]

[X] Set up this disk as an LVM group

[] Encrypt the LVM group with LUKS

Passphrase:

Confirm passphrase:

[] Also create a recovery key

The key will be stored as ~/recovery-key.txt in
and will be copied to /var/log/installer/ in the

() Custom storage layout

[Done]
[Back]


```
FILE SYSTEM SUMMARY

MOUNT POINT      SIZE      TYPE      DEVICE TYPE
[ /               13.996G   new ext4   new LVM logical volume ▶ ]
[ /boot          2.000G   new ext4   new partition of local disk ▶ ]

AVAILABLE DEVICES

DEVICE                                TYPE                                SIZE
[ ubuntu-vg (new)                     LVM volume group                   27.996G ▶ ]
  free space                           14.000G ▶

[ Create software RAID (md) ▶ ]
[ Create volume group (LVM) ▶ ]

USED DEVICES

DEVICE                                TYPE                                SIZE
[ ubuntu-vg (new)                     LVM volume group                   27.996G ▶ ]
  ubuntu-lv      new, to be formatted as ext4, mounted at / 13.996G ▶

[ 360022480604d9b8f0e80ea701a3dc926   local disk                         30.000G ▶ ]
  partition 1    new, BIOS grub spacer                               1.000M ▶
  partition 2    new, to be formatted as ext4, mounted at /boot 2.000G ▶
  partition 3    new, PV of LVM volume group ubuntu-vg           27.997G ▶

[ Done ]
```

-cliquer sur continuer

```
Confirm destructive action

Selecting Continue below will begin the installation process and
result in the loss of data on the disks selected to be formatted.

You will not be able to return to this or a previous screen once the
installation has started.

Are you sure you want to continue?

[ No ]
[ Continue ]
```

-remplir le nom : le nom du serveur :votre user :

Et le mdp

Profile configuration

[Help]

Enter the username and password you will use to log in to the system. You can configure SSH access on a later screen, but a password is still needed for sudo.

Your name:

Your servers name:
The name it uses when it talks to other computers.


Pick a username:

Choose a password:

Confirm your password:

[Done]

-Important cocher install openssh server

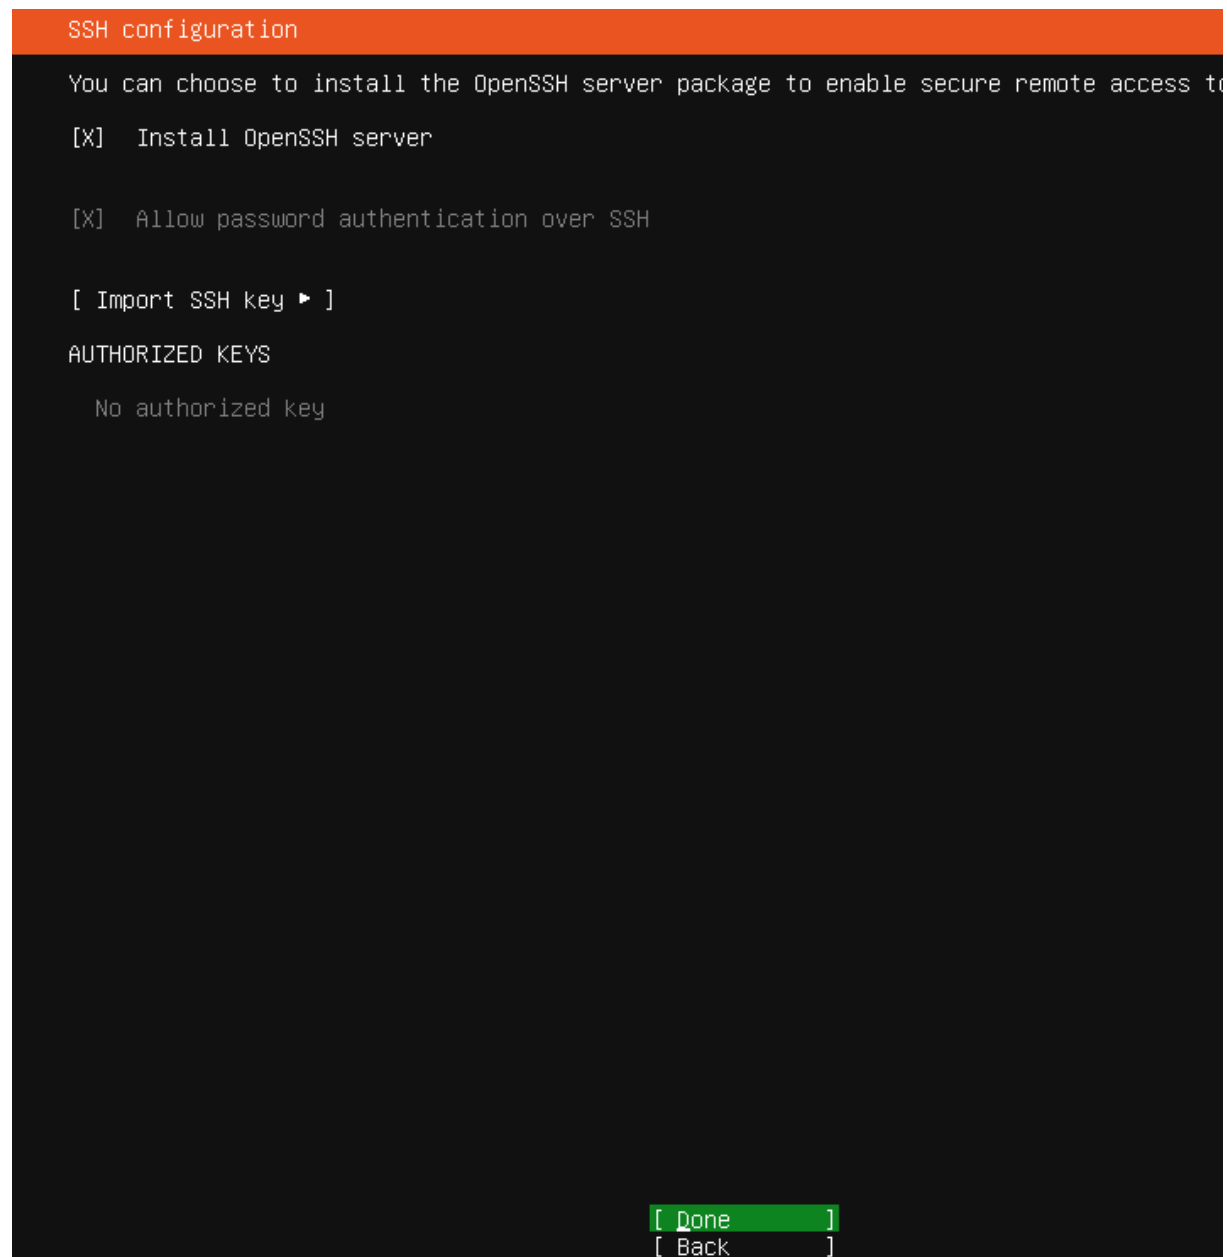

Featured server snaps

These are popular snaps in server environments. Select or deselect with SPACE, press ENTER to see more details of the package, publisher and versions available.

[]	microk8s	canonical✓	Kubernetes for workstations and appliances
[]	nextcloud	nextcloud✓	Nextcloud Server - A safe home for all your data
[]	wekan	xet7	Open-Source kanban
[]	canonical-livepatch	canonical✓	Canonical Livepatch Client
[]	rocketchat-server	rocketchat✓	Rocket.Chat server
[]	mosquitto	mosquitto✓	Eclipse Mosquitto MQTT broker
[]	etcd	canonical✓	Resilient key-value store by CoreOS
[]	powershell	canonical✓	PowerShell for every system!
[]	sabnzbd	safihre	SABnzbd - The automated Usenet download tool
[]	wormhole	snappcrafters🚀	get things from one computer to another, safely
[]	aws-cli	aws✓	Universal Command Line Interface for Amazon Web
[]	slcli	softlayer	Python based SoftLayer API Tool.
[]	doctl	digitalocean✓	The official DigitalOcean command line interface
[]	keepalived	keepalived-project✓	High availability VRRP/BFD and load-balancing fo
[]	prometheus	canonical✓	The Prometheus monitoring system and time series
[]	lxd	canonical✓	LXD - container and VM manager

[Done]

[Back]

Installation complete!

```
curtin command extract
  acquiring and extracting image from cp:///tmp/tmpc077om50/mount
configuring keyboard
curtin command in-target
executing curtin install curthooks step
curtin command install
  configuring installed system
  running 'curtin curthooks'
curtin command curthooks
  configuring apt configuring apt
  installing missing packages
  Installing packages on target system: ['grub-pc']
  configuring iscsi service
  configuring raid (mdadm) service
  configuring NVMe over TCP
  installing kernel
  setting up swap
  apply networking config
  writing etc/fstab
  configuring multipath
  updating packages on target system
  configuring pollinate user-agent on target
  updating initramfs configuration
  configuring target system bootloader
  installing grub to target devices
  copying metadata from /cdrom
final system configuration
  calculating extra packages to install
  installing openssh-server
  retrieving openssh-server
  curtin command system-install
  unpacking openssh-server
  curtin command system-install
  configuring cloud-init
  downloading and installing security updates
  curtin command in-target
  restoring apt configuration
  curtin command in-target
subiquity/Late/run:
```

[View full log]

[Reboot Now]

Installation des paquets : Apache, PHP (toutes les extensions), MySQL

cette commande installe tout : le serveur web (Apache, normalement), PHP avec sa tonne d'extensions et la base de données.

```
glpi@glpi-sisr:~$sudo apt install apache2 php php-mysql php-xml php-curl php-gd php-intl php-ldap php-mbstring php-zip php-bz2 mysql-server -y
```

mysql : creation base de données

Crée un espace de stockage dédié à GLPI dans MySQL.

```
sudo mysql
```

```
mysql>CREATE DATABASE glpi CHARACTER SET utf8mb4 COLLATE utf8mb4_general_ci;
```

Crée un compte MySQL dédié à GLPI. On ne donne jamais à une application l'accès root on crée un utilisateur limité avec son propre mot de passe.

```
mysql>CREATE USER 'glpi'@'localhost' IDENTIFIED BY 'glpi123';
```

Donne à l'utilisateur glpi tous les droits sur sa propre base, puis force MySQL à recharger la table des droits pour que ça s'applique immédiatement.

```
mysql>GRANT ALL PRIVILEGES ON glpi.* TO 'glpi'@'localhost';
```

```
mysql>FLUSH PRIVILEGES;
```

```
mysql>quit
```

téléchargement et extraction de glpi

Télécharge l'archive de GLPI depuis GitHub directement sur le serveur, sans passer par un navigateur

```
glpi@glpi-sisr:~$cd /tmp
```

```
glpi@glpi-sisr:/tmp$wget https://github.com/glpi-project/glpi/releases/download/10.0.16/glpi-10.0.16.tgz
```

Extrait le contenu de l'archive téléchargée

Déploiement dans le repertoire web

Déplace le dossier glpi vers le répertoire racine d'Apache

```
glpi@glpi-sisr:/tmp$sudo mv glpi /var/www/html/
```

```
glpi@glpi-sisr:/tmp$sudo chown -R www-data:www-data /var/www/html/glpi
```

```
glpi@glpi-sisr:/tmp$sudo chmod -R 755 /var/www/html/glpi
```

```
glpi@glpi-sisr:/tmp$ls -la /var/www/html/
```

Démarrage d'apache et finalisation

Redémarre le service Apache pour qu'il prenne en compte tous les changements effectués

```
glpi@glpi-sisr:/tmp$sudo systemctl restart apache2
```

```
glpi@glpi-sisr:/tmp$ sudo systemctl status apache2
```

-http://l'ip de votre machine/glpi

User :glpi

Mdp : glpi