

A bag-of-tales from Santa

Converting the Ashliman Folktexts Collection into a dataset for machine learning

Sándor Darányi · Joshua Hagedorn ·

Received: date / Accepted: date

Abstract Computational motif identification in folktales is an open research problem. To move ahead in this area, the field would benefit from shared test data for machine learning, putting experimentation in focus. Folklore databases including text collections in multiple languages do exist, but not in dataset form for data science, and are currently not shared, making their results non-reproducible, an obstacle to scientific progress. The need for significant preprocessing adds insult to injury, rendering the outcome both incomparable and subject to multidisciplinary criticism. As a first step to remedy this problem, we report work in progress, having converted the Ashliman Folktexts Collection into a public dataset for supervised tale type learning, itself a precondition for scalable motif identification. In the future, this dataset can be upgraded in several respects to serve as the basis for springboard experiments with the Thompson Motif Index and the Aarne-Thompson-Uther tale typology, paving the way for ontology development.

Keywords folktale · mythology · motif · reproducibility · machine learning ·

Grants or other notes about the article that should go on the front page should be placed here. General acknowledgments should be placed at the end of the article.

Sándor Darányi
Swedish School of Library and Information Science, University of Borås
E-mail: sandor.daranyi.hb.se@gmail.com

Joshua Hagedorn
Department of ZZZ, University of WWW
E-mail: josh.hagedorn@gmail.com

1 Introduction

Ever since the concept of a motif was introduced some 200 years ago, the quest to identify content elements above word level has been a standard preoccupation in literary science [Frenzel(1992)], [Seigneuret(1988)]. There, a motif stands for a recurrent theme, whereas in musicology, a motive is considered “the smallest structural unit possessing thematic identity” [White(1976)]. In a similar vein, Stith Thompson defined motifs in folktale research as “the smallest element in a tale having a power to persist in tradition” [Thompson(1977)] (1946).

A sufficient overlap between these definitions suggests that such higher order content units exist as narrative building blocks in a generic sense, but their automatic extraction by computational means has eluded folk narrative studies so far [Darányi and Lendvai(2010)]. In spite of the suggestion that topics identified by Labeled Latent Dirichlet Allocation (L-LDA) had an analogous function with motifs in a database of Dutch and Frisian folktales [Karsdorp and van den Bosch(2013)], we consider finding characteristic patterns of semantic content an open research problem. One reason for our skepticism is that in Thompson’s Motif Index of Folk Literature [Thompson(1951)] alone, over 45000 motifs are listed on a global scale, but many more e.g. regional motif indexes exist whose material would doubtlessly inflate that number. As we will argue below, digital humanities (DH) in general, and folk narrative studies in particular, are not up to the task of a scalable pattern hunt yet.

Our research problem for the current paper is this: consider the case of two standard reference tools, the TMI, and the Aarne-Thompson-Uther tale typology [Uther and Fellows(2004)]. A count in the TMI indicated the presence of . . . motifs, whereas Yarlott and Finlayson counted 46,248 motifs and sub-motifs from over 614 collections, 41,796 of which had references to tales or tale types [Yarlott and Finlayson(2016)]. However, based on our count the ATU uses only . . . (% of them to model tale structures as motif strings. One is then prompted to ask, where have . . . % of motifs in the TMI disappeared, and how can an important monograph acquire almost canonical status with such a discrepancy in its background? In our eyes, the explanation may go back to the very different comparison capacities of the human mind vs. the computer, leading to differently robust deductions, and for a remedy to this situation one needs to call in data science. Namely if we want to apply machine learning for motif identification and extraction, we need suitable datasets which enable research teams to replicate each other’s results. Below we take a small step in this direction.

The structure of this paper is as follows. In Section 2, we bring examples of related research. In Section 3, Ashliman’s Folktexts tale collection is introduced. In Section 4 we explain our motivation to support reproducible research in computational folkloristics, with Section 5 offering details of data harvesting and cleaning. Section 6 brings details about the new annotated dataset

for machine learning, while in Section 7 we add our conclusions and plans for future research.

2 Related research

Instead of enumerating important steps in computational folkloristics [Abello et al(2012)Abello, Broadwell, and Tangherlini], in a chronological manner, for the sake of brevity we present related progress in the context of *evolving semantics*. In interaction with vector space based methods and predication based semantic indexing [Cohen et al(2012)Cohen, Widdows, Schvaneveldt, Davies, and Rindfleisch], this paradigm is emerging e.g. in digital preservation [Kontopoulos et al(2016b)Kontopoulos, Riga, Mitziias, Andreadis, Stamatopoulos, and Papadopoulos], [Kontopoulos et al(2016a)Kontopoulos, Darányi, Wittek, Konstantinidis, Riga, Mitziias, Stavropoulos, Andreadis, Maron, and Papadopoulos].

2.1 Converging trends

In this broader context, one can observe two major trends whose convergence will be underlying the results of the next decade. The first is focus on the evolutionary aspect of motif and/or tale type distributions, either with regard to certain tale types [Silva and Tehrani(2016)], [Karsdorp and van den Bosch(2013)], [Karsdorp(2016)] (eg d’Huy and Tehrani), or geographical distribution of globally occurring narrative motifs [Thuillard et al(2018)Thuillard, d’Huy, Berezkin, and Le Quellec]. Strikingly, there is a certain genetically inspired thinking in the background, ultimately going back to the modeling capacities inherent in Dawkins’ meme theory [Dawkins(2016)], comparing tale types as motif sequences to ‘narrative DNA’ [Darányi et al(2012)Darányi, Wittek, and Forró], [Ofek et al(2013)Ofek, Darányi, and Rokach], [Meder et al(2016)Meder, Karsdorp, Nguyen, Theune, Trieschnigg, and Muiseur] (Murphy 2014, 2015), or looking at the evolution of narrative/story networks as a quasi-biological process based on the mutation and recombination of narrative elements [Karsdorp(2016)]. Such views possibly rely on certain similarities with bioinformatics in terms of network motif identification (ref), a problem analog with ours. The second popular trend is that of computing embeddings by multivariate statistics; this means geometrically located content of increasingly condensed word and sentence semantics and beyond [Mikolov et al(2013)Mikolov, Chen, Corrado, and Dean], [Pennington et al(2014)Pennington, Socher, and Manning], [Rothe and Schütze(2015)], [Le and Mikolov(2014)], [Reimers and Gurevych(2019)], [Garg et al(2019)Garg, Ikbāl, Srivastava, Vishwakarma, Karanam, and Subramaniam], and must be familiar from information retrieval, machine learning, data science or knowledge representation. Many results of computational folkloristics manifest examples of this paradigm [Tangherlini(2016)], [Lô et al(2020)Lô, de Boer, and van Aart]. Related methods fall back on *distributional semantics*. However, vector spaces are not really suitable to investigate semantic evolution per se, the notion asking for vector fields instead to model the inherent dynamics of content [Wittek et al(2015)Wittek, Darányi, Kontopoulos, Moysiadis, and Kompatsiaris], [Darányi et al(2016)Darányi, Wittek, Konstantinidis, Papadopoulos, and Kontopoulos].

Unfortunately, no semantic theory is available to explain factors behind language change or conceptual dynamics [Darányi and Wittek(2013)] in terms of vector fields for the time being.

Another method of encoding sentence semantics, reliant on *compositional semantics*, connects to quantum theory (QT) inspired text processing methods, a research direction in artificial intelligence [Widdows et al(2021)Widdows, Kitto, and Cohen]. The first publications looking at the structural study of Greek mythology from a QT perspective were published a while ago [Darányi et al(2014)Darányi, Wittek, and Kitto], [Darányi and Wittek(2016)], expected to pave the way for similar efforts.

As the computing of results for the above both trends require datasets, we briefly look at their availability next.

2.2 Databases and datasets

D’Huy et al with U. Datasets extracted from databases must exist but are not published. Berezkin dataset in Russian only. This is a catch-22 situation: A Dutch will never repeat the experiment and a non-Dutch will never be able to do so. The same holds for Russian, Estonian, Hungarian, etc. The closest to a lingua franca, no pun intended, is to default on English. GS survey returns practically nil. Meder survey, Ilyefalvi, all articles rely on ones of own manufacturing, plus neither are in the public domain. Evolving datasets even less so (Karsdorp 2016). One of the exceptions that qualified in every respect, and was graciously donated to the digital humanities (DH) and data science community, is Prof DL Ashliman’s Folktexts ([http](http://www.folktexts.com/)).

Tangherlini 2016: Big folklore implies pattern discovery at large but the respective datasets are nowhere to be accessed.

Berezkin 2015b states that only the catalog is placed on the web but not the corresponding files. Research potential thereafter is nominal at best. Site was promised to be opened but I wonder. Cca 50000 abstracts, comparable with Meertens, but short of institutional support, in Russian only.

3 The Ashliman Folktexts collection

The ‘*Folktexts*’ site has been populated and maintained since 1996 by D.L. Ashliman, professor emeritus from the University of Pittsburgh. While some other sites may have a more lavish design, Ashliman’s is the largest and most extensively annotated. It serves as a respected scholarly resource for folklorists, with a large and curated set of tale texts. While we have only included tales from pages with clear ATU annotations ($n = 208$ pages) in this dataset, the total content of the website is much larger ($n = 366$ pages), and includes various creation myths, stories of changelings, Faust legends, and more.

Despite the richness of this resource, it has not frequently been used in folklore research as a larger corpus. While some previous studies reference the Ashliman corpus, these often only include a smaller portion of the entire set of

texts [Reiter et al(2014)Reiter, Frank, and Hellwig]. To our knowledge, none of the published studies provide an openly-accessible corpus of the data for use in promoting subsequent research.

4 Support for Reproducibility in Folklore Studies

Reproducibility is a defining characteristic of science, yet a wide gamut of scientific fields have been plagued by a “replicability crisis”: a situation where trusted research findings have been impossible to reproduce [cite]. While the problem has come to the fore in the health and social sciences, it has been acknowledged in disciplines as broad as archaeology [cite], political science [cite], biology [cite], and economics [cite].

Reproducible research entails that study results be accompanied by:

1. a detailed description of the methods used to obtain and operate on the data
2. the full dataset(s) used in the study
3. the full code used to transform the data and compute the results

In recent years some strides have been made in the digital humanities to emulate these efforts, with the *Journal of Open Humanities Data* being a noteworthy exception to the more common practice.

4.1 Guiding Principles

The following features guided our selection of tools and format for the code and data:

- *Open data*: In order to use tale data consistently, it must be made freely and openly available to anyone. The dataset is therefore distributed under a Creative Commons license [cite].
- *Extensible data*: The dataset can be added to or modified, in order to develop a more complete repository of tales. This can be done by submitting pull requests to the project’s GitHub repository (see Sect. 4.2 for additional details).
- *Open code*: Allowing any user to view and run the code that produces the dataset, as well as downstream analyses which use the dataset. This allows for inspection, refinement and reasoning about the effects of transformation and statistical modeling on the data.
- *Common form*: We have chosen to use the dataframe as the structure of the dataset, and specifically the “tidy” dataframe described by Wickham, in which (a) Each variable forms a column, (b) Each observation forms a row, and (c) a single type of observational unit forms the dataframe [Wickham(2014)].

- *Common tools*: The data must also be structured in a way that allows for use with the standard tools of the trade of data science. These tools are continuously evolving, yet the dataframe is likely to continue to be common object across R (in `tidyverse`) and Python (in `pandas`). In addition, it can be read easily from a `.csv` format by Excel users to allow for ease of investigation.
- *Modifiable form*: Text analysis has traditionally used other types of data structures to model its quantitative features (e.g. document-term matrices, term co-occurrence matrices), and dataframes have been incorporated into tidy data workflows and available packages such as `quanteda` or `tidytext`. This allows for reshaping the data into sparse matrices, nested structures, and graph-based structures as dictated by the needs of a given analysis, while starting from a common source dataset (i.e. the `aft`).

4.2 Growing the Corpus

- motifs, tale types and tale corpus are incomplete, but that does not mean they should be thrown out
- need structure for adding new tales
- pull request provides structure for submission and review of changes
- this can also be used to identify and correct errors (so publish and PR)
- for reproducible research, articles using the datasets should use the url with the current commit's SHA to indicate the state of the dataset at the time the analysis was run.

5 Data Harvesting and Cleaning

5.1 Steps

Web-scraping of the *Folktexts* site was completed using the `rvest` package in the R statistical programming language. The full script is available on GitHub, and the following high-level summary of data-cleaning steps is provided to allow for an understanding of the methods used and their limitations:

1. Obtain URLs and associated label text for all “child” pages of the main website to create a dataframe of page names and URLs.¹
2. Remove any links pointed to external websites, since these would require separate web-scraping logic to be developed.
3. Retain all links with the form `type...`, which Ashliman used to denote pages containing tales belonging to a type. Recode links which do not follow this form, but which contain tales belonging to an ATU type. For example, the page for *Animal Brides and Animal Bridegrooms* was recoded as belonging to ATU type 0402.

¹ The main URL for the site is <http://www.pitt.edu/~dash/folktexts.html>

4. Extract the ATU type ID from the URL for each page.

The steps above result in a dataframe listing 208 webpages, each associated with a tale type and containing the page name, the page URL, and the associated ATU ID for each. This list of page URLs was looped through, using the following steps to the HTML within each page:

5. Extract HTML nodes from the page using CSS selectors (i.e. `body`, `h1`, `li`, `p`, `h3`, `a`) and create a dataframe using the text, name and attribute elements of the nodes.
6. Remove the table of contents and other superfluous text other than the tales, their titles, and other associated metadata (e.g. source documents, notes, etc.).
7. Since not all paragraphs had HTML tags, using a straightforward scraping technique would result in tales with missing sections. Therefore, we separated the `body` of each page into a separate dataframe, unnested the text by lines,² and used a fuzzy-joining method to align the missing body text with the well-formatted HTML.³
8. Join to the dataframe of extracted data elements from other URLs.

The resulting dataframe compiled the available tales from the original list of 208 webpages. To this dataframe, the following steps were applied:

9. Select the longest `text`, choosing between the tagged HTML version and the version extracted from the `body`.
10. Select the available metadata from the tagged HTML versions where those existed, using the alternate versions only if those were `NA`.
11. Remove irrelevant entries using regular expressions.
12. Create unique tale titles where these were duplicated across multiple variants of tales.
13. Clean tale text data (e.g. removing remnant HTML tags, extra spaces, replacing internal double quotes with single quotes).

5.2 Limitations

- Unable to scrape broken links
- Following pages from the initial set of URLs were unable to be scraped, due to errors generated in the session.
- Only one tale type per tale, intent is to store multiple ATUs as a nested list
- The `provenance` field is still messy, since multiple variables (i.e. country, region, tale collection) are still stored in a single column

² Using the `tidytext::unnest_tokens()` function.

³ Using the `fuzzyjoin::stringdist_full_join()` function, we used the *Jaro-Winkler* method and set the maximum distance for a match to 1.

6 Features of the Annotated FolkTales (aft) dataset

6.1 Data Dictionary

The **aft** (i.e. *Annotated Folk Tales*) dataframe contains 1561 rows, each corresponding to a single tale. Its 9 columns are described briefly below:


- **type_name** : The name associated with the Aarne-Thompson-Uther (ATU) tale type identifier.
- **atu_id** : The Aarne-Thompson-Uther (ATU) tale type identifier which classifies the tale.
- **tale_title** : The title of the tale.
- **provenance** : The person, place or tradition from which the tale came. In Ashliman’s collection, this refers variously to the person recording the tales (e.g. *Giambattista Basile*), the country or region from which the version of the tale came (e.g. *North Africa*), or the larger collection of tales in which the tale is found (e.g. *The Kathasaritsagara*).
- **notes** : Additional notes related to the tale.
- **source** : The bibliographic citation for the original published source of the tale.
- **copyright** : Any copyright information published alongside the tales in their scraped sources.
- **text** : The full text of the tale identified in **tale_title**.
- **data_source** : The source of the annotated tales. At the time of this writing, the source of all tales is “Ashliman’s Folktexts”, but this will change as the dataset grows.
- **date_obtained** : The date on which the data set identified as a **data_source** was last downloaded and compiled.

To provide a sense of the appearance of the dataset, the

6.2 Descriptive Statistics

Length of tales. The 1561 tales in the dataset average 796 words in length, though the individual texts vary with a minimum of 0 words and a maximum of 11210. The histogram below shows the distribution of tale lengths:


Distribution of tale text length

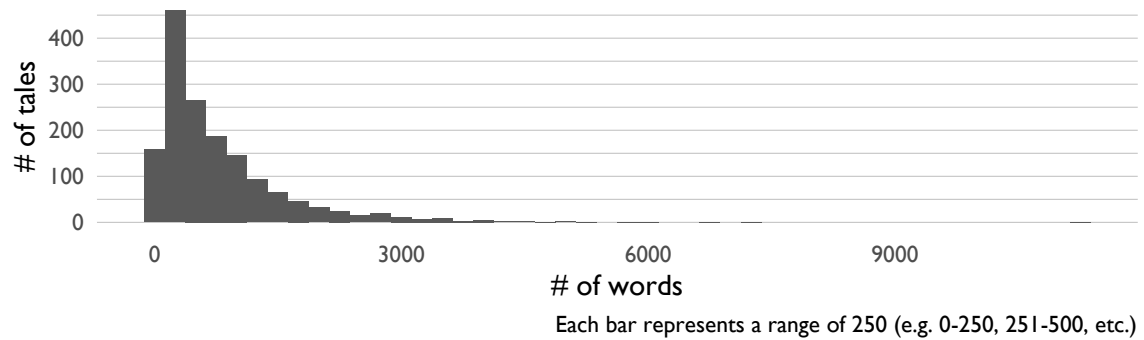

Number of tales by ATU type The tales compiled in the `aft` data are annotated by Aarne-Thompson-Uther (ATU) tale type, and represent 186 distinct types. There are an average of 8.3924731 tales in each tale type, with a range of 1 to 31.

Distribution of tale type membership


How many tales are included in each type?

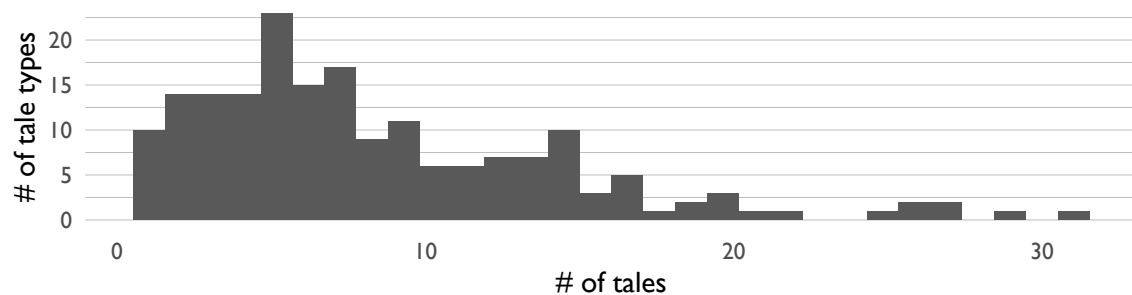

The tale types with the largest representative group of tales in the corpus is shown below:

Top tale types

Ten tale types with the largest number of representative tales

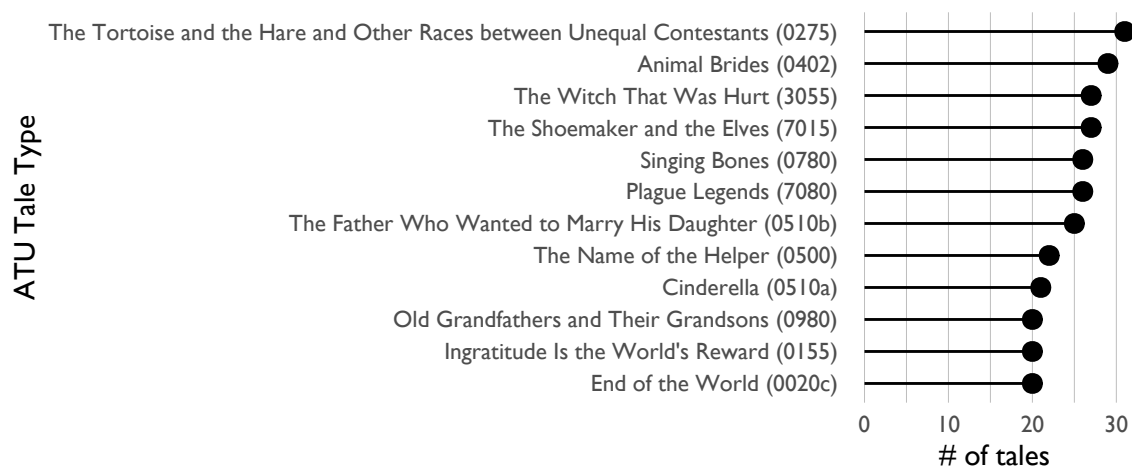

7 Conclusion and Future Research

7.1 Future

The intent of the repository is to provide:

- a set of all defined mythological and folktale motifs
- a set of ‘types’, or recipes describing a sequence of motifs which are commonly used together in myths and tales
- a collection of myth and tale texts that have been annotated as belonging to a ‘type’

References

- Abello et al(2012)Abello, Broadwell, and Tangherlini. Abello J, Broadwell P, Tangherlini TR (2012) Computational Folkloristics. *Communications of the ACM* 55(7):60–70, DOI 10.1145/2209249.2209267, URL <https://doi.org/10.1145/2209249.2209267>, place: New York, NY, USA Publisher: Association for Computing Machinery
- Cohen et al(2012)Cohen, Widdows, Schvaneveldt, Davies, and Rindflesch. Cohen T, Widdows D, Schvaneveldt RW, Davies P, Rindflesch TC (2012) Discovering discovery patterns with Predication-based Semantic Indexing. *Journal of Biomedical Informatics* 45(6):1049–1065, DOI 10.1016/j.jbi.2012.07.003
- Darányi and Lendvai(2010). Darányi S, Lendvai P (2010) Proceedings of the First AMI-CUS Workshop, October 21, 2010 Vienna, Austria. University of Szeged, Department of Library and Human Information Science, Hungary, URL <http://urn.kb.se/resolve?urn=urn:nbn:se:hb:diva-3570>
- Darányi and Wittek(2013). Darányi S, Wittek P (2013) Demonstrating Conceptual Dynamics in an Evolving Text Collection. *Journal of the American Society for Information Science and Technology* 64(12):2564–2572, DOI 10.1002/asi.22940, URL <https://doi.org/10.1002/asi.22940>

- Darányi and Wittek(2016). Darányi S, Wittek P (2016) Conceptual Machinery of the Mythopoeic Mind: Attis, A Case Study. In: Atmanspacher H, Filk T, Pothos E (eds) Quantum Interaction, Springer International Publishing, Cham, Lecture Notes in Computer Science, pp 195–206, DOI 10.1007/978-3-319-28675-4_15
- Darányi et al(2012)Darányi, Wittek, and Forró. Darányi S, Wittek P, Forró L (2012) Toward Sequencing “Narrative DNA”: Tale Types, Motif Strings and Memetic Pathways. In: Proceedings of CMN-12, 3rd Workshop on Computational Models of Narrative in conjunction with the 8th Language Resources and Evaluation Conference, Istanbul, Turkey, pp 2–10, URL [urn:nbn:se:hb:diva-6904](http://nbn-resolving.org/urn:nbn:se:hb:diva-6904)
- Darányi et al(2014)Darányi, Wittek, and Kitto. Darányi S, Wittek P, Kitto K (2014) The Sphynx’s New Riddle: How to Relate the Canonical Formula of Myth to Quantum Interaction. In: Atmanspacher H, Haven E, Kitto K, Raine D (eds) Quantum Interaction, Springer, Berlin, Heidelberg, Lecture Notes in Computer Science, pp 47–58, DOI 10.1007/978-3-642-54943-4_5, URL https://link.springer.com/chapter/10.1007/978-3-642-54943-4_5
- Darányi et al(2016)Darányi, Wittek, Konstantinidis, Papadopoulos, and Kontopoulos. Darányi S, Wittek P, Konstantinidis K, Papadopoulos S, Kontopoulos E (2016) A Physical Metaphor to Study Semantic Drift. CoRR abs/1608.01298, URL <https://arxiv.org/abs/1608.01298v1>
- Dawkins(2016). Dawkins R (2016) The selfish gene. Oxford University Press
- Frenzel(1992). Frenzel E (1992) Stoffe der Weltliteratur : ein Lexikon dichtungsgeschichtlicher Längsschnitte / Elisabeth Frenzel, 8th edn. Kröners Taschenausgabe ; 300, Kröner, Stuttgart
- Garg et al(2019)Garg, Ikbāl, Srivastava, Vishwakarma, Karanam, and Subramaniam. Garg D, Ikbāl S, Srivastava SK, Vishwakarma H, Karanam H, Subramaniam LV (2019) Quantum embedding of knowledge for reasoning. In: Wallach H, Larochelle H, Beygelzimer A, d’Alché-Buc F, Fox E, Garnett R (eds) Advances in Neural Information Processing Systems, Curran Associates, Inc., vol 32, URL <https://proceedings.neurips.cc/paper/2019/file/cb12d7f933e7d102c52231bf62b8a678-Paper.pdf>
- Karsdorp and van den Bosch(2013). Karsdorp F, van den Bosch A (2013) Identifying Motifs in Folktales using Topic Models, pp 41–49. Reporting year: 2013
- Karsdorp(2016). Karsdorp FB (2016) Retelling Stories: A Computational-Evolutionary Perspective. PhD Thesis, Radboud Universiteit, URL <http://www.karsdorp.io/retelling-stories>, ISBN: 978-90-9029993-8
- Kontopoulos et al(2016a)Kontopoulos, Darányi, Wittek, Konstantinidis, Riga, Mitziās, Stavropoulos, Andreadis, Maronidis, Karakostas et al. Kontopoulos E, Darányi S, Wittek P, Konstantinidis K, Riga M, Mitziās P, Stavropoulos T, Andreadis S, Maronidis A, Karakostas A, et al (2016a) Deliverable 4.5: Context-aware Content Interpretation. PERICLES project
- Kontopoulos et al(2016b)Kontopoulos, Riga, Mitziās, Andreadis, Stavropoulos, Konstantinidis, Maronidis, Karakostas, Tachos, Kaltsa et al. Kontopoulos E, Riga M, Mitziās P, Andreadis S, Stavropoulos T, Konstantinidis K, Maronidis A, Karakostas A, Tachos S, Kaltsa V, et al (2016b) Pericles deliverable 4.4: modelling contextualised semantics. PERICLES project
- Le and Mikolov(2014). Le QV, Mikolov T (2014) Distributed representations of sentences and documents. CoRR abs/1405.4053, URL <http://arxiv.org/abs/1405.4053>, 1405.4053
- Lô et al(2020)Lô, de Boer, and van Aart. Lô G, de Boer V, van Aart CJ (2020) Exploring West African Folk Narrative Texts Using Machine Learning. Information 11(5), DOI 10.3390/info11050236, URL <https://www.mdpi.com/2078-2489/11/5/236>
- Meder et al(2016)Meder, Karsdorp, Nguyen, Theune, Trieschnigg, and Muiser. Meder T, Karsdorp F, Nguyen DP, Theune M, Trieschnigg RB, Muiser I (2016) Automatic Enrichment and Classification of Folktales in the Dutch Folktale Database. The Journal of American Folklore 129(511):78–96, DOI 10.5406/jamerfolk.129.511.0078, publisher: American Folklore Society
- Mikolov et al(2013)Mikolov, Chen, Corrado, and Dean. Mikolov T, Chen K, Corrado G, Dean J (2013) Efficient estimation of word representations in vector space. 1301.3781
- Ofek et al(2013)Ofek, Darányi, and Rokach. Ofek N, Darányi S, Rokach L (2013) Linking Motif Sequences with Tale Types by Machine Learning. In: Finlayson MA, Fisseni B, Löwe B, Meister JC (eds) 2013 Workshop on Computational Models of Narrative,

- Schloss Dagstuhl–Leibniz-Zentrum fuer Informatik, Dagstuhl, Germany, OpenAccess Series in Informatics (OASICS), vol 32, pp 166–182, DOI 10.4230/OASICS.CMN.2013.166, URL <http://drops.dagstuhl.de/opus/volltexte/2013/4150>, ISSN: 2190-6807
- Pennington et al(2014)Pennington, Socher, and Manning. Pennington J, Socher R, Manning C (2014) GloVe: Global vectors for word representation. In: Proceedings of the 2014 Conference on Empirical Methods in Natural Language Processing (EMNLP), Association for Computational Linguistics, Doha, Qatar, pp 1532–1543, DOI 10.3115/v1/D14-1162, URL <https://www.aclweb.org/anthology/D14-1162>
- Reimers and Gurevych(2019). Reimers N, Gurevych I (2019) Sentence-bert: Sentence embeddings using siamese bert-networks. 1908.10084
- Reiter et al(2014)Reiter, Frank, and Hellwig. Reiter N, Frank A, Hellwig O (2014) An NLP-based cross-document approach to narrative structure discovery. *Literary and Linguistic Computing* 29(4):583–605, DOI 10.1093/llc/fqu055, URL <https://doi.org/10.1093/llc/fqu055>
- Rothe and Schütze(2015). Rothe S, Schütze H (2015) AutoExtend: Extending word embeddings to embeddings for synsets and lexemes. In: Proceedings of the 53rd Annual Meeting of the Association for Computational Linguistics and the 7th International Joint Conference on Natural Language Processing (Volume 1: Long Papers), Association for Computational Linguistics, Beijing, China, pp 1793–1803, DOI 10.3115/v1/P15-1173, URL <https://www.aclweb.org/anthology/P15-1173>
- Seigneuret(1988). Seigneuret JC (1988) Dictionary of literary themes and motifs. Greenwood Press New York
- Silva and Tehrani(2016). Silva SGd, Tehrani JJ (2016) Comparative phylogenetic analyses uncover the ancient roots of Indo-European folktales. *Royal Society open science* 3(1):150645, DOI 10.1098/rsos.150645, URL <https://doi.org/10.1098/rsos.150645>, publisher: Royal Society
- Tangherlini(2016). Tangherlini T (2016) Big folklore: A special issue on computational folkloristics. *The Journal of American Folklore* 129:5, DOI 10.5406/jamerfolk.129.511.0005
- Thompson(1951). Thompson S (1951) Motif-index of folk-literature : a classification of narrative elements in folktales, ballads, myths, fables, mediaeval romances, example, fables, jest-books and local legends, rev. [2nd] ed. edn. Rosenkilde Copenhagen
- Thompson(1977). Thompson S (1977) The Folktale. Campus (Berkeley, Calif.), University of California Press, URL https://books.google.com/books?id=WKN44RtM_loC
- Thuillard et al(2018)Thuillard, d’Huy, Berezkin, and Le Quellec. Thuillard M, d’Huy J, Berezkin Y, Le Quellec JL (2018) A Large-Scale Study of World Myths. *Trames Journal of the Humanities and Social Sciences* 22(4):407–424, DOI 10.3176/tr.2018.4.05, URL <https://doi.org/10.3176/tr.2018.4.05>
- Uther and Fellows(2004). Uther HJ, Fellows F (2004) The Types of International Folktales: A Classification and Bibliography, Based on the System of Antti Aarne and Stith Thompson. No. 284-286 in FF communications, Suomalainen Tiedekatemia, Academia Scientiarum Fennica, Helsinki, URL <https://books.google.hu/books?id=HVQsAQAAIAAJ>
- White(1976). White J (1976) The Analysis of Music. Prentice-Hall, URL <https://books.google.hu/books?id=AFMkAQAAIAAJ>
- Wickham(2014). Wickham H (2014) Tidy Data. *Journal of Statistical Software* 59(1):1–23, DOI 10.18637/jss.v059.i10, URL <https://www.jstatsoft.org/index.php/jss/article/view/v059i10>, number: 1
- Widdows et al(2021)Widdows, Kitto, and Cohen. Widdows D, Kitto K, Cohen T (2021) Quantum mathematics in artificial intelligence. *CoRR* abs/2101.04255, URL <https://arxiv.org/abs/2101.04255>, 2101.04255
- Wittek et al(2015)Wittek, Darányi, Kontopoulos, Moysiadis, and Kompatsiaris. Wittek P, Darányi S, Kontopoulos E, Moysiadis T, Kompatsiaris I (2015) Monitoring term drift based on semantic consistency in an evolving vector field. In: 2015 International Joint Conference on Neural Networks (IJCNN), IEEE, Killarney, Ireland, pp 1–8, DOI 10.1109/IJCNN.2015.7280766
- Yarlott and Finlayson(2016). Yarlott WVH, Finlayson MA (2016) Learning a Better Motif Index: Toward Automated Motif Extraction. In: Miller B, Lieto A, Ronfard R, Ware SG, Finlayson MA (eds) 7th Workshop on Computational Models of Narrative (CMN 2016),

Schloss Dagstuhl–Leibniz-Zentrum fuer Informatik, Dagstuhl, Germany, OpenAccess Series in Informatics (OASICS), vol 53, pp 7:1–7:10, DOI 10.4230/OASICS.CMN.2016.7, URL <http://drops.dagstuhl.de/opus/volltexte/2016/6708>