

Encoding 2: Delta RLE (Previous Spoke Reference)

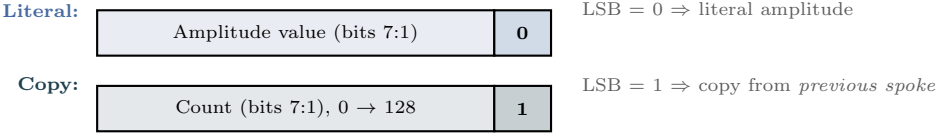

Worked Example

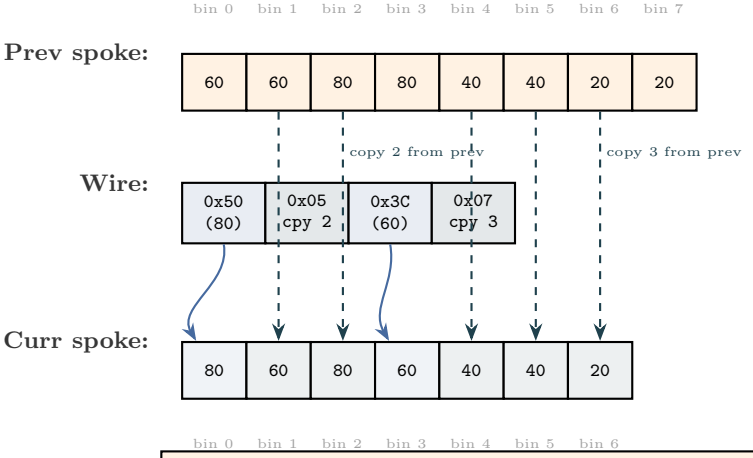

First-spoke fallback: The first spoke in a packet (`sweep_idx == 0`) uses Encoding 1 (self-referencing RLE) instead, because no previous spoke is available. Subsequent spokes reference the immediately preceding decoded spoke at the same range bin index.