

# Body



**WARNING:** Collision damage repair must conform to the instructions contained in this workshop manual. Replacement components must be new, genuine Ford Motor Company parts. Recycled, salvaged, aftermarket or reconditioned parts (including body parts, wheels or safety restraint components) are not authorized by Ford.

**Departure from the instructions provided in this manual, including alternate repair methods or the use of substitute components, risks compromising crash safety. Failure to follow these instructions may adversely affect structural integrity and crash safety performance, which could result in serious personal injury to vehicle occupants in a crash.**

The body consists of the following:

- Cab-forward design
- Full frame bolted to the body
- Aluminum hood
- Body side outer panel constructed of dent resistant High-Strength Steel (HSS) and mild steels
- Magnesium radiator support
- Front structure inner reinforcement is hydroformed High-Strength Low Alloy (HSLA) rail assembly
- Lightweight steel welded panel construction
- Extensive use of HSLA, Dual Phase Steel (DP) and Boron steel in the cab body structure(s)
- Dash panel constructed of laminated sound/vibration steel
- Bolted, removable front fenders, hinged doors, tailgate and hood
- Fender outer panels constructed of dent resistant HSS steel
- Front and rear door outer panels constructed of dent resistant HSS steel
- Structural adhesive used throughout the body shell and underbody
- Regular cab, SuperCab and SuperCrew cab styles
- Styleside pickup bed available with 1.67 m (5.5 ft), 1.98 m (6.5 ft) and 2.44 m (8.0 ft) pickup bed length
- 3,198 mm (126 in) wheelbase
- 3,365 mm (133 in) wheelbase
- 3,671 mm (145 in) wheelbase
- 3,988 mm (157 in) wheelbase
- 4,140 mm (163 in) wheelbase

• **NOTE:** For information regarding cab style and pickup bed configurations, refer to Section 100-01.

Platinum edition available in SuperCrew cab style only

- Platinum edition has unique chrome body side cladding
- Platinum edition has unique chrome pickup bed rail bars
- Mastic sound deadener material used on floor pans

F-150 SVT Raptor package contains the following:

- SuperCab
- 1.67 m (5.5 ft) pickup bed length
- Steel pickup bed outer panels
- 3,365 mm (133 in) wheelbase
- Sheet-Molded Composite (SMC) hood and front fenders
- Unique grille
- Modified front and rear bumpers

Lincoln Mark LT (Mexico only) contains the following:


- Lincoln Mark LT available in SuperCrew cab, styleside
- Lincoln Mark LT has unique chrome grille
- Lincoln Mark LT has unique chrome body side cladding
- Lincoln Mark LT has unique chrome pickup bed rail bars
- Lincoln Mark LT has unique tailgate applique

For dimensional information, refer to the following illustrations.

### Underhood Dimensions

**NOTICE:** The front structure rails cannot be sectioned and must be serviced at the original factory seam locations or as an assembly if damaged. It is mandatory that the replacement section be installed as delivered at the original factory seam locations or energy collision management can be compromised.


**NOTE:** Measurements are obtained on center, unless otherwise indicated.

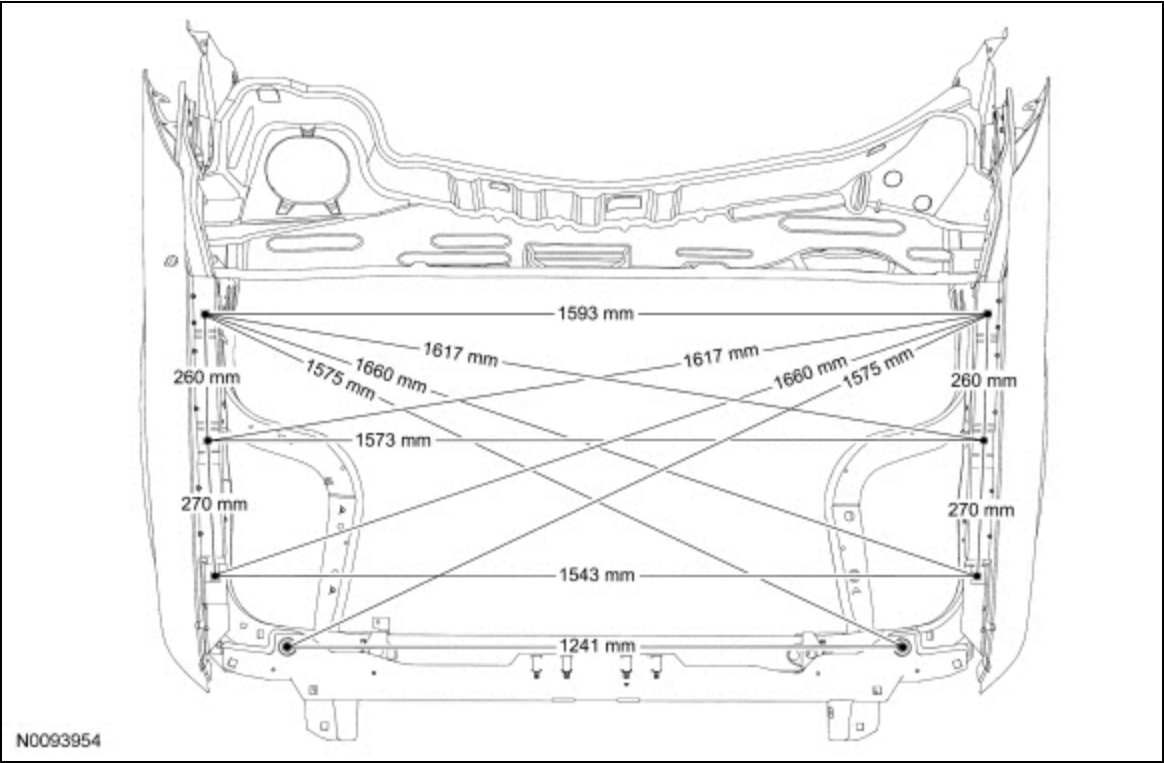

### Body Margins

**NOTE:** Dimensions apply to all cab and box styles unless otherwise indicated. Dimensions apply to right and left side. SuperCrew cab shown.

**NOTE:** F-150 SVT Raptor hood, grille and fender margin specifications are identical with F-150.

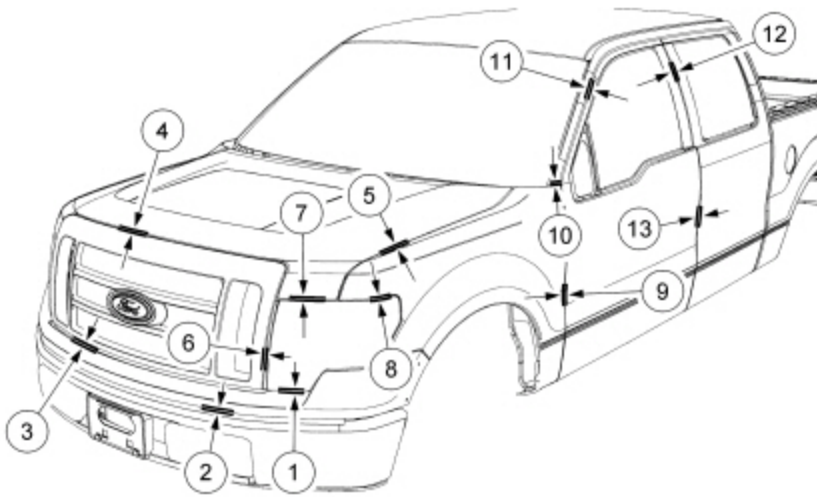


N0087702

| Item | Description                                                 | Specification                              | Flushness Specification                     |
|------|-------------------------------------------------------------|--------------------------------------------|---------------------------------------------|
| 1    | Headlamp to upper fascia                                    | 3.0 mm (0.118 in) $\pm$ 3.0 mm (0.118 in)  | —                                           |
| 2    | Fascia to bumper                                            | 19.0 mm (0.748 in) $\pm$ 6.0 mm (0.236 in) | 7.0 mm (0.275 in) $\pm$ 7.0 mm (0.275 in)   |
| 3    | Grille to fascia                                            | 15.0 mm (0.59 in) $\pm$ 5.0 mm (0.196 in)  | —                                           |
| 4    | Hood to grille                                              | 1.5 mm (0.059 in) $\pm$ 1.5 mm (0.059 in)  | 1.0 mm (0.039 in) $\pm$ 1.0 mm (0.039 in)   |
| 5    | Hood to fender                                              | 4.0 mm (0.157 in) $\pm$ 2.0 mm (0.078 in)  | 0.0 mm ( in) $\pm$ 2.0 mm (0.078 in)        |
| 6    | Headlamp to grille                                          | 8.0 mm (0.314 in) $\pm$ 4.5 mm (0.177 in)  | —                                           |
| 7    | Hood to headlamp                                            | 7.5 mm (0.295 in) $\pm$ 2.5 mm (0.098 in)  | —                                           |
| 8    | Fender to headlamp                                          | 3.0 mm (0.118 in) $\pm$ 2.0 mm (0.078 in)  | 0.0 mm ( in) $\pm$ 2.0 mm (0.078 in)        |
| 9    | Front door to fender (all cab styles)                       | 5.0 mm (0.196 in) $\pm$ 2.0 mm (0.078 in)  | -0.5 mm (-0.019 in) $\pm$ 2.0 mm (0.078 in) |
| 10   | Fender to A-pillar                                          | 4.0 mm (0.157 in) $\pm$ 2.0 mm (0.078 in)  | —                                           |
| 11   | Door to A-pillar                                            | 5.0 mm (0.196 in) $\pm$ 2.0 mm (0.078 in)  | -3.3 mm (-0.129 in) $\pm$ 2.0 mm (0.078 in) |
| 12   | Front door to rear door (appliance on regular cab)          | 5.0 mm (0.196 in) $\pm$ 2.0 mm (0.078 in)  | 0.0 mm ( in) $\pm$ 2.0 mm (0.078 in)        |
| 13   | Front door to rear door (door opening panel on regular cab) | 5.0 mm (0.196 in) $\pm$ 2.0 mm (0.078 in)  | 0.0 mm ( in) $\pm$ 2.0 mm (0.078 in)        |

### Body Margins


**NOTE:** Styleside shown, F-150 SVT Raptor margin specifications are identical.

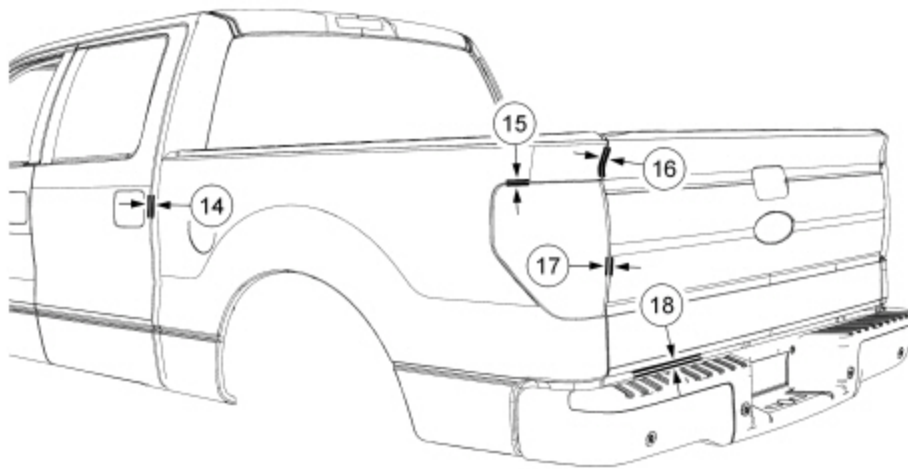

N0087703

| Item | Description              | Specification                              | Flushness Specification                   |
|------|--------------------------|--------------------------------------------|-------------------------------------------|
| 14   | Cab to pickup bed        | 25.0 mm (0.984 in) $\pm$ 5.0 mm (0.196 in) | 5.0 mm (0.196 in) $\pm$ 5.0 mm (0.196 in) |
| 15   | Rear lamp to outer panel | 2.0 mm (0.078 in) $\pm$ 1.5 mm (0.059 in)  | 5.0 mm (0.196 in) $\pm$ 1.5 mm (0.059 in) |
| 16   | Tailgate to pickup bed   | 5.0 mm (0.196 in) $\pm$ 2.5 mm (0.098 in)  | 0.0 mm ( in) $\pm$ 2.5 mm (0.098 in)      |
| 17   | Tailgate to rear lamp    | 5.0 mm (0.196 in) $\pm$ 2.5 mm (0.098 in)  | 5.0 mm (0.196 in) $\pm$ 2.5 mm (0.098 in) |
| 18   | Tailgate to step pad     | 30. mm $\pm$ 5.0 mm (0.196 in)             | —                                         |


### Body Margins — Lincoln Mark LT (Mexico only)

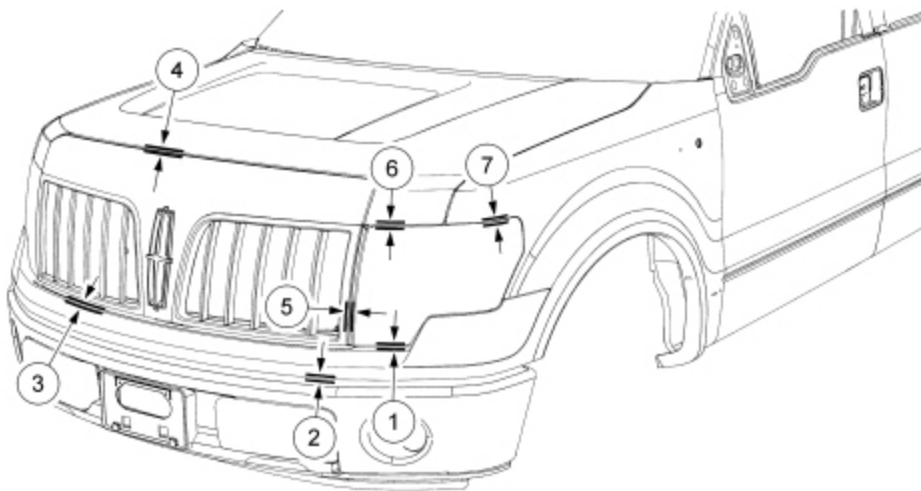

N01012693

| Item | Description              | Specification                              | Flushness Specification                   |
|------|--------------------------|--------------------------------------------|-------------------------------------------|
| 1    | Headlamp to upper fascia | 3.0 mm (0.118 in) $\pm$ 3.0 mm (0.118 in)  | —                                         |
| 2    | Fascia to bumper         | 19.0 mm (0.748 in) $\pm$ 6.0 mm (0.236 in) | 7.0 mm (0.275 in) $\pm$ 7.0 mm (0.275 in) |
| 3    | Grille to fascia         | 15.0 mm (0.59 in) $\pm$ 5.0 mm (0.196 in)  | —                                         |
| 4    | Hood to grille           | 1.5 mm (0.059 in) $\pm$ 1.5 mm (0.059 in)  | 1.0 mm (0.039 in) $\pm$ 1.0 mm (0.039 in) |
| 5    | Headlamp to grille       | 8.0 mm (0.314 in) $\pm$ 4.5 mm (0.177 in)  | —                                         |
| 6    | Hood to headlamp         | 7.5 mm (0.295 in) $\pm$ 2.5 mm (0.098 in)  | —                                         |
| 7    | Fender to headlamp       | 3.0 mm (0.118 in) $\pm$ 2.0 mm (0.078 in)  | 0.0 mm ( in) $\pm$ 2.0 mm (0.078 in)      |

Body Margins — Lincoln Mark LT (Mexico only)

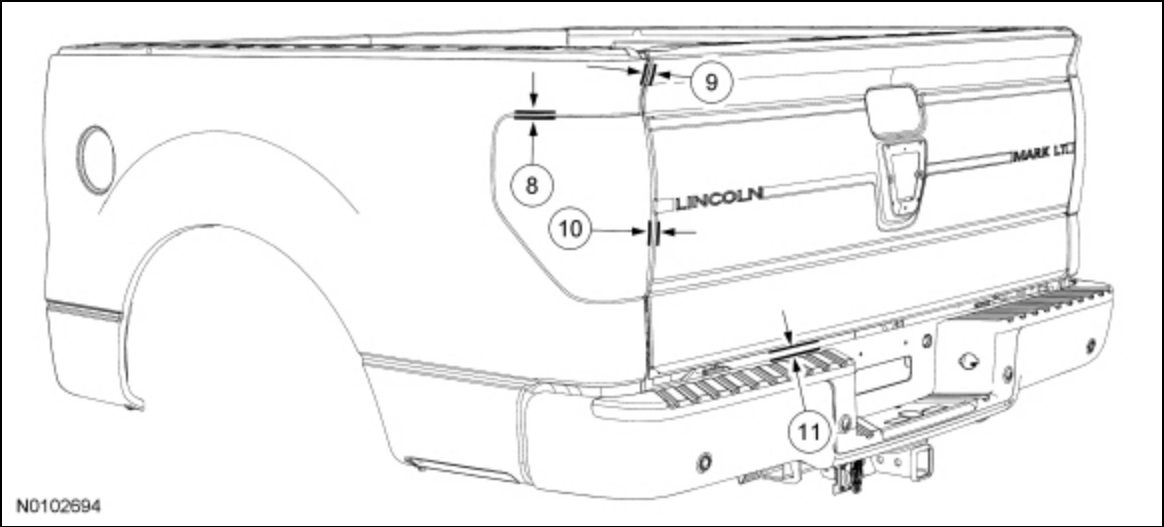


| Item | Description              | Specification                          | Flushness Specification               |
|------|--------------------------|----------------------------------------|---------------------------------------|
| 8    | Rear lamp to outer panel | 2.0 mm (0.078 in) ± 1.5 mm (0.059 in)  | 5.0 mm (0.196 in) ± 1.5 mm (0.059 in) |
| 9    | Tailgate to pickup bed   | 5.0 mm (0.196 in) ± 2.5 mm (0.098 in)  | 0.0 mm ( in) ± 2.5 mm (0.098 in)      |
| 10   | Tailgate to rear lamp    | 5.0 mm (0.196 in) ± 2.5 mm (0.098 in)  | 5.0 mm (0.196 in) ± 2.5 mm (0.098 in) |
| 11   | Tailgate to step pad     | 30.0 mm (1.181 in) ± 5.0 mm (0.196 in) | —                                     |

Body Side Dimensions


Regular Cab

**NOTE:** Measurements are obtained on center, unless otherwise indicated. Measurement at door striker obtained flush with body surface.

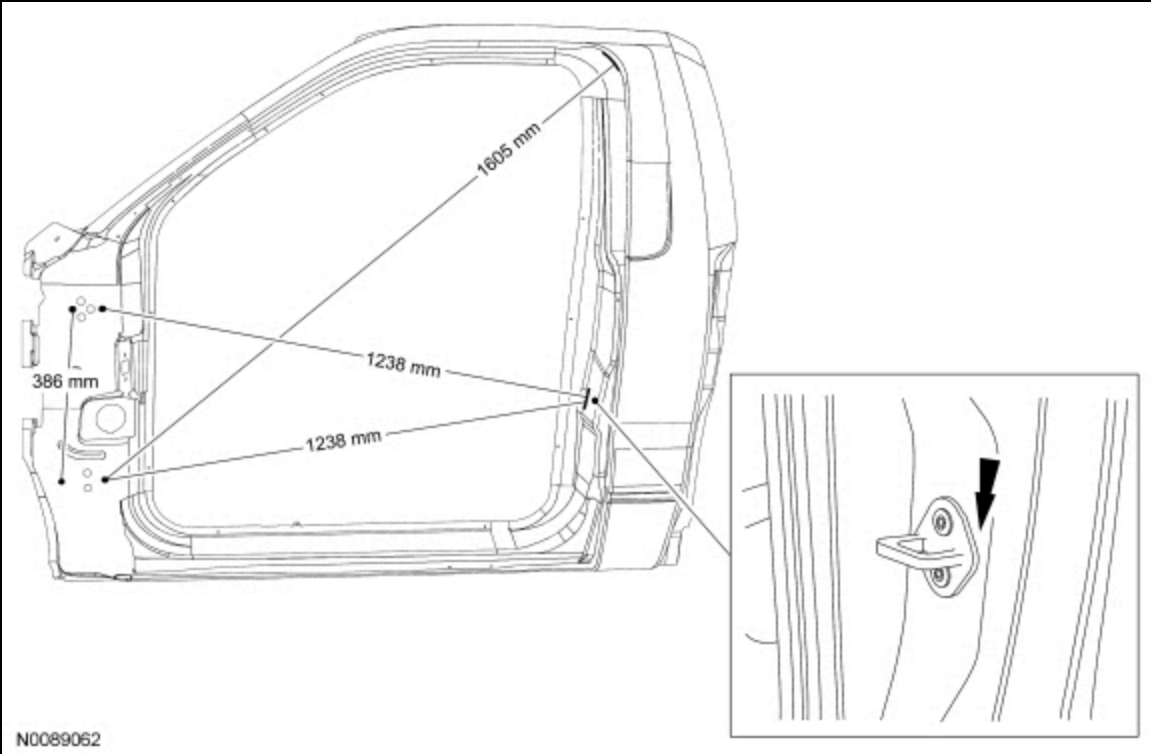


# **SuperCab**

**NOTE:** *Measurements are obtained on center, unless otherwise indicated.*

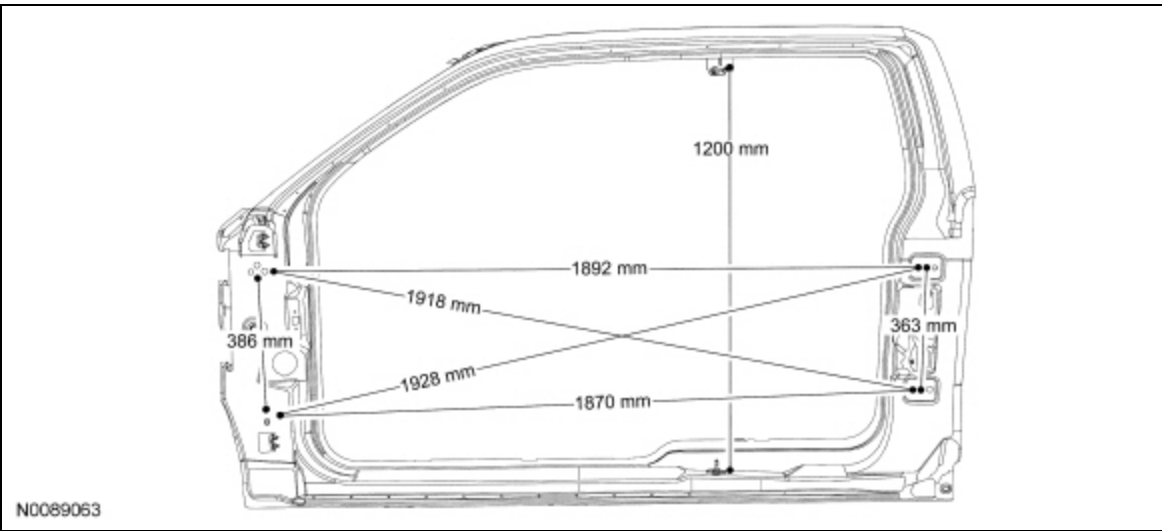

# **SuperCrew Cab**


**NOTE:** *Measurements are obtained on center, unless otherwise indicated. Measurement at door striker obtained flush with body surface.*

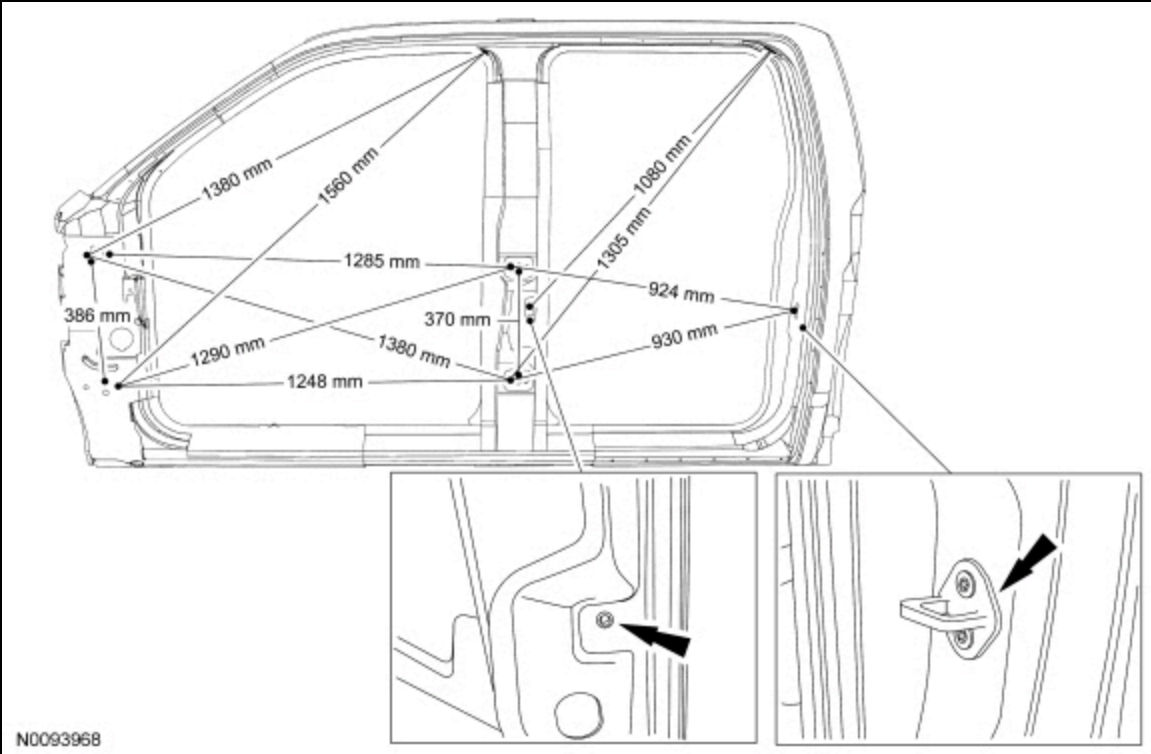

## Tailgate Opening Dimensions

### Styleside

**NOTE:** Styleside tailgate opening dimensions identical for all pickup bed lengths. Measurements taken flush from striker and lower hinge mount surfaces.

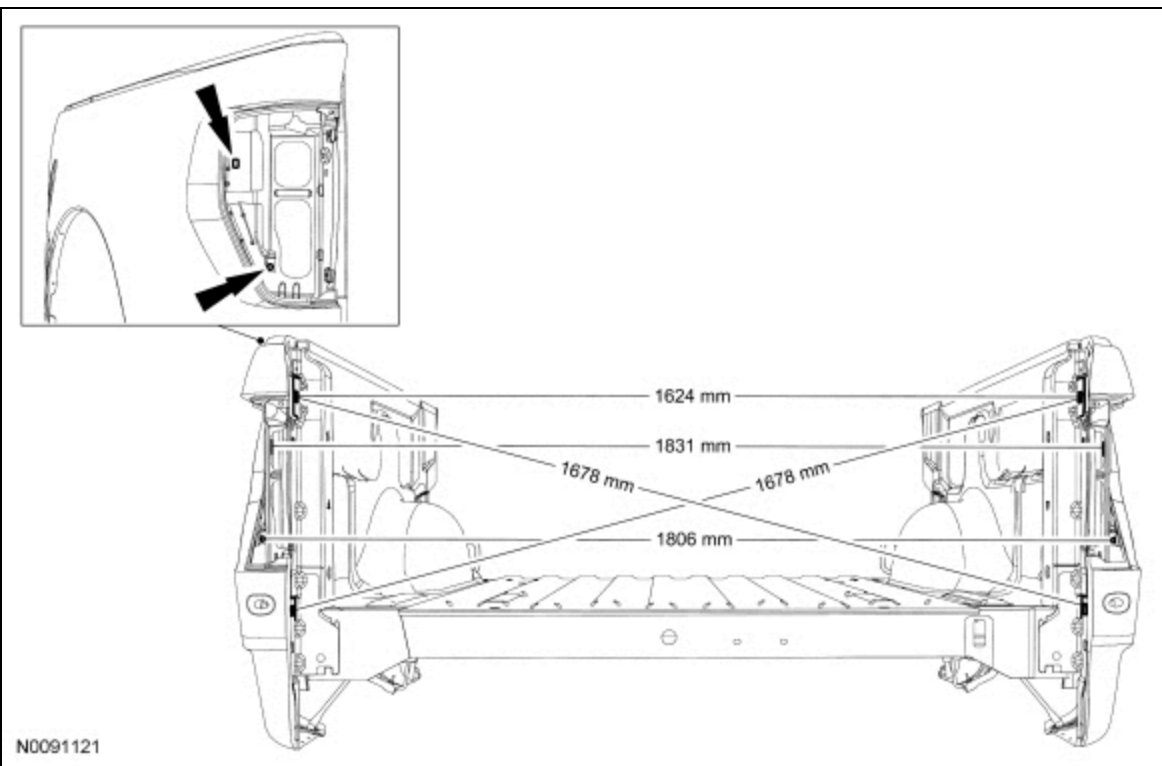


## Underbody Dimensions

**WARNING:** Frame rail crush zones absorb crash energy during a collision and must be replaced if damaged. Prior to replacement of frame rail crush zones, straighten damaged frame rails to correct frame dimensions. Failure to follow these instructions may adversely affect frame rail crush zone performance and may result in serious personal injury to vehicle occupants in a crash.


### Frame Datum Height — Regular Cab

**NOTE:** Datum height determined measuring from lower edge of holes and slots on center, unless otherwise indicated.

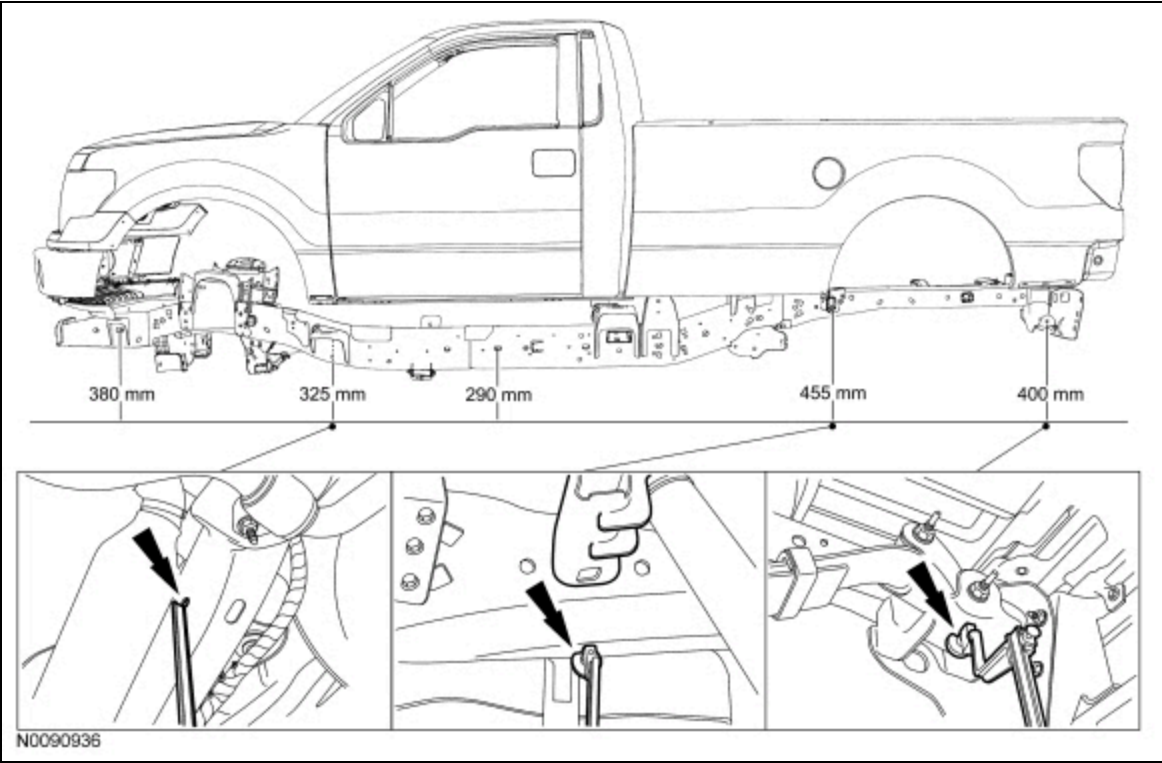


**Frame Datum Height — SuperCab**

**NOTE:** Datum height determined measuring from lower edge of holes or slots, on center, unless otherwise indicated.

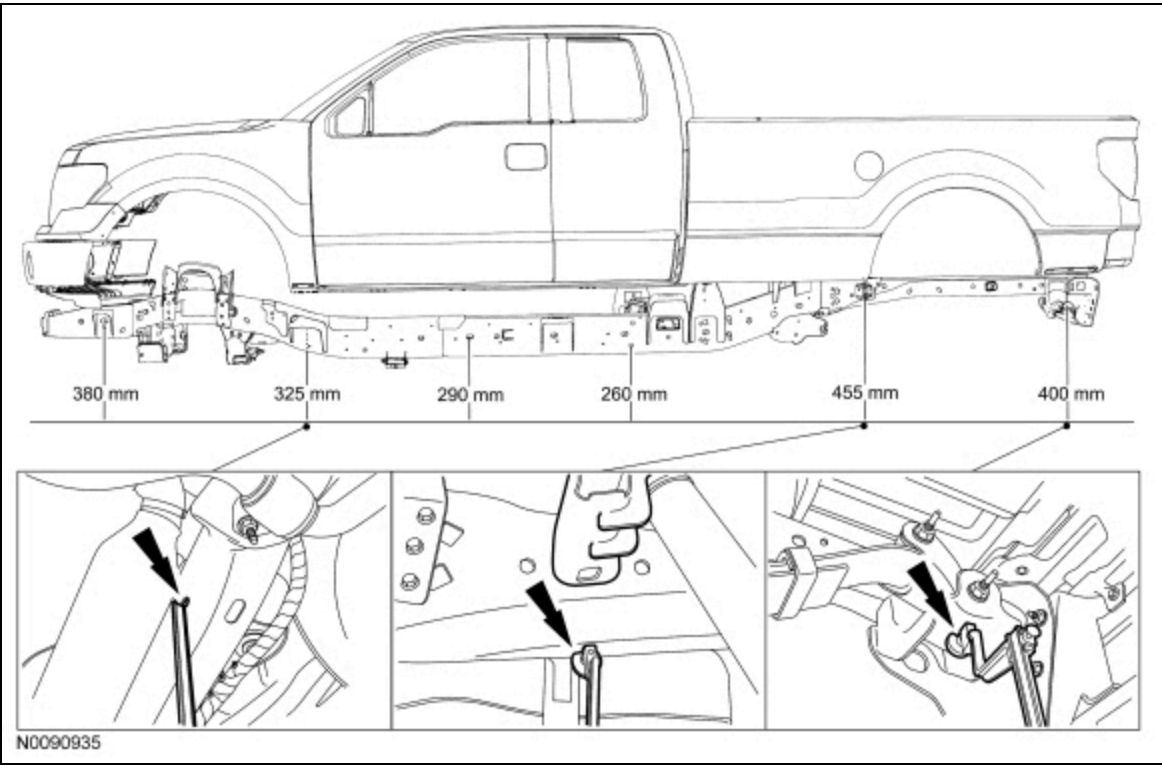


**Frame Datum Height — SuperCrew Cab**

**NOTE:** Datum height determined measuring from lower edge of holes or slots, on center, unless otherwise indicated.

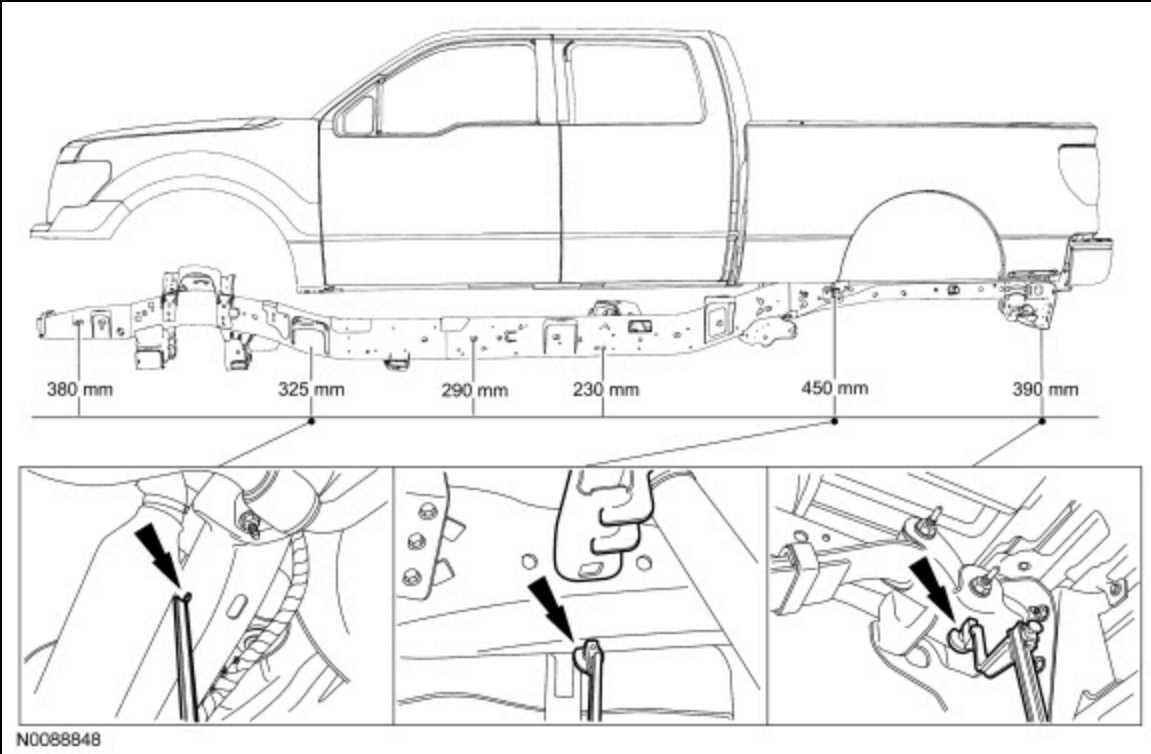


# **Front Frame Section**

**NOTE:** *The front frame section is dimensionally common to all vehicles.*

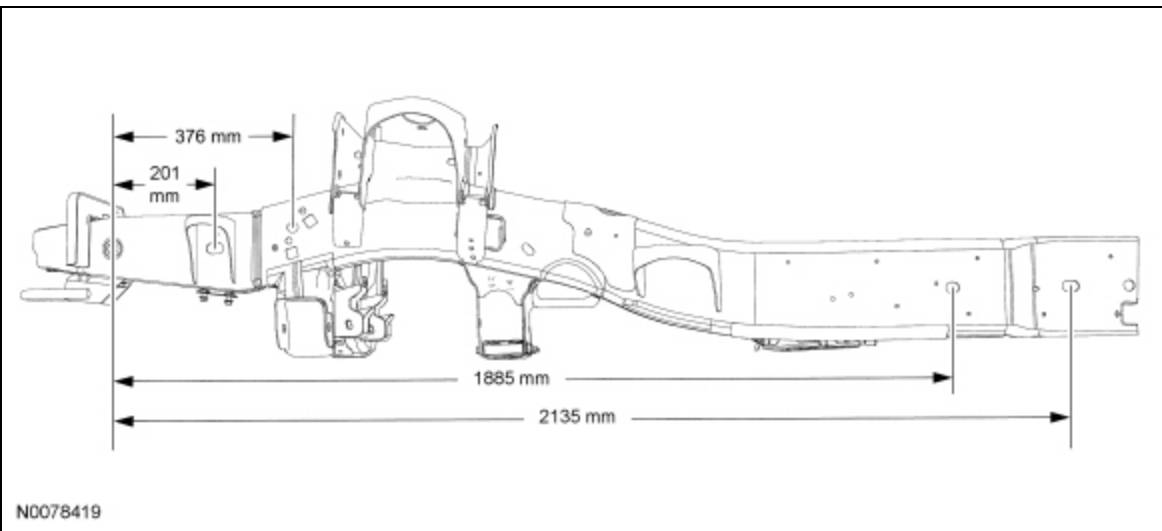

# **Frame Length — 3,198 mm (126 in) Wheelbase**


**NOTE:** *Measurements are obtained on center, unless otherwise indicated.*

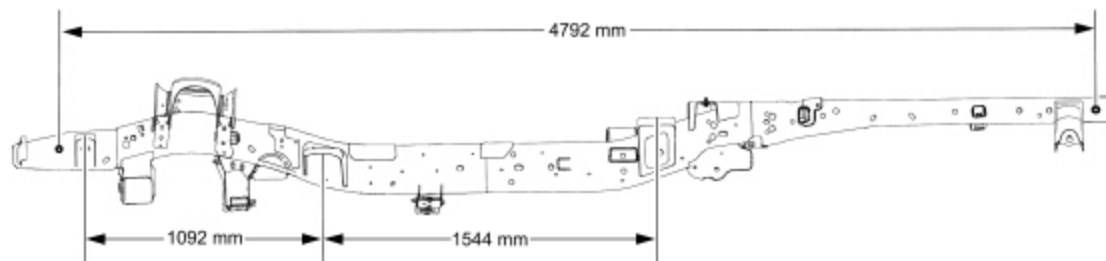

N0091487

**Frame Length — 3,366 mm (133 in) Wheelbase**


**NOTE:** *Measurements are obtained on center, unless otherwise indicated.*

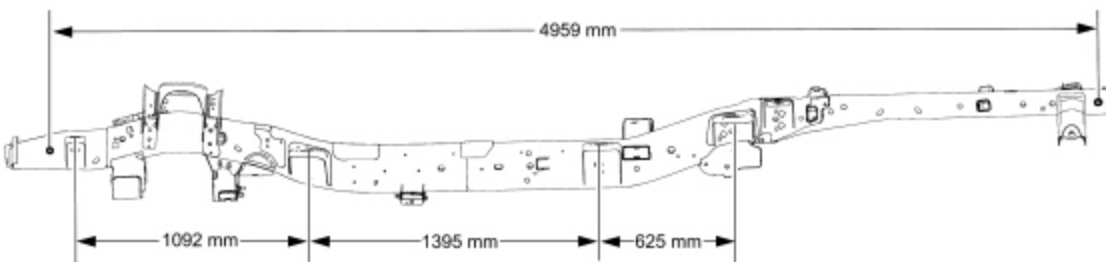

N0091488

**Frame Length — 3,671 mm (145 in) Wheelbase**


**NOTE:** *Measurements are obtained on center, unless otherwise indicated.*

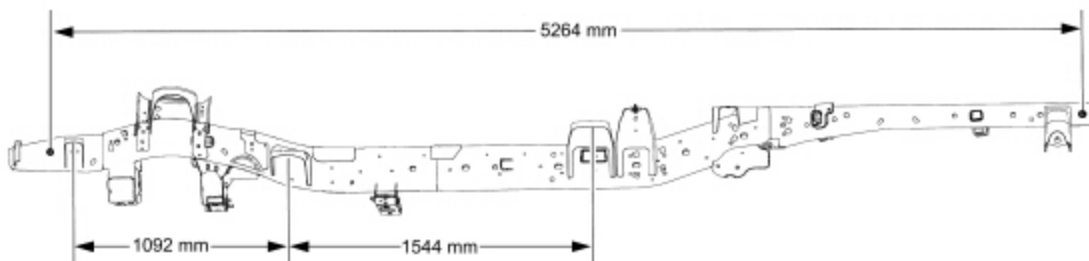

N0091489

**Frame Length — 3,988 mm (157 in) Wheelbase**


**NOTE:** Measurements are obtained on center, unless otherwise indicated.

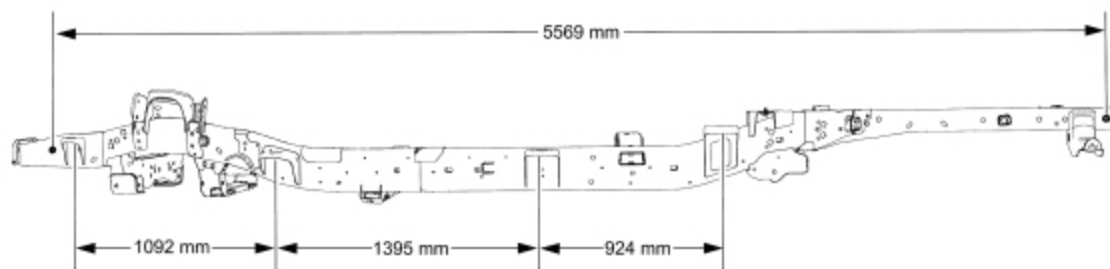

N0091490

**Frame Length — 4,140 mm (163 in) Wheelbase**


**NOTE:** Measurements are obtained on center, unless otherwise indicated.

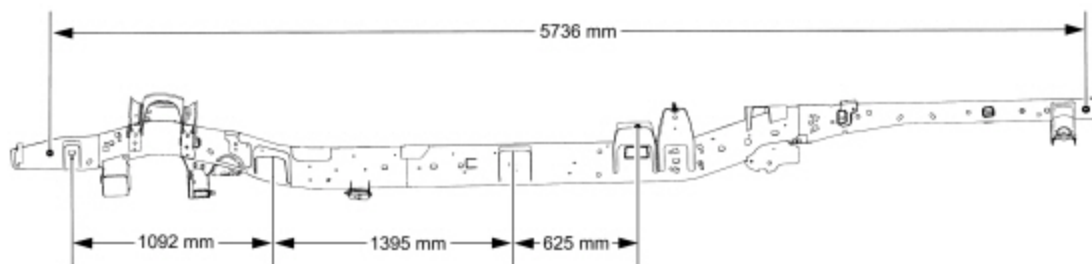

N0091491

**Frame Width — 3,198 mm (126 in) Wheelbase**


**NOTE:** Measurements are obtained on center, unless otherwise indicated.

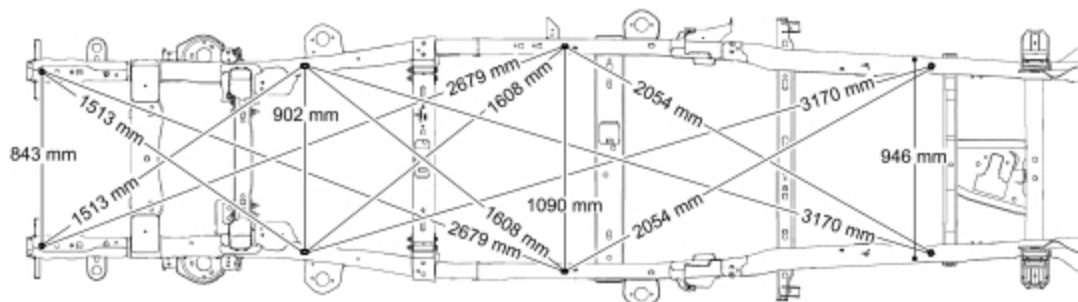

N0091492


**Frame Width — 3,366 mm (133 in) Wheelbase**

**NOTE:** *Measurements are obtained on center, unless otherwise indicated.*

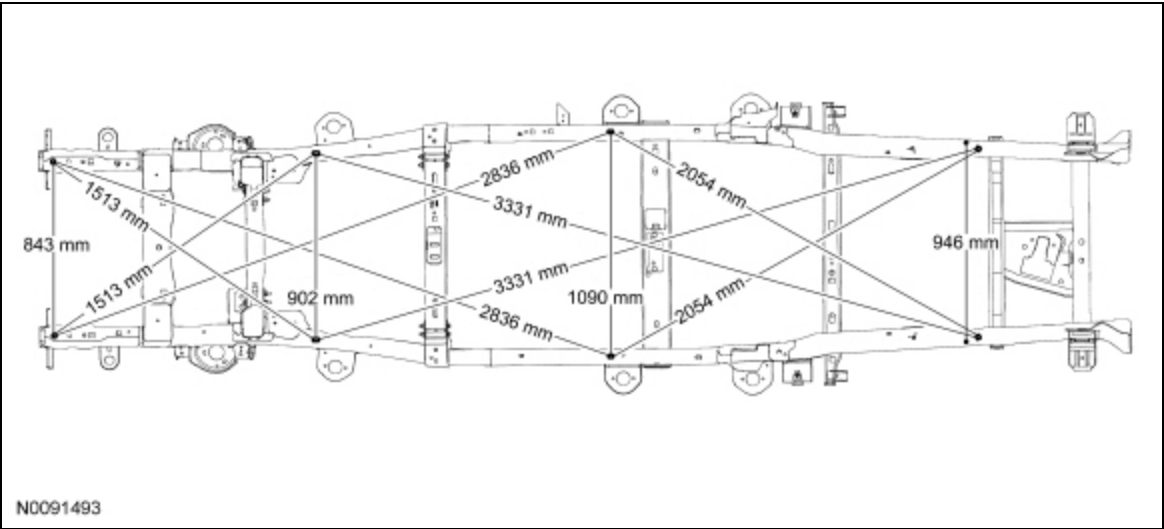


**Frame Width — 3,671 mm (145 in) Wheelbase**

**NOTE:** *Measurements are obtained on center, unless otherwise indicated.*

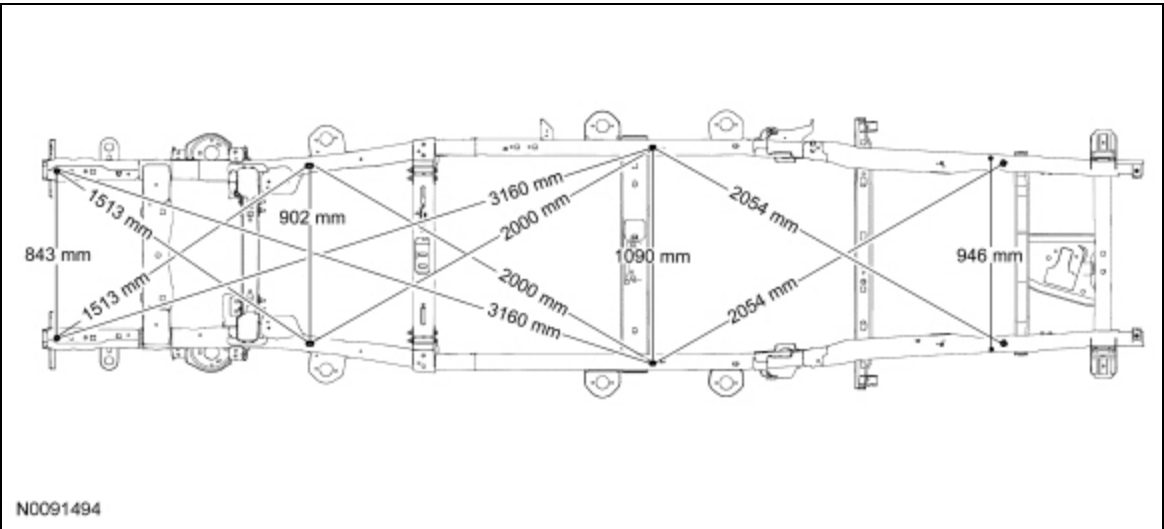


**Frame Width — 3,988 mm (157 in) Wheelbase**

**NOTE:** *Measurements are obtained on center, unless otherwise indicated.*

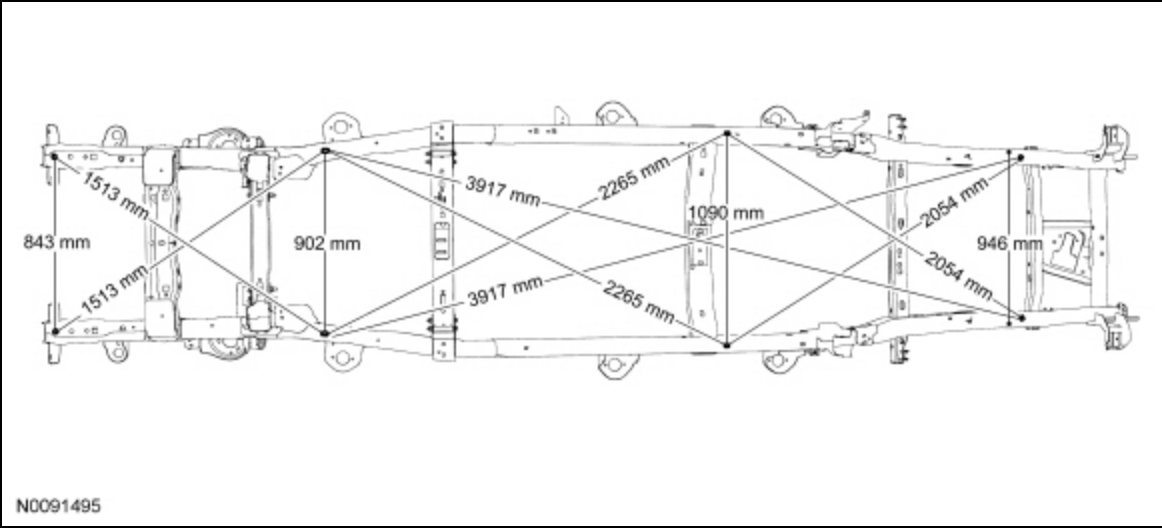

**Frame Width — 4,140 mm (163 in) Wheelbase**

**NOTE:** *Measurements are obtained on center, unless otherwise indicated.*

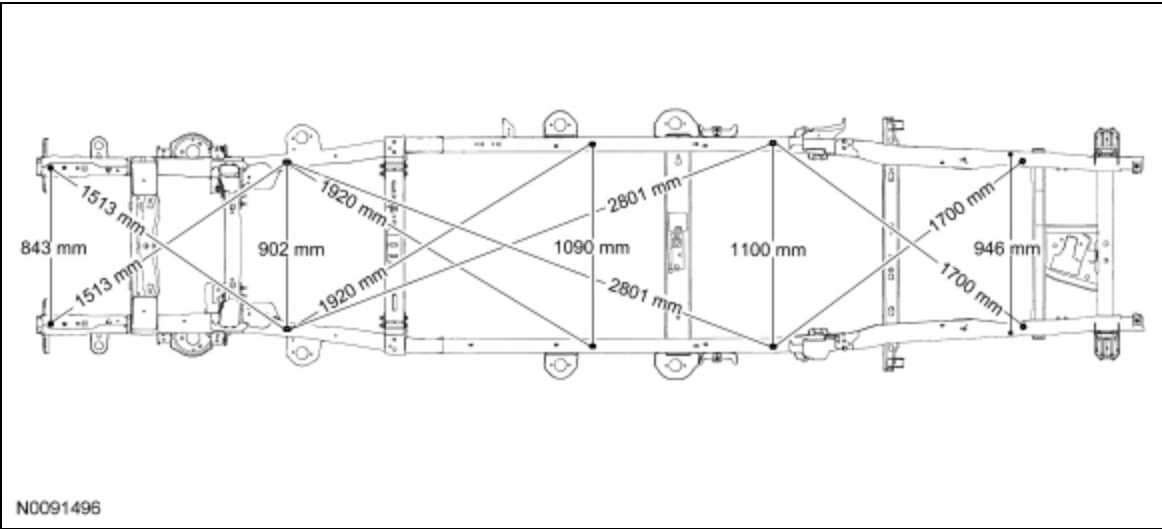

**Rear Bumper Mount Brackets**

**NOTE:** *Measurements are obtained on center, unless otherwise indicated.*

