


Solenoid Body Strategy

 [Ford Ecat Electronic Parts Catalog](#)

Special Tool(s)

	Vehicle Communication Module (VCM) and Integrated Diagnostic System (IDS) software with appropriate hardware, or equivalent scan tool
--	---


Solenoid Body Identification Procedure

1. Using the scan tool, select Powertrain, Transmission and Transmission Solenoid Body Identification from the toolbox icon and follow the instructions displayed on the scan tool.
- The solenoid body identification screen displays solenoid body identification information:
- Solenoid body strategy 13-digits
 - Solenoid body identification 12-digits
- The next screen displays the current solenoid body identification and strategy data file stored in the PCM . If the solenoid body strategy field is blank, the module contains a partial transmission solenoid body strategy. This is due to a corrupt or missing file at the time the programmable parameters were completed.

NOTE: The 13-digit solenoid body strategy number consists of only numbers. Letters are not used.

2. Compare the solenoid body identification and strategy to the solenoid body identification tag located on the left side of the transmission case.


Solenoid Strategy Identification Tag

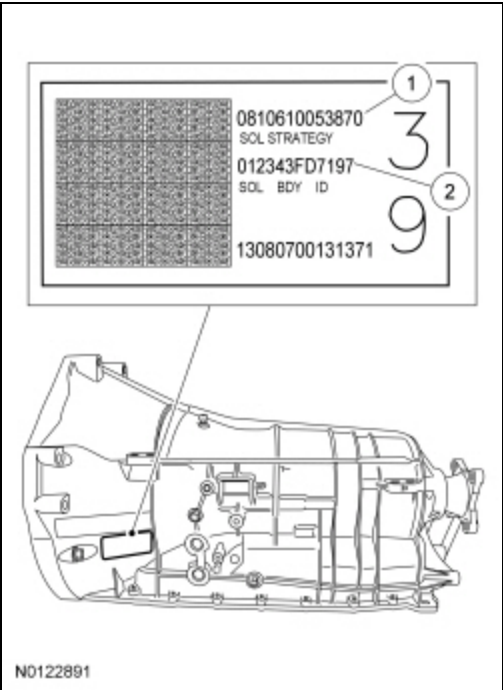

Item	Description
1	13-digit solenoid body strategy
2	12-digit solenoid body identification

3. If the solenoid body identification and strategy displayed on the scan tool match the solenoid body identification tag or replacement tag, then the solenoid body identification and strategy are correct for this transmission and a solenoid body strategy data download is not required. If the solenoid body identification tag or replacement tag is missing or damaged so it is not readable or does not match the identification or strategy displayed on the scan tool, remove the transmission fluid pan and filter and locate the 13-digit solenoid body strategy etched on the main control casting. Refer to Fluid Pan, Gasket and Filter.

Replacement Solenoid Strategy Identification Tag

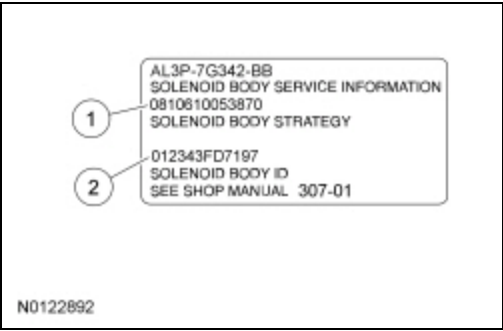


Item	Description
1	13-digit solenoid body strategy
2	12-digit solenoid body identification

4. **NOTICE: The 13-digit solenoid body strategy number displayed on the scan tool must match the solenoid body strategy number etched on the main control. If the numbers do not match, damage to the transmission or driveability concerns can occur.**

NOTICE: If the new main control was not supplied with a replacement solenoid strategy identification tag, DO NOT INSTALL the main control as all required programming information is missing.

Compare the solenoid body strategy identification etched on the main control to the solenoid strategy identification tag on the transmission case. If the solenoid body strategy identification etched on the main control does not match the solenoid strategy identification tag then a solenoid body strategy data download is required. If the solenoid body strategy etched on the main control does match the solenoid strategy identification tag on the transmission case but does not match the solenoid body identification and strategy displayed on the scan tool, then a solenoid body strategy data download is also required.

Main Control Solenoid Body Strategy

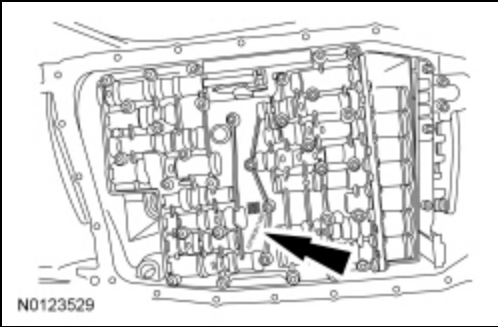

Solenoid Body Strategy Data Download

1. If a new main control was installed, record the 12-digit solenoid body identification and 13-digit solenoid body strategy from the replacement solenoid body tag provided with the main control service kit. Place the replacement tag over the existing identification tag.
2. Using the scan tool, select Module Programming and Programmable Parameters under the toolbox icon then select transmission. Follow the instructions displayed on the scan tool.
There are fields to enter the 12-digit solenoid body identification and 13-digit solenoid body strategy recorded from the solenoid body.
3. **NOTICE: If the solenoid body information is not correct, transmission damage or driveability concerns can occur.**

Enter the solenoid body 13-digit strategy.
The scan tool verifies the numbers entered are valid and displays a message if the information is not valid.
The scan tool checks to see if the file is present on the scan tool. If the file is present, the technician may proceed with downloading the file to the **PCM**. If the file is not present, the scan tool needs to be connected to the **PTS** server to download the file onto the scan tool.

4. Verify the file is present on the scan tool. If the file is present, go to Step 8. If the file is not present, continue with this procedure.
5. Connect the scan tool to the **PTS** server.
6. Follow the instructions on the network to download the strategy file to the scan tool.
7. If the scan tool cannot connect to the **PTS** server, download the file from **PTS** using the OASIS tab and select the transmission strategy.
If the scan tool cannot download a strategy from the web site, a partial strategy automatically downloads.
8. Reconnect the scan tool to the vehicle.
9. Follow the instructions displayed on the scan tool.
10. The scan tool automatically downloads the strategy file or partial strategy file to the **PCM**. The scan tool displays a message when it is finished downloading the data that states that the file was downloaded successfully.
11. **NOTICE: The customer may feel erratic shifts and driveability concerns if the adaptive drive cycle has not been performed.**

Road test the vehicle following the Adaptive Drive Cycle. Refer to Shift Point Road Test.