


Iterative Depth-Normal Refinement

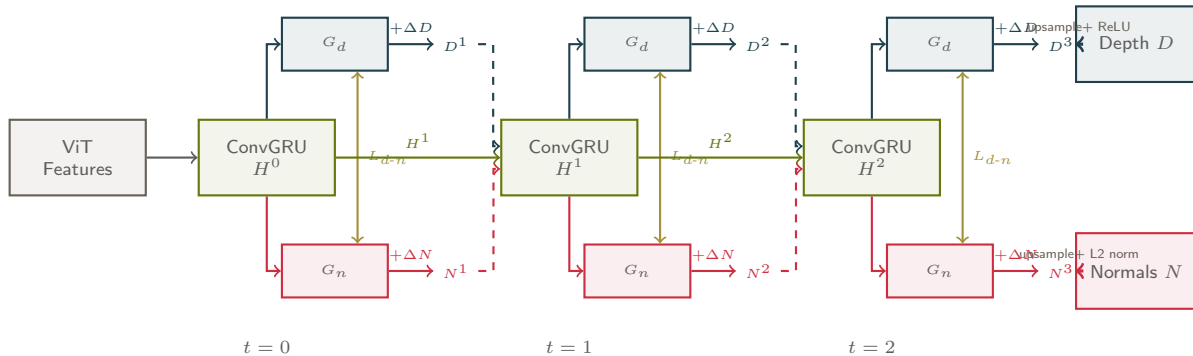

- Shared hidden state H^t jointly encodes depth and normal features
- Heads G_d , G_n produce residual updates ΔD , ΔN each step
- Operates at $\frac{1}{4}$ resolution, upsampled after final iteration
- L_{d-n} consistency loss during training enforces depth-normal agreement
- First method to jointly iterate depth AND normals (prior work iterated one task only)
- Typically 3–4 iterations at inference