



Markov chain over sampler states

transition $T(s' | s) = q(s' | s) \alpha(s, s')$, accept $\alpha(s, s') = \min\left(1, \frac{\pi(s')q(s | s')}{\pi(s)q(s' | s)}\right)$

self-loop $T(s | s)$ collects the probability of REJECTED proposals (chain stays)

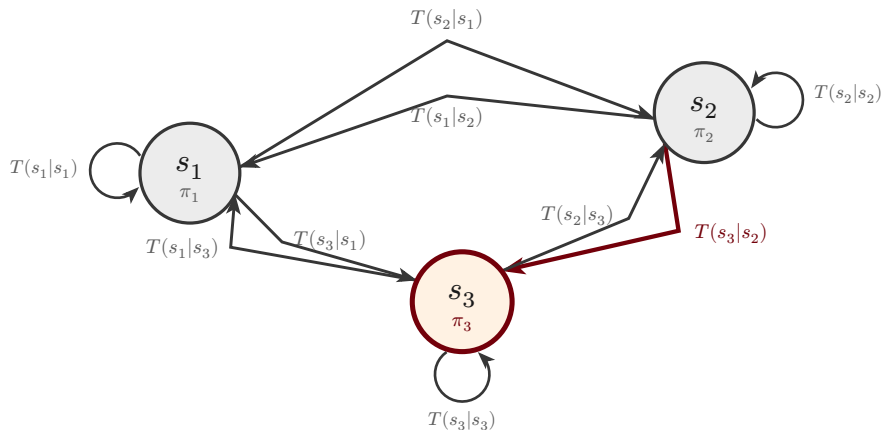

Realized trajectory $s^{(0)}, s^{(1)}, \dots$

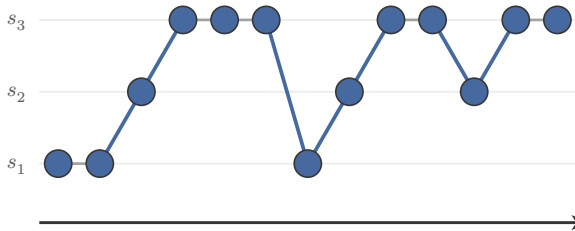

flat segments = rejections (self-loop)

Empirical occupancy $\rightarrow$ target π

