

1. Terminology

One-line summary

The processes by which the *performance itself* of source equipment is carried over to newly crafted equipment.

1-1. Performance Inheritance

One-line summary

The process by which the *performance itself* of source equipment is carried over to newly crafted equipment.

Performance Inheritance — Concept

Observed organization in RF4SP / RF5; not an internal-specification proof

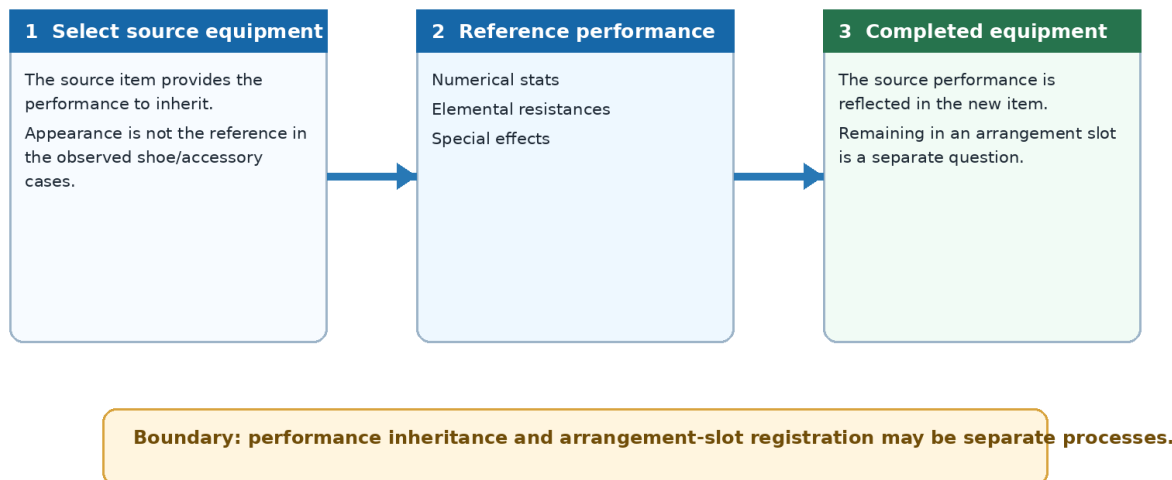


Figure 1-1. Performance Inheritance and its boundary from arrangement-slot registration.

When equipment is crafted, this process carries the performance of the source equipment over to the newly crafted equipment.

In this document, **Performance Inheritance** includes:

- numerical stats;
- elemental resistances; and
- special effects.

At least within the scope of the present observations, when shoes or accessories are inherited in both RF4SP and RF5, the performance of the source equipment—not its appearance—is referenced.

However, the method by which special effects are retained may differ:

RF4SP:

They may depend on the arrangement slots.

RF5:

They may become fixed to the item itself at the time of inheritance.

Performance Inheritance and registration in an arrangement slot may also be handled as separate processes.

Therefore, whether the source equipment remains in one of the final arrangement slots and whether the source equipment's performance is reflected in the completed item are not necessarily the same question.


1-2. Arrangement Inheritance

One-line summary

The process by which materials selected as inheritance candidates are *stored in the arrangement slots*.

Arrangement Inheritance — Concept

Selected materials are stored as arrangement-slot entries

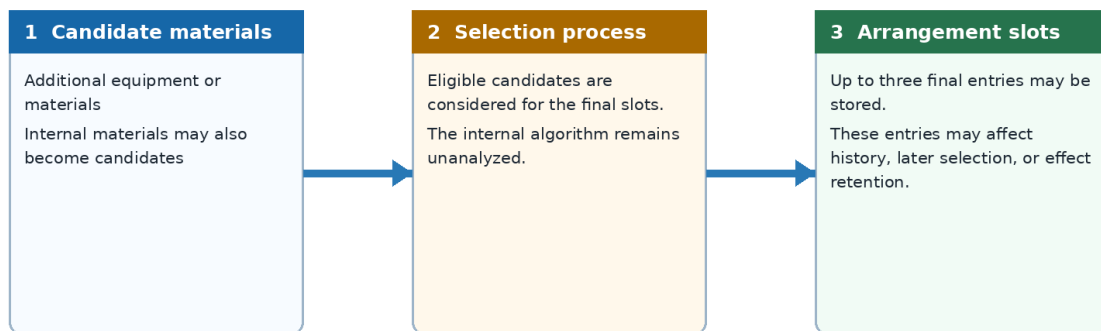

Observed boundary: RF4SP and RF5 may handle arrangement slots differently.

Figure 1-2. Candidate selection and storage in the final arrangement slots.

When equipment is crafted, materials or equipment registered as inheritance candidates are stored in the arrangement slots.

The arrangement slots may be involved in:

- inheritance history;
- the candidate pool for selection; and
- retention of special effects.

At least within the scope of the present observations, RF4SP and RF5 may differ in how arrangement slots are handled.

1-3. Auto Arrange

One-line summary

When a recipe requires four or more materials, this process automatically fills otherwise unfilled arrangement slots.

Auto Arrange: Required Material Pool Model

Observation-Based Candidate Pool Model

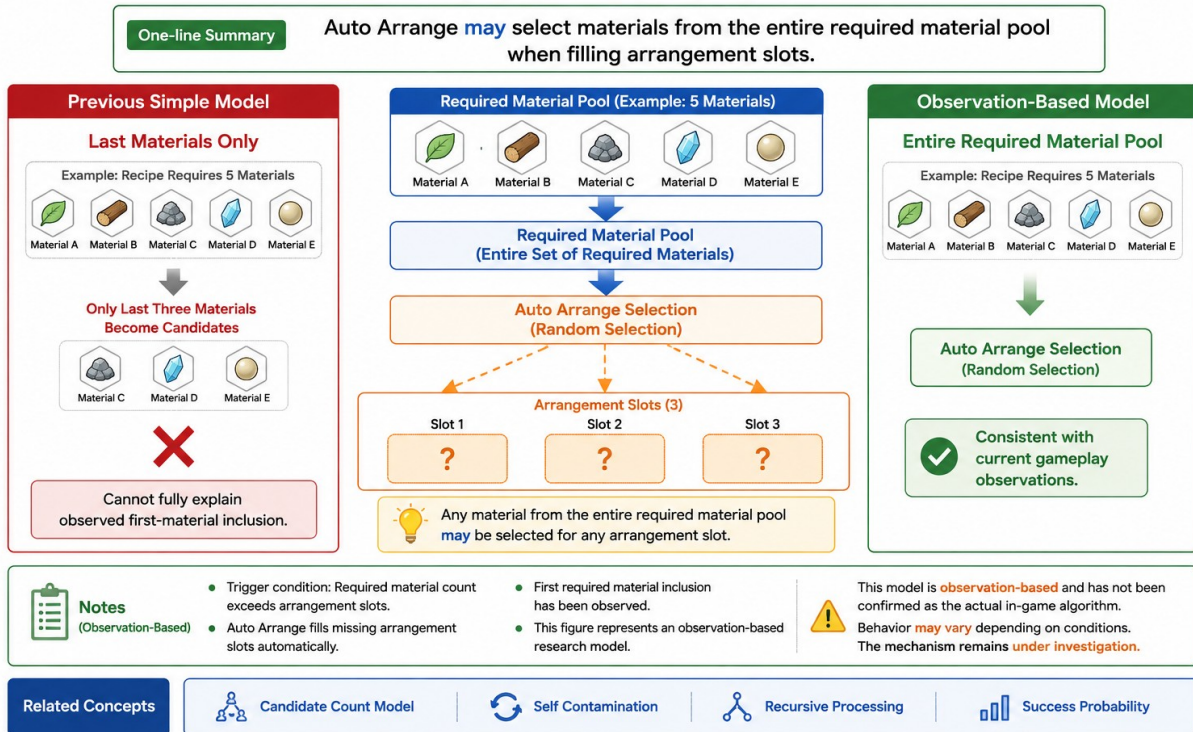


Figure 1-3. Auto Arrange and the required-material candidate pool.

Auto Arrange is the automatic arrangement-generation process that occurs when crafting a base item if the recipe requires four or more materials and there are not enough arrangement-slot entries.

In this document, let:

n = the number of required materials.

When the number of required materials satisfies:

$$n > 3,$$

the number of unfilled arrangement slots is:

$$n - 3.$$

For those $n - 3$ slots, materials are selected at random from the n required materials and registered in the arrangement slots.

At least within the scope of the present observations, the following have been observed:

- selection is not fixed to the last material;
- inclusion of the first material has also been observed; and
- materials may be selected from the full set of required materials.

After the item is completed, these entries are treated as ordinary arrangement-slot entries; no special distinction has been observed.

1-4. Selection Process

One-line summary

The process that determines which materials from the candidate pool actually enter the arrangement slots.

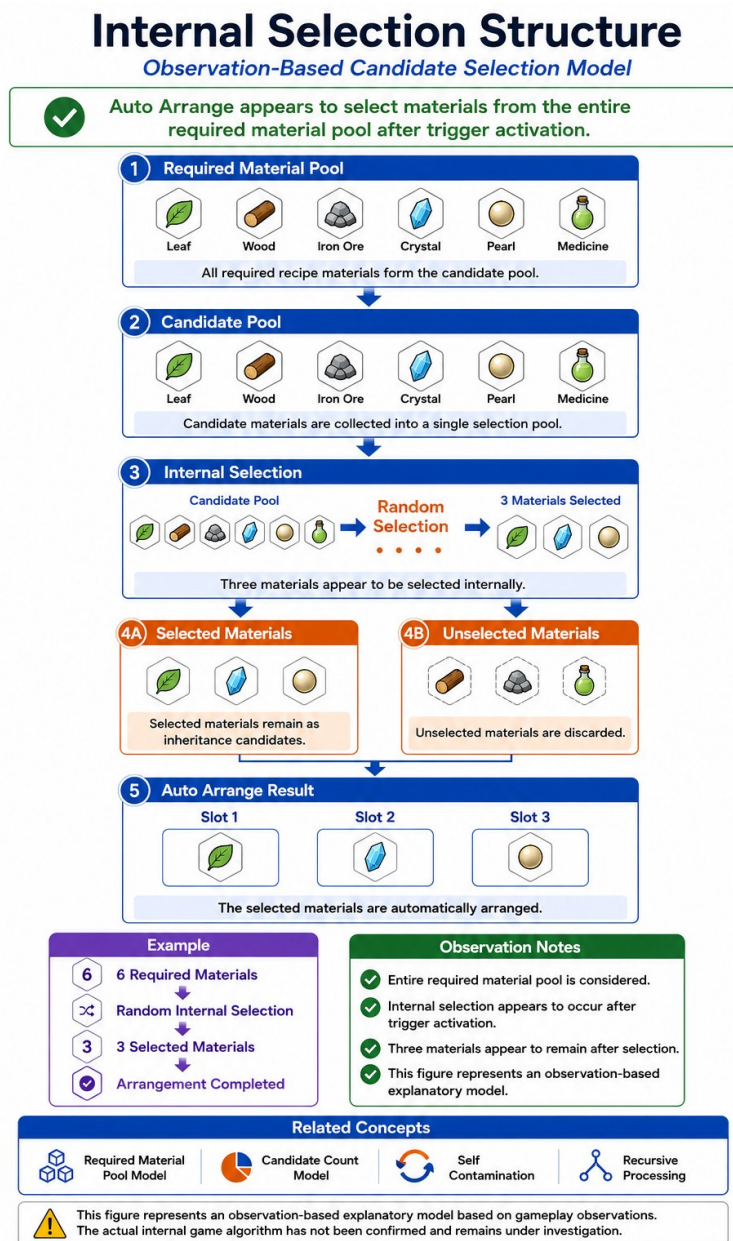


Figure 1-4. Observation-based model of the Selection Process.

This process determines which materials from the candidate pool are actually registered in the arrangement slots.

At least within the scope of the present observations, the following have been observed:


RF4SP:

Selection may be strongly random from the first attempt.

RF5:

Behavior tends to be fixed when the candidate count is three or fewer, while reselection may occur when it is four or more.

Auto Arrange: Occurrence Is Observed, the Trigger Transition Is Not

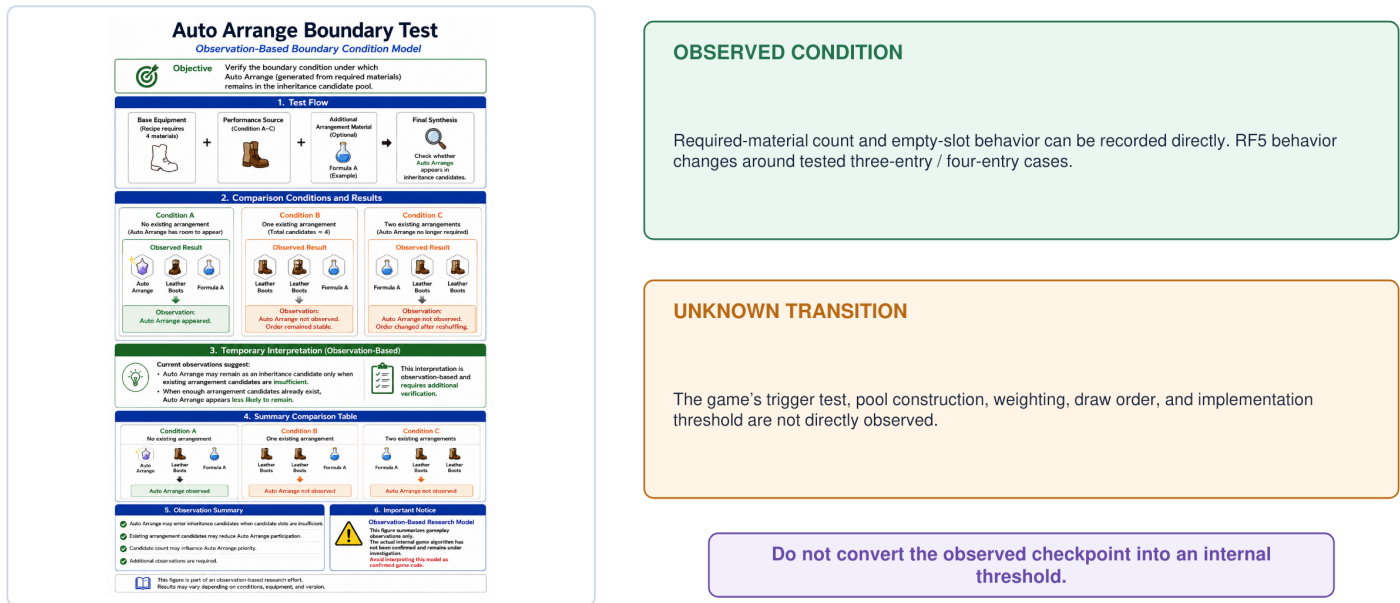

Observed State $\rightarrow$ Unknown Transition $\rightarrow$ Observed State

01-05 Revision Master Set

Local caption

Auto Arrange

The internal algorithm has not been analyzed. The present description therefore includes observation-based hypotheses.

1-5. Candidate Generation

One-line summary

The phenomenon in which materials that the player did not originally add are *added to the selection candidate pool*.


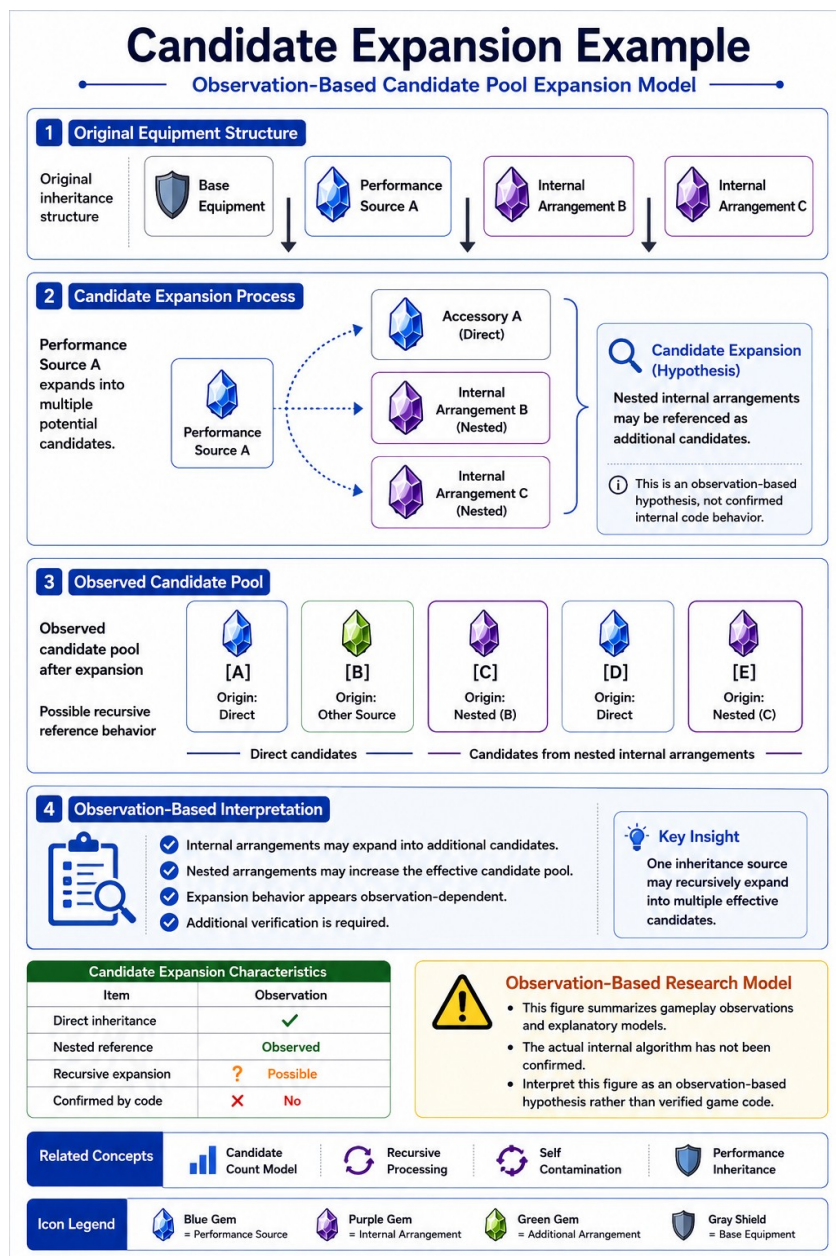


Figure 1-5. Example of candidates expanding beyond directly added materials.

During arrangement selection, a particular material or piece of equipment is **generated as a candidate** when it is treated as an eligible target that may enter an arrangement slot.

In this document, **Candidate Generation** refers to the phenomenon in which materials or equipment that the player did not originally add are introduced into the candidate pool through processes such as:

Figure 1-4

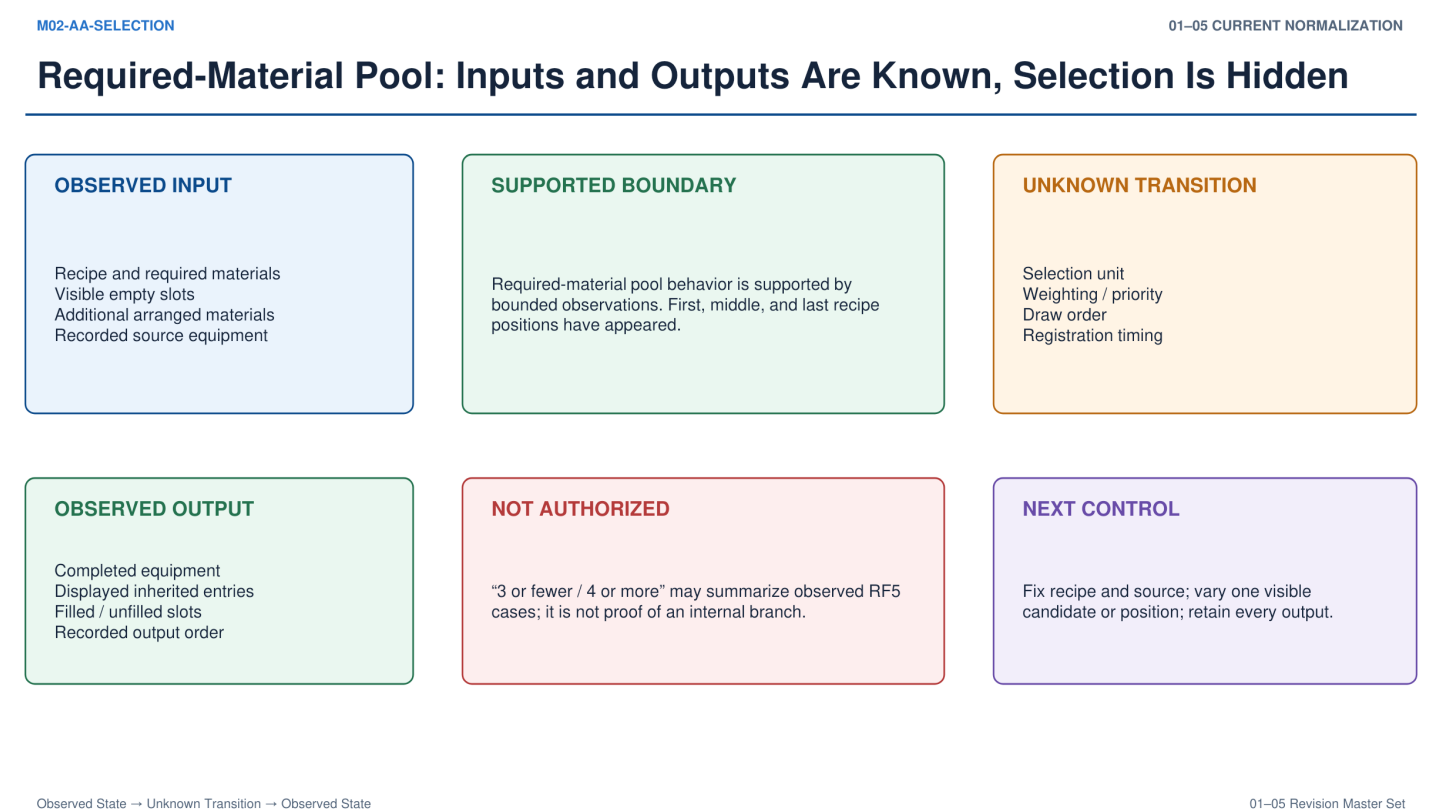

- Self Contamination / Performance-Source Contamination / Inheritance-Source Contamination (observed only with shoes and accessories*); and
- internal arrangement materials.

When Candidate Generation increases the size of the selection pool, it can substantially affect:

- success probability;
- the expected number of attempts; and
- the efficiency of split-save strategies.

This document treats Candidate Generation as one of the key concepts for organizing the inheritance mechanics.

Example

Base equipment: Work Gloves

Performance source: Fluffy Scarf

Additional arrangement entry: Charm

The player directly added only:

- Fluffy Scarf; and
- Charm.

However, if Auto Arrange materials stored inside the Fluffy Scarf are added to the candidate pool during inheritance processing, the pool may expand as follows:

- Charm;
- Fluffy Scarf;
- internal material 1; and
- internal material 2.

In this document, this kind of phenomenon—where eligible selection candidates are added and the candidate pool grows—is called **Candidate Generation**.


* The parenthetical limitation is retained from the Japanese source.

1-6. Self Contamination (Performance-Source / Inheritance-Source Contamination)

One-line summary

The phenomenon in which repeated inheritance causes the source performance to *multiply as new candidates*.

Figure 1-5

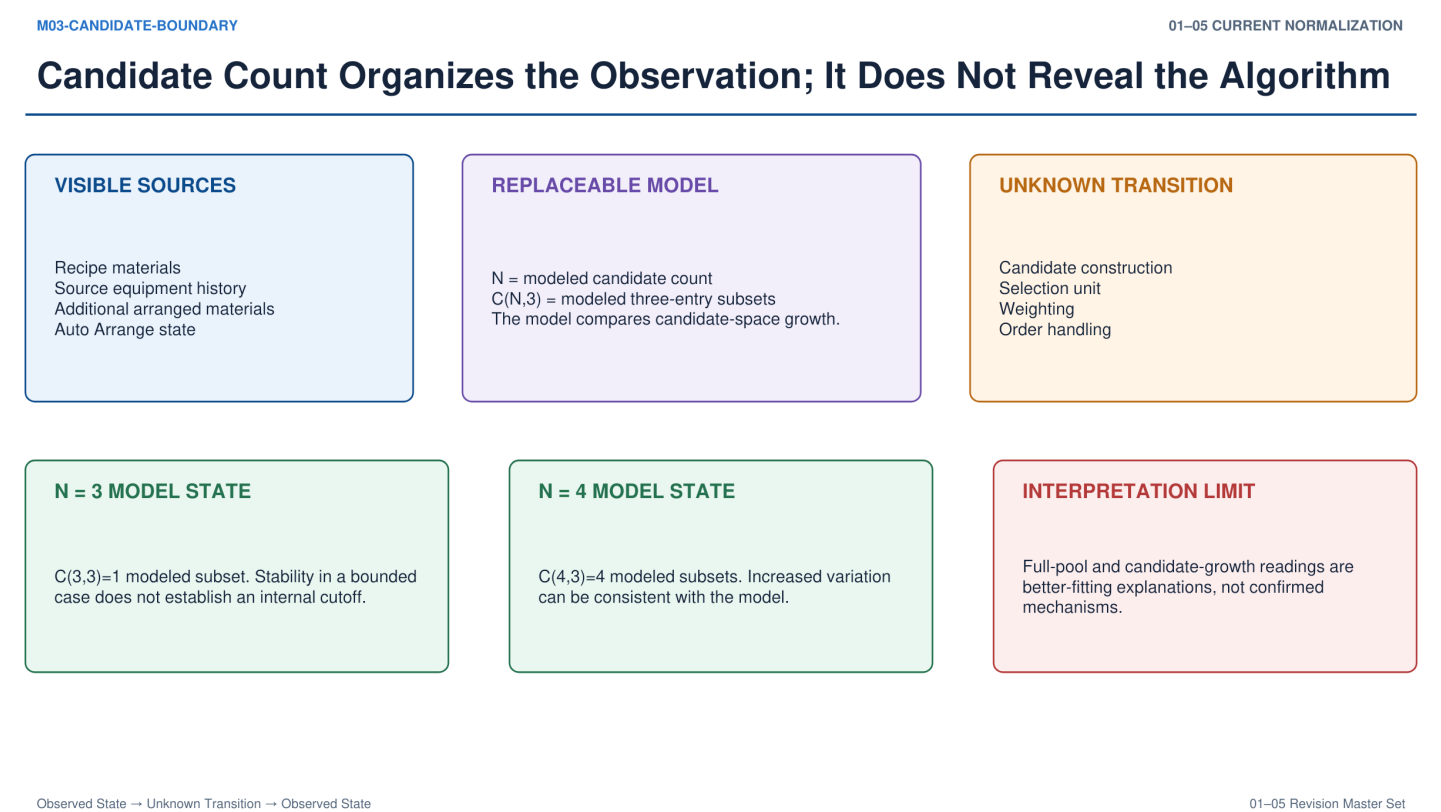

Self Contamination Concept

• Observation-Based Candidate Expansion Model •

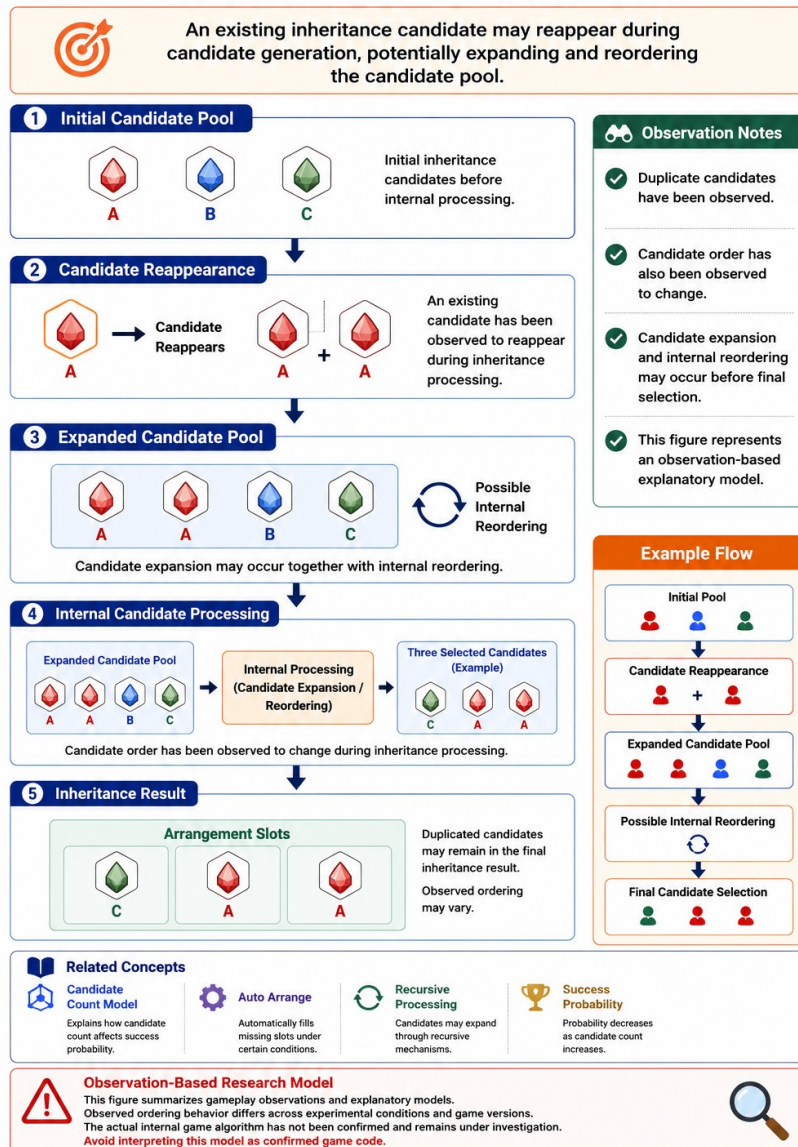


Figure 1-6. Performance-Source Contamination across repeated inheritance.

Self Contamination—also termed **Performance-Source Contamination** or **Inheritance-Source Contamination** in newer project materials—is the phenomenon in which repeated inheritance adds the source performance as a new selection candidate.

At least within the scope of the present observations, it has been observed in both RF4SP and RF5.

In this document, **Self Contamination (Performance-Source / Inheritance-Source Contamination)** refers to the phenomenon in which the source performance is generated as a candidate and increases the number of entries in the arrangement slots.

These are project-specific terms and are not official names.

When discussing this phenomenon within a community, readers may use whichever of **Performance-Source Contamination** and **Inheritance-Source Contamination** is easier to use. If a shared term is needed, the community is invited to discuss which name is most suitable rather than treating either translation as fixed official terminology.

For consistency, this document uses **Performance-Source Contamination** from this point onward.

1-7. Recursive Processing (Nested Reference)

One-line summary

The process that *further references and expands* arrangement information stored inside a material.

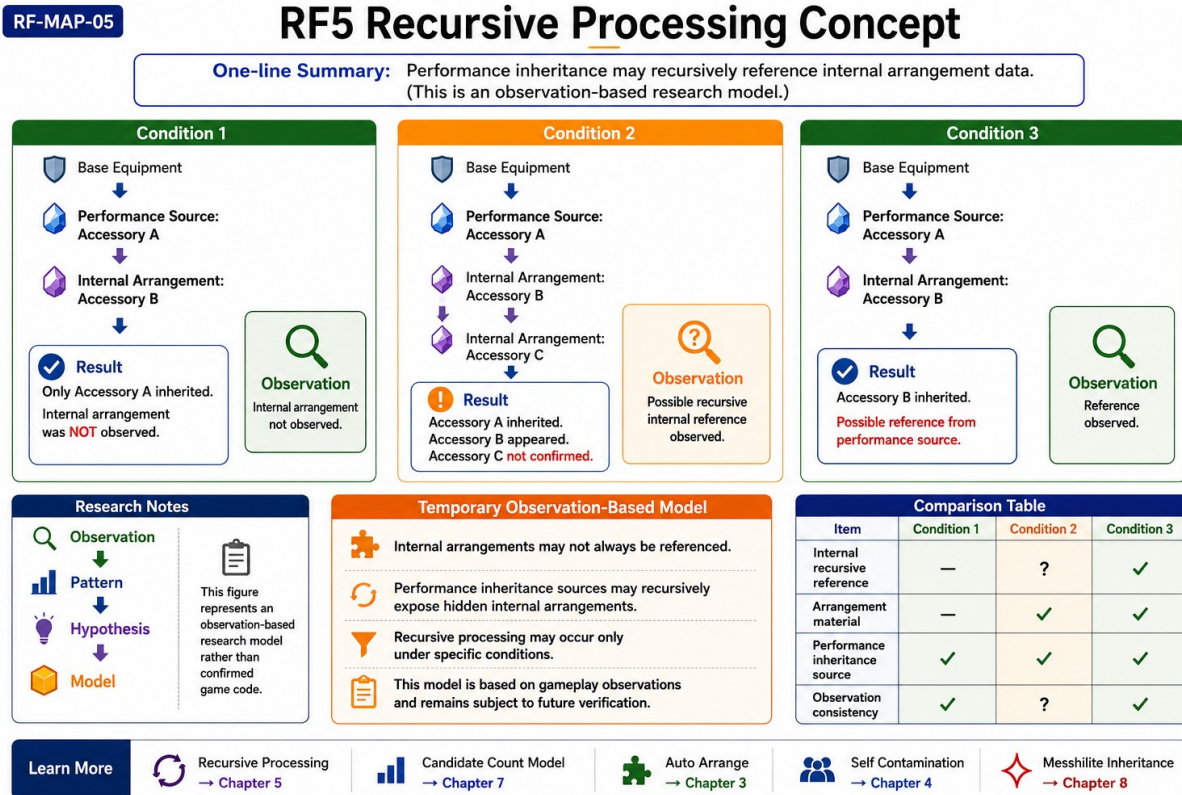


Figure 1-7. Recursive Processing as a nested-reference hypothesis.

Recursive Processing is the process that further references arrangement information or internal-material information stored inside an inherited material and adds that information to the candidate pool.

For example, suppose there is a nested structure such as:

Equipment A
→ contains Equipment B
→ which contains Equipment C.

When the final item is generated, the questions are:


- whether only A is referenced;
- whether the reference extends to B; and
- whether C is also referenced recursively.

At least within the scope of the present observations:

- for additional arrangement materials, Candidate Generation from internal information has not been observed; and
- for the performance source, internal information may be referenced and generated as candidates.

For convenience, this document uses the terms:

Figure 1-6

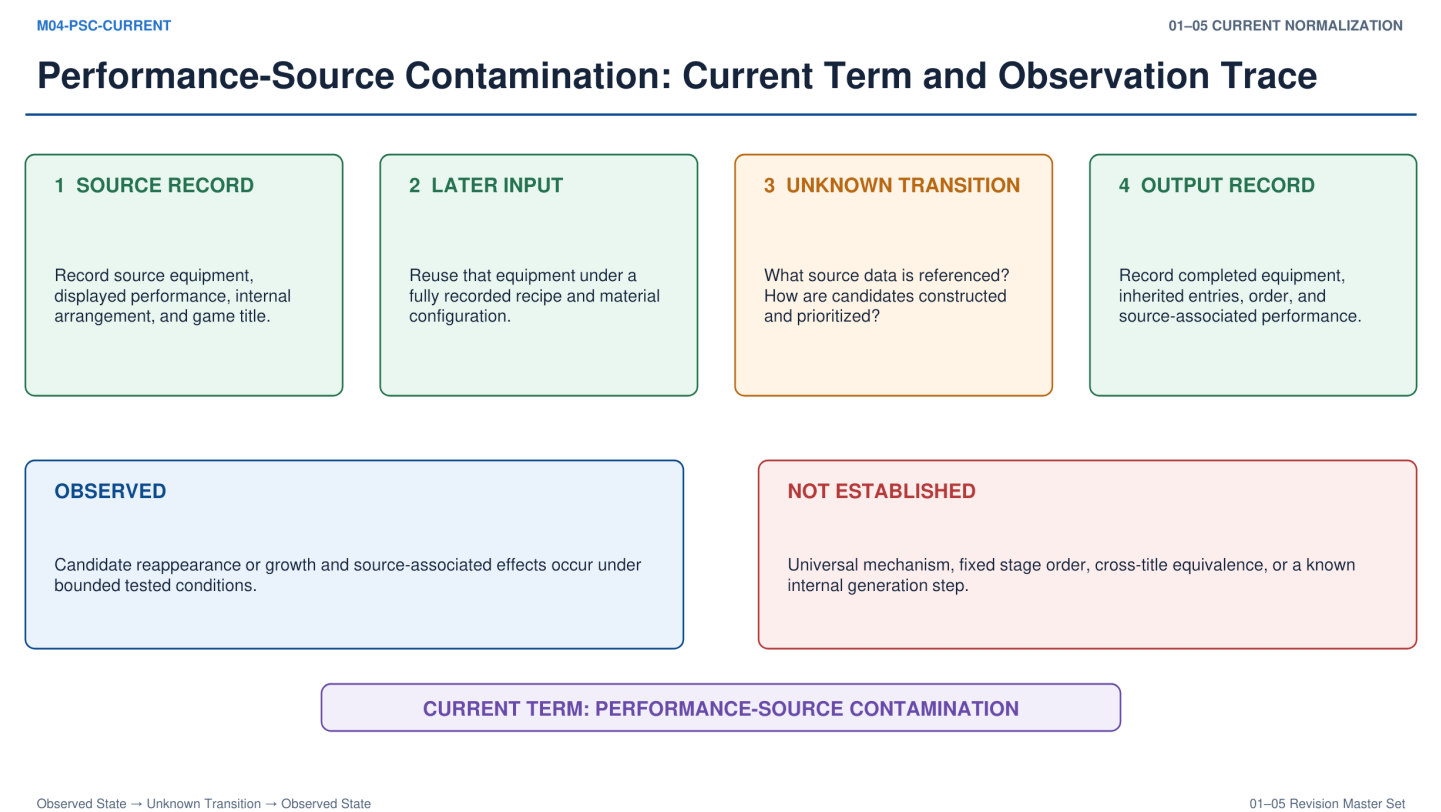

- **Recursive Processing;** and
- **Nested Reference.**

This phenomenon includes classifications and terminology specific to this document. Its interpretation may change with additional testing.

Recursive Processing: Depth-1 Support Does Not Establish Deeper Recursion

