(https://customerconnect.vmware.com/home) Products and Accounts

Knowledge

MAIN CONTENT

Search for topics, products or issues..

Q



Implementing Hypervisor-Specific Mitigations for Microarchitectural Data Sampling (MDS) Vulnerabilities (CVE-2018-12126, CVE-2018-12127, CVE-2018-12130, and CVE-2019-11091) in vSphere (67577)

Last Updated: 2/10/2020	Categorie	es: Security Tota	al Views: 57424
Language: English	~	SUBSCRIBE	i
Ĉi 81 people found this	helpful		Please provide article feedback: 🕲 👨

Purpose

This article documents the <u>Hypervisor-Specific Mitigations</u> enablement process required to address Microarchitectural Data Sampling (MDS) Vulnerabilities identified by CVE-2018-12126, CVE-2018-12127, CVE-2018-12130, and CVE-2019-11091 in vSphere.

Support Assistant

In addition to the <u>Hypervisor-Specific Mitigations</u> described in this article, <u>Hypervisor-</u> Assisted Guest Mitigations and Operating System-Specific Mitigations are also required.

These additional mitigations are documented VMSA-2019-0008. (https://customerconnect.vmware.com/home) Products and Accounts

Knowledge

The **Update History** section of this article will be revised if there is a significant change. Click **Subscribe to Article** in the Actions box to be alerted when new information is added to this document and sign up at our Security-Announce mailing list (http://lists.vmware.com/cgi-bin/mailman/listinfo/security-announce) to receive new and updated VMware Security Advisories.

Introduction to MDS

Intel has disclosed details on a new wave of speculative-execution vulnerabilities known collectively as "Microarchitectural Data Sampling (MDS)" that can occur on Intel microarchitecture prior to 2nd Generation Intel® Xeon® Scalable Processors (formerly known as Cascade Lake). These issues may allow a malicious user who can locally execute code on a system to infer the values of data otherwise protected by architectural mechanisms.

Attack Vector Summary

- <u>Sequential-context attack vector</u> (Inter-VM): a malicious VM can potentially infer recently accessed data of a previous context (hypervisor thread or other VM thread) on either logical processor of a processor core.
- <u>Concurrent-context attack vector</u> (Inter-VM): a malicious VM can potentially infer recently accessed data of a concurrently executing context (hypervisor thread or other VM thread) on the other logical processor of the Hyper-Threading-enabled processor core.

Mitigation Summary

• The <u>Sequential-context attack vector</u> (Inter-VM): is mitigated by a Hypervisor update to the product versions listed in VMSA-2019-0008 section 3a. These mitigations are dependent on Intel microcode updates (provided in separate ESXi patches for most Intel hardware platforms) also listed in the advisory. This mitigation is enabled by default and does not impose a significant performance impact.

Support Assistant

• The <u>Concurrent-context attack vector</u> (Inter-VM): is mitigated through enablement of the ESXi Side-Channel-Aware Scheduler Version 1 or Version 2. These options may


impose a non-trivial performance impact and are not enabled by default. (https://customerconnect.vmware.com/home) Products and Accounts

Knowledge

Important: Disabling Intel Hyperthreading in firmware/BIOS (or by using VMkernel.Boot.Hyperthreading) after applying vSphere updates and patches is not recommended.

Resolution

The Inter-VM mitigation process for MDS is divided into three phases:

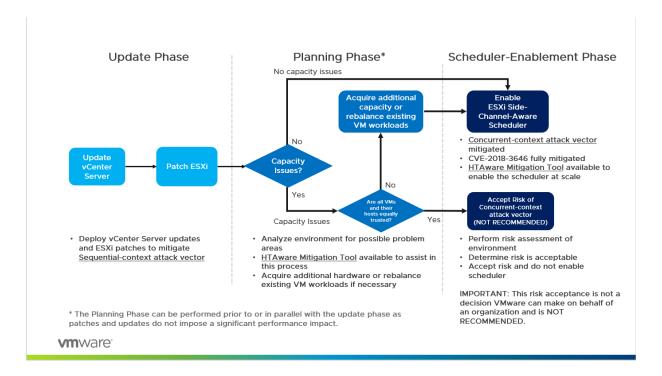

1. Update Phase: Apply vSphere Updates and Patches

The Inter-VM <u>Sequential-context attack vector</u> is mitigated by a vSphere update to the product versions listed in VMware Security Advisory VMSA-2019-0008. This mitigation is dependent on Intel microcode updates (provided in separate ESXi patches for most Intel hardware platforms) which are also documented in VMSA-2019-0008. This mitigation is enabled by default and does not impose a significant performance impact.

Note: As displayed in the workflow above, vCenter Server should be updated prior to applying ESXi patches. Notification messages were previously 经过度均均数据数据和to explain that the ESXi Side-Channel-Aware Scheduler must be enabled to mitigate Inter-VM Concurrent-context attack vectors. If ESXi is updated prior to vCenter you may receive cryptic notification messages relating to this. After vCenter has been

updated, the notifications will be shown correctly.

(https://customerconnect.vmware.com/home) Products and Accounts

Knowledge

2. Planning Phase: Assess Your Environment

Inter-VM <u>Concurrent-context attack vectors</u> are mitigated through enablement of the <u>ESXi Side-Channel-Aware Scheduler</u> which is included in the updates and patches listed in VMSA-2019-0008. This scheduler is not enabled by default. Enablement of this scheduler may impose a non-trivial performance impact on applications running in a vSphere environment. The goal of the Planning Phase is to understand if your current environment has sufficient CPU capacity to enable the scheduler without operational impact.

The following list summarizes potential problem areas after enabling the <u>ESXi Side-</u>Channel-Aware Scheduler:

- VMs configured with vCPUs greater than the physical cores available on the ESXi host
- VMs configured with custom affinity or NUMA settings
- VMs with latency-sensitive configuration
- ESXi hosts with Average CPU Usage greater than 70%
- Hosts with custom CPU resource management options enabled
- HA Clusters where a rolling upgrade will increase Average CPU Usage above 100%

Important: The above list is meant to be a brief overview of potential problem areas related to enablement of the <u>ESXi Side-Channel-Aware Scheduler</u>. The VMware Performance Team has provided an in-depth guide as well as performance data in KB55767 (/s/article/55767). It is strongly suggested to thoroughly review this document prior to enablement of the scheduler.

Note: It may be necessary to acquire additional hardware, or rebalance existing workloads, before enablement of the ESXi Side-Channel-Aware Scheduler. Organizations can choose not to enable the ESXi Side-Channel-Aware Scheduler after by accepting the risk posed by the Concurrent-context attack vector. This is NOT RECOMMENDED and VMware cannot make this decision on behalf of an organization.

3. Scheduler-Enablement Phase: (https://customerconnect.vmware.com/home) Products and Accounts

Knowledge

1. Enable the ESXi Side-Channel-Aware Scheduler in ESXi 5.5, 6.0, 6.5, and 6.7 prior to 6.7u2.

After addressing the potential problem areas described above during the Planning Phase, the <u>ESXi Side-Channel-Aware Scheduler</u> must be enabled to mitigate Inter-VM <u>Concurrent-context attack vectors</u>. The scheduler can be enabled on an individual ESXi host via the advanced configuration option hyperthreadingMitigation.

Note: Enabling this option will result in the vSphere UI reporting only a single logical processor per physical core; halving the number of logical processors if Hyperthreading was previously enabled. In addition Hyperthreading may be reported as 'Disabled' in various configuration tabs.

Enabling the ESXi Side-Channel-Aware Scheduler using the vSphere Web Client or vSphere Client

- Connect to the vCenter Server using either the vSphere Web or vSphere Client.
- 2. Select an ESXi host in the inventory.
- 3. Click the **Manage** (5.5/6.0) or **Configure** (6.5/6.7) tab.
- 4. Click the **Settings** sub-tab (5.5/6.0) or find the **System** section in the middle panel (6.5/6.7).
- 5. Under the System heading, click **Advanced System Settings**.
- 6. Click in the Filter box and search for VMkernel.Boot.hyperthreadingMitigation
- 7. Select the setting by name and click the **Edit** pencil icon.
- 8. Change the configuration option to true (default: false).
- 9. Click OK.
- 10. Reboot the ESXi host for the configuration change to go into effect.

Enabling the ESXi Side-Channel-Aware Scheduler using ESXi Embedded Host Support Assistant

1. Connect to the ESXi host by opening a web browser to

https://HOSTNAME.

(https://customergonnecharage.com/home) Products and Accounts

Knowledge

- 3. Click the **Advanced settings** sub-tab
- 4. Click in the Filter box and search for VMkernel.Boot.hyperthreadingMitigation
- 5. Select the setting by name and click the **Edit** pencil icon
- 6. Change the configuration option to true (default: false)
- 7. Click Save.
- 8. Reboot the ESXi host for the configuration change to go into effect.

Enable ESXi Side-Channel-Aware Scheduler setting using ESXCLI


- SSH to an ESXi host or open a console where the remote ESXCLI is installed. For more information, see the http://www.vmware.com/ support/developer/vcli/ (http://www.vmware.com/support/developer/vcli/)
- 2. Check the current runtime value of the HTAware Mitigation Setting by running esxcli system settings kernel list -o hyperthreadingMitigation
- 3. To enable HT Aware Mitigation, run this command:

esxcli system settings kernel set -s hyperthreadingMitigation -v TRUE

- 4. Reboot the ESXi host for the configuration change to go into effect.
- Enable the ESXi Side-Channel-Aware Scheduler (SCAv1) or the ESXi Side-Channel-Aware Scheduler v2 (SCAv2) in ESXi 6.7u2 (13006603) or later

Note: ESXi 6.7u2 (13006603) and future release lines of ESXi include the <u>ESXi Side-Channel-Aware Scheduler v2</u>. Prior release lines such as 6.5, 6.0, and 5.5 cannot accommodate this new scheduler.

Support Assistant

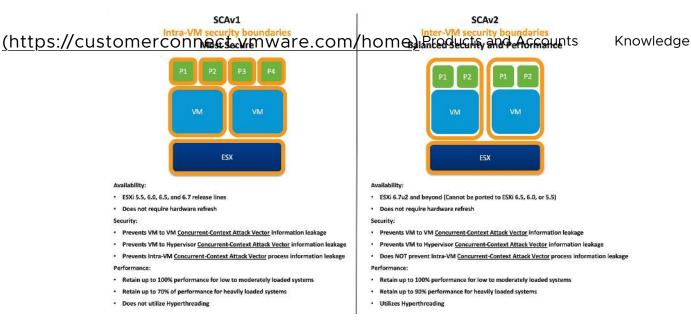

VMware has published a white paper entitled Performance of vSphere 6.7 Scheduling Options (https://www.vmware.com/techpapers/2018/scheduler-options-vsphere67u2-perf.html) which provides a more detailed look into the performance differences between SCAv1 and SCAv2. Please review this document before continuing.

Enabling the ESXi Side-Channel-Aware Scheduler (SCAv1) using the vSphere Web Client or vSphere Client

- Connect to the vCenter Server using either the vSphere Web or vSphere Client.
- 2. Select an ESXi host in the inventory.
- 3. Click the Configure tab.
- 4. Under the System heading, click **Advanced System Settings**.
- 5. Click Edit.
- 6. Click in the Filter box and search for VMkernel.Boot.hyperthreadingMitigation
- 7. Select the setting by name
- 8. Change the configuration option to true (default: false).
- Click in the Filter box and search for VMkernel.Boot.hyperthreadingMitigationIntraVM
- 10. Change the configuration option to true (default: †"'Je Support Assistant
- 11. Click **OK**.
- 12. Reboot the ESXi host for the configuration change to go into effect.

Enabling the <u>ESXi Side-Channel-Aware Scheduler</u> (SCAv1) using ESXi (https://customercented and Accounts

Knowledge

- Connect to the ESXi host by opening a web browser to https://HOSTNAME.
- 2. Click **Manage** under host navigator
- 3. Click the **Advanced settings** Tab
- 4. Use the search box to find VMkernel.Boot.hyperthreadingMitigation
- Select the VMkernel.Boot.hyperthreadingMitigation setting and click the **Edit** Option
- 6. Change the configuration option to true (default: false)
- 7. Click Save.
- 8. Use the search box to find VMkernel.Boot.hyperthreadingMitigationIntraVM
- 9. Select the VMkernel.Boot.hyperthreadingMitigationIntraVM setting and click the **Edit** Option
- 10. Change the configuration option to true (default: true).
- 11. Click Save.
- 12. Reboot the ESXi host for the configuration change to go into effect.

Enable ESXi Side-Channel-Aware Scheduler (SCAv1) using ESXCLI

- SSH to an ESXi host or open a console where the remote ESXCLI is installed. For more information, see the http://www.vmware.com/ support/developer/vcli/ (http://www.vmware.com/support/developer/vcli/).
- 2. Check the current runtime values by running esxcli system settings kernel list -o hyperthreadingMitigation and esxcli system settings kernel list -o hyperthreadingMitigationIntraVM
- 3. To enable the <u>ESXi Side-Channel-Aware Scheduler</u> Version 1, run these commands:

esxcli system settings kernel set -s hyperthreadingMitigation -v TRUE

Support Assistant

esxcli system settings kernel set -s (https://customercennectarmmareaeom/home)-Products and Accounts

Knowledge

4. Reboot the ESXi host for the configuration change to go into effect.

Enabling the ESXi Side-Channel-Aware Scheduler Version 2 (SCAv2) using the vSphere Web Client or vSphere Client

- Connect to the vCenter Server using either the vSphere Web or vSphere Client.
- 2. Select an ESXi host in the inventory.
- 3. Click the **Configure** tab.
- 4. Under the System heading, click **Advanced System Settings**.
- 5. Click **Edit**.
- 6. Click in the Filter box and search for VMkernel.Boot.hyperthreadingMitigation
- 7. Select the setting by name
- 8. Change the configuration option to true (default: false).
- Click in the Filter box and search for VMkernel.Boot.hyperthreadingMitigationIntraVM
- 10. Change the configuration option to false (default: true).
- 11. Click **OK**.
- 12. Reboot the ESXi host for the configuration change to go into effect.

Enabling the <u>ESXi Side-Channel-Aware Scheduler Version 2</u> (SCAv2) using ESXi Embedded Host Client

- Connect to the ESXi host by opening a web browser to https://HOSTNAME.
- 2. Click Manage under host navigator
- 3. Click the **Advanced Settings** tab
- 4. Use the search box to find VMkernel.Boot.hyperthreadingMitigation
- 5. Select the VMkernel.Boot.hyperthreadingMitigation setting and click the **Edit** option
- 6. Change the configuration option to true (default: false)
 Support Assistant
- 7. Click Save.
- 8. Use the search box to find VMkernel.Boot.hyperthreadingMitigationIntraVM

9. Select

(https://customergonnecte/mware/com/hame) Mireflysts and click the **Edit** option.

- 10. Change the configuration option to false (default: true).
- 11. Click Save.
- 12. Reboot the ESXi host for the configuration change to go into effect.

Enable ESXi Side-Channel-Aware Scheduler Version 2 (SCAv2) using ESXCLI

- SSH to an ESXi host or open a console where the remote ESXCLI is installed. For more information, see the http://www.vmware.com/ support/developer/vcli/ (http://www.vmware.com/support/developer/vcli/)
- 2. Check the current runtime values by running esxcli system settings kernel list -o hyperthreadingMitigation and esxcli system settings kernel list -o hyperthreadingMitigationIntraVM
- 3. To enable the <u>ESXi Side-Channel-Aware Scheduler</u> Version 2 run these commands:

esxcli system settings kernel set -s hyperthreadingMitigation -v TRUE

esxcli system settings kernel set -s
hyperthreadingMitigationIntraVM -v FALSE

4. Reboot the ESXi host for the configuration change to go into effect.

ESXi 6.7u2 (and later) Scheduler Configuration Summary

hyperthreading Mitigation	hyperthreadingMitigationIntraVM	Scheduler Enabled
FALSE	TRUE or FALSE	Default scheduler (unr. itigated)ort Assistan
TRUE	TRUE	SCAv1



HTAware Mitigation Tool

VMware has provided a tool to assist in performing both the **Planning Phase** and the **Scheduler-Enablement** Phase at scale. This tool has been updated to include SCAv2 support and can be found in KB56931 (/s/article/56931) along with detailed instructions on its usage, capabilities, and limitations.

Table 1: Affected Intel Processors Supported by ESXi

Intel Code Name	FMS	Intel Brand Names
Nehalem-EP	0x106a5	Intel Xeon 35xx Series; Intel Xeon 55xx Series
Lynnfield	0x106e5	Intel Xeon 34xx Lynnfield Series
Clarkdale	0x20652	Intel i3/i5 Clarkdale Series; Intel Xeon 34xx Clarkdale Series
Arrandale	0x20655	Intel Core i7-620LE Processor
Sandy Bridge DT	0x206a7	Intel Xeon E3-1100 Series; Intel Xeon E3-1200 Series; Intel i7-2655-LE Series; Intel i3-2100 Series
Westmere EP	0x206c2	Intel Xeon 56xx Series; Intel Xeon 36xx Series
Sandy Bridge EP	0x206d7	Intel Pentium 1400 Series; Intel Xeon E5-1400 Series; Intel Xeon E5-1600 Series; Intel Xeon E5-2400 Series; Intel Xeon E5-2600 Series; Intel Xeon E5-4600 Series
Nehalem EX	0x206e6	Intel Xeon 65xx Series; Intel Xeon 75xx Series Support Assistan

tps://www.texmer	<u>്യമാങ്</u> ഉt.	Intel Xeon E7-8800 Series; Vintel Xeon E7-8800 Series; Intel Xeon E7-2800 Series	wledge
		Titlet Aeoff L7-2000 Series	
Ivy Bridge DT	0x306a9	Intel i3-3200 Series; Intel i7-3500-LE/UE, Intel i7-3600-QE, Intel Xeon E3-1200-v2 Series; Intel Xeon E3-1100-C-v2 Series; Intel Pentium B925C	
Haswell DT	0x306c3	Intel Xeon E3-1200-v3 Series	
Ivy Bridge EP	0x306e4	Intel Xeon E5-4600-v2 Series; Intel Xeon E5-2400-v2 Series; Intel Xeon E5-2600-v2 Series; Intel Xeon E5-1400-v2 Series; Intel Xeon E5-2600-v2 Series	
Ivy Bridge EX	0x306e7	Intel Xeon E7-8800/4800/2800-v2 Series	
Haswell EP	0x306f2	Intel Xeon E5-2400-v3 Series; Intel Xeon E5-1400-v3 Series; Intel Xeon E5-1600-v3 Series; Intel Xeon E5-2600-v3 Series; Intel Xeon E5-4600-v3 Series	Our Survey
Haswell EX	0x306f4	Intel Xeon E7-8800/4800-v3 Series	T
Broadwell H	0x40671	Intel Core i7-5700EQ; Intel Xeon E3-1200-v4 Series	
Avoton	0x406d8	Intel Atom C2300 Series; Intel Atom C2500 Series; Intel Atom C2700 Series	
Broadwell EP/EX	0x406f1	Intel Xeon E7-8800/4800-v4 Series; Intel Xeon E5-4600-v4 Series; Intel Xeon E5-2600-v4 Series; Intel Xeon E5-1600-v4 Series	
Skylake SP	0x50654	Intel Xeon Platinum 8100 (Skylake-S:) Saujesort Assistant Intel Xeon Gold 6100/5100 (Skylake-SP) Series Intel Xeon Silver 4100, Bronze 3100 (Skylake-SP) Series	t

		Intel Xeon D-1500 Series vmware.com/home) Products and Accounts Kno	wledge
Broadwell DE	0x50663	Intel Xeon D-1500 Series	
Actions			
Broadwell DE <u>ि Copy link t</u>	0x50664 to clipboard	Intel Xeon D-1500 Series	
Broadwell NS Broadwell NS Language	0x50665 En	Intel Xeon D-1500 Series	
Skylake H/S	0x506e3	Intel Xeon E3-1500-v5 Series; Intel Xeon E3-1200-v5 Series	
Kaby Lake H/S/XAdditiona	0x906e9 al Resour	Intel Xeon E3-1200-v6 CeS	
	Broadwell DE Actions Broadwell DE Copy link to the copy	Broadwell DE	Broadwell DE

Ask The Community

Get answers quickly from VMware experts in the community

Post Subject

Type your question here

CONTINUE IN COMMUNITIES

Related Products:

VMware vSphere ESXi

Datacenter

Related Versions:

VMware vSphere ESXi 7.0.0

VMware vSphere ESXi 6.7

VMware vSphere ESXi 6.5

Support Assistant

VMware vSphere ESXi 6.0

(https://৫៧%প্রেক্সঞ্চিশ্রন্ডের্নের্নিউট্রেইvmware.com/home) Products and Accounts

Knowledge



Copyright © 2023 VMware, Inc. All rights reserved.

Terms of Use (https://customerconnect.vmware.com/web/vmware/terms-of-use?mode=view)

Your California Privacy Rights (https://www.vmware.com/help/privacy/california-privacy-rights.html)

Privacy (https://www.vmware.com/help/privacy.html) Accessibility (https://www.vmware.com/accessibility.html)

Your Opt-Out Rights

Support Assistant