



How to Install Rancher on Ubuntu

September 2, 2020

DOCKER KUBERNETES

[Home](#) » [DevOps and Development](#) » How to Install Rancher on Ubuntu


≡ Contents



Introduction

Rancher is a container management platform that helps manage Kubernetes at scale. It makes it simple to deploy and run Kubernetes everywhere. The software is especially useful as most cloud/virtualization vendors include Kubernetes as standard infrastructure.

In this tutorial, you will learn how to install Rancher on Ubuntu.

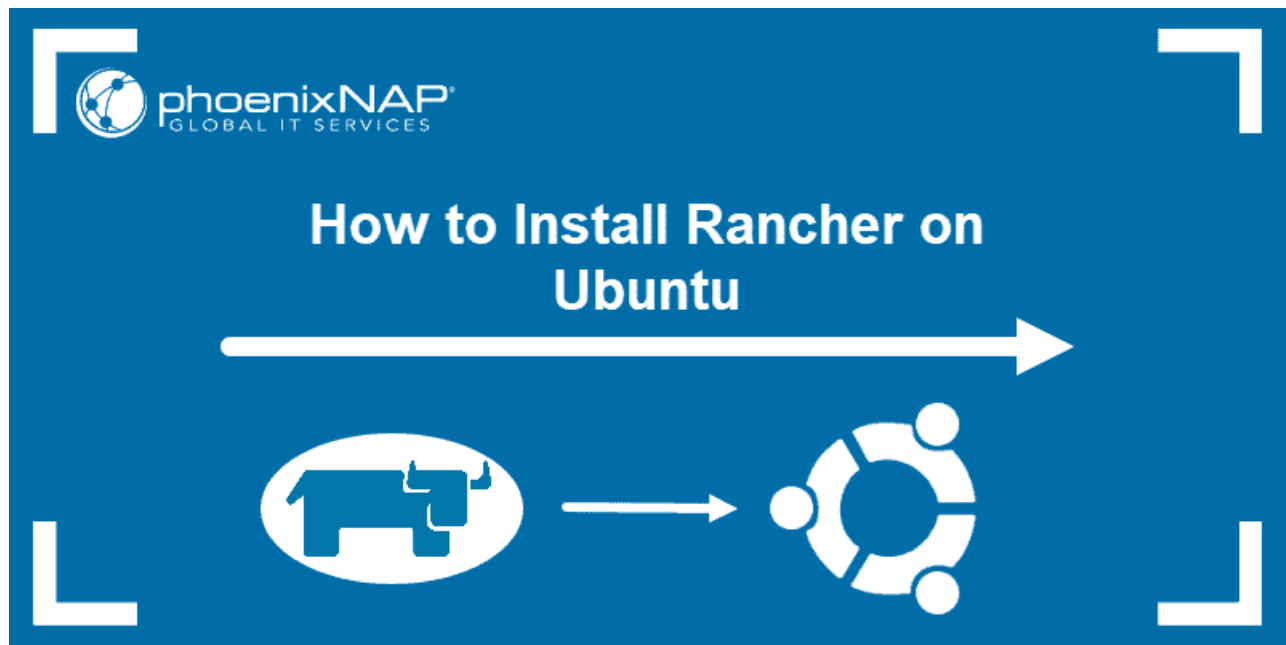

Note: Find out what makes Kubernetes a fundamental tool for managing and deploying containers in this [Complete Kubernetes Guide](#).

Prerequisites

- An Ubuntu system
- Access to a command-line/terminal
- A user account with **sudo** or **root** privileges
- Multiple nodes you can use for your cluster

Step 1: Install Docker

1. Before downloading any new packages, always make sure to update your system:

```
sudo apt update
```

2. Uninstall any old Docker versions by running the command:

```
sudo apt remove docker docker-engine docker.io containerd runc
```



Note: If you encounter the "*Unable to locate package docker-engine*" error, remove the docker-engine package from the command and repeat the step 2.

3. Now you can [install Docker](#) with:

```
sudo apt install docker.io
```

4. Verify the installation was successful:

```
docker --version
```

5. Start the Docker service:

```
sudo systemctl start docker
```


6. Set it to run at startup:

```
sudo systemctl enable docker
```

7. Finally, check the status of Docker:

```
sudo systemctl status docker
```

The output should display the service is **active (running)**. Exit the status output by pressing **Ctrl + C**.



Note: As an alternative, you can [Install Docker from Official Repository](#).

Step 2: Install Rancher

Once you have set up Docker, use the platform to create a container where you can run the Rancher server.

1. Create a new Rancher server container using the following command:

```
sudo docker run -d --restart=unless-stopped -p 8080:8080 rancher/server:stable
```

The command above instructs Docker to run the container in **detached mode** and to keep it running (unless it is manually stopped). The server container is configured to listen to port **8080**, but you can modify the port number according to your needs.

Docker should pull the latest Rancher image and launch the container.

2. To access the Rancher user interface, open a web browser and type the server IP number and port in the URL bar following the syntax:

```
https://[server_ip]:[port]
```



Step 3: Configure Rancher

Once you have accessed the platform, Rancher instructs you to set up the Admin user (one that has full control over Rancher).

1. Open the **ADMIN** drop-down menu and click **Access Control**.

2. Click the **LOCAL** button in the menu to move to the **Local Authentication** window.

3. Provide the required information to set up an Admin user and click **Enable Local Auth** to confirm.

Step 4: Create a Custom Cluster

When creating a custom [Kubernetes cluster on Rancher](#), you need to provision a Linux host (an on-premise virtual machine, a cloud-host VM or a [bare metal server](#)). Then, you can create your custom Kubernetes cluster.

Provision a Host

1. Open the **INFRASTRUCTURE** drop-down menu and select **HOSTS**.
2. The instructions inform you that the host needs to have a supported version of Docker

and allowed traffic to and from hosts on ports **500** and **4500**. Start up the machine making sure it has all the specified prerequisites.

3. Rancher gives you an option to add a label to the host.
4. Provide the IP address that should be registered for this host.

5. Doing so generated a unique command which should be run on the specified host.

6. Copy and paste the command in the terminal window.

7. Click Close and wait for the new host to appear on the **Host** screen.

Create a Custom Kubernetes Cluster

With the Linux host assigned, move on to creating a custom cluster.

1. Navigate to the **Clusters** page and click **Add Cluster**.

2. Select **Existing Nodes**.

3. Type a **Cluster Name**, and click **Next**.

4. Under **Node Options**, choose what roles you want the nodes to have (**etcd**, **Control Plane**, and/or **Worker**).

5. In **Cluster Options**, chose the **Kubernetes Version** and the **Network Provider**:



6. Choose the cloud provider. If you do not have one, select **None**.

Sofia Simic

Sofija Simic

Sofija Simic

is an

experienced

Technical

Writer.

Alongside

Next you should read

5. Copy and paste the generated **command** on each worker node machine and wait for the educational

[Networking, SysAdmin, Virtualization](#)

What is

Kubernetes

DaemonSet and

How to Use It?

July 16, 2020



contains an analysis of

DaemonSets and

practical examples of

how best to

implement...

[READ MORE](#)

Set up the platform to start creating Kubernetes clusters.

[DevOps and Development, Networking, Virtualization](#)

How to Deploy

RabbitMQ on

Kubernetes

March 6, 2020

in mind that each machine within the cluster needs a version of Docker installed.

you should have learned how to install Rancher on Ubuntu and

ck out our guide on [how to install Rancher on CentOS 7](#) and get

Yes

No

R
a
b
bi
t
M
Q

[DevOps and
Development,
Virtualization](#)

How to Install Jenkins on Kubernetes Cluster

March 3, 2020

Use a provided set of
YAML files to deploy
scalable Jenkins on
Kubernetes in 4 easy
steps. Use Jenkins to...

READ MORE

[DevOps and
Development,
Virtualization](#)

How to Monitor Kubernetes With Prometheus

February 24, 2020

This tutorial shows you
how to create a series
of .yaml files to set up
Prometheus

M
o
n
i
t
o
r
i
n
g
y
o
u
r



Live Chat



Get a Quote



Support | 1-855-330-1509



Sales | 1-877-588-5918

Contact Us

Legal

Privacy Policy

Terms of Use

DMCA

GDPR

Site map

© 2022 Copyright phoenixNAP | Global IT Services.
All Rights Reserved.

RE
A
D
M
O
RE

ce
s.
T
hi
s
w
ell
...
RE
A
D
M
O
RE