


MOTOR TYPE	POWER		U _N	n _N	I _N	I _A	η- EFFICIENCY			Cosφ - POWER FACTOR			τ _N	τ _A	AXIAL LOAD
							η - VERİMLİLİK			Cosφ - GÜÇ FAKTÖRÜ					
	GÜÇ						V	rpm	A	A	at % load / % yükte				at % load / % yükte
HP	kW	50	75	100	50	75					100	Nm	Nm	kN	
KM6-5.5	5.5	4	380	2870	10.2	39	67	71	71	0.63	0.71	0.84	13.1	15.5	20
			400	2870	9.8	38	68	72	72	0.59	0.67	0.82	13.0	17.2	
			415	2880	9.5	37	68	72	72	0.58	0.66	0.81	12.9	18.7	
KM6-7.5	7.5	5.5	380	2850	13.3	53	70	73	75	0.63	0.71	0.84	18.1	15.4	20
			400	2870	12.8	51	71	74	76	0.59	0.67	0.82	18.0	17.2	
			415	2880	12.3	49	72	75	77	0.58	0.66	0.81	17.8	18.5	
KM6-10	10	7.5	380	2845	17.2	66	77	79	79	0.63	0.71	0.84	24.5	18.9	20
			400	2860	16.5	64	79	80	80	0.59	0.67	0.82	24.3	21.1	
			415	2870	16.1	62	79	80	80	0.58	0.66	0.81	24.2	23.0	
KM6-12.5	12.5	9.3	380	2850	20.8	80	80	81	81	0.63	0.71	0.84	30.5	25.5	20
			400	2870	20.2	78	80	81	81	0.59	0.67	0.82	30.4	28.5	
			415	2880	19.5	75	81	82	82	0.58	0.66	0.81	30.2	30.7	
KM6-15	15	11	380	2855	23.7	92	81	82	82	0.58	0.66	0.81	36.0	30.9	20
			400	2870	22.8	88	81	82	82	0.67	0.75	0.86	35.8	34.8	
			415	2880	22.2	86	82	83	83	0.63	0.71	0.84	35.5	37.4	
KM6-17.5	17.5	13	380	2850	28.7	111	80	81	81	0.61	0.69	0.83	42.5	44.4	20
			400	2870	27.6	107	80	81	81	0.65	0.73	0.85	42.2	49.6	
			415	2880	26.6	103	81	82	82	0.61	0.69	0.83	42.0	53.8	
KM6-20	20	15	380	2850	33.1	128	82	83	83	0.59	0.67	0.82	49.0	53.2	20
			400	2870	32.2	125	80	81	81	0.65	0.73	0.85	48.8	59.7	
			415	2880	31	120	80	81	81	0.61	0.69	0.83	48.6	64.6	
KM6-25	25	18.5	380	2850	41.8	162	81	82	82	0.61	0.69	0.83	60.7	74.0	20
			400	2870	40.2	155	80	81	81	0.59	0.67	0.82	60.4	83.2	
			415	2880	38.8	150	81	82	82	0.61	0.69	0.83	60.1	89.9	
KM6-30	30	22	380	2860	48.5	188	82	83	83	0.58	0.66	0.81	72.2	90.7	20
			400	2875	46.7	180	81	82	82	0.57	0.65	0.8	72.0	101.5	
			415	2885	45	174	82	83	83	0.63	0.71	0.84	71.7	110.0	
KM6-35	35	26.5	380	2870	56.4	218	83	84	84	0.59	0.67	0.82	87.1	122.0	20
			400	2885	54.9	212	83	84	84	0.58	0.66	0.81	86.9	136.8	
			415	2895	52.9	204	83	84	84	0.65	0.73	0.85	86.6	148.4	
KM6-40	40	30	380	2880	64.6	250	84	85	85	0.61	0.69	0.83	99.3	135.7	26.5
			400	2895	62.1	240	82	83	83	0.59	0.67	0.82	99.0	152.0	
			415	2905	59.9	231	83	84	84	0.65	0.73	0.85	98.8	164.0	
KM6-50	50	37	380	2890	79.7	316	84	85	85	0.61	0.69	0.83	122.6	193.6	26.5
			400	2905	76.7	303	80	81	83	0.59	0.67	0.82	122.3	217.1	
			415	2915	74.7	289	81	82	84	0.65	0.73	0.85	122.0	235.4	
KM6-60	60	45	380	2890	97	375	83	84	84	0.61	0.69	0.83	148.4	234.4	26.5
			400	2905	93.4	361	86	85	87	0.59	0.67	0.82	148.1	262.9	
			415	2915	90	357	85	86	88	0.65	0.73	0.85	147.8	285.2	
KM6-60	60	45								0.59	0.67	0.82			26.5

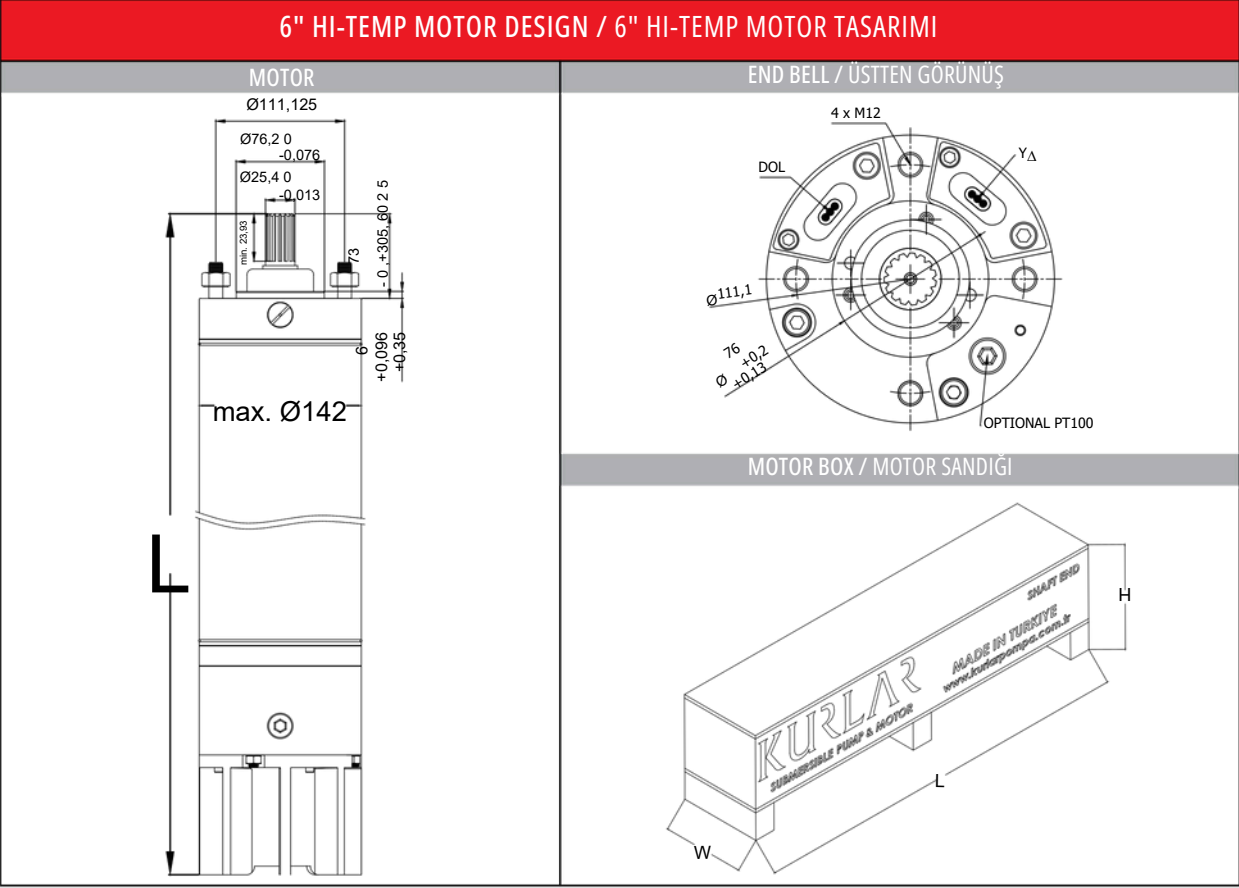

MOTOR TYPE	POWER		MOTOR LENGTH	MOTOR WEIGHT	SHIPPING SIZE			MOTOR WEIGHT (with package)
					SANDIK ÖLÇÜLERİ			
	MOTOR TİPİ	GÜÇ			UZUNLUK	AĞIRLIK	W	L
HP		kW	mm	kg			cm	cm
KM6-5.5	5.5	4	721	39	17.4	92.4	27.4	46
KM6-7.5	7.5	5.5	750	43	17.4	92.4	27.4	50
KM6-10	10	7.5	830	50	17.4	92.4	27.4	57
KM6-12.5	12.5	9.3	870	54	17.4	92.4	27.4	61
KM6-15	15	11	923	59	17.4	102.4	27.4	68
KM6-17.5	17.5	13	983	65	17.4	102.4	27.4	74
KM6-20	20	15	1045	71	17.4	122.4	27.4	81
KM6-25	25	18.5	1078	75	17.4	122.4	27.4	85
KM6-30	30	22	1178	86	17.4	122.4	27.4	96
KM6-35	35	26.5	1289	98	17.4	137.4	27.4	109
KM6-40	40	30	1319	103	17.4	137.4	27.4	114
KM6-50	50	37	1419	112	17.4	152.4	27.4	124
KM6-60	60	45	1480	124	17.4	152.4	27.4	136