


Northwind database for Postgres

A simple sql script that will populate a database with the famous northwind example, adapted for postgres.

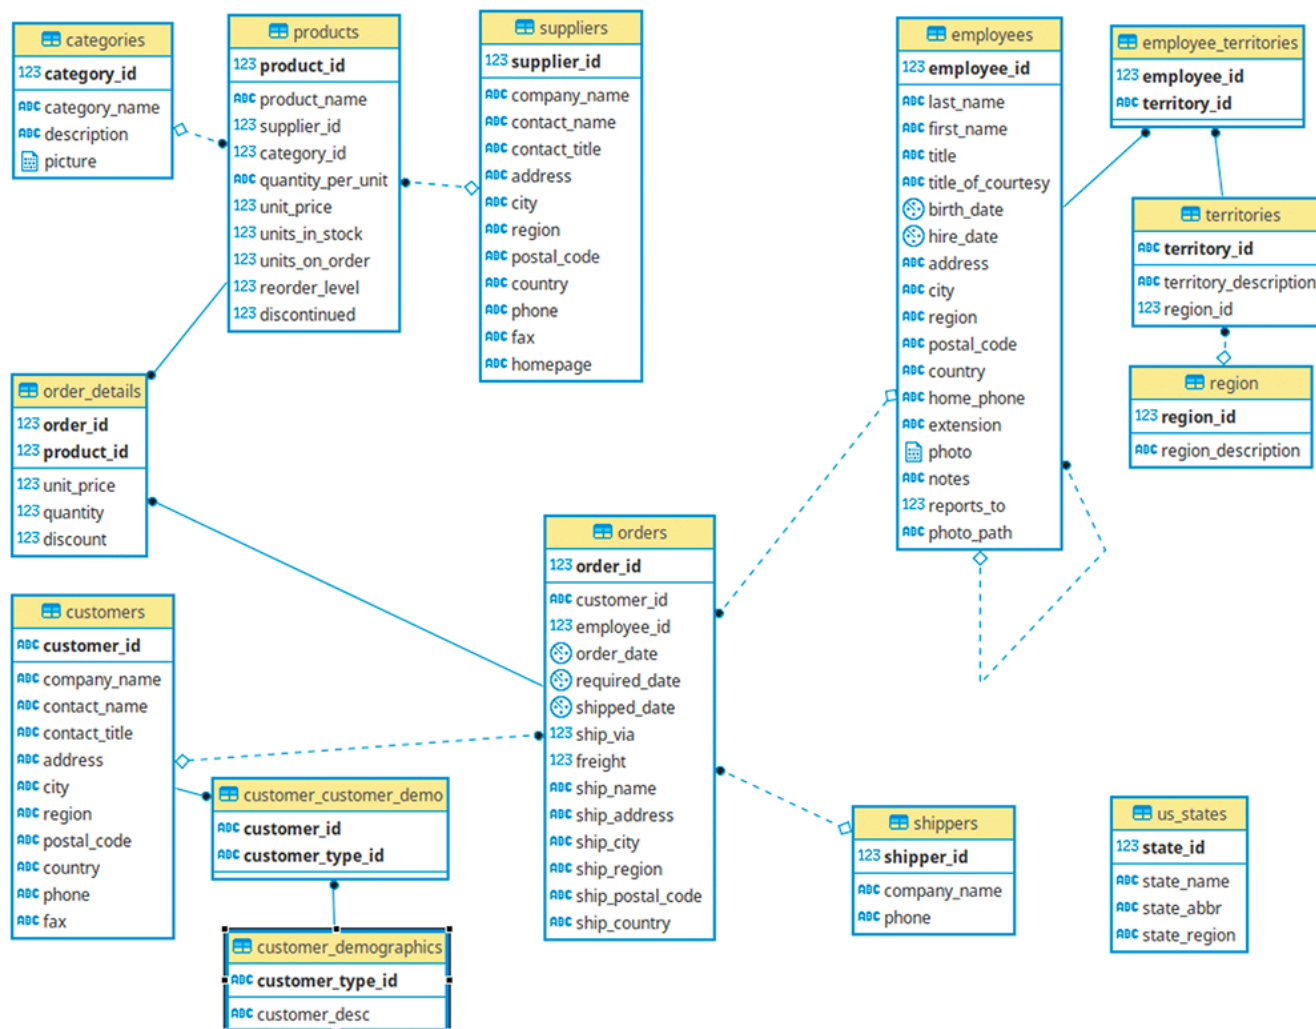

Getting started:

Manually

Use the provided sql file `northwind.sql` in order to populate your database.

With Docker and docker compose

Pre-requirement: install docker and docker-compose

<https://www.docker.com/get-started>

<https://docs.docker.com/compose/install/>

1. Run docker-compose

```
> docker-compose up
...
... Lots of messages...
...
Creating network "northwind_psql_db" with driver "bridge"
Creating volume "northwind_psql_db" with default driver
Creating volume "northwind_psql_pgadmin" with default driver
Creating pgadmin ... done
Creating db      ... done
```

2. Run psql client:

Method 1: Via the docker-compose container

Open another terminal window, and type:

```
> docker-compose exec db psql -U postgres -d northwind

psql (13.2 (Debian 13.2-1.pgdg100+1))
Type "help" for help.

northwind=# select * from us_states;
 state_id | state_name | state_abbr | state_region
-----+-----+-----+-----
       1 | Alabama   | AL         | south
       2 | Alaska    | AK         | north
       ...
```

Alternatively, you can launch bash, then psql:

```
docker-compose exec db /bin/bash

# You are now inside the "db" docker container
psql -U postgres northwind
```

Method 2: Direct access via the port 55432

The "db" docker exposes postgres on the port 55432. If you have psql on your path, you may connect to it via:

```
# Run this directly from your computer (this will connect to the docker db)
psql -U postgres northwind -p 55432
```

3. Connect PgAdmin

Access to PgAdmin at the url: `http://localhost:5050`

Add a new server in PgAdmin:

- General Tab:
 - Name = db
- Connection Tab:
 - Host name: db
 - Username: postgres
 - Password: postgres

Then, select database "northwind".

4. Stop docker-compose

Stop the server that was launched by `docker compose up` via `Ctrl-C`, then remove the containers via:

```
docker-compose down
```

5. Files & persistence

Your modifications to the postgres database(s) will be persisted in the `postgresql_data` docker volume, and can be retrieved once you restart `docker compose up`.

If you need to delete the database data, run `docker-compose down -v` (the database will then be repopulated from scratch when running `docker-compose up`).

If you need to upload any files into your db container, just copy and paste them to the `files` local folder. They will be available at the `/files` path inside the db container.