
How a receiver rebuilds a message

Reassembler in high/receiver/cef_to_json.py, for one message sent as 3 UDP packets

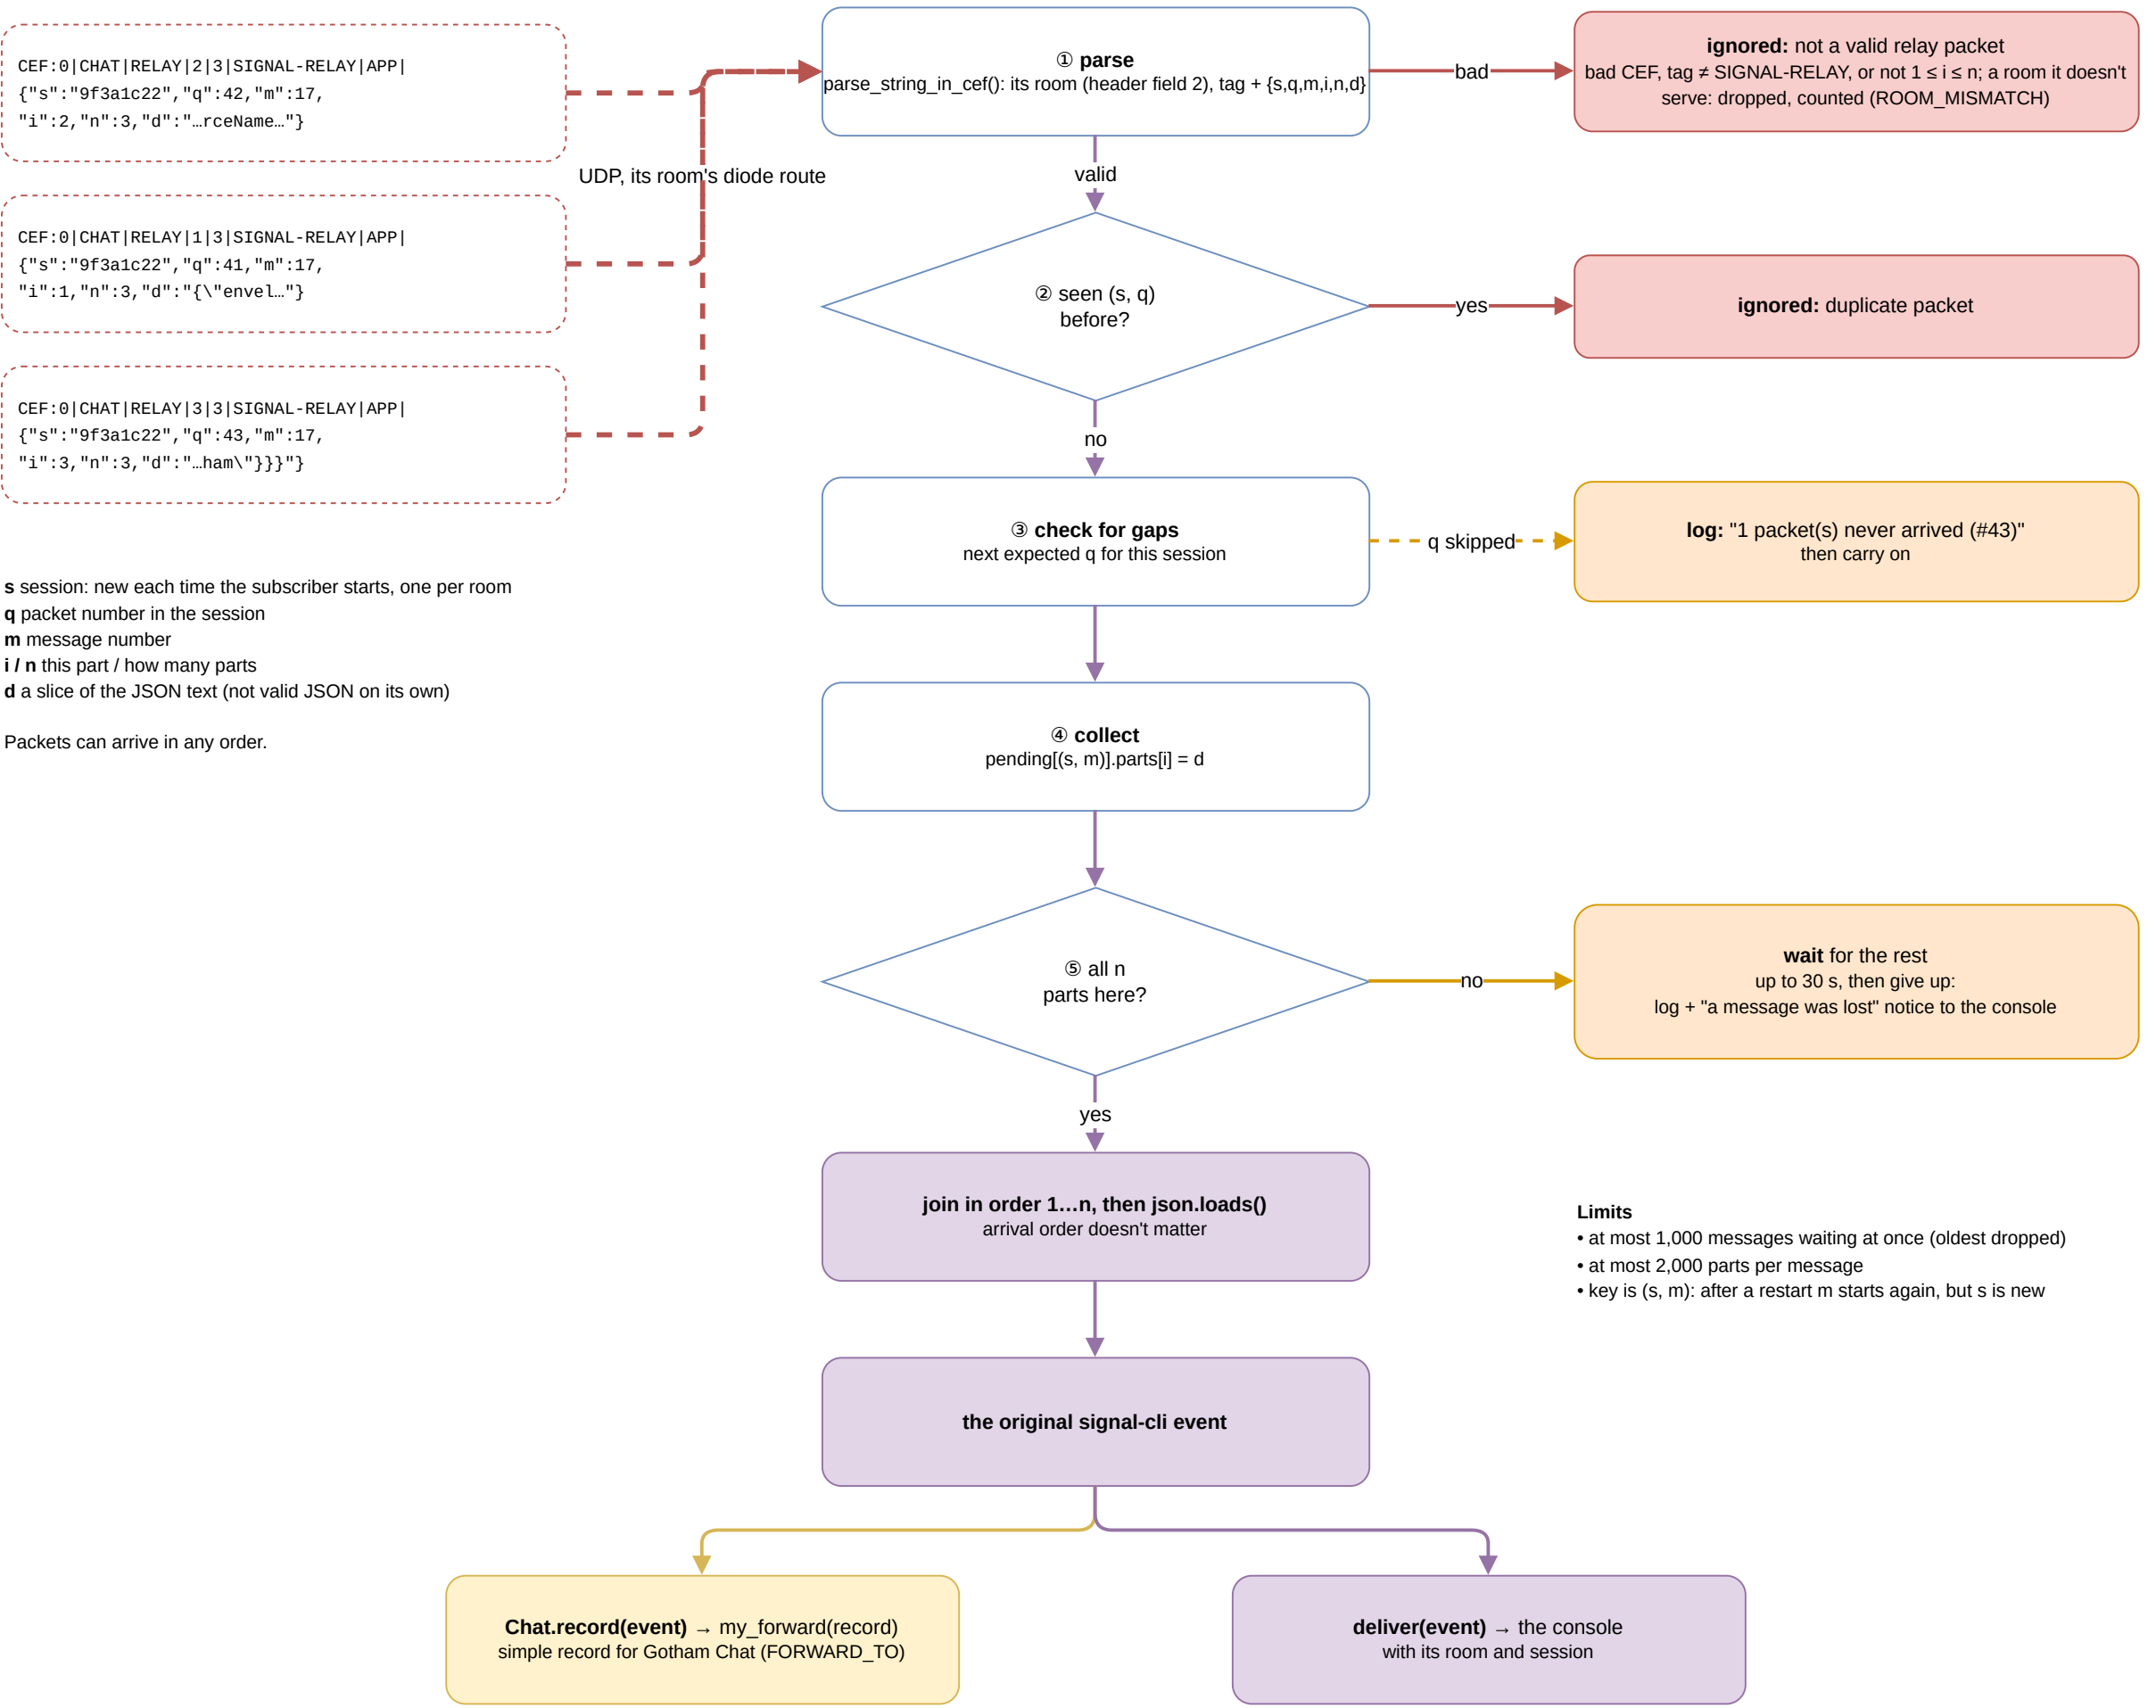

s session: new each time the subscriber starts, one per room
q packet number in the session
m message number
i / n this part / how many parts
d a slice of the JSON text (not valid JSON on its own)

Packets can arrive in any order.

Limits

- at most 1,000 messages waiting at once (oldest dropped)
- at most 2,000 parts per message
- key is (s, m): after a restart m starts again, but s is new