
服务暴露流



ProxyFactory.getInvoker(T proxy,type,url)创建invoker<T> 通过protocol.export(invoker)封装filter链到其中,将invoker存入exporter中, protocol创建server,传入handler,handler可找到exporter

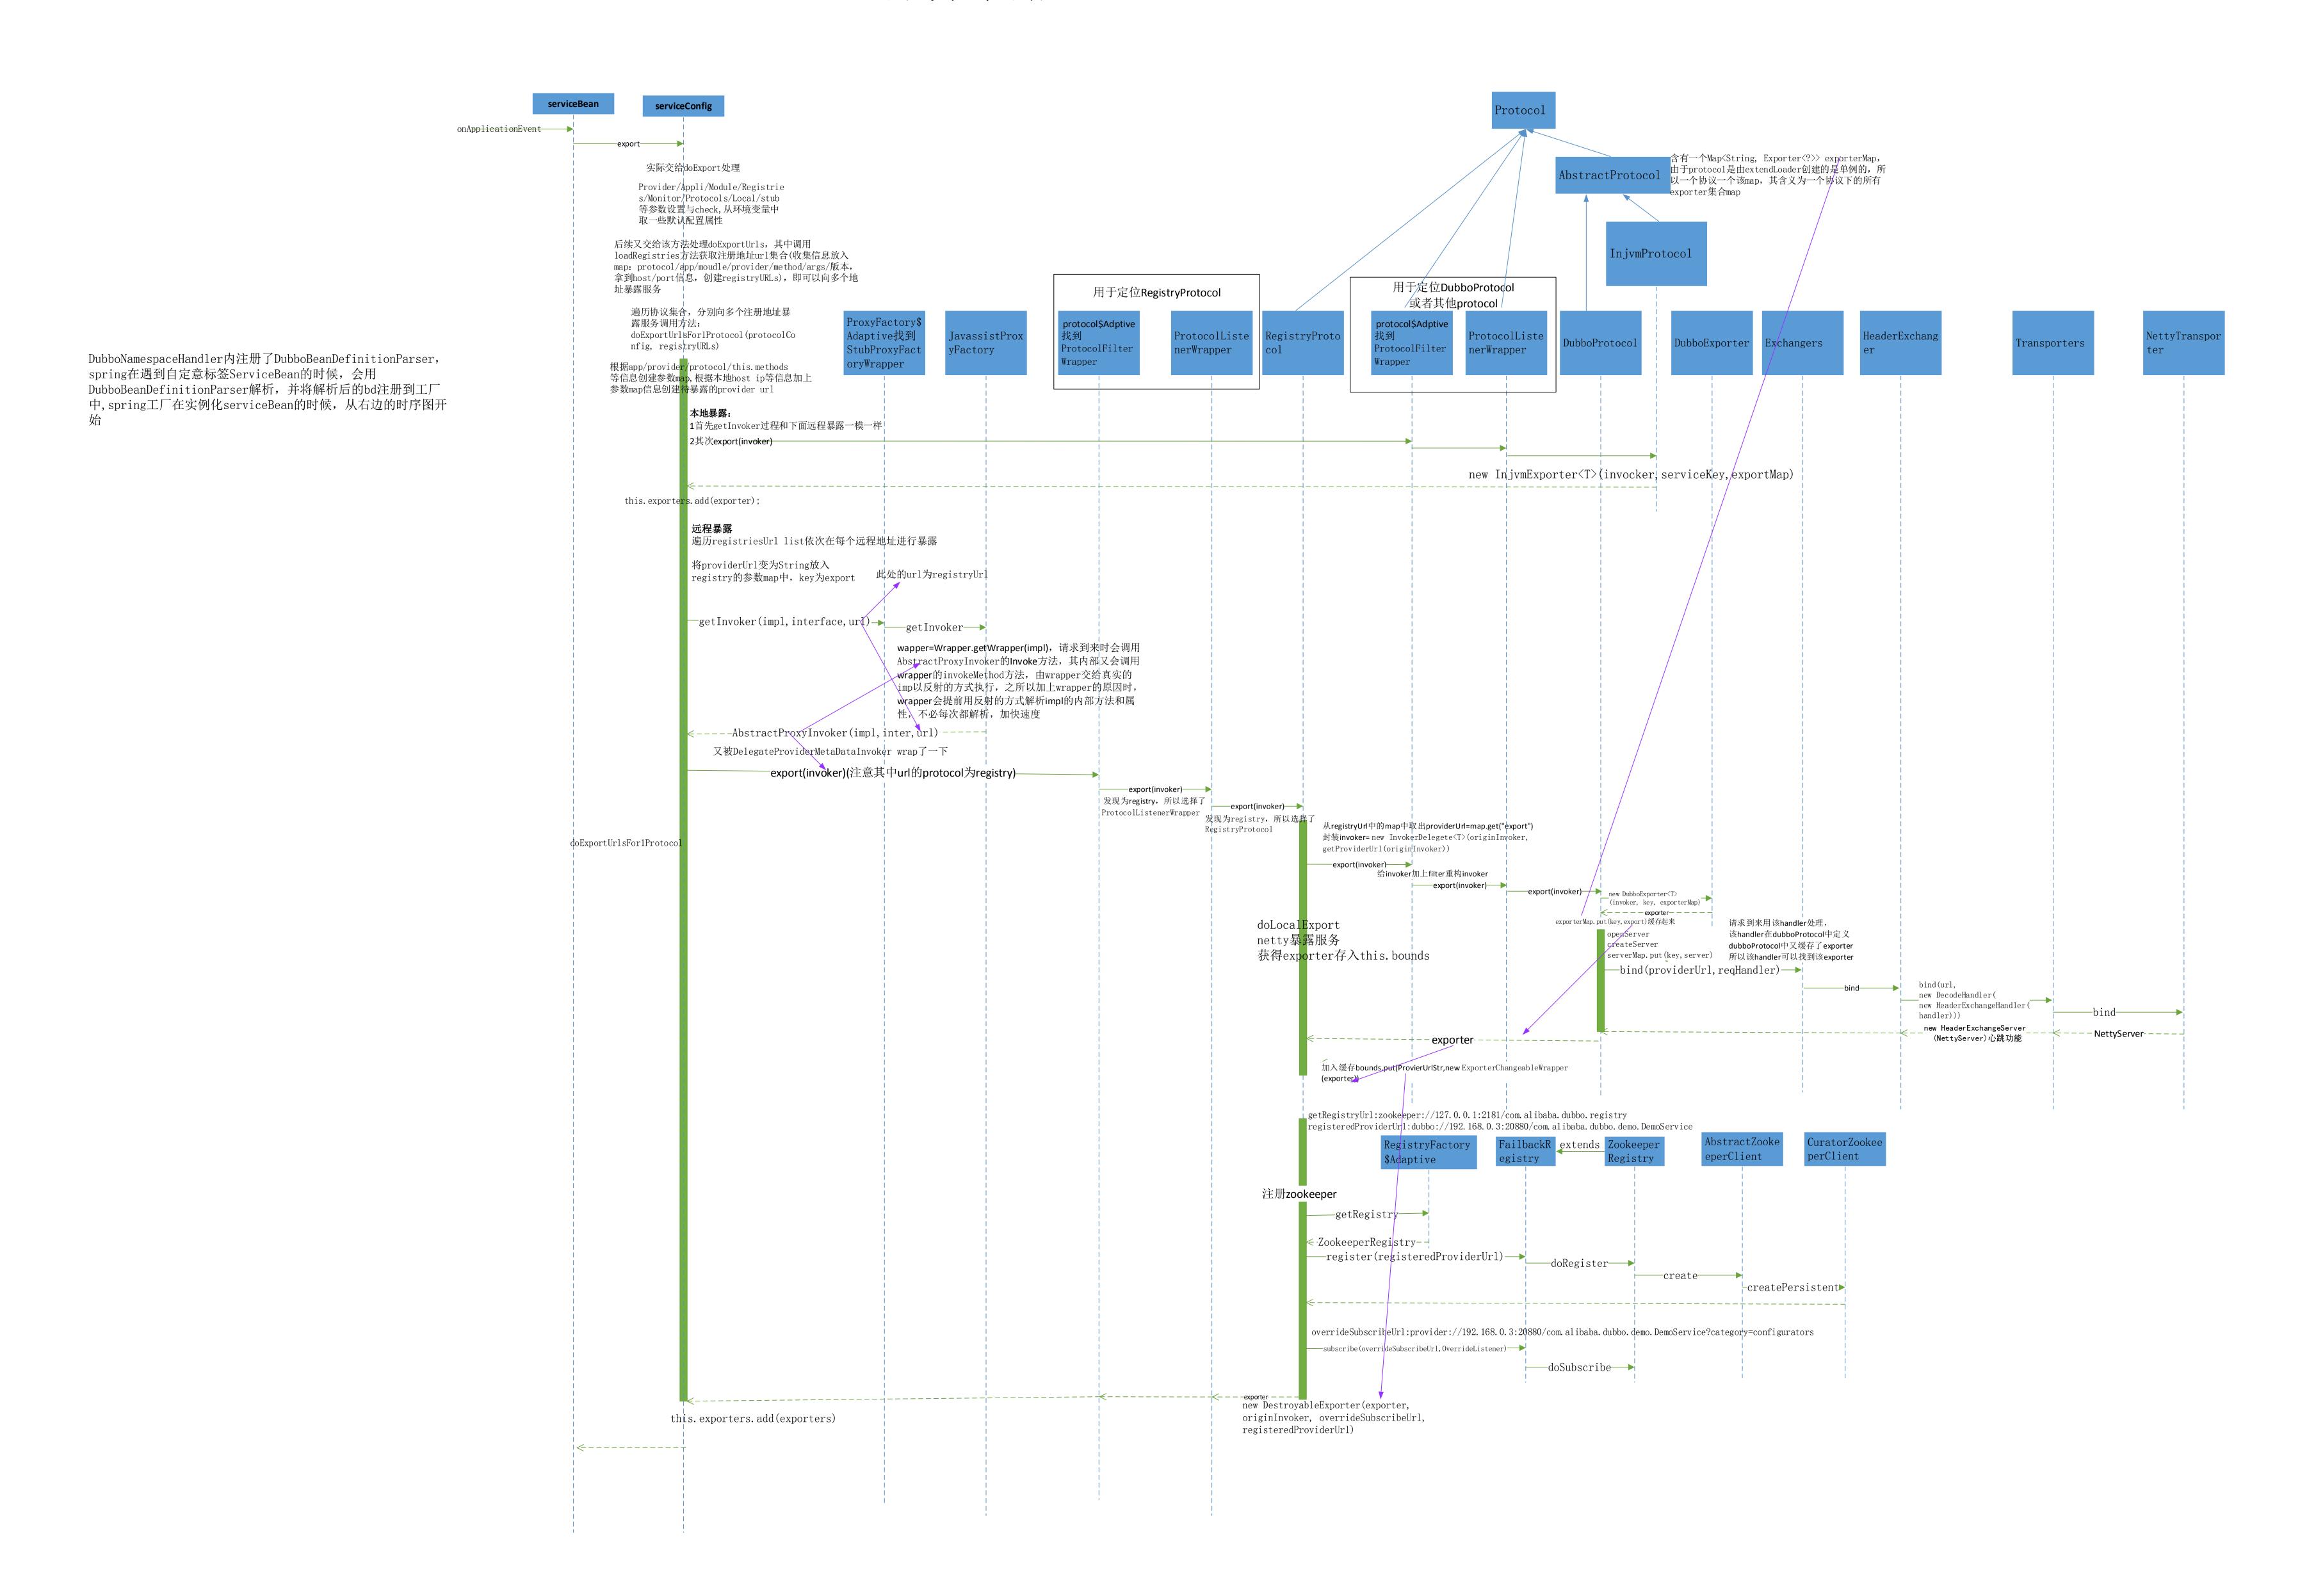