

繪圖軟體應用 第15周(12/18)

M_Map

1. Getting started

c 槽或是toolbox裡面要有m_map才可使用以下所有指令

m_proj('')


```
clear;clc  
  
m_proj('oblique mercator'); %投影(斜麥卡托)  
% m_coast;  
% m_grid;
```

m_coast


```
m_proj('oblique mercator');  
m_coast; %海岸線(xy軸不是經緯度)  
% m_grid;
```

m_grid

```
m_proj('oblique mercator');  
m_coast;  
m_grid; %加上網格。反投影，加上經緯度
```

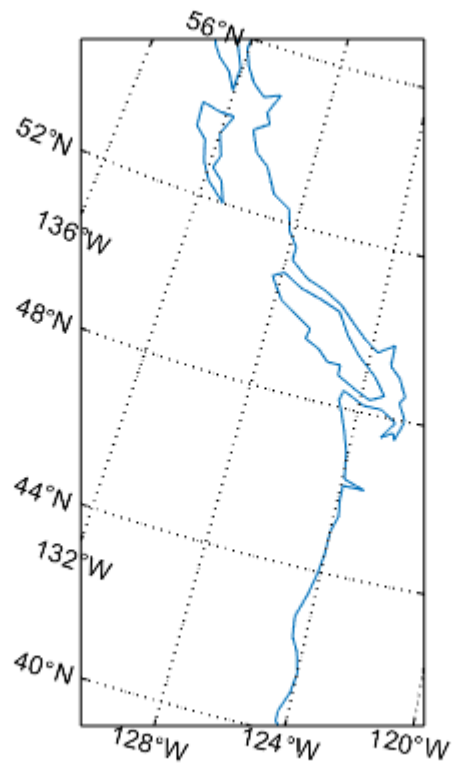

```
m_proj('oblique mercator','longitudes',[119.5 125], ...
        'latitudes',[40 20],'direction','vertical','aspect',.5)
m_coast;
m_grid; %加上網格
```

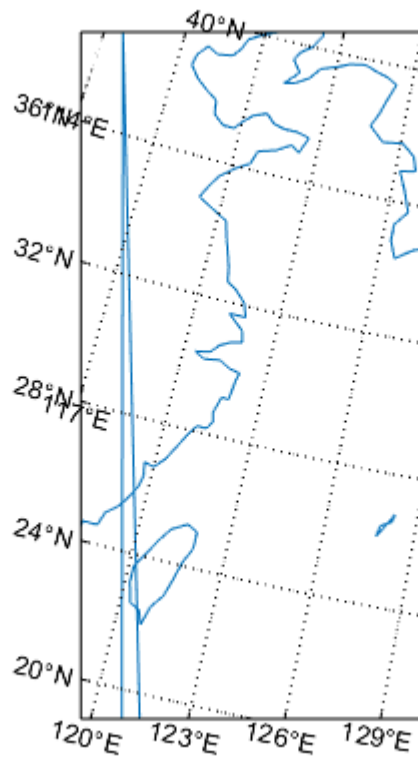

This is a line map of the Oregon/British Columbia coast, using an Oblique Mercator projection (A few more complex maps can be generated by running the demo function `m_demo`).

```
% m_demo
```

2. Specifying projections

```
clear;clc
m_proj get %get a list of the current projections,
```

```
Current mapping parameters -
Projection: Mercator (function: mp_cyl)
longitudes: 100 140
Latitudes: 10 30
sphere: normal
```

```
m_proj('set'); %get a list of the current projections,
```

```
Available projections are:
Stereographic
Orthographic
Azimuthal Equal-area
Azimuthal Equidistant
Gnomonic
Satellite
Albers Equal-Area Conic
Lambert Conformal Conic
Mercator
```

```
Miller Cylindrical
Equidistant Cylindrical
Oblique Mercator
Transverse Mercator
Sinusoidal
Gall-Peters
Hammer-Aitoff
Mollweide
Robinson
UTM
```

```
m_proj('set','Mercator') %使用麥卡托投影
```

```
'Mercator'
<,'lon<gitude>',( [min max] | center)>
<,'lat<itude>',( maxlat | [min max]>
<,'sph<ere>', one of
    normal
    sphere
    grs80
    grs67
    wgs84
    wgs72
    wgs66
    wgs60
    clrk66
    clrk80
    intl24
    intl67
```

```
%details about the possible options for any of these projections,
% add its name to the above command
```

Which currently return the following list:

Available projections are:

Stereographic

Orthographic ##

Azimuthal Equal-area

Azimuthal Equidistant

Gnomonic

Satellite

Albers Equal-Area Conic

Lambert Conformal Conic

Mercator ###

Miller Cylindrical

Equidistant Cylindrical

Oblique Mercator ####

Transverse Mercator

Sinusoidal

Gall-Peters


Hammer-Aitoff

Mollweide

Robinson

UTM

```
m_proj('Mercator','lon',[100 140],'lat',[10,40]);  
clf  
m_coast;  
m_grid;
```

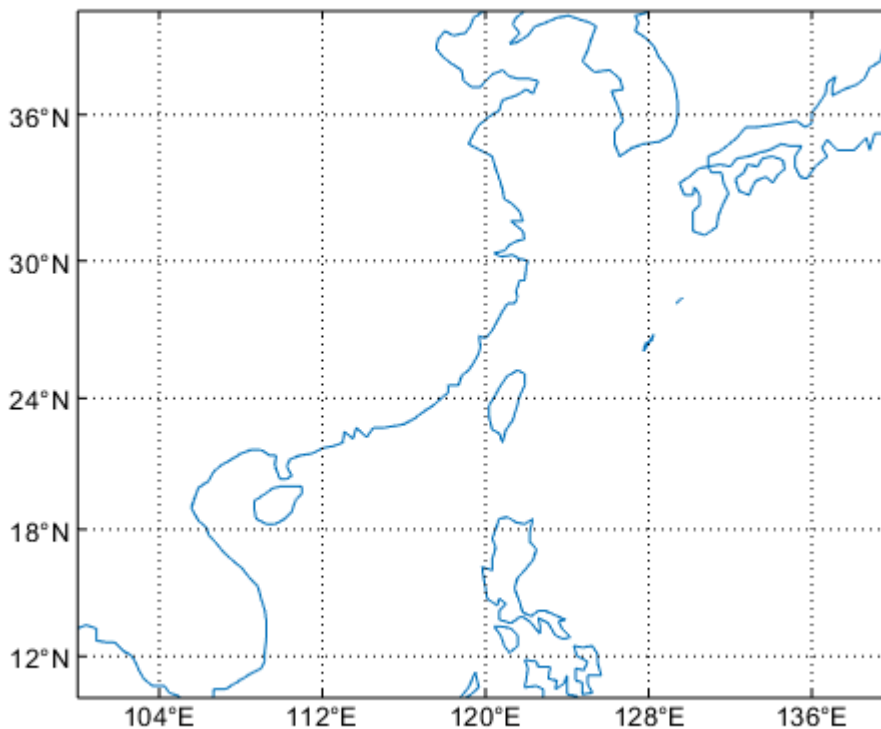

3. Coastlines and Bathymetry

Coastline options

```
help m_coast
```

```
m_coast Add a coastline to a given map.  
m_coast draw a coastline as either filled patches (slow) or  
lines (fast) on a given projection. It uses a coastline database with  
a resolution of about 1/4 degree.
```

```

m_coast( (standard line option,...,...) ) or
m_coast('line', (standard line option,...,...) ) draws the coastline
as a simple line.
m_coast('patch' ( ,standard patch options,...,...) ) draws the
coastline as a number of patches.

```


See also `m_proj`, `m_grid`

```

clear;clc
m_proj('Mercator','lon',[100 140],'lat',[10,40]);

m_coast('color','r','linewidth',2); %海岸線顏色
m_coast('patch','c','edgecolor','k'); %陸地塗色、陸地邊界顏色
m_grid;

```

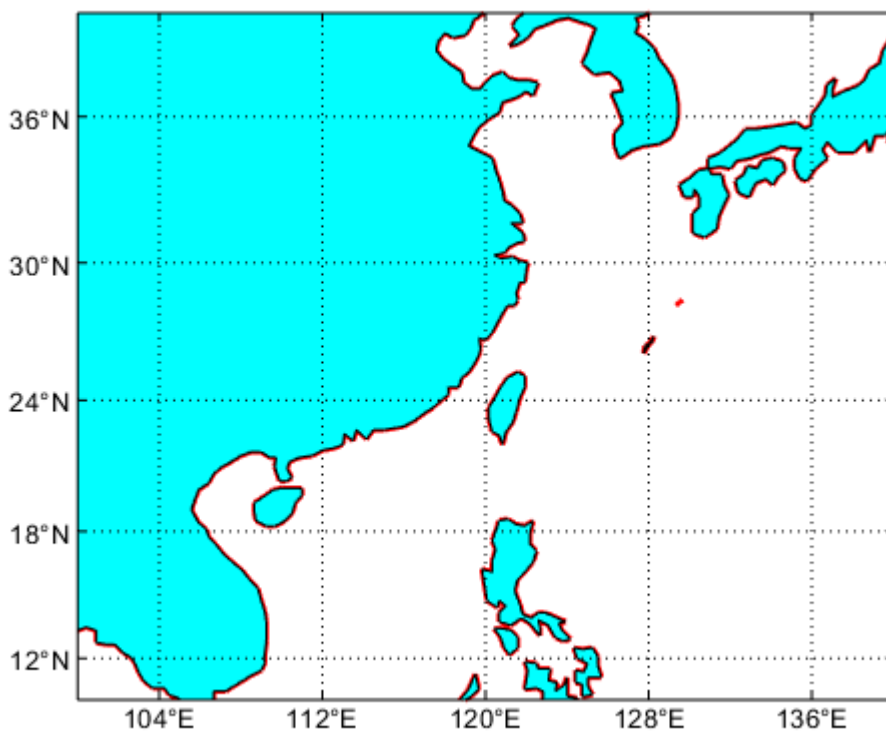

help `m_hatch`

`m_hatch` Draws hatched or speckled interiors to a patch

```
m_hatch(LON,LAT,STYL,ANGLE,STEP,...line parameters);
```

INPUTS:

X,Y - vectors of points.
 STYL - style of fill
 ANGLE,STEP - parameters for style

E.g.

```
'single',45,5 - single cross-hatch, 45 degrees, 5 points apart  
'cross',40,6 - double cross-hatch at 40 and 90+40, 6 points apart  
'speckle',7,1 - speckled (inside) boundary of width 7 points, density 1  
                  (density >0, .1 dense 1 OK, 5 sparse)  
'outspeckle',7,1 - speckled (outside) boundary of width 7 points, density 1  
                  (density >0, .1 dense 1 OK, 5 sparse)
```


`H=m_hatch(...)` returns handles to hatches/speckles.

`[XI,YI,X,Y]=MHATCH(...)` does not draw lines - instead it returns vectors `XI,YI` of the hatch/speckle info, and `X,Y` of the original outline modified so the first point==last point (if necessary).

Note that inside and outside speckling are done quite differently and 'outside' speckling on large coastlines can be very slow.

If you get weird results - try putting an `M_LINE(LON,LAT)` call **before** (or otherwise set the plot axis `xlim/ylim` parameters - this is necessary because otherwise `m_hatch` can't properly determine the 'points' units).

```
clf  
m_coast('speckle','color','k'); %陸地以顆粒填色  
m_coast('color','b');  
m_grid;
```

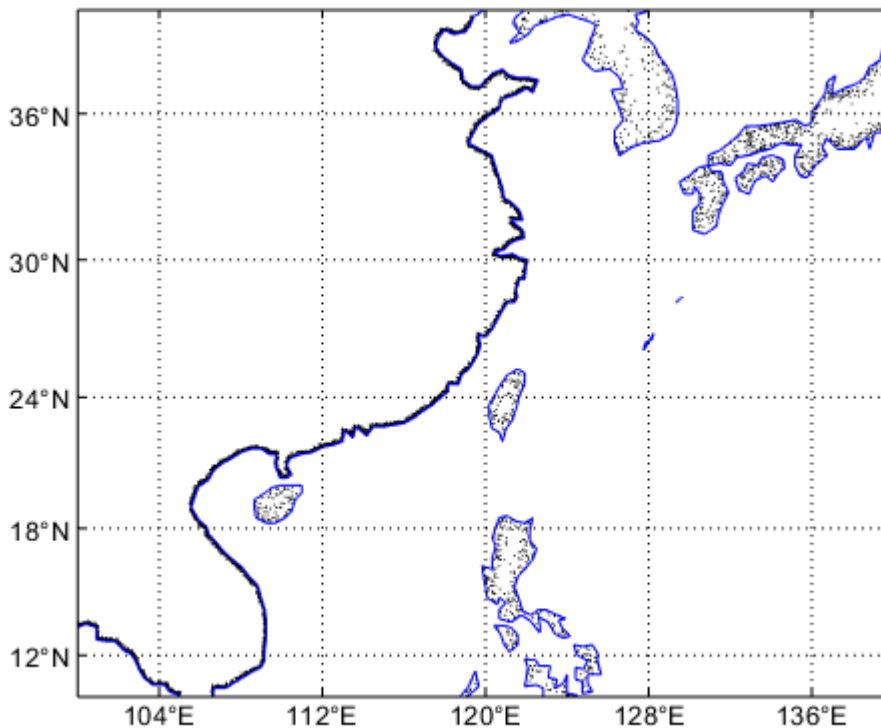

Topography/Bathymetry options

`m_elev;`

Different levels can also be specified:

```
m_elev('contour',LEVELS, optional contour arguments);
```

For example, if you want all the contours to be dark blue, use:

```
m_elev('contour',LEVELS,'edgecolor','b');
```

Filled contours are also possible:

```
m_elev('contourf',LEVELS, optional contourf arguments);
```

help `m_elev`


```
m_elev Contour elevation onto a map using a 1-degree database
m_elev contours elevations at 1000m intervals for the map.
m_elev(OPTN) where OPTN is one of the following strings lets
you draw a particular background:
OPTN: 'contour' - contour lines are drawn.
      'contourf' - filled contours are drawn.
              LEVELS are the levels used, and ARGS
              are optional patch arguments of line types,
              colors, etc.
      'pcolor'    - pcolor call
      'image'     - displays pixellated image
      'shadedrelief' - shaded relief map.
m_elev(OPTN,args,...) lets you pass arguments to the OPTN call.

[CS,H]=m_elev(...) allows access to the return arguments of the
contour/contourf call.


[ELEV, LONG, LAT]=m_elev([LONG_MIN LONG_MAX LAT_MIN LAT_MAX])
extracts elevation data for the given lat/long limits (without plotting).
```

See also `m_proj`, `m_grid`, `m_coast`

```
clear;clc;clf
% figure(1)
m_proj('Mercator','lon',[100 140],'lat',[10 40]);
[c,h] = m_elev('contour',[-7000:500:0],'edgecolor','k');
clabel(c,h);
m_coast('color','b');
m_grid('box','fancy'); %黑白間隔座標軸
```
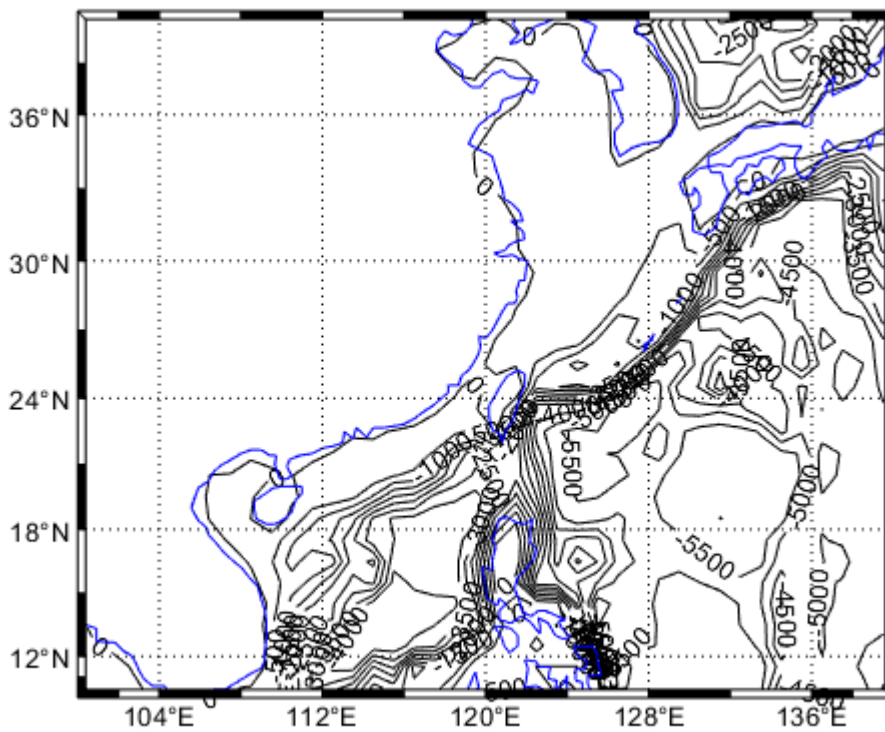
```
clear;clc;clf
% figure(2)
m_proj('Mercator','lon',[100 140],'lat',[10 40]);
m_elev('pcolor');
shading interp;
m_coast('color','b');
colormap('jet');
colorbar('v');
[c,h] = m_elev('contour',[-7000:500:0],'edgecolor','k');
clabel(c,h);
m_grid();
```

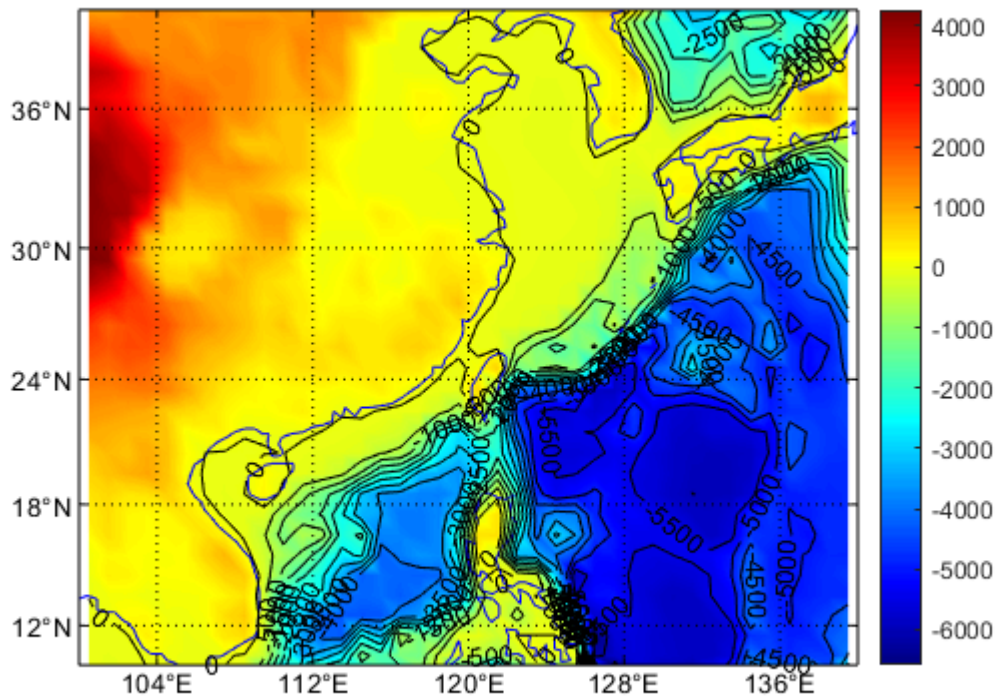

4. Customizing axes

help `m_grid`

`m_grid` make a grid on a map.

`m_grid('parameter','value',...)` with any number (or no) optional parameters is used to draw a lat/long grid for a previously initialized map projection.

The optional parameters allow the user to control the look of the grid. These parameters are listed by `m_grid('get')`, with default parameters in `m_grid('set')`;

see also `m_proj`

`m_grid('get');`


```
'axes',( gca | axis handle)
'box',( 'on' | 'fancy' | 'off' )
'xtick',( num | [value1 value2 ...])
'ytick',( num | [value1 value2 ...])
'xticklabels',[label1;label2 ...]
'yticklabels',[label1;label2 ...]
'xlabel', ( 'middle' | 'end' )
'ylabel', ( 'end' | 'middle' )
'ticklength',value
'tickdir',( 'in' | 'out' )
'tickstyle',('dm' | 'da' | 'dd' )
'color',colormap
'gridcolor',colormap
'backgroundcolor',colormap
'linewidth', value
```

```

'linestyle',( linespec | 'none' )
'fontsize',value
'fontname',name
'XaxisLocation',( 'bottom' | 'middle' | 'top' )
'YaxisLocation',( 'left' | 'middle' | 'right' )

```


```
m_grid('box','fancy'); %黑白間隔座標軸
```

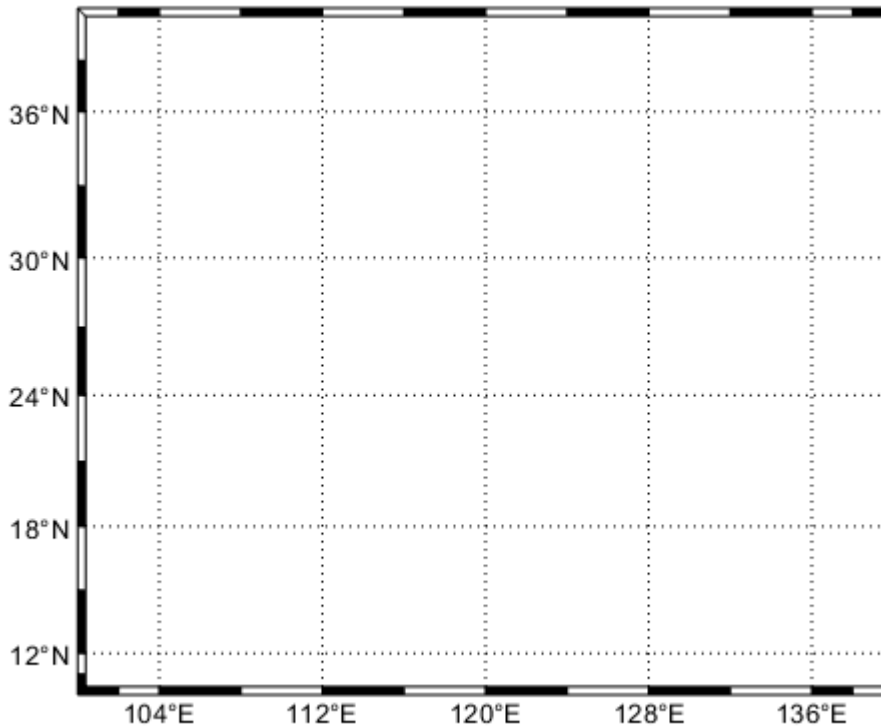

```

clear;clc;clf
m_proj('Mercator','lon',[100 140],'lat',[10 40]);
m_elev('pcolor');
shading interp;
m_coast('color','b');
colormap('jet');
colorbar('v');
[c,h] = m_elev('contour',[-7000:500:0],'edgecolor','k');
clabel(c,h);
m_grid('box','fancy');


```

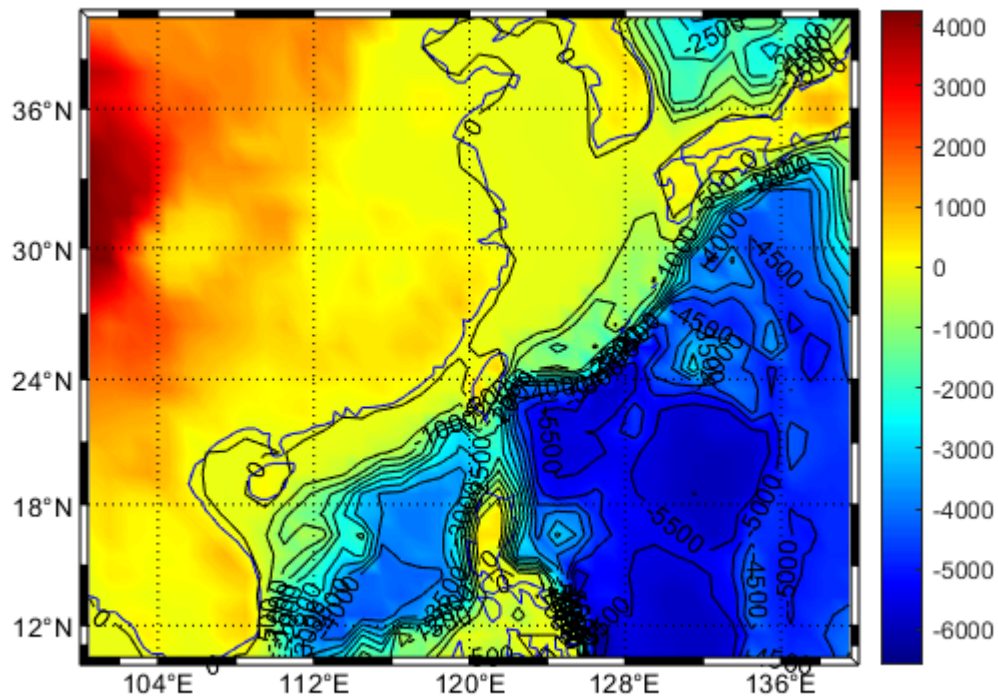

Axis labels can be produced either in decimal degrees ('dd') or degrees-minutes ('dm', default). The 'da' option is an abbreviated degrees-minutes format without degree marks or the N/S/E/W letters appended:

'tickstyle',('dd' | 'da' | 'dm')

```
clf
m_grid('box','fancy','XaxisLocation','middle');
```

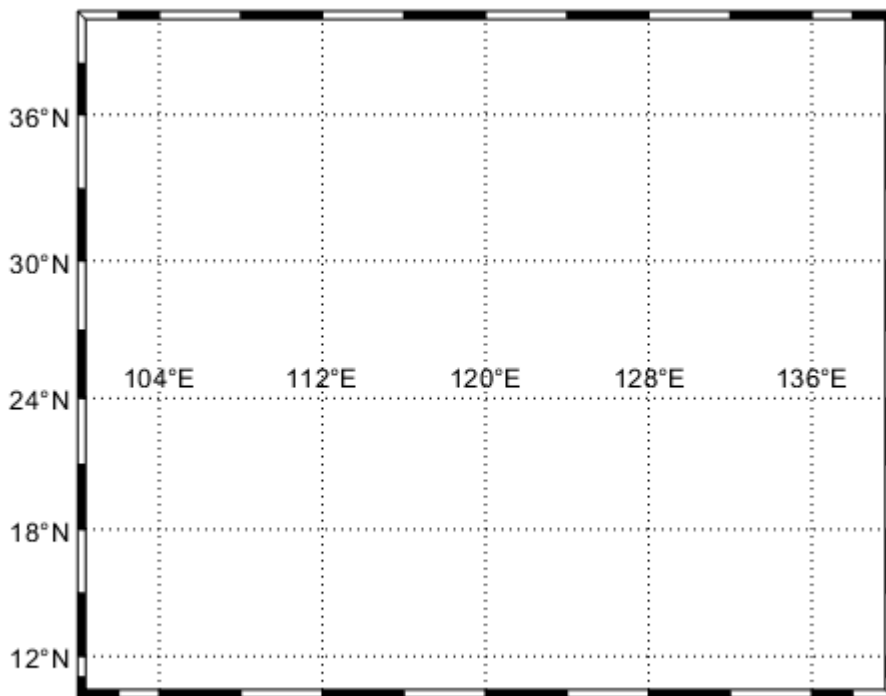


```
clear;clc;clf
m_proj('Mercator','lon',[100 140],'lat',[10 40]);
m_elev('pcolor');
shading interp;
m_coast('color','b');
colormap('jet');
colorbar('v');
[c,h] = m_elev('contour',[-7000:500:0],'edgecolor','k');
clabel(c,h);
m_grid('box','fancy');
```

```
%text([110,20],'Hainan') 無法用
[LAT,LON] = m_ll2xy(110,20) %在沒有grid()之前的xy座標
```

```
LAT = -0.1745
LON = 0.3564
```

```
text(LAT,LON,'Hainan');


m_text(110,35,'\it China','color','r','FontSize',15,'FontName','times')
```

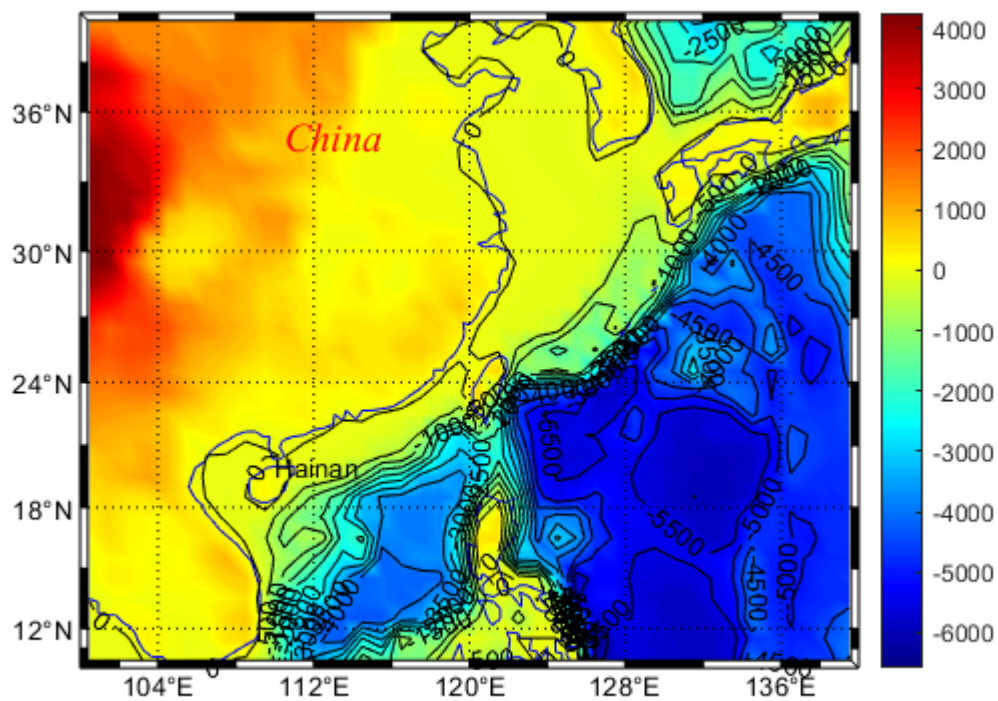

```

clf
m_proj('oblique mercator');
m_coast('patch',[0.8 0.87 0.87]);
m_grid('xlabeldir','end','fontsize',10);
m_line(-129,48.5,'marker','square','markersize',4,'color','r');
m_text(-129,48.5,' M5','vertical','top');

```

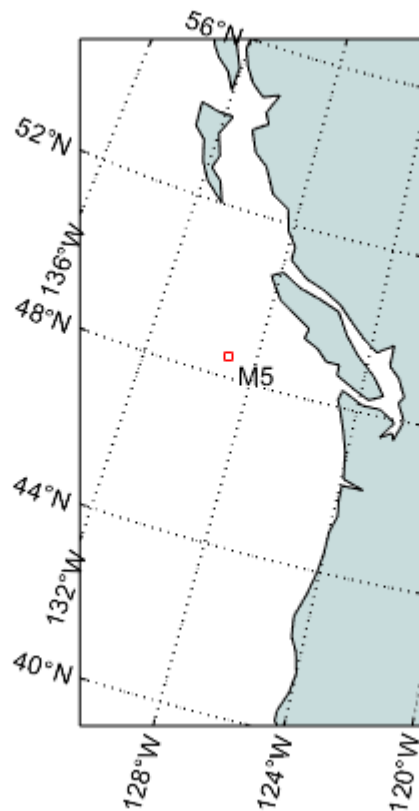

5. Adding your own data

Drawing lines, text, arrows, patches, hatches, speckles and contours

`m_plot(LONG,LAT,...line properties)`

% draw a line on a map (erase current plot)

`m_line(LONG,LAT,...line properties)`

% draw a line on a map

`m_text(LONG,LAT,'string')` % Text

`m_quiver(LONG,LAT,U,V,S)` % A quiver plot

`m_patch(LONG,LAT,..patch properties)` % Patches.

`m_annotation('line',LON,LAT)` % Annotation

help `m_hatch`

`m_hatch` Draws hatched or speckled interiors to a patch

`m_hatch(LON,LAT,STYL,ANGLE,STEP,...line parameters);`

INPUTS:

X,Y - vectors of points.

STYL - style of fill
ANGLE,STEP - parameters for style

E.g.

```
'single',45,5 - single cross-hatch, 45 degrees, 5 points apart  
'cross',40,6 - double cross-hatch at 40 and 90+40, 6 points apart  
'speckle',7,1 - speckled (inside) boundary of width 7 points, density 1  
                  (density >0, .1 dense 1 OK, 5 sparse)  
'outspeckle',7,1 - speckled (outside) boundary of width 7 points, density 1  
                  (density >0, .1 dense 1 OK, 5 sparse)
```


H=m_hatch(...) returns handles to hatches/speckles.

[XI,YI,X,Y]=MHATCH(...) does not draw lines - instead it returns vectors XI,YI of the hatch/speckle info, and X,Y of the original outline modified so the first point==last point (if necessary).

Note that inside and outside speckling are done quite differently and 'outside' speckling on large coastlines can be very slow.

If you get weird results - try putting an M_LINE(LON,LAT) call *before* (or otherwise set the plot axis xlim/ylim parameters - this is necessary because otherwise m_hatch can't properly determine the 'points' units).

```
bndry_lon=[-128.8 -128.8 -128.3 -128 -126.8 -126.6 -128.8];  
bndry_lat=[49      50.33  50.33  50   49.5   49    49];  
  
clf;  
m_proj('lambert','long',[-130 -121.5],'lat',[47 51.5],'rectbox','on');  
  
m_coast('color','k');           % Coastline...  
m_coast('speckle','color','k'); % with speckle added  
  
m_line(bndry_lon,bndry_lat,'linewi',2,'color','k'); % Area outline ...  
m_hatch(bndry_lon,bndry_lat,'single',30,5,'color','k'); % ...with hatching added.  
  
m_grid('linewi',2,'linest','none','tickdir','out','fontsize',12);  
title('Speckled Boundaries for nice B&W presentation','fontsize',14);  
m_text(-128,48,{'Pacific','Ocean'},'fontsize',18);
```

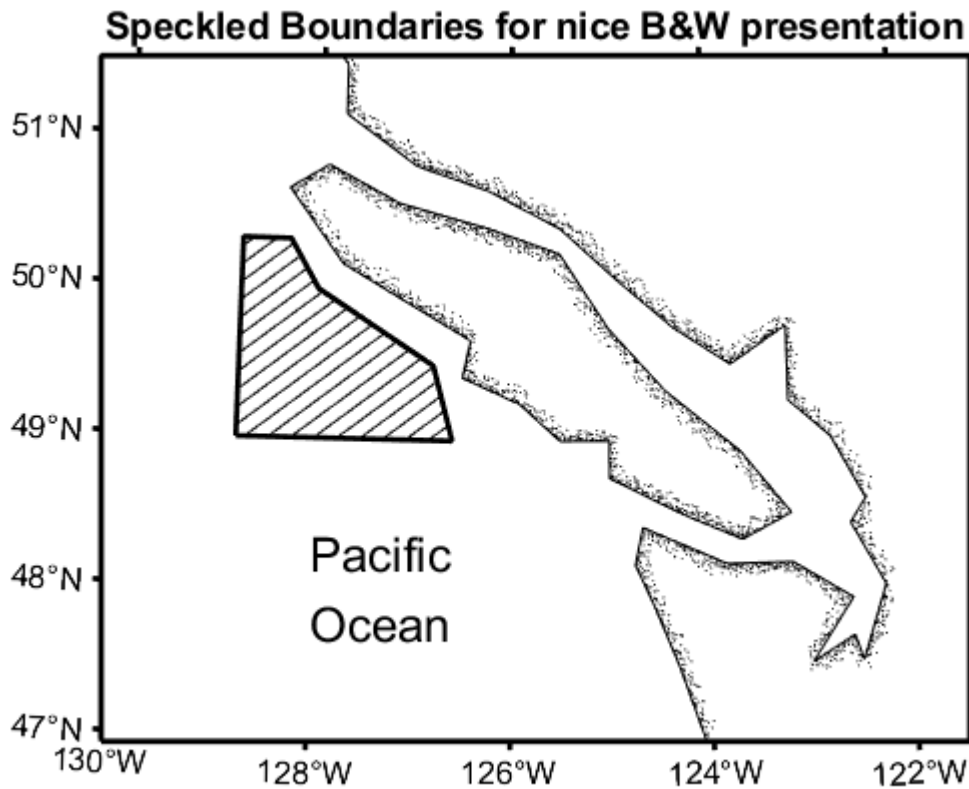Drawing images and pcolor

```
imm = imread('75472268.jpg');
figure
image(imm)
```

```
clf
m_proj('lambert','lat',[5 24],'long',[105 125]);

set(gcf,'color','w') % Set background colour before m_image call

caxis([-6000 0]);
colormap(flipud([flipud(m_colmap('blues',10));m_colmap('jet',118)]));
m_etopo2('shadedrelief','gradient',3);
```

Warning: Cannot open /ocean/rich/more/mmapbase/etopo1/etopo2 !! \n Have you installed the Etopo2 database correctly?\n This (optional) database must be installed separately - see the M_Map user's guide for instructions\n ----Using default elevation database instead

```
m_coast('patch',[.8 .8 .8]);

m_grid('box','fancy');

ax=m_contfbar(.97,[.5 .9],[-6000 0],[-6000:100:000],'edgecolor','none','endpiece','no');
```

```
xlabel(ax, 'meters', 'color', 'k');
```

