



Database System Lab (CSE 3104)

Connecting NetBeans Project to MSSQL Server


Open the Sql Server Configuration Manager

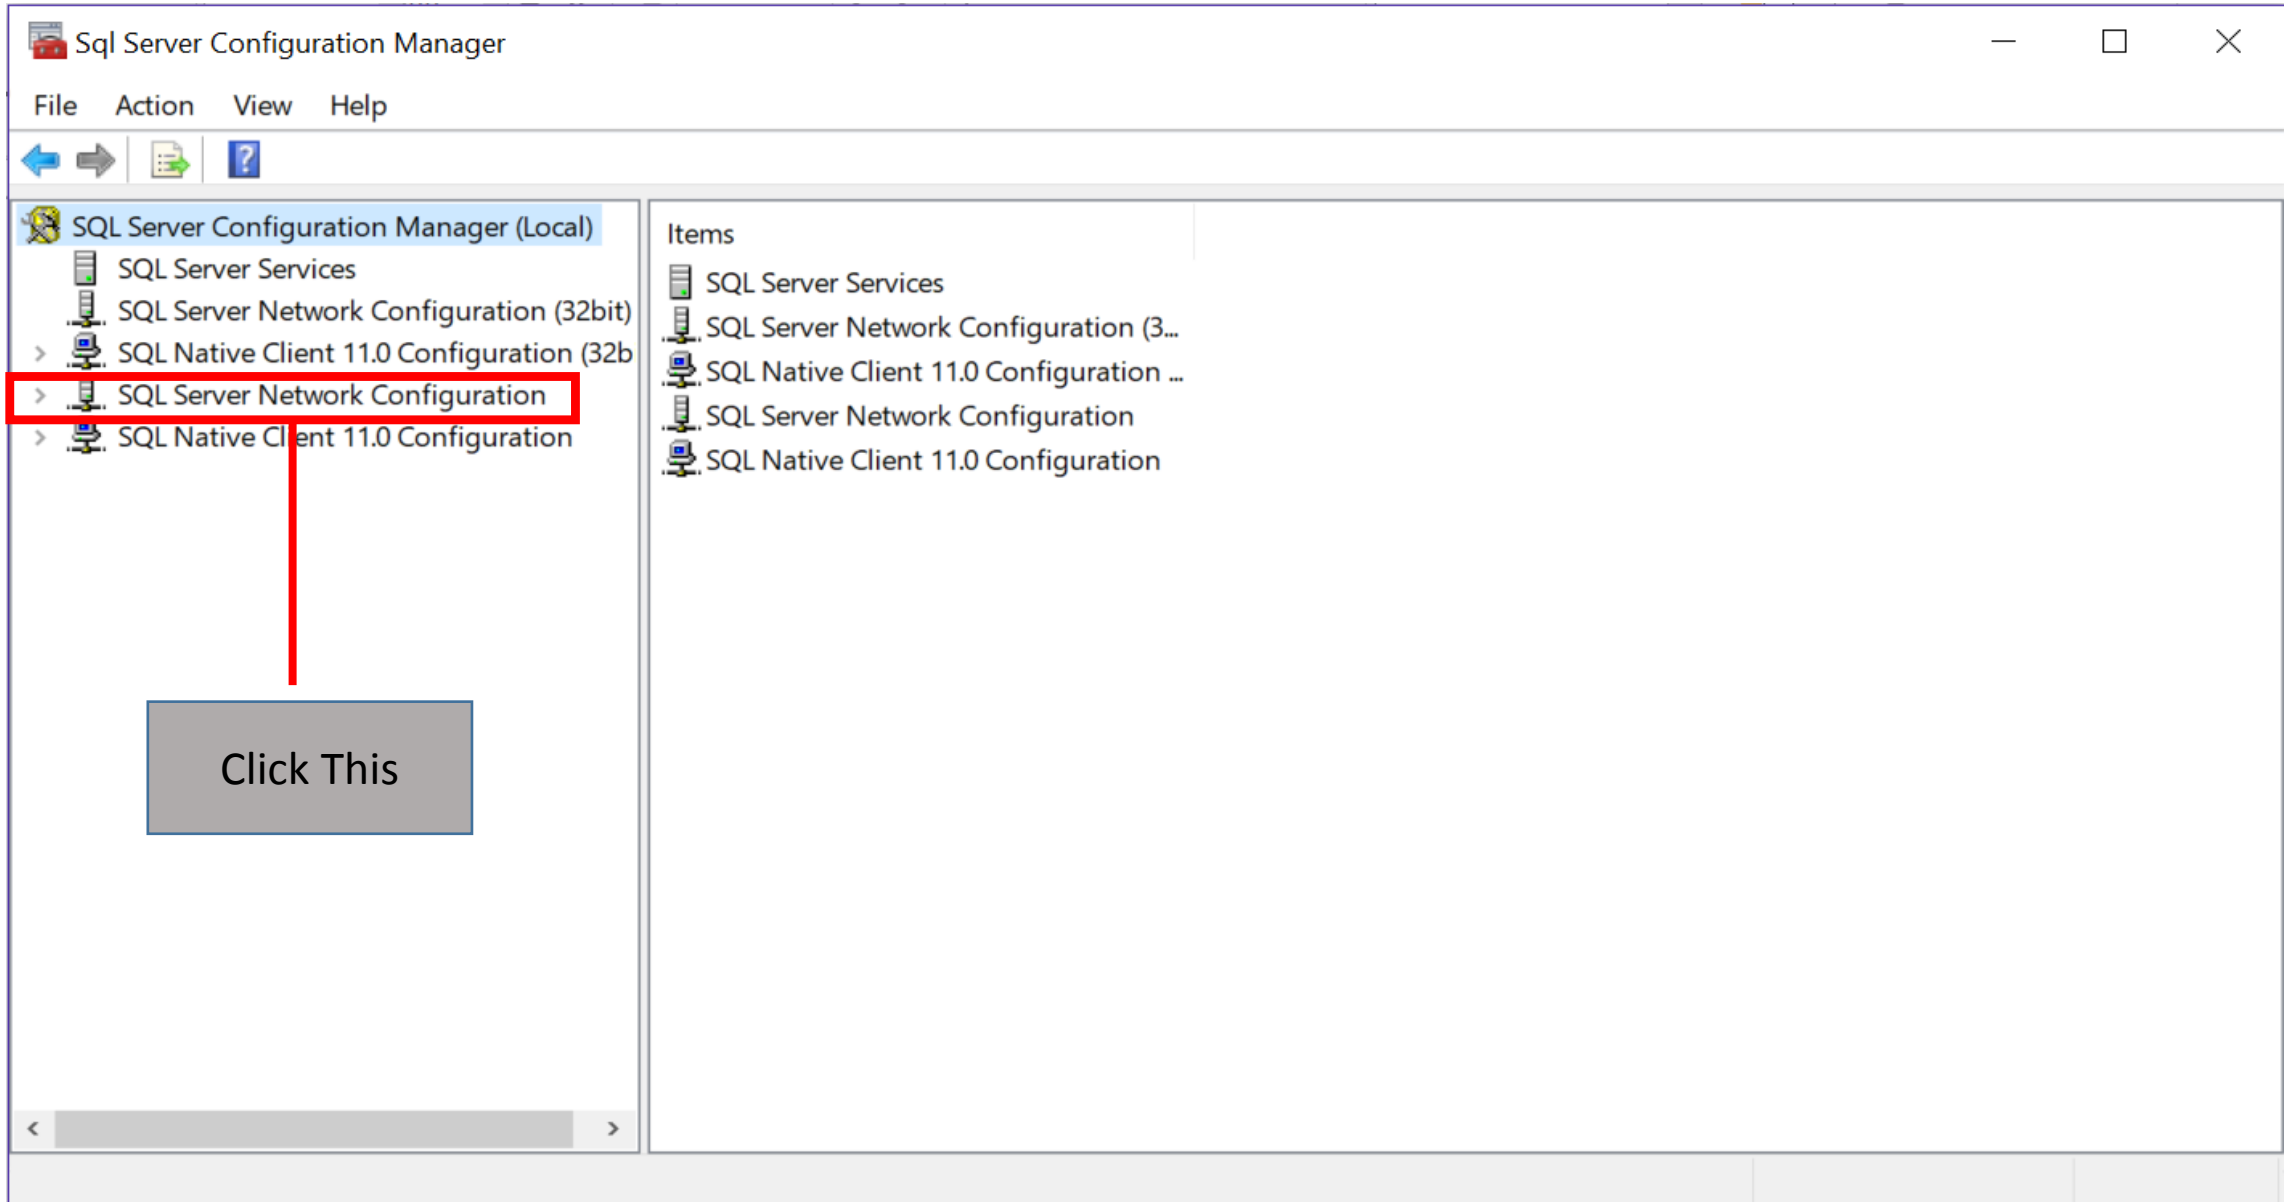


Right Click the TCP/IP, Go to Properties -> IP Addresses

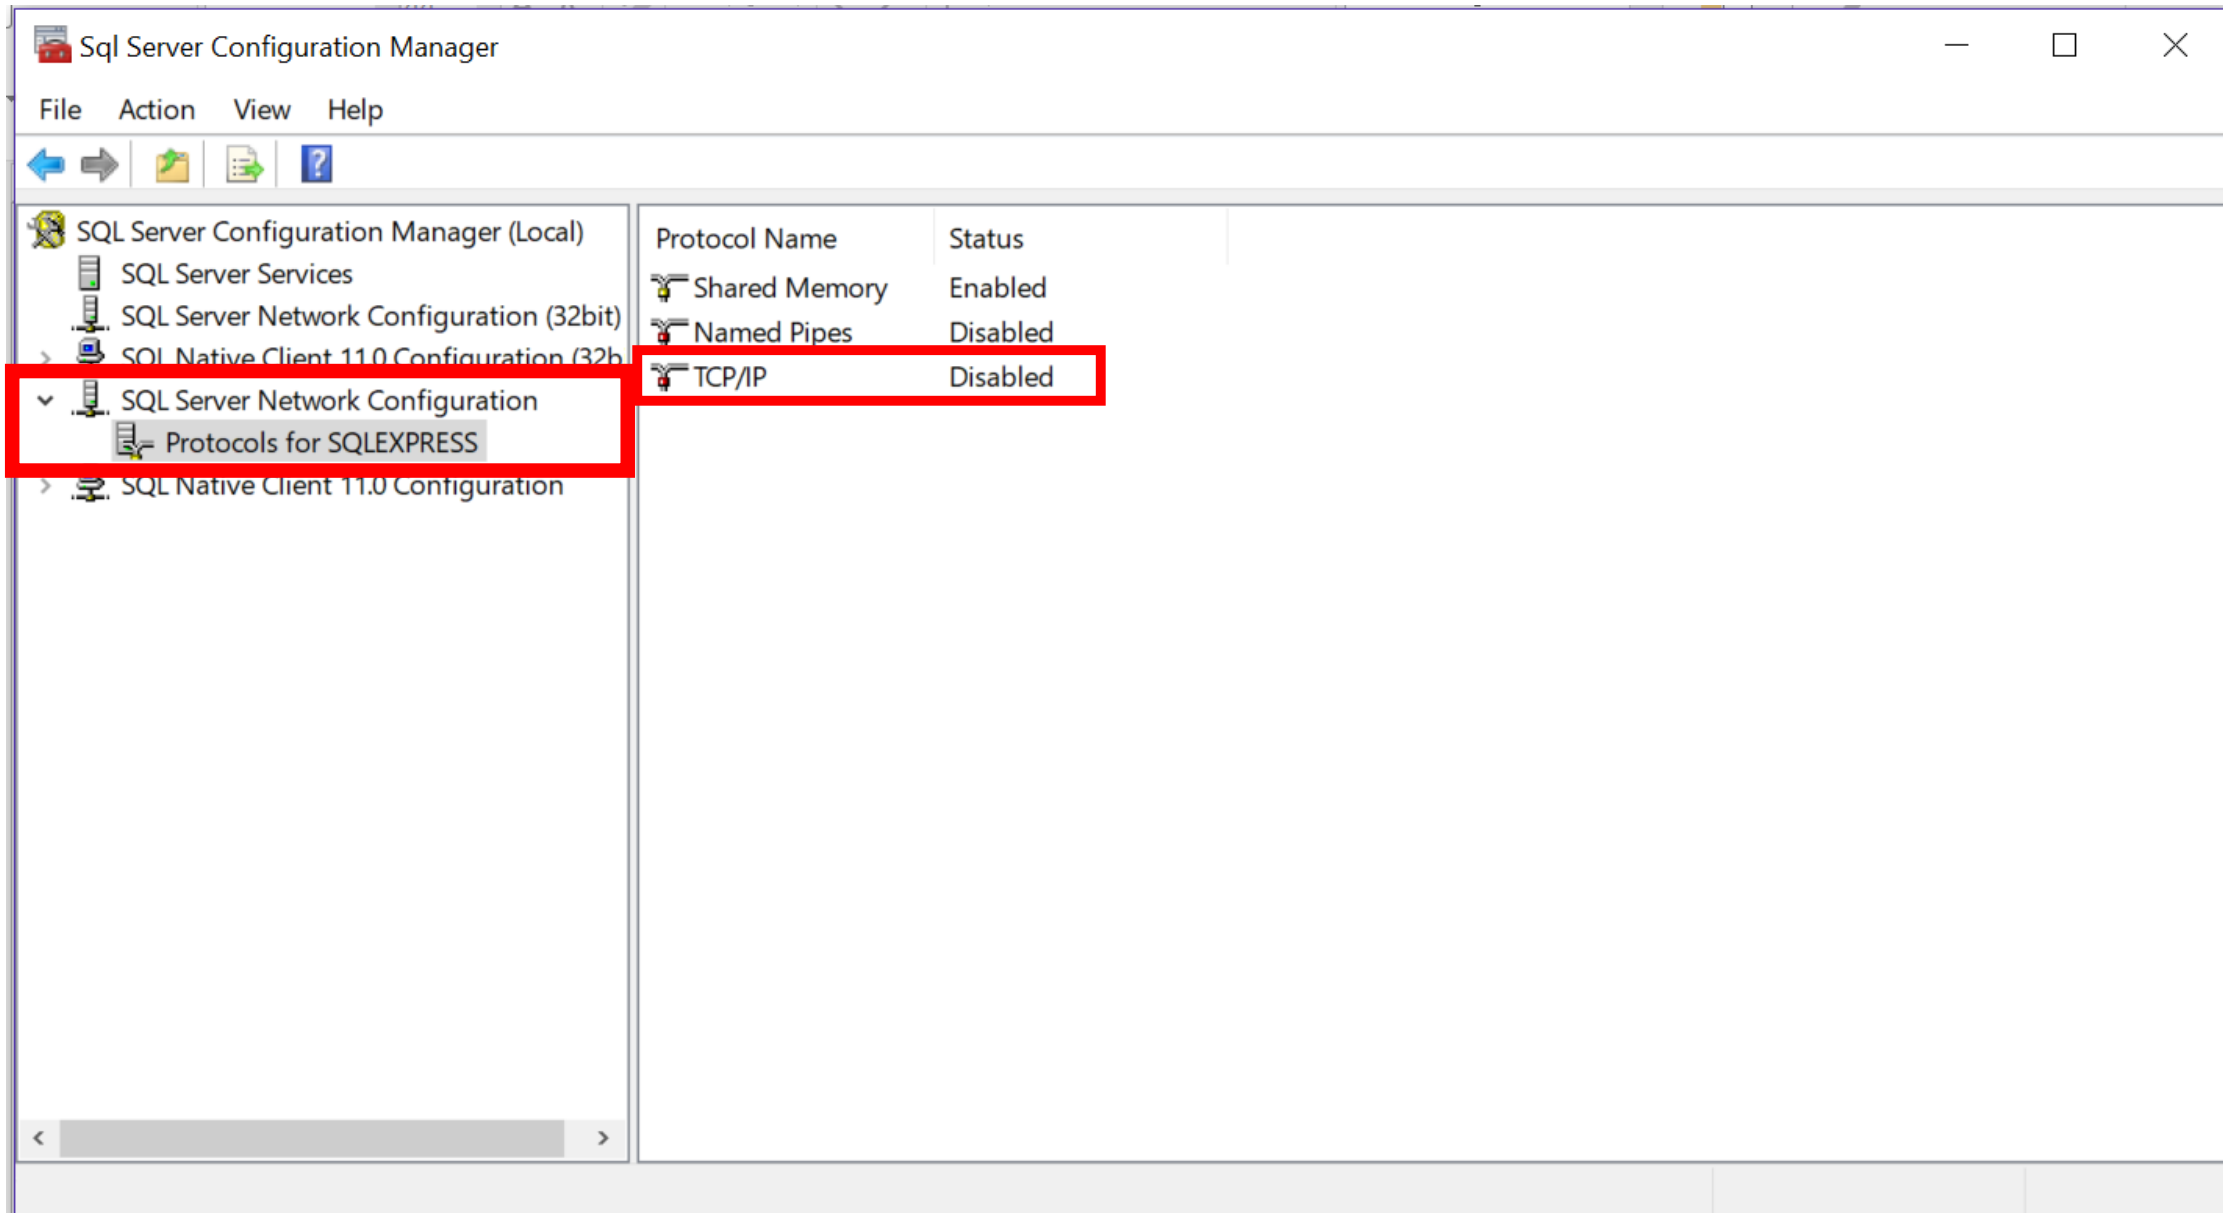


Scroll Down. Go to the last option: **IPAll**. Click on the TCP Port

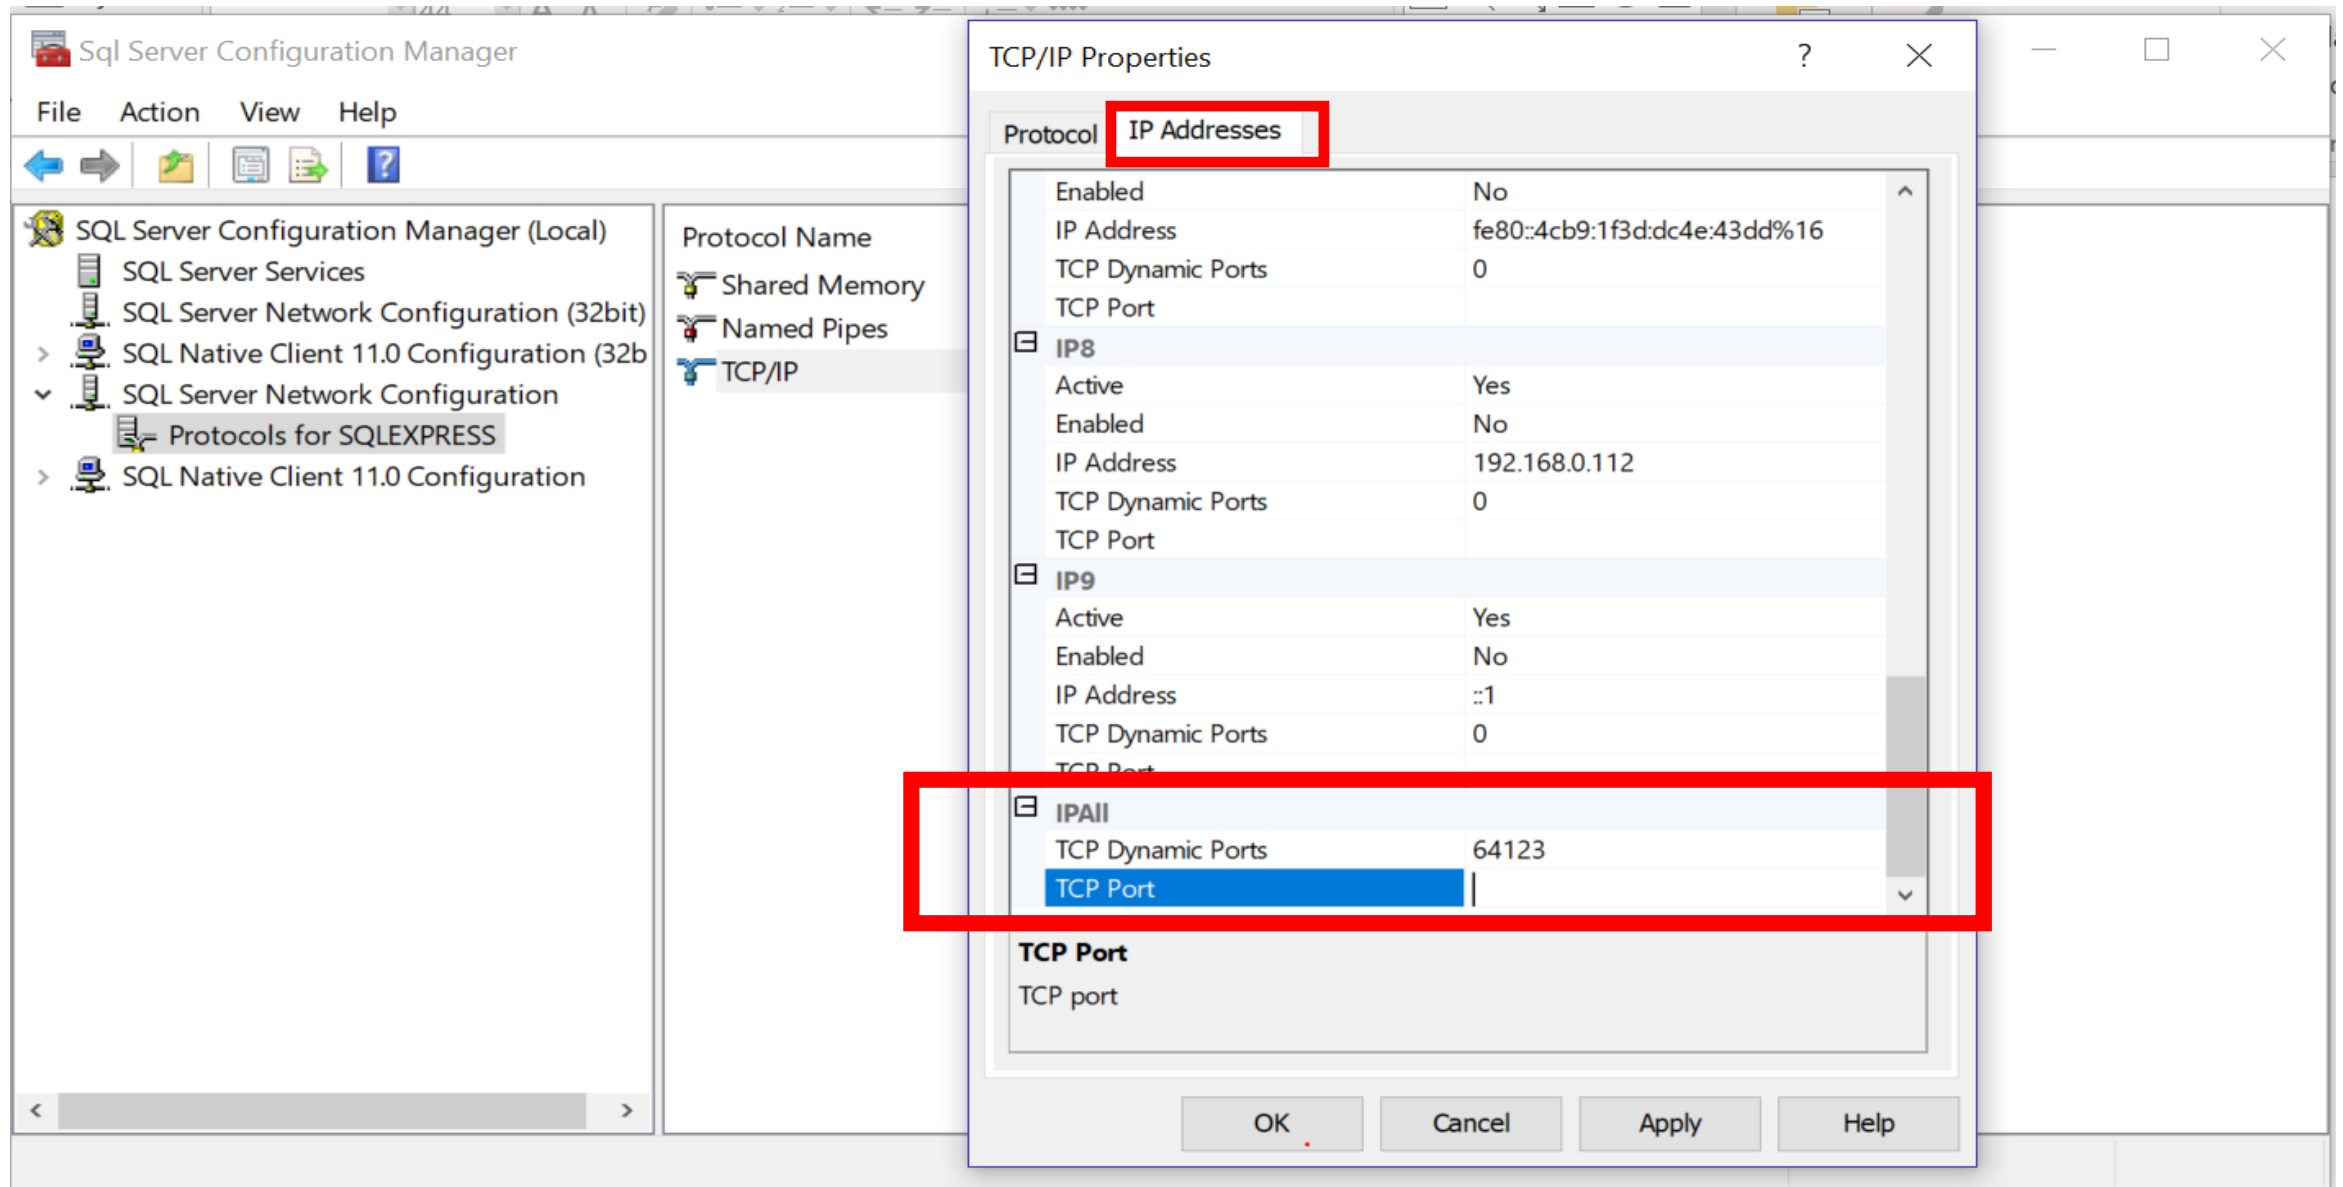


Type 1433 in the TCP Port Option and click Apply.

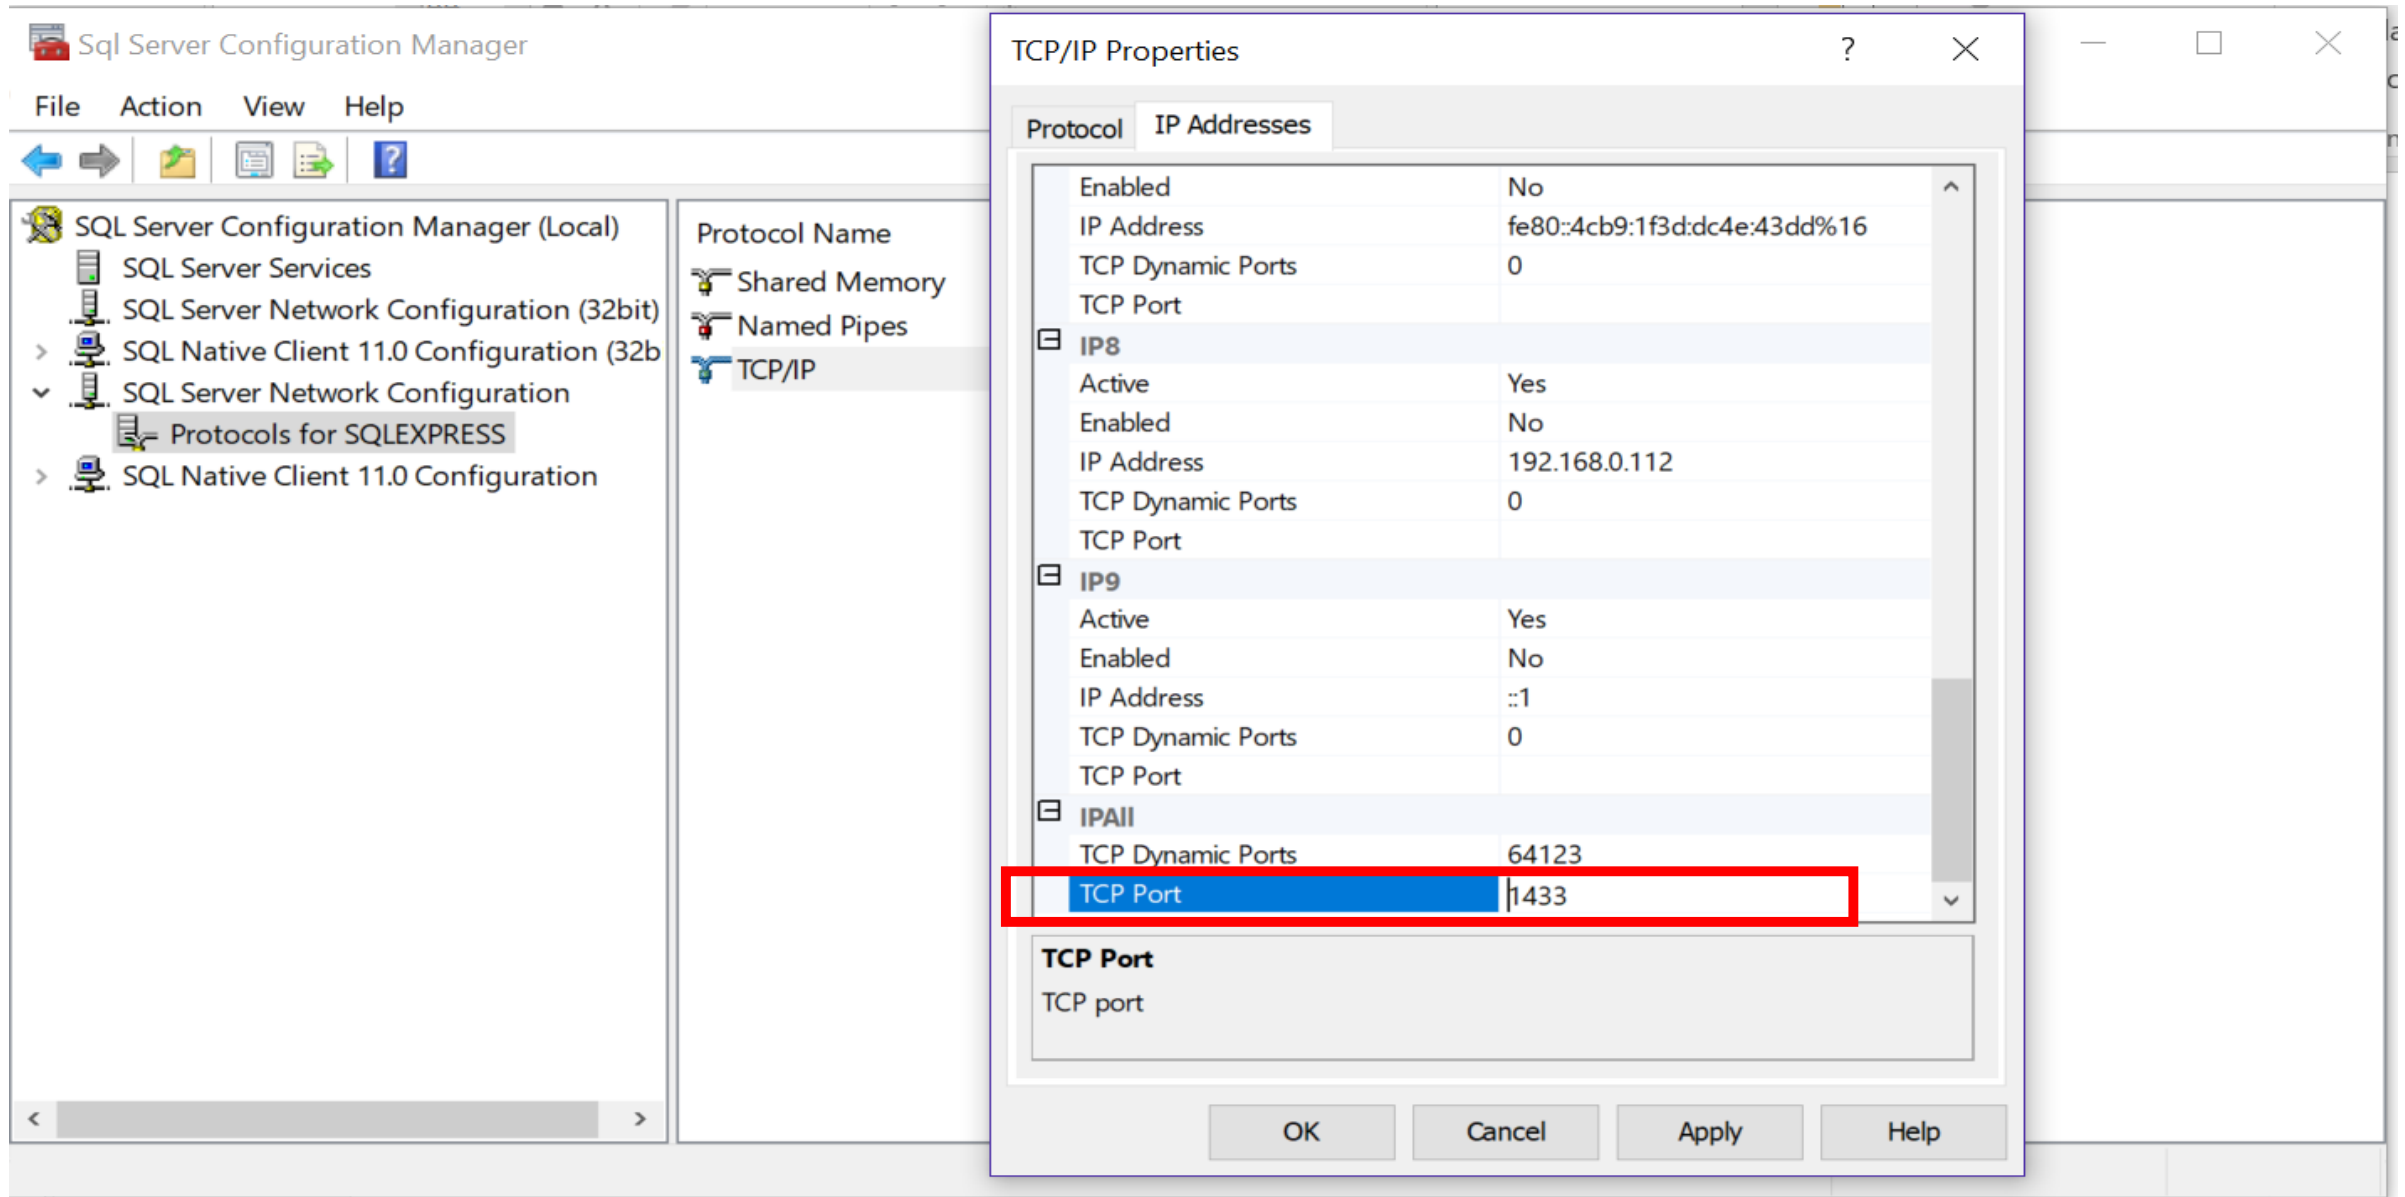


Again Right Click the TCP/IP and Click Enable.

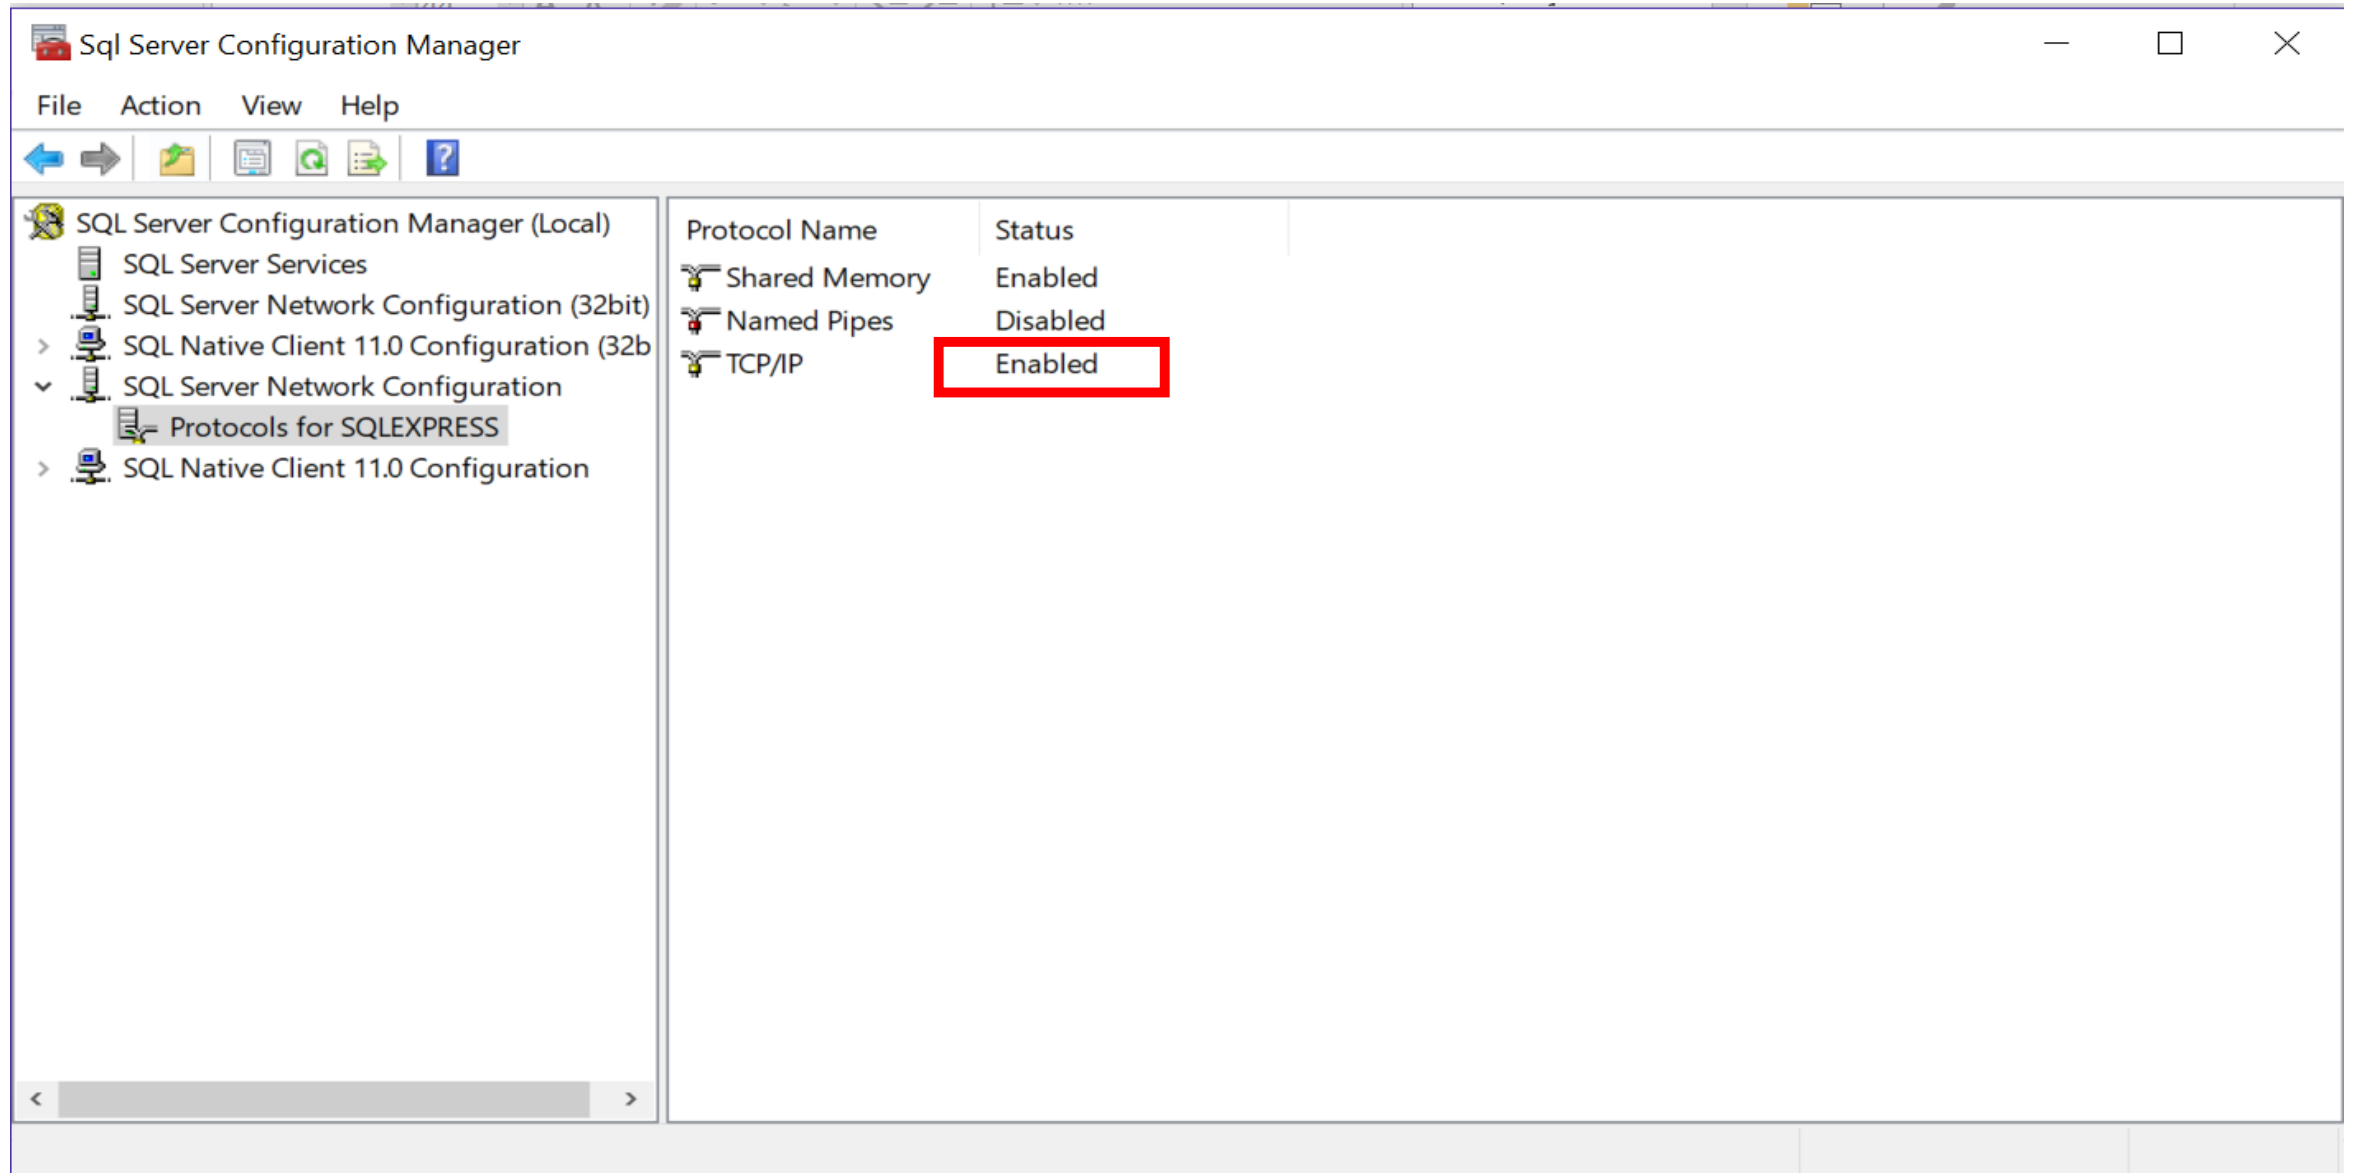


Right Click The SQL Server and Click Restart

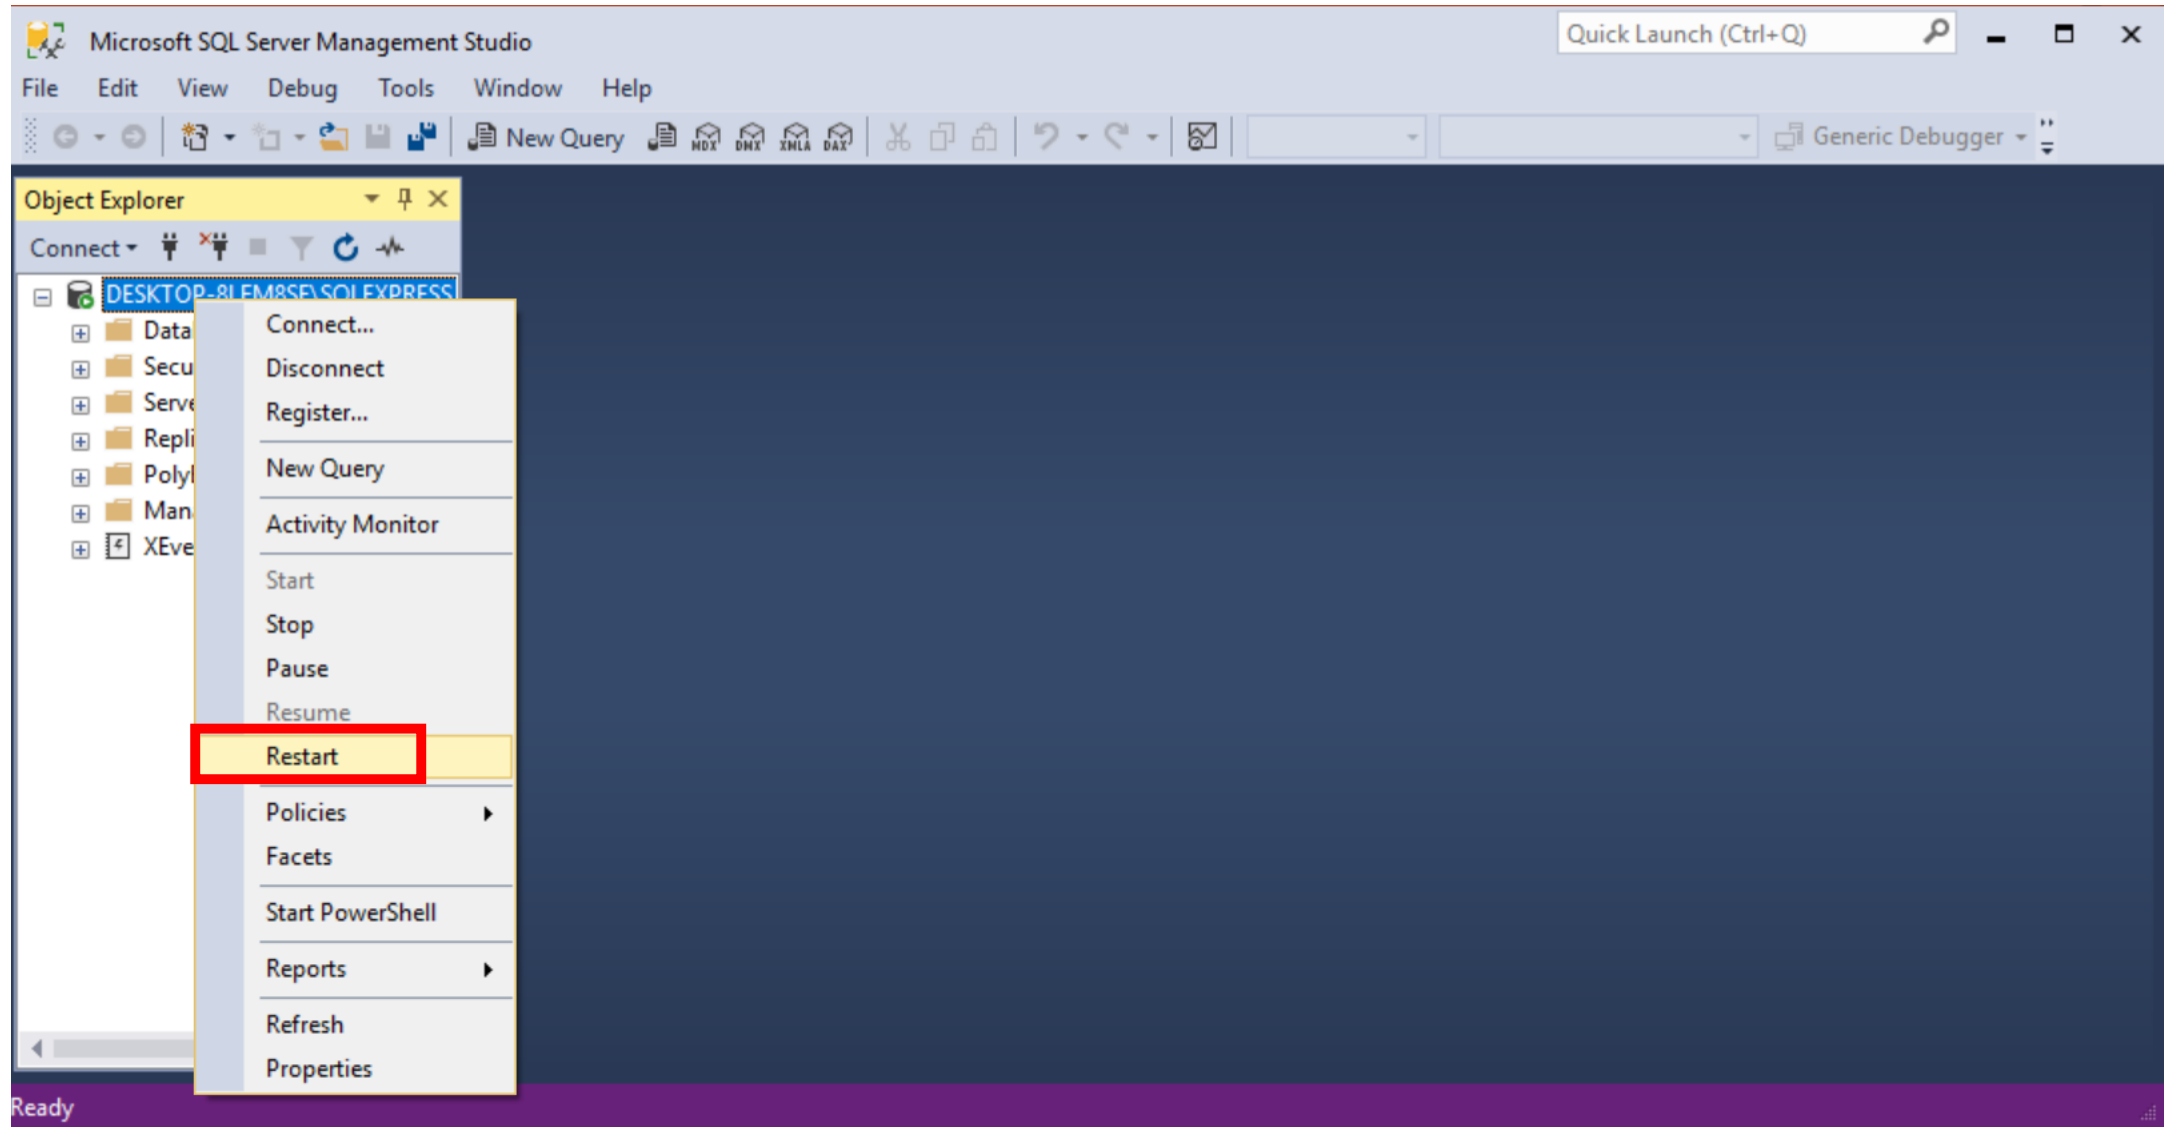

Click Yes

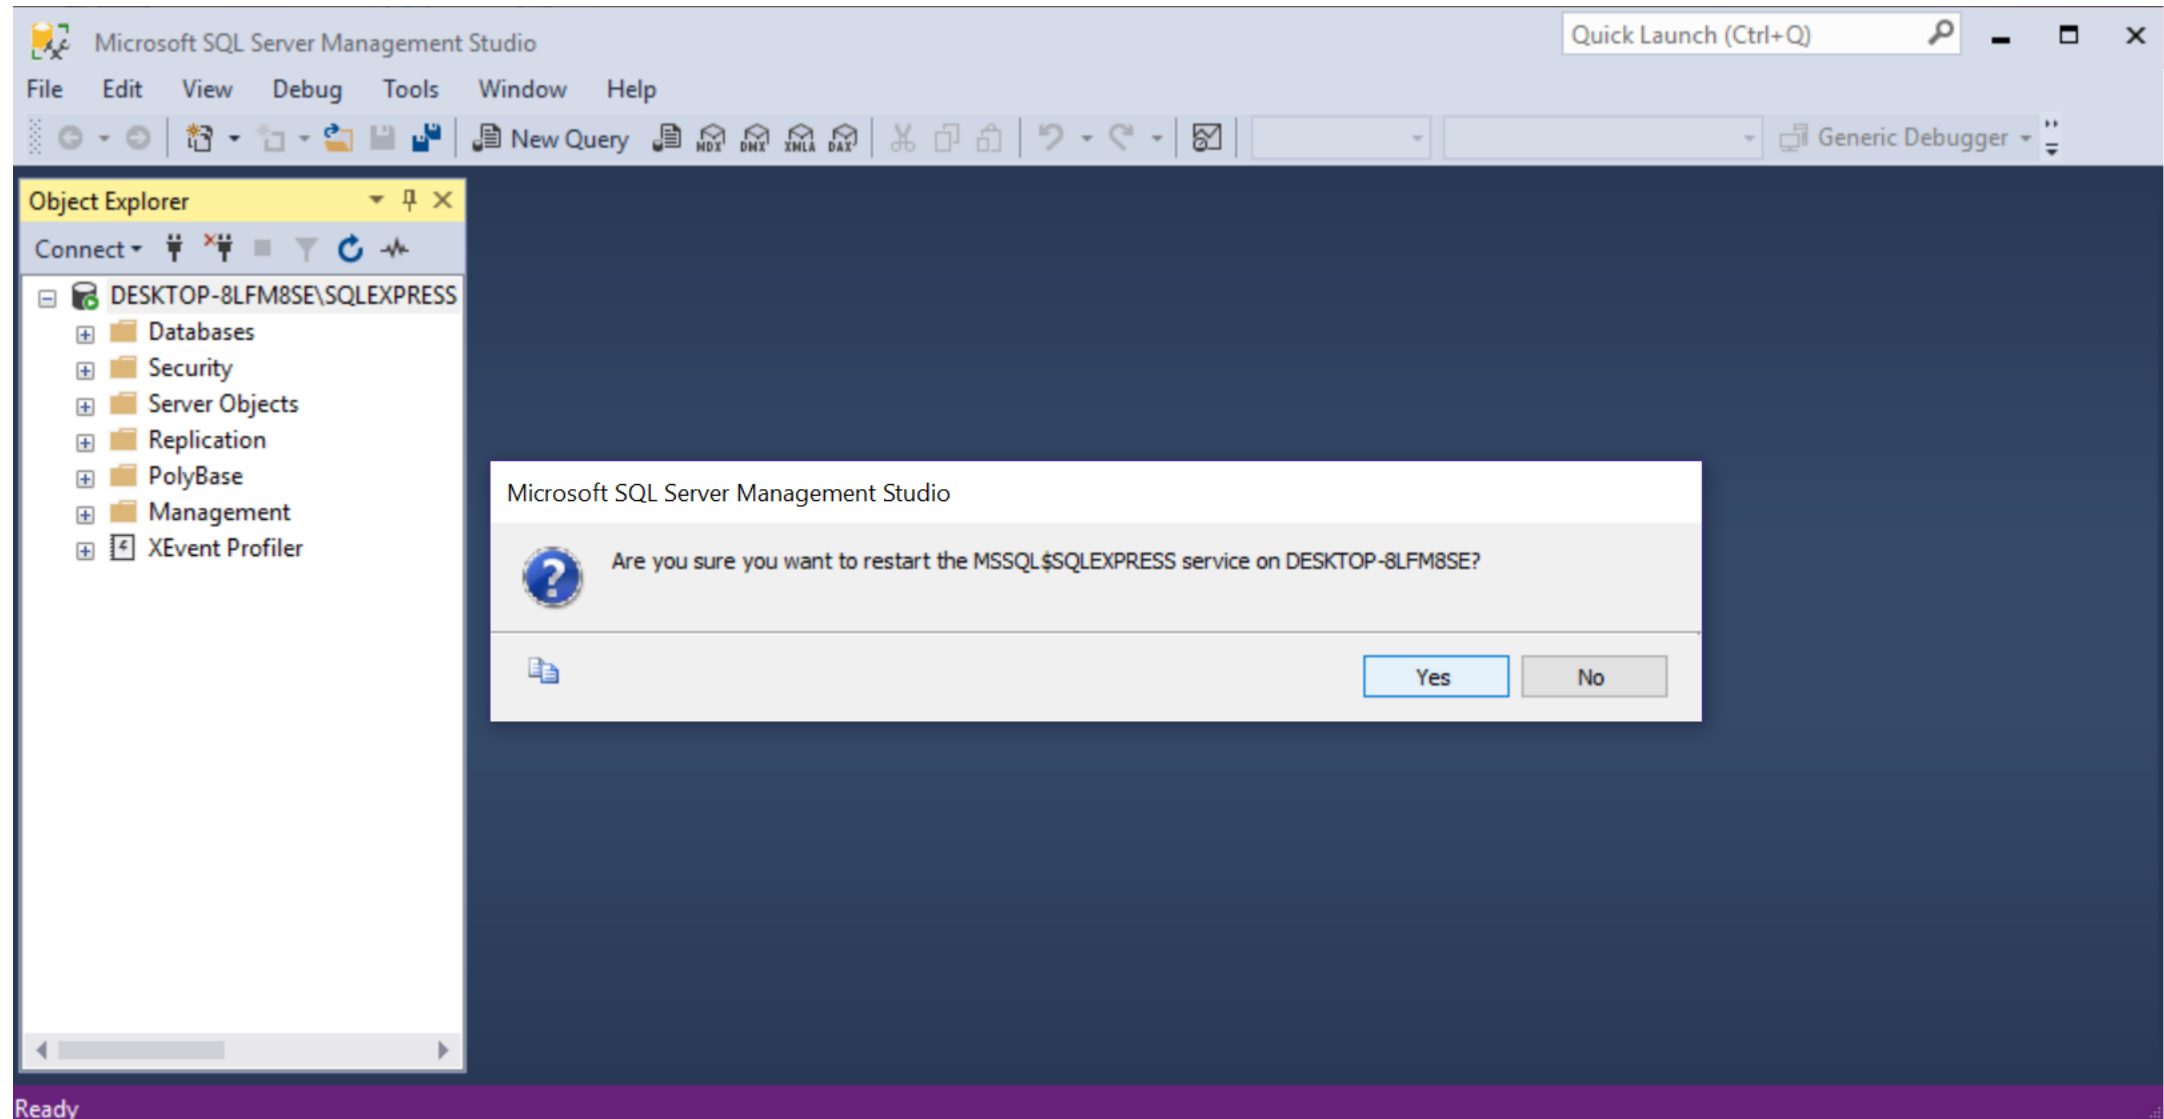

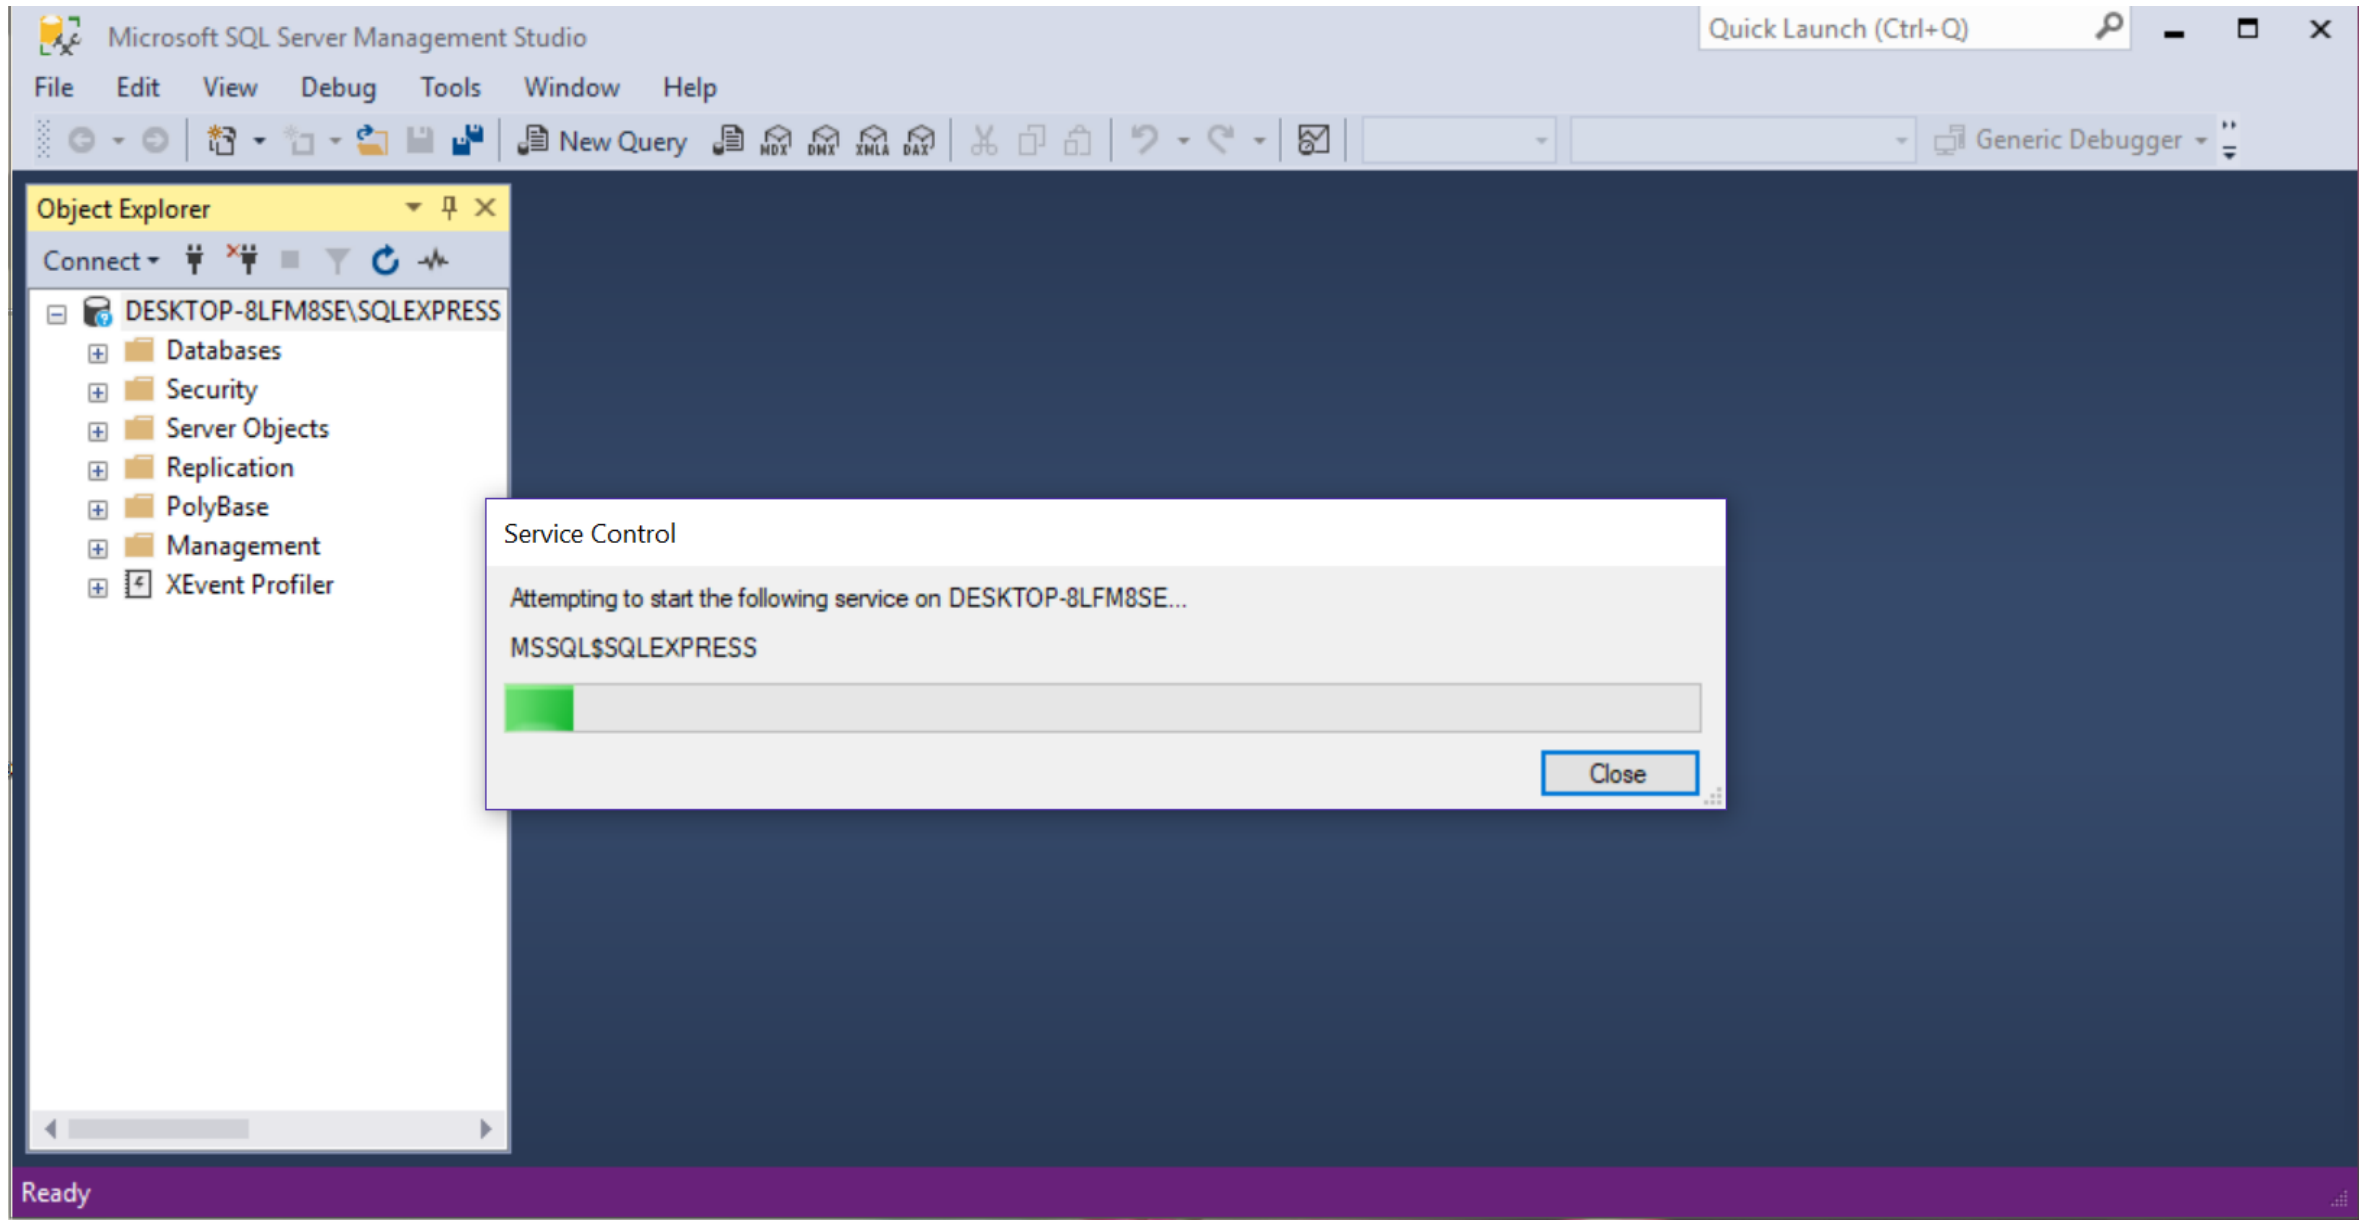

Execute the Following queries:

```
Alter login sa with password = '123456'
```

```
Alter login sa enable
```

SQLQuery1.sql - DESKTOP-8LFM8SE\SQLEXPRESS.master (DESKTOP-8LFM8SE\Arony (52))* - Microsoft SQL Server Management Studio

File Edit View Query Project Debug Tools Window Help

master

Execute Debug

Object Explorer

Connect

DESKTOP-8LFM8SE\SQLEXPRESS (SQL S

Databases

Security

Logins

##MS_PolicyEventProcessing

##MS_PolicyTsqlExecutionLo

BUILTIN\Users

DESKTOP-8LFM8SE\Arony

NT AUTHORITY\SYSTEM

NT Service\MSSQL\$SQLEXPR

NT SERVICE\SQLTELEMETRY

NT SERVICE\SQLWriter

NT SERVICE\Winmgmt

sa

Server Roles

Credentials

Audits

Server Audit Specifications

Server Objects

Replication

project.sql - DESK...8LFM8SE\Arony (55))*

SQLQuery1.sql - D...LFM8SE\Arony (52))*

Alter login sa with password = '123456'

Alter login sa enable

146 %

Query executed successfully.

DESKTOP-8LFM8SE\SQLEXPRESS ...

DESKTOP-8LFM8SE\Arony ...

master

00:00:00

0 rows

Ready

Ln 4

Col 22

Ch 22


INS


sa is now disable. Execute the queries to change the password to 123456 and to enable it

Right Click
Sql Server.

Go to


Properties
-> Security

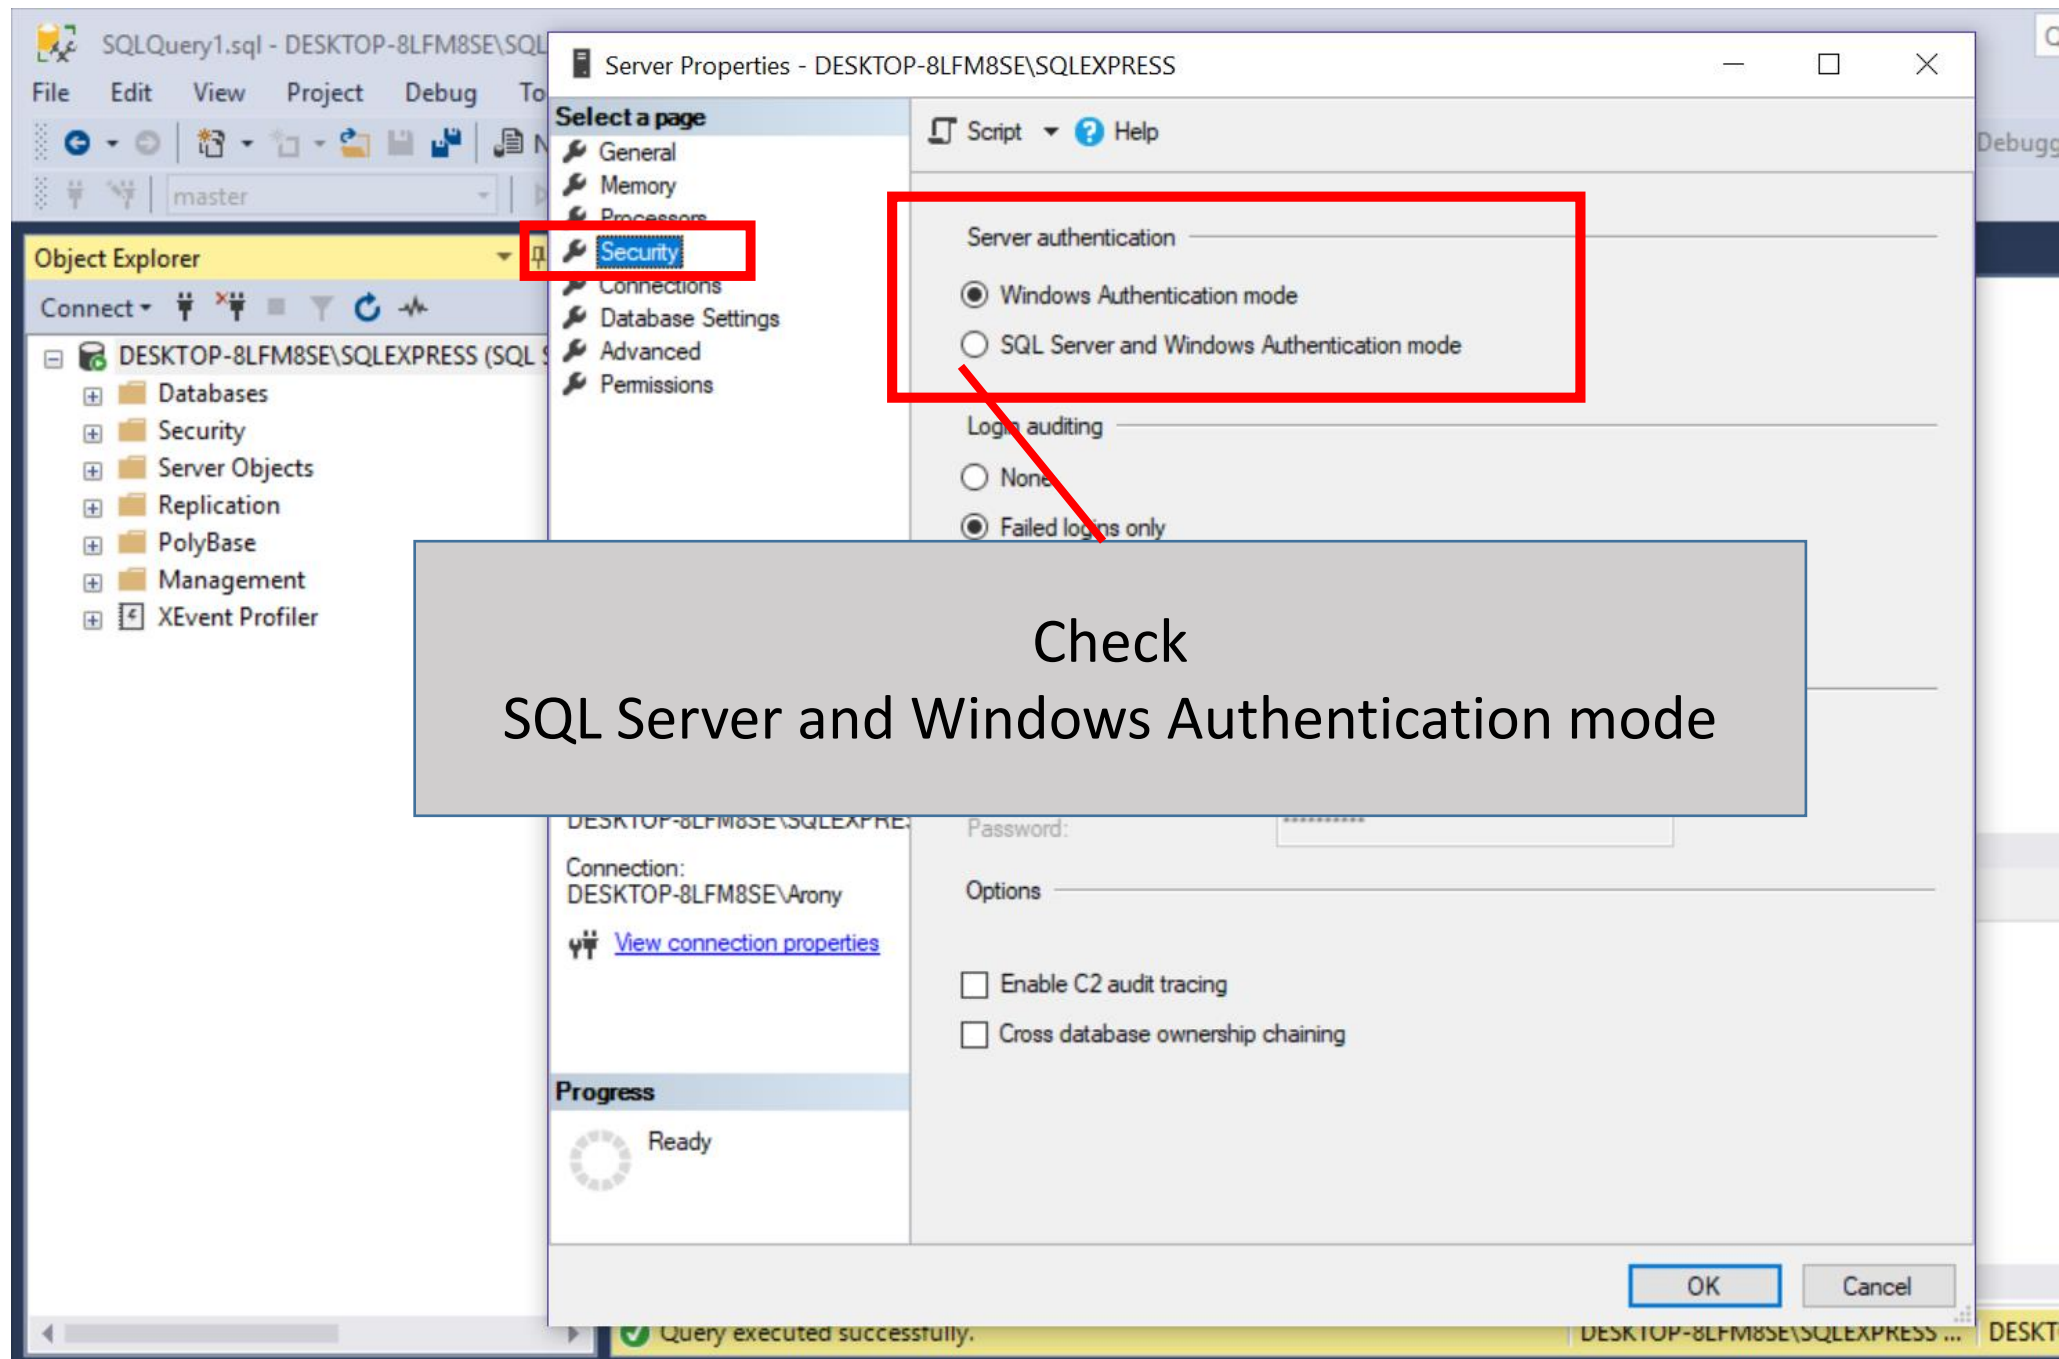

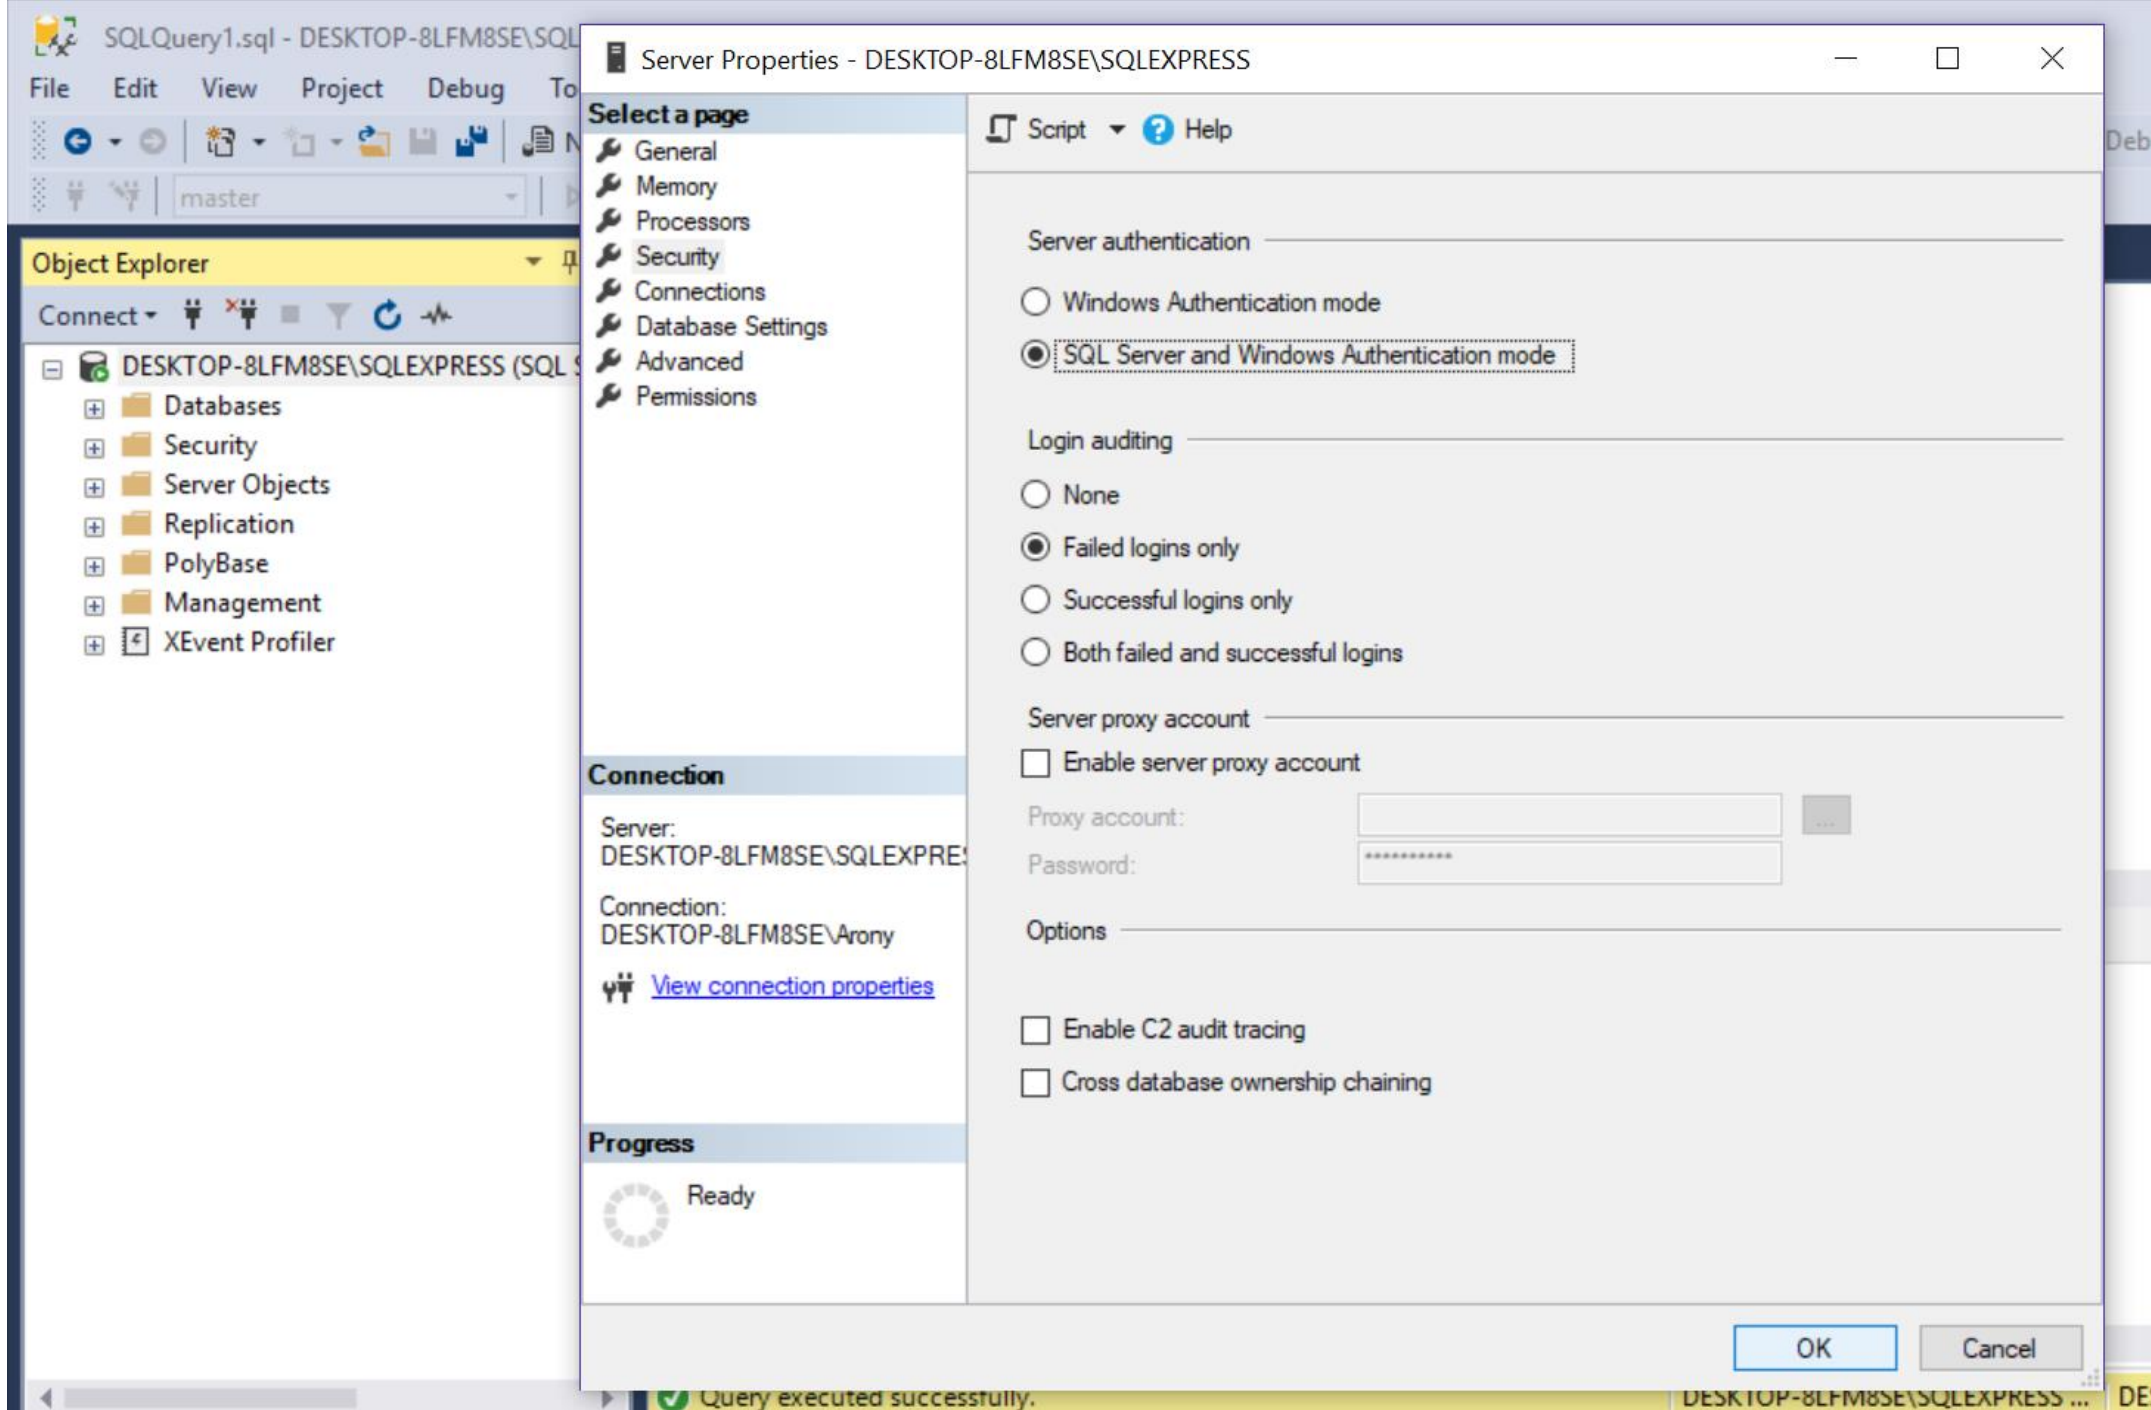

Steps:

- Disconnect the sql server
- Then again click connect.
- Change Authentication from Windows Authentication to SQL Server Authentication
- Give Login : sa
Password : 123456
- Click Connect

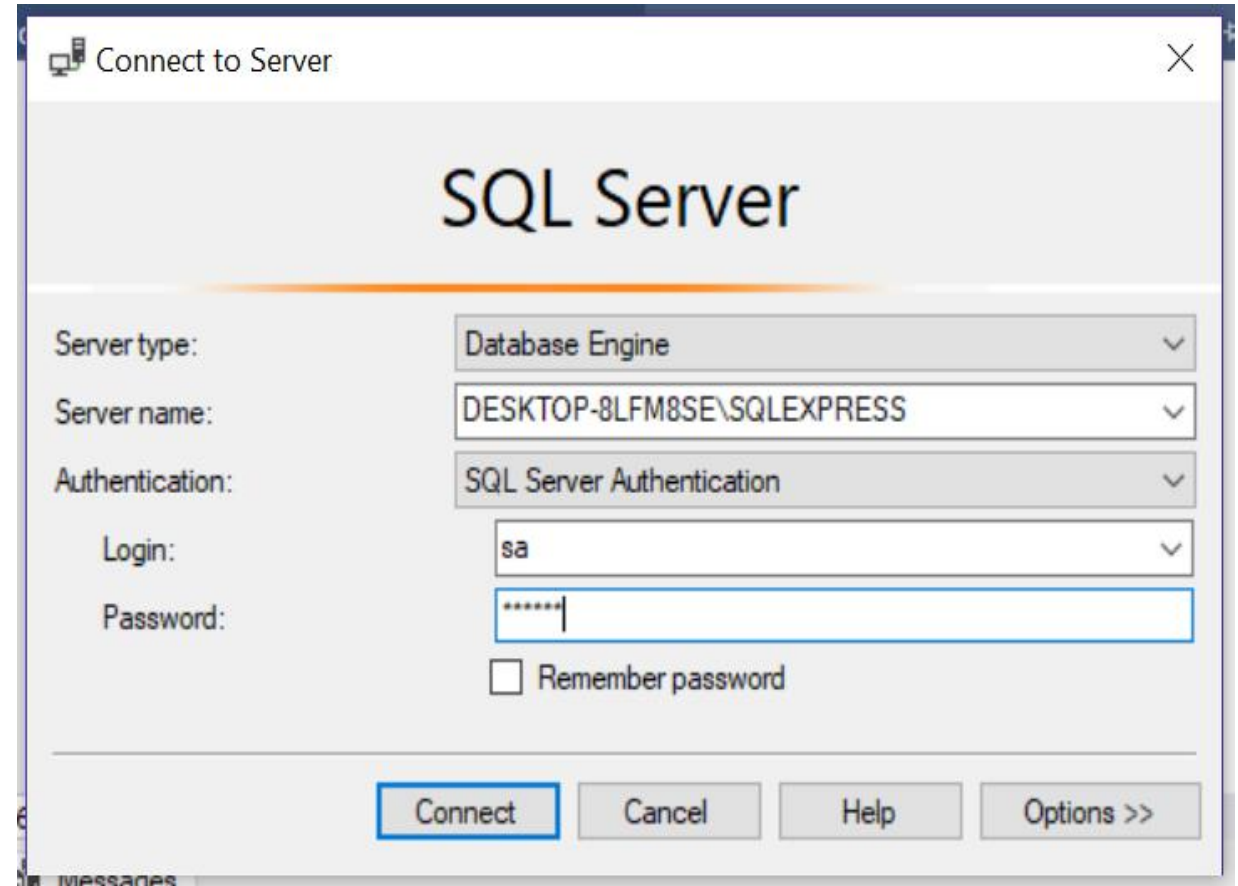

Steps:

- Create your project Database in Microsoft SQL SERVER Management Studio.
- Create table and insert data in the database.

You can use this for testing Purpose

Create Database ProjectDB;

Use ProjectDB;

CREATE TABLE Customer(

CustomerID int IDENTITY(1,1) NOT NULL PRIMARY KEY,
FirstName varchar (50) NOT NULL,
LastName varchar (50) NOT NULL,
CustomerAddress varchar (50) NOT NULL,
City varchar (50) NOT NULL,
Country varchar (50) NOT NULL
);

INSERT INTO CUSTOMER

VALUES ('Amy', 'Johnson', '11000 Beecher', 'Joliet', 'USA'),
('Bill', 'Brown', '7312 Bettis Ave.', 'Pittsburg', 'USA'),
('Janna', 'Smith', '200 E. Elm Apt. #32', 'Sparks', 'USA'),
('Evette', 'LeBlanc', '207 Queens Quay West', 'Toronto', 'CA'),
('Drew', 'Brisco', '1690 Hollis Street', 'Ottawa', 'CA')

Steps:

- Open NetBeans. Create New Project -> Project Name
Unclick the create main class before finishing
- Create a new class named ConnectMSSQL.
- Copy and paste the connectDB() method given in the next slide inside the Class ConnectMSSQL

```
public void connectDB(){
    try {
        Class.forName("com.microsoft.sqlserver.jdbc.SQLServerDriver");
        Connection connection = DriverManager
            .getConnection(
                "jdbc:sqlserver://localhost:1433;databaseName=ProjectDB;selectMethod=cursor", "sa", "123456");

        System.out.println("DATABASE NAME IS:"
            + connection.getMetaData().getDatabaseProductName());
        Statement statement = connection.createStatement();
        ResultSet resultSet = statement
            .executeQuery("SELECT FirstName FROM Customer");
        while (resultSet.next()) {
            System.out.println("Customer NAME:"
                + resultSet.getString("FirstName"));
        }
    } catch (Exception e) {
        e.printStackTrace();
    }
}
```

The Class will look like this

```
import java.sql.Connection;
import java.sql.DriverManager;
import java.sql.ResultSet;
import java.sql.Statement;

public class ConnectMSSQL {



    public void connectDB() {
        try {
            Class.forName("com.microsoft.sqlserver.jdbc.SQLServerDriver");
            Connection connection = DriverManager.getConnection(
                "jdbc:sqlserver://localhost:1433;databaseName=ProjectDB;selectMethod=cursor", "sa", "123456");

            System.out.println("DATABASE NAME IS:" + connection.getMetaData().getDatabaseProductName());

            Statement statement = connection.createStatement();
            ResultSet resultSet = statement.executeQuery("SELECT FirstName FROM Customer");


            while (resultSet.next()) {
                System.out.println("Customer NAME:" + resultSet.getString("FirstName"));
            }
        } catch (Exception e) {
            e.printStackTrace();
        }
    }
}
```

- Right click Libraries in the Project Created in Netbeans
- Select Add Jar/Folder
- Add the `sqljdbc4.jar` to the Libraries

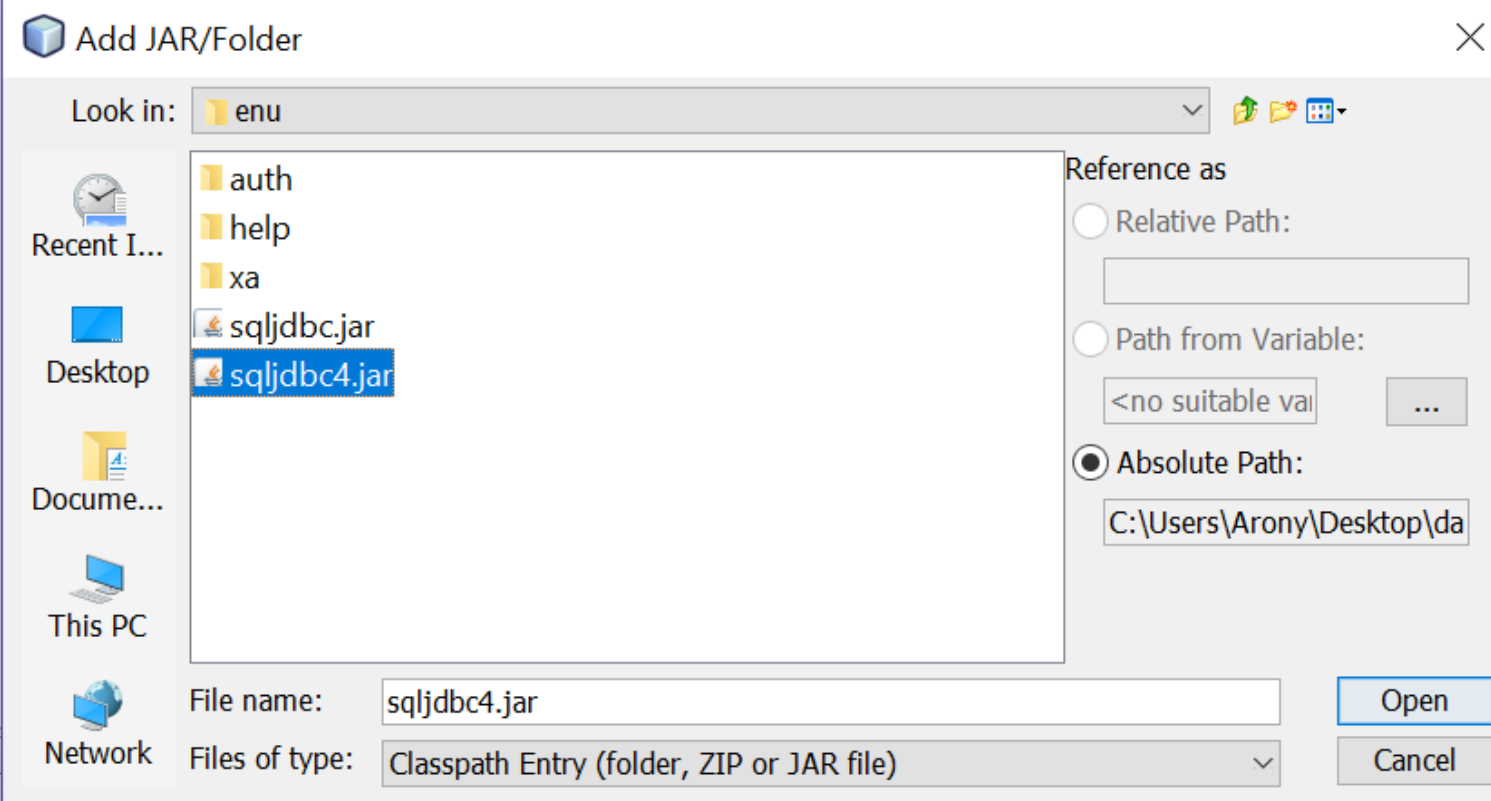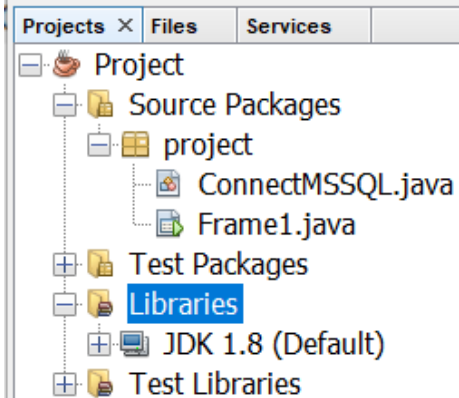

```
10  public void connectDB () {  
11      try {
```

- Create a JFrame Form inside the project
- Put button on the frame
- Go to the back end of the button
- Create an Object of the Class `ConnectMSSQL`
- Call the method `connectDB()`




Projects **Files** **Services**

- Project
 - Source Packages
 - project
 - ConnectMSSQL.java
 - Frame1.java
 - Test Packages
 - Libraries
 - sqljdbc4.jar
 - JDK 1.8 (Default)
 - Test Libraries

Frame1.java x ConnectMSSQL.java x

Source **Design** History

To change layout manager of a container use Set Layout submenu from its context menu.

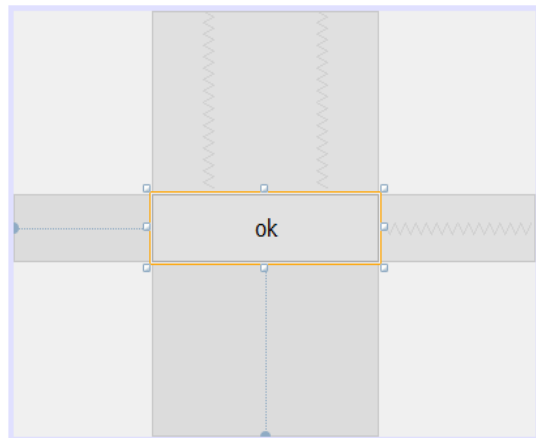

okButton [JButton] - Navigator

Form Frame1

- Other Components
 - [JFrame]
 - okButton [JButton]



Palette

- Swing Containers**
 - Panel
 - Scroll Pane
 - Internal Frame
 - Tabbed Pane
 - Tool Bar
 - Layered Pane
 - Split Pane
 - Desktop Pane
- Swing Controls**
 - Label
 - Check Box
 - Combo Box
 - Text Area
 - Progress Bar
 - Spinner
 - Editor Pane
 - Button
 - Radio Button
 - List
 - Scroll Bar
 - Formatted Field
 - Separator
 - Tree
 - Toggle Button
 - Button Group
 - Text Field
 - Slider
 - Password Field
 - Text Pane
 - Table
- Swing Menus**
- Swing Windows**
- Swing Fillers**
- AWT**
- Beans**

okButton [JButton] - Properties

Properties Binding Events Code

Properties	
action	<none>
background	[240,240,240]
font	Tahoma 16 Plain
foreground	[0,0,0]
icon	<none>
mnemonic	
text	ok
toolTipText	
Other Properties	
UIClassID	ButtonUI
actionCommand	ok
alignmentX	0.0
alignmentY	0.5
autoscrolls	

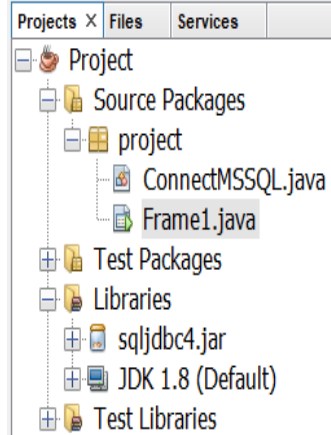

Frame1.java x ConnectMSSQL.java x

Source Design History

```
60
61 private void okButtonActionPerformed(java.awt.event.ActionEvent
62     // TODO add your handling code here:
63
64     ConnectMSSQL cnObj = new ConnectMSSQL();
65     cnObj.connectDB();
66
67 }
```


- Run the frame and Click ok
- You should get the desired Output

