


# Decision Tree Classification Algorithm

- Decision Tree is a **Supervised learning technique** that can be used for both classification and Regression problems, but mostly it is preferred for solving Classification problems. It is a tree-structured classifier, where **internal nodes represent the features of a dataset, branches represent the decision rules** and **each leaf node represents the outcome**.
- In a Decision tree, there are two nodes, which are the **Decision Node** and **Leaf Node**. Decision nodes are used to make any decision and have multiple branches, whereas Leaf nodes are the output of those decisions and do not contain any further branches.
- The decisions or the test are performed on the basis of features of the given dataset.
- It is a graphical representation for getting all the possible solutions to a problem/decision based on given conditions.***
- It is called a decision tree because, similar to a tree, it starts with the root node, which expands on further branches and constructs a tree-like structure.
- In order to build a tree, we use the **CART algorithm**, which stands for **Classification and Regression Tree algorithm**.
- A decision tree simply asks a question, and based on the answer (Yes/No), it further split the tree into subtrees.
- Below diagram explains the general structure of a decision tree:

Note: A decision tree can contain categorical data (YES/NO) as well as numeric data.

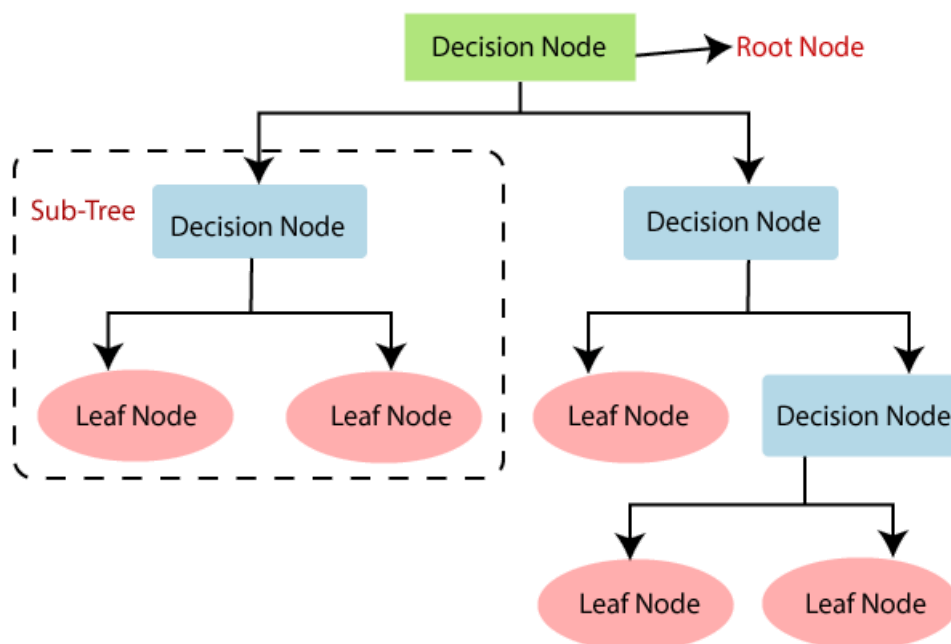

## Why use Decision Trees?

There are various algorithms in Machine learning, so choosing the best algorithm for the given dataset and problem is the main point to remember while creating a machine learning model. Below are the two reasons for using the Decision tree:

- Decision Trees usually mimic human thinking ability while making a decision, so it is easy to understand.

- The logic behind the decision tree can be easily understood because it shows a tree-like structure.

## Decision Tree Terminologies

- **Root Node:** Root node is from where the decision tree starts. It represents the entire dataset, which further gets divided into two or more homogeneous sets.
- **Leaf Node:** Leaf nodes are the final output node, and the tree cannot be segregated further after getting a leaf node.
- **Splitting:** Splitting is the process of dividing the decision node/root node into sub-nodes according to the given conditions.
- **Branch/Sub Tree:** A tree formed by splitting the tree.
- **Pruning:** Pruning is the process of removing the unwanted branches from the tree.
- **Parent/Child node:** The root node of the tree is called the parent node, and other nodes are called the child nodes.


### How does the Decision Tree algorithm Work?

In a decision tree, for predicting the class of the given dataset, the algorithm starts from the root node of the tree. This algorithm compares the values of root attribute with the record (real dataset) attribute and, based on the comparison, follows the branch and jumps to the next node.

For the next node, the algorithm again compares the attribute value with the other sub-nodes and move further. It continues the process until it reaches the leaf node of the tree. The complete process can be better understood using the below algorithm:

- **Step-1:** Begin the tree with the root node, says S, which contains the complete dataset.
- **Step-2:** Find the best attribute in the dataset using **Attribute Selection Measure (ASM)**.
- **Step-3:** Divide the S into subsets that contains possible values for the best attributes.
- **Step-4:** Generate the decision tree node, which contains the best attribute.
- **Step-5:** Recursively make new decision trees using the subsets of the dataset created in step -3. Continue this process until a stage is reached where you cannot further classify the nodes and called the final node as a leaf node.

**Example:** Suppose there is a candidate who has a job offer and wants to decide whether he should accept the offer or Not. So, to solve this problem, the decision tree starts with the root node (Salary attribute by ASM). The root node splits further into the next decision node (distance from the office) and one leaf node based on the corresponding labels. The next decision node further gets split into one decision node (Cab facility) and one leaf node. Finally, the decision node splits into two leaf nodes (Accepted offers and Declined offer). Consider the below diagram:

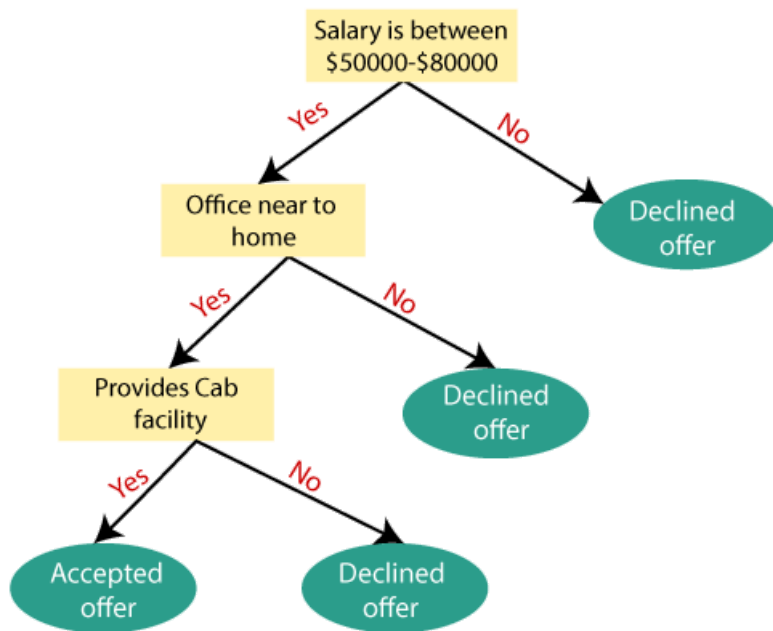

## Attribute Selection Measures

While implementing a Decision tree, the main issue arises that how to select the best attribute for the root node and for sub-nodes. So, to solve such problems there is a technique which is called as **Attribute selection measure or ASM**. By this measurement, we can easily select the best attribute for the nodes of the tree. There are two popular techniques for ASM, which are:

- **Information Gain**
- **Gini Index**

### 1. Information Gain:

- Information gain is the measurement of changes in entropy after the segmentation of a dataset based on an attribute.
- It calculates how much information a feature provides us about a class.
- According to the value of information gain, we split the node and build the decision tree.
- A decision tree algorithm always tries to maximize the value of information gain, and a node/attribute having the highest information gain is split first. It can be calculated using the below formula:

$$\text{Information Gain} = \text{Entropy}(S) - [(\text{Weighted Avg}) * \text{Entropy}(\text{each feature})]$$

**Entropy:** Entropy is a metric to measure the impurity in a given attribute. It specifies randomness in data. Entropy can be calculated as:

$$\text{Entropy}(s) = -P(\text{yes}) \log_2 P(\text{yes}) - P(\text{no}) \log_2 P(\text{no})$$

Where,

- **S= Total number of samples**

- **P(yes)= probability of yes**
- **P(no)= probability of no**

## 2. Gini Index:

- Gini index is a measure of impurity or purity used while creating a decision tree in the CART(Classification and Regression Tree) algorithm.
- An attribute with the low Gini index should be preferred as compared to the high Gini index.
- It only creates binary splits, and the CART algorithm uses the Gini index to create binary splits.
- Gini index can be calculated using the below formula:

$$\text{Gini Index} = 1 - \sum_j p_j^2$$

## Pruning: Getting an Optimal Decision tree

*Pruning is a process of deleting the unnecessary nodes from a tree in order to get the optimal decision tree.*

A too-large tree increases the risk of overfitting, and a small tree may not capture all the important features of the dataset. Therefore, a technique that decreases the size of the learning tree without reducing accuracy is known as Pruning. There are mainly two types of tree **pruning** technology used:

- **Cost Complexity Pruning**
- **Reduced Error Pruning.**

## Advantages of the Decision Tree

- It is simple to understand as it follows the same process which a human follow while making any decision in real-life.
- It can be very useful for solving decision-related problems.
- It helps to think about all the possible outcomes for a problem.
- There is less requirement of data cleaning compared to other algorithms.

## Disadvantages of the Decision Tree

- The decision tree contains lots of layers, which makes it complex.
- It may have an overfitting issue, which can be resolved using the **Random Forest algorithm**.
- For more class labels, the computational complexity of the decision tree may increase.

## Python Implementation of Decision Tree

Now we will implement the Decision tree using Python. For this, we will use the dataset "**user\_data.csv**," which we have used in previous classification models. By using the same dataset, we can compare the Decision tree classifier with other classification models such as **KNN SVM**, **LogisticRegression**, etc.

Steps will also remain the same, which are given below:

- **Data Pre-processing step**
- **Fitting a Decision-Tree algorithm to the Training set**
- **Predicting the test result**
- **Test accuracy of the result(Creation of Confusion matrix)**
- **Visualizing the test set result.**

### 1. Data Pre-Processing Step:

Below is the code for the pre-processing step:

```
# importing libraries
import numpy as nm
import matplotlib.pyplot as mtp
import pandas as pd

#importing datasets
data_set= pd.read_csv('user_data.csv')

#Extracting Independent and dependent Variable
x= data_set.iloc[:, [2,3]].values
```

```

y= data_set.iloc[:, 4].values

# Splitting the dataset into training and test set.
from sklearn.model_selection import train_test_split
x_train, x_test, y_train, y_test= train_test_split(x, y, test_size= 0.25, random_state=0)

#feature Scaling
from sklearn.preprocessing import StandardScaler
st_x= StandardScaler()
x_train= st_x.fit_transform(x_train)
x_test= st_x.transform(x_test)

```

In the above code, we have pre-processed the data. Where we have loaded the dataset, which is given as:

Index	User ID	Gender	Age	EstimatedSalary	Purchased
0	15624510	Male	19	19000	0
1	15810944	Male	35	20000	0
2	15668575	Female	26	43000	0
3	15603246	Female	27	57000	0
4	15804002	Male	19	76000	0
5	15728773	Male	27	58000	0
6	15598044	Female	27	84000	0
7	15694829	Female	32	150000	1
8	15600575	Male	25	33000	0
9	15727311	Female	35	65000	0
10	15570769	Female	26	80000	0
11	15606274	Female	26	52000	0
12	15746139	Male	20	86000	0
13	15704987	Male	32	18000	0
14	15628972	Male	18	82000	0
15	15697686	Male	29	80000	0

## 2. Fitting a Decision-Tree algorithm to the Training set

Now we will fit the model to the training set. For this, we will import the **DecisionTreeClassifier** class from **sklearn.tree** library. Below is the code for it:

```

#Fitting Decision Tree classifier to the training set
From sklearn.tree import DecisionTreeClassifier

```

```
classifier= DecisionTreeClassifier(criterion='entropy', random_state=0)
classifier.fit(x_train, y_train)
```

In the above code, we have created a classifier object, in which we have passed two main parameters;

- **"criterion='entropy':** Criterion is used to measure the quality of split, which is calculated by information gain given by entropy.
- **random\_state=0":** For generating the random states.

Below is the output for this:

```
Out[8]:
DecisionTreeClassifier(class_weight=None, criterion='entropy', max_depth=None,
max_features=None, max_leaf_nodes=None,
min_impurity_decrease=0.0, min_impurity_split=None,
min_samples_leaf=1, min_samples_split=2,
min_weight_fraction_leaf=0.0, presort=False,
                        random_state=0, splitter='best')
```


### 3. Predicting the test result

Now we will predict the test set result. We will create a new prediction vector **y\_pred**. Below is the code for it:

```
#Predicting the test set result
y_pred= classifier.predict(x_test)
```

#### Output:

In the below output image, the predicted output and real test output are given. We can clearly see that there are some values in the prediction vector, which are different from the real vector values. These are prediction errors.

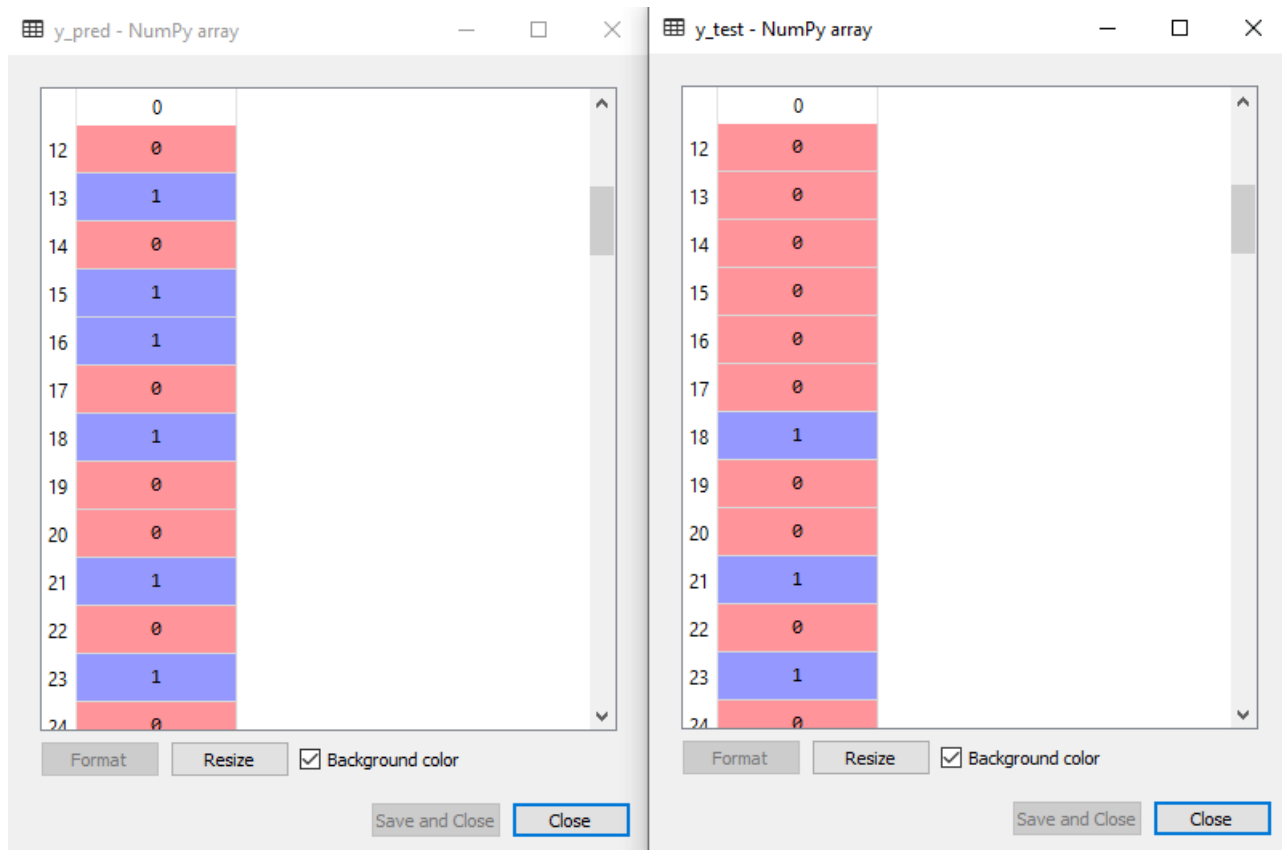


#### 4. Test accuracy of the result (Creation of Confusion matrix)

In the above output, we have seen that there were some incorrect predictions, so if we want to know the number of correct and incorrect predictions, we need to use the confusion matrix. Below is the code for it:

```
#Creating the Confusion matrix
from sklearn.metrics import confusion_matrix
cm= confusion_matrix(y_test, y_pred)
```

**Output:**



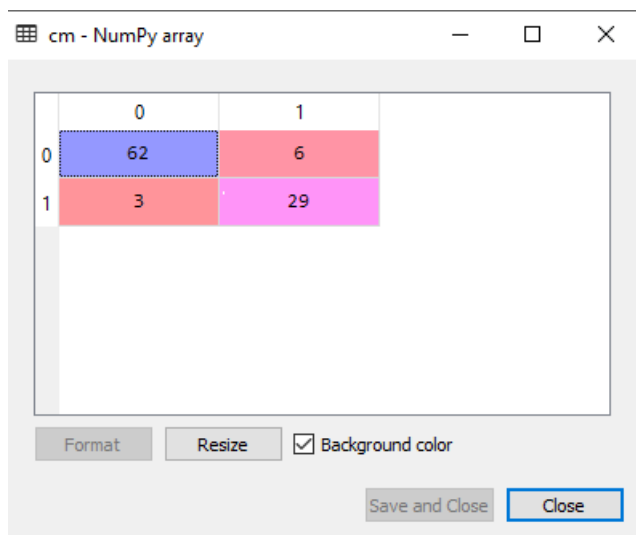


In the above output image, we can see the confusion matrix, which has **6+3= 9 incorrect predictions** and **62+29=91 correct predictions**. Therefore, we can say that compared to other classification models, the Decision Tree classifier made a good prediction.

## 5. Visualizing the training set result:

Here we will visualize the training set result. To visualize the training set result we will plot a graph for the decision tree classifier. The classifier will predict yes or No for the users who have either Purchased or Not purchased the SUV car as we did in [Logistic Regression](#). Below is the code for it:

```
#Visulaizing the trianing set result
from matplotlib.colors import ListedColormap
x_set, y_set = x_train, y_train
x1, x2 = nm.meshgrid(nm.arange(start = x_set[:, 0].min() - 1, stop = x_set[:, 0].max() + 1, step = 0.01),
nm.arange(start = x_set[:, 1].min() - 1, stop = x_set[:, 1].max() + 1, step = 0.01))
mtp.contourf(x1, x2, classifier.predict(nm.array([x1.ravel(), x2.ravel()]).T).reshape(x1.shape),
alpha = 0.75, cmap = ListedColormap(('purple','green' )))
mtp.xlim(x1.min(), x1.max())
mtp.ylim(x2.min(), x2.max())
for i, j in enumerate(nm.unique(y_set)):
mtp.scatter(x_set[y_set == j, 0], x_set[y_set == j, 1],
c = ListedColormap(('purple', 'green'))(i), label = j)
mtp.title('Decision Tree Algorithm (Training set)')
mtp.xlabel('Age')
mtp.ylabel('Estimated Salary')
mtp.legend()
mtp.show()
```

**Output:**

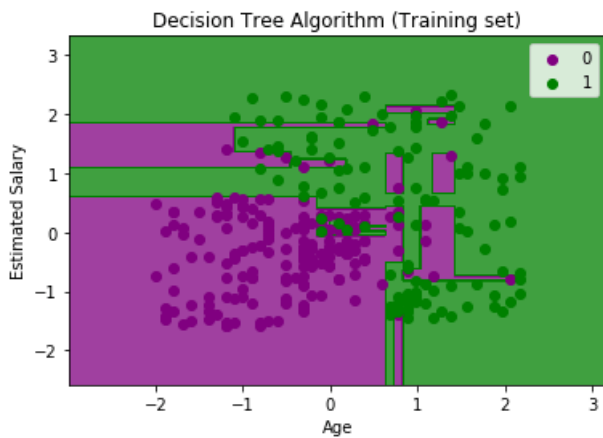

The above output is completely different from the rest classification models. It has both vertical and horizontal lines that are splitting the dataset according to the age and estimated salary variable.


As we can see, the tree is trying to capture each dataset, which is the case of overfitting.

## 6. Visualizing the test set result:

Visualization of test set result will be similar to the visualization of the training set except that the training set will be replaced with the test set.

```
#Visualizing the test set result
from matplotlib.colors import ListedColormap
x_set, y_set = x_test, y_test
x1, x2 = nm.meshgrid(nm.arange(start = x_set[:, 0].min() - 1, stop = x_set[:, 0].max() + 1, step = 0.01),
nm.arange(start = x_set[:, 1].min() - 1, stop = x_set[:, 1].max() + 1, step = 0.01))
mtp.contourf(x1, x2, classifier.predict(nm.array([x1.ravel(), x2.ravel()]).T).reshape(x1.shape),
alpha = 0.75, cmap = ListedColormap(('purple', 'green' )))
mtp.xlim(x1.min(), x1.max())
mtp.ylim(x2.min(), x2.max())
for i, j in enumerate(nm.unique(y_set)):
mtp.scatter(x_set[y_set == j, 0], x_set[y_set == j, 1],
c = ListedColormap(('purple', 'green'))(i), label = j)
mtp.title("Decision Tree Algorithm(Test set)")
mtp.xlabel('Age')
mtp.ylabel('Estimated Salary')
mtp.legend()
mtp.show()
```

**Output:**

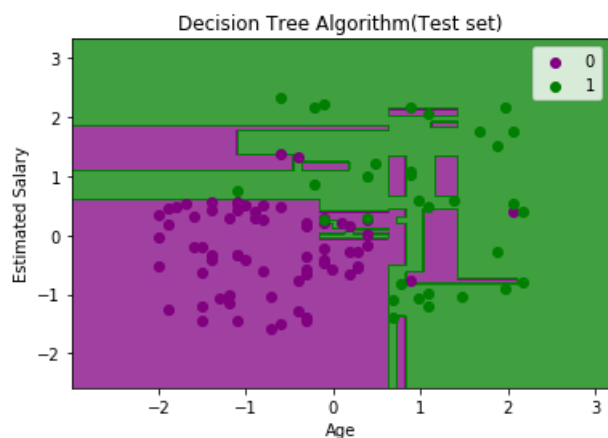

As we can see in the above image that there are some green data points within the purple region and vice versa. So, these are the incorrect predictions which we have discussed in the confusion matrix.

← Prev

Next →

 [For Videos Join Our Youtube Channel: Join Now](#)

## Feedback

- Send your Feedback to [feedback@javatpoint.com](mailto:feedback@javatpoint.com)






## Help Others, Please Share













### Learn Latest Tutorials


 Splunk tutorial Splunk	 SPSS tutorial SPSS	 Swagger tutorial Swagger	 T-SQL tutorial Transact-SQL	 Tumblr tutorial Tumblr
 React tutorial ReactJS	 Regex tutorial Regex	 Reinforcement learning tutorial Reinforcement Learning	 R Programming tutorial R Programming	 RxJS tutorial RxJS
 React Native tutorial React Native	 Python Design Patterns Python Design Patterns	 Python Pillow tutorial Python Pillow	 Python Turtle tutorial Python Turtle	 Keras tutorial Keras

### Preparation

 Aptitude Aptitude	 Logical Reasoning Reasoning	 Verbal Ability Verbal Ability	 Interview Questions Interview Questions	 Company Interview Questions Company Questions
---	---	---	---	---

### Trending Technologies


 Artificial Intelligence Artificial Intelligence	 AWS Tutorial AWS	 Selenium tutorial Selenium	 Cloud Computing Cloud Computing	 Hadoop tutorial Hadoop
 ReactJS Tutorial ReactJS	 Data Science Tutorial Data Science	 Angular 7 Tutorial Angular 7	 Blockchain Tutorial Blockchain	 Git Tutorial Git


 Machine  
Learning Tutorial  
Machine Learning


 DevOps  
Tutorial  
DevOps


## B.Tech / MCA

 DBMS tutorial  
DBMS

 Data Structures  
tutorial  
Data Structures


 DAA tutorial  
DAA

 Operating  
System  
Operating System


 Computer  
Network tutorial  
Computer Network


 Compiler  
Design tutorial  
Compiler Design


 Computer  
Organization and  
Architecture  
Computer  
Organization

 Discrete  
Mathematics  
Tutorial  
Discrete  
Mathematics

 Ethical Hacking  
Ethical Hacking

 Computer  
Graphics Tutorial  
Computer Graphics


 Software  
Engineering  
Software  
Engineering


 html tutorial  
Web Technology


 Cyber Security  
tutorial  
Cyber Security


 Automata  
Tutorial  
Automata


 C Language  
tutorial  
C Programming


 C++ tutorial  
C++

 Java tutorial  
Java

 .Net  
Framework  
tutorial  
.Net

 Python tutorial  
Python

 List of  
Programs  
Programs

 Control  
Systems tutorial  
Control System

 Data Mining  
Tutorial  
Data Mining

 Data  
Warehouse  
Tutorial  
Data Warehouse