



(a) Four candidates per parent per update

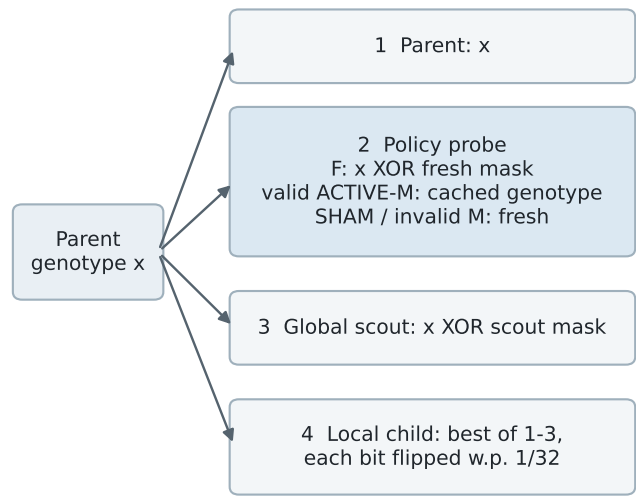


Retrieval replaces one of two uniform fresh proposals; 128 objective queries per update in every cell.

(b) Population event order at update t

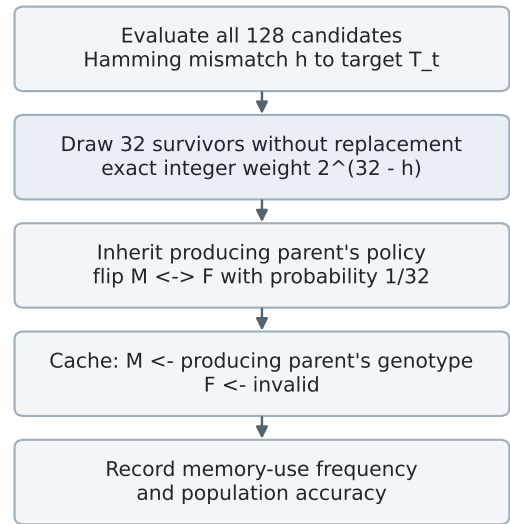

No label, cache or lineage identifier enters selection.

(c) Target laws (illustrative, not data)

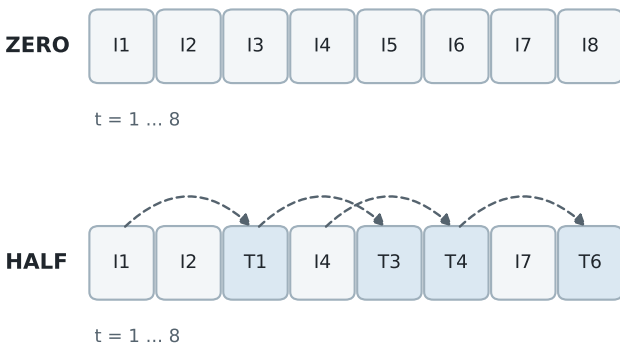

HALF: for $t \geq 3$, $T_t = T_{(t-2)}$ with probability 1/2, else a fresh innovation; aligned with the one-generation cache delay by construction.

(d) Paired cells and inferential families

