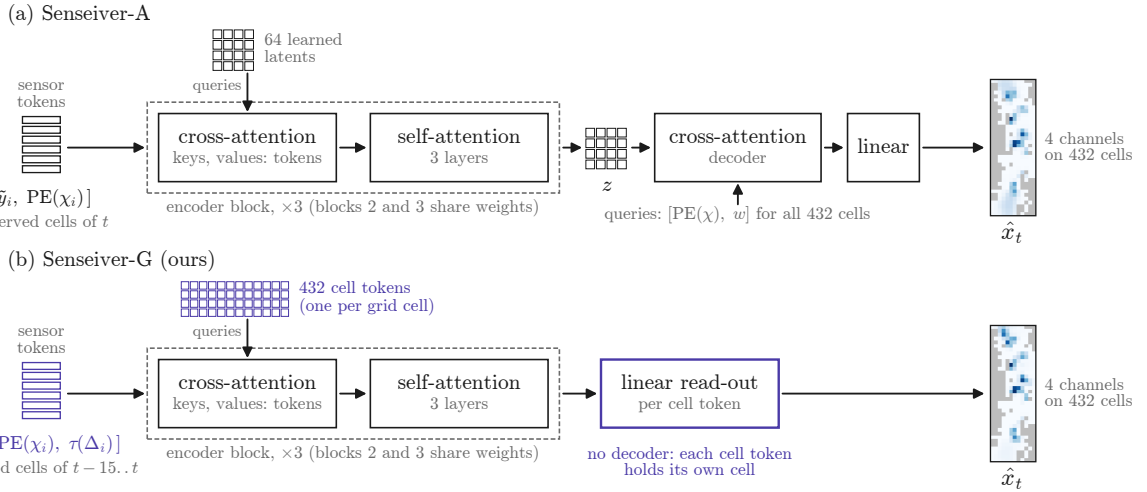
(a) Senseiver-A
64 learned latents
queries
sensor tokens
cross-attention
keys, values: tokens
self-attention
3 layers
$[\tilde{y}_i,\ \mathrm{PE}(\chi_i)]$
observed cells of t
encoder block, ×3 (blocks 2 and 3 share weights)
z
cross-attention
decoder
linear
queries: $[\mathrm{PE}(\chi),\ w]$ for all 432 cells
4 channels on 432 cells
$\hat{x}_t$
(b) Senseiver-G (ours)
432 cell tokens (one per grid cell)
queries
sensor tokens
cross-attention
keys, values: tokens
self-attention
3 layers
$[\tilde{y}_i,\ \mathrm{PE}(\chi_i),\ \tau(\Delta_i)]$
observed cells of $t-15..t$
encoder block, ×3 (blocks 2 and 3 share weights)
linear read-out
per cell token
no decoder: each cell token holds its own cell
4 channels on 432 cells
$\hat{x}_t$