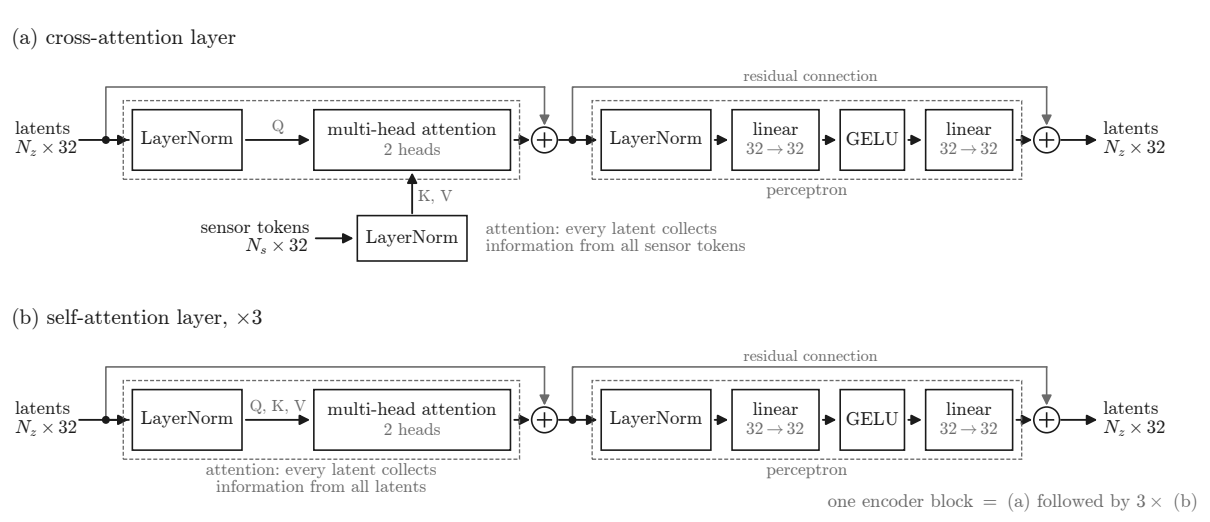
(a) cross-attention layer
residual connection
latents
$N_z \times 32$
LayerNorm
Q
multi-head attention
2 heads
LayerNorm
linear
$32 \to 32$
GELU
linear
$32 \to 32$
latents
$N_z \times 32$
perceptron
K, V
sensor tokens
$N_s \times 32$
LayerNorm
attention: every latent collects
information from all sensor tokens
(b) self-attention layer, $\times 3$
residual connection
latents
$N_z \times 32$
LayerNorm
Q, K, V
multi-head attention
2 heads
LayerNorm
linear
$32 \to 32$
GELU
linear
$32 \to 32$
latents
$N_z \times 32$
attention: every latent collects
information from all latents
perceptron
one encoder block = (a) followed by $3\times$ (b)