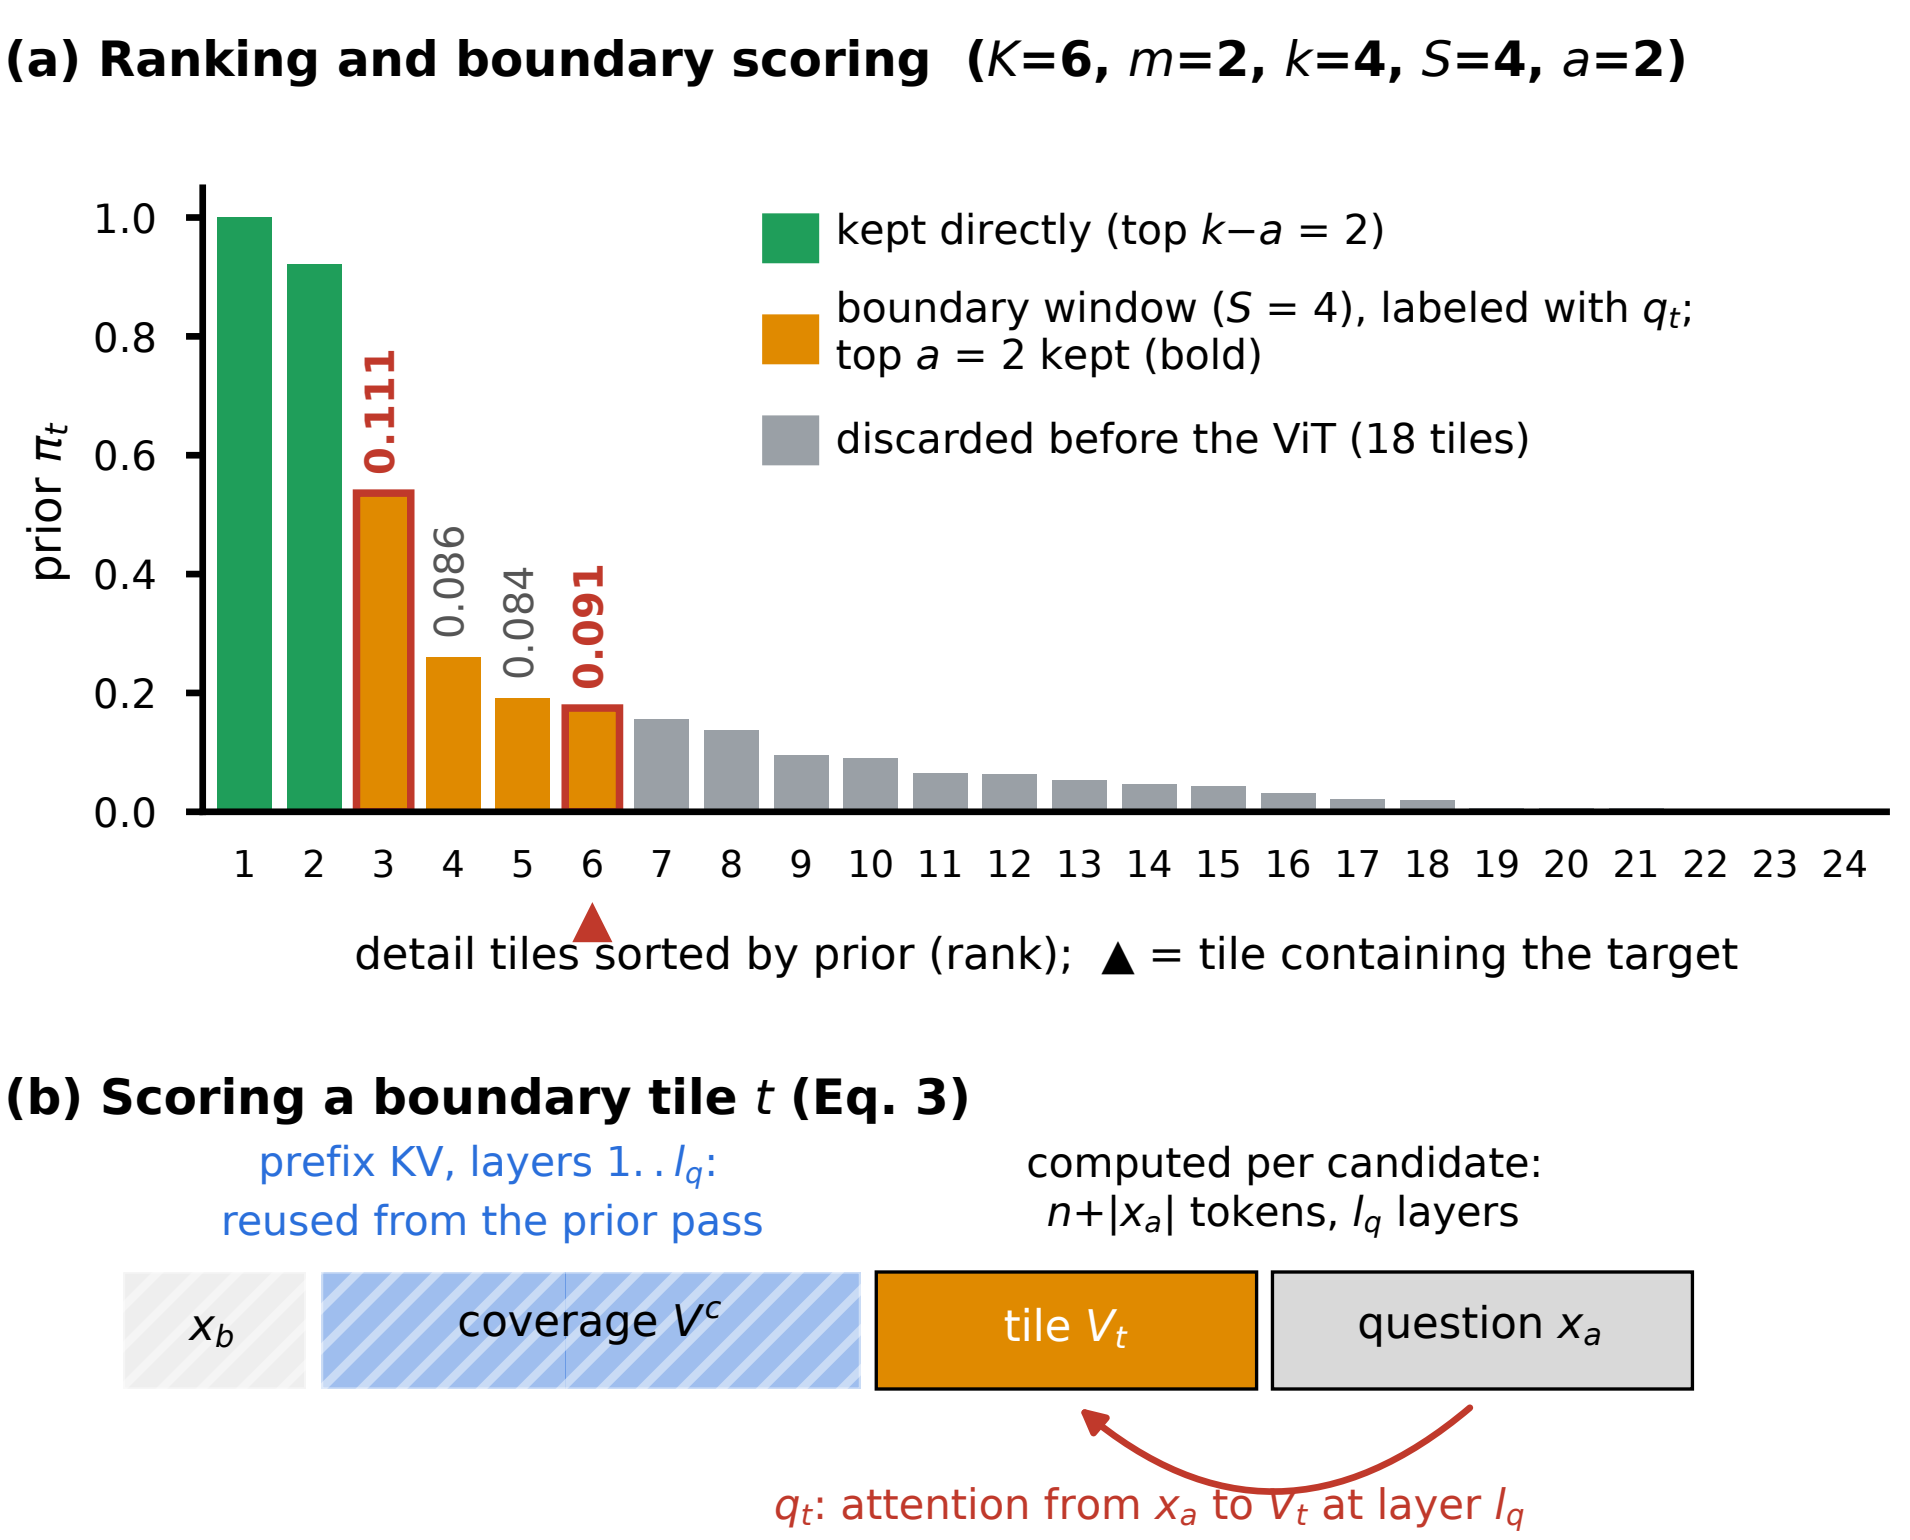
(a) Ranking and boundary scoring (K=6, m=2, k=4, S=4, a=2)
kept directly (top k−a = 2)
boundary window (S = 4), labeled with q_t; top a = 2 kept (bold)
discarded before the ViT (18 tiles)
prior π_t
1.0
0.8
0.6
0.4
0.2
0.0
0.111
0.086
0.084
0.091
1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24
detail tiles sorted by prior (rank); ▲ = tile containing the target
(b) Scoring a boundary tile t (Eq. 3)
prefix KV, layers 1..l_q: reused from the prior pass
computed per candidate: n+|x_a| tokens, l_q layers
x_b
coverage V^c
tile V_t
question x_a
q_t: attention from x_a to V_t at layer l_q