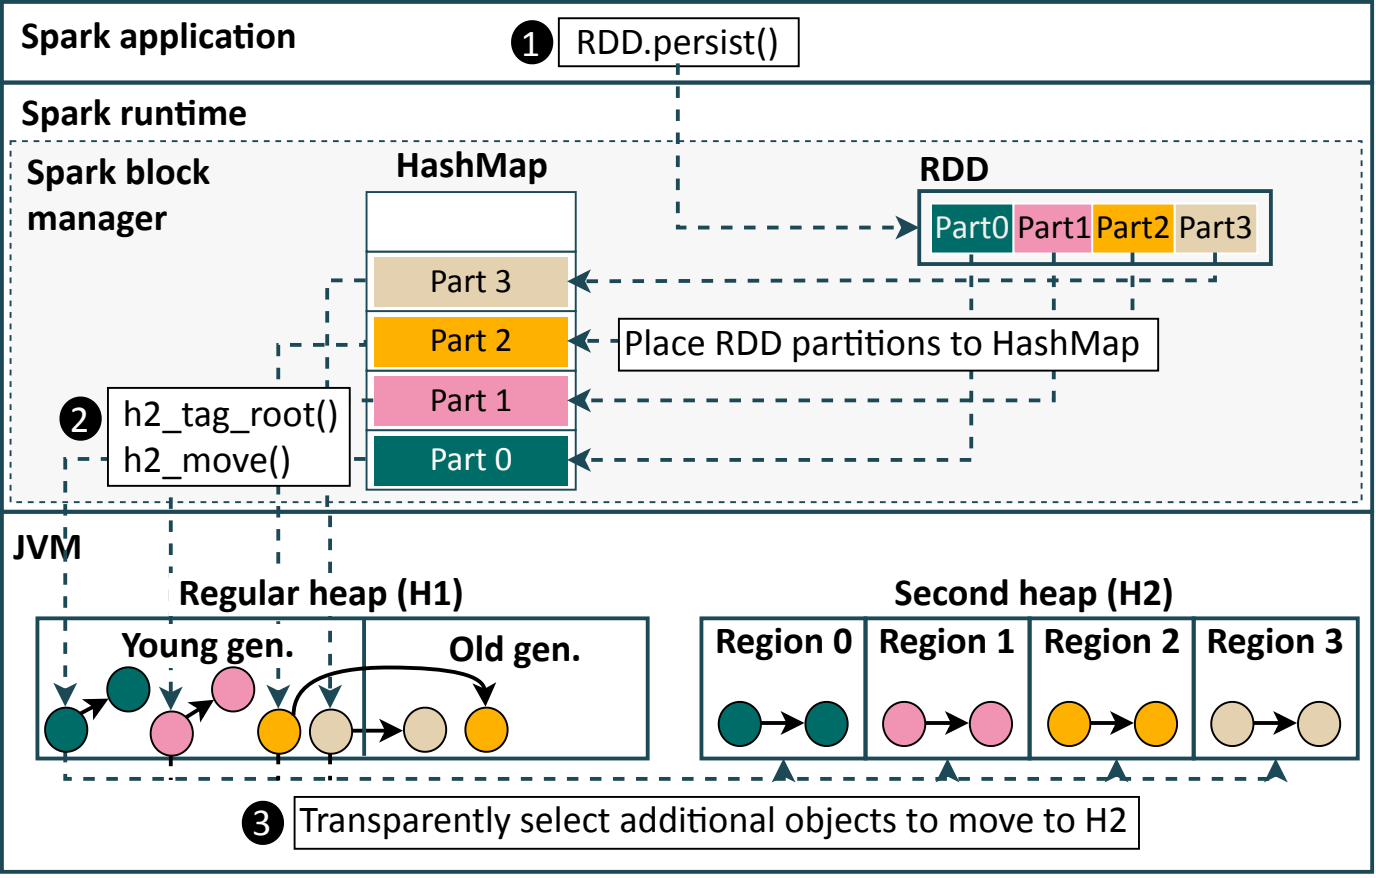

Spark application
1
RDD.persist()
Spark runtime
Spark block manager
HashMap
RDD
Part0
Part1
Part2
Part3
Part 3
Part 2
Part 1
Part 0
Place RDD partitions to HashMap
2
h2_tag_root()
h2_move()
JVM
Regular heap (H1)
Young gen.
Old gen.
Second heap (H2)
Region 0
Region 1
Region 2
Region 3
3
Transparently select additional objects to move to H2