

An Investigation and Visualisation of the Riemann Hypothesis

Jack Morgan

A-Level Computer Science Coursework

Dr Challoner's Grammar School
Centre Number: 52205
Candidate Number: 7469
January 2022

Contents

1 Analysis	3
1.1 Introduction	3
1.1.1 Project Proposal	3
1.1.2 Abstract	3
1.1.3 End Users	3
1.2 Research	4
1.2.1 What is the Riemann Hypothesis?	4
1.2.2 The Importance of the Riemann Hypothesis	5
1.2.3 Complex Numbers and Key Operations	6
1.2.4 The Riemann Zeta Function	11
1.2.5 The Riemann Hypothesis and Prime Numbers	15
1.2.6 Visualisations of the Riemann Hypothesis	19
1.2.7 Data Storage	22
1.2.8 Programming Languages	23
1.2.9 Product Research	24
1.3 Project Objectives	26
1.4 Third-Party Input	28
1.4.1 The Significance of Third Party Input	28
1.4.2 Who are my Third Parties?	28
1.4.3 How and Why I will be Conducting My Research	28
1.4.4 Interview Transcript - Student 1	28
1.4.5 Interview Transcript - Student 2	30
1.4.6 Interview Conclusion	33
1.5 Modelling the Problem	34
1.5.1 Prototypes	34
2 Documented Design	37
2.1 Structure Diagrams	37
2.1.1 Program Overview Structure Diagram	38
2.1.2 Login System Structure Diagram	39
2.1.3 Tutorial Structure Diagram	40
2.1.4 Introduction Structure Diagram	42
2.1.5 Investigation Structure Diagram	43
2.1.6 Summary Structure Diagram	44
2.2 Hierarchy Diagrams	45
2.3 System Flowcharts	45
2.4 Data Flow Diagrams	45
2.5 Object-Oriented Design	46
2.6 Database Design	50
2.6.1 Table Designs	50
2.6.2 Third Normal Form	54
2.6.3 Database-Program Connections	54
2.6.4 Entity-Relationship Diagrams	54
2.7 Key Algorithms Design	55

2.7.1	Euclidean Algorithm	55
2.7.2	Riemann Zeta Function	58
2.7.3	Circular Queue	64
2.7.4	Binary Insertion Sort	70
2.8	Data Structure Design	72
2.9	File Structure	73
2.10	HCI and Screen Designs	74
2.10.1	Generic Template	74
2.10.2	Main Menu Screen Design	75
2.10.3	Login Screen Design	76
2.10.4	Graph Plots Screen Design	77
2.10.5	Calculator Screen Design	77
3	Technical Solution	78
3.1	Program Re-design	78
3.1.1	Database Redesign	78
3.1.2	User Interface	84
3.2	Full Technical Solution	84
4	Appendix A - Technical Solution Code	86
	References	333

1 Analysis

1.1 Introduction

1.1.1 Project Proposal

Throughout this coursework, I will be examining the Riemann Hypothesis; to be able to visualise this important conjecture and make its complex mathematical structures accessible for anyone who is interested in mathematics. This project will be heavily based on how to compute and plot recursive mathematical functions on the complex plane and test whether the Riemann hypothesis is a true statement, as well as how the hypothesis affects mathematics today.

1.1.2 Abstract

During this coursework, I aim to be able to make the Riemann Hypothesis a more accessible mathematical concept to be able to help people to understand it and hopefully inspire them to research further into related mathematical subjects. I will do this in 3 simple ways:

1. By detailing what the Riemann hypothesis is and why it is so important,
2. Investigating the major functions that make up the Riemann Hypothesis
3. By Visualising the significant concepts of the Hypothesis, in order to make them more understandable; and to be able to investigate what they are and how they work.

I will be conducting my investigation by programming the key functions of the Hypothesis in Python 3. This will allow me to:

1. Compute key mathematical functions
2. Plot graphs of data
3. Store data in files and a database
4. Have a graphical user interface

1.1.3 End Users

This project is aimed at people who are interested in mathematics. It is a great way to inspire people to delve deeper into maths and number theory; as well as help those with a more advanced understanding of mathematics. Although the mathematics and understanding behind the problem can be complex at times, I am for this project to be able to be used by anyone who will want to use it. This would require it to be simple for people to understand and navigate. I aim to get input from people with a range of mathematical abilities to give me feedback on the project.

1.2 Research

1.2.1 What is the Riemann Hypothesis?

The Riemann Hypothesis - first proposed by Bernhard Riemann in 1859 - is considered by many to be one the most important unsolved problems in mathematics. To understand why the Riemann hypothesis is so important, it is necessary to understand what the Riemann hypothesis is, and how it is used in many mathematical and scientific fields. The Riemann hypothesis was proposed by Bernhard Riemann in his paper "On the Number of Primes Less Than a Given Magnitude". This paper deeply explores the prime numbers, and the functions used to estimate and count prime numbers. Throughout this paper, Riemann discussed definitions and proofs of multiple theories that all relate to the prime numbers. But most notably, he had taken a function previously mentioned by Leonhard Euler (a famous mathematician who lived around 100 years prior), and formalised this function into the Riemann Zeta Function.

Riemann took Euler's function and used a process called analytic continuation to extend the domain of this function to all numbers - be that real, imaginary or complex. Just like every other function, the Riemann Zeta Function contains what are called 'zeros' or 'roots'. This is where a function's output is equal to zero. These zeros can be described as trivial (where the explanation for why these zeros exist is almost intuitive), or non-trivial (where it can be hard to explain why these zeros occur.) The Riemann Zeta Function has trivial zeros when the input is a negative even integer. I will explore why this is the case later on.

However, the non-trivial zeros of the zeta function can be found when the real part of the function's input is between 0 and 1 (called the critical region). This is a fact that has been proven by Riemann in his paper, and he even proved that there are an infinite amount of non-trivial zeros in the critical region. But Riemann went further than this, he hypothesised that the non-trivial zeros do not only occur when the real part of the input is between 0 and 1; but they all occur in the middle of the critical region when the real part of the input is exactly $\frac{1}{2}$. The Riemann Hypothesis states that 'the real part of every nontrivial zero of the Riemann zeta function is $\frac{1}{2}$ '. This is the fundamental part of the Riemann Hypothesis, and although it is widely considered to be true, this conjecture has never actually been proven with conclusive evidence, and that is why these are considered to be non-trivial zeros.

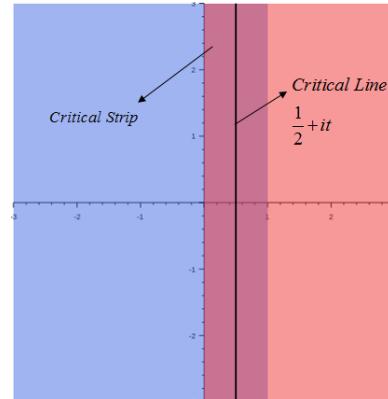


Figure 1: Critical Strip and Line

1.2.2 The Importance of the Riemann Hypothesis

The Riemann Hypothesis and the Riemann Zeta Function have many extraordinary uses. From calculating prime numbers to uses in Quantum Physics, and even cryptography with the RSA algorithm. This is due to the fact that the Zeta function is deeply connected to the prime numbers.

One of the main reasons why the Riemann Hypothesis is significant is because there have been many conjectures and theories that assume the Riemann hypothesis to be true. So if the Riemann hypothesis was proven, this would also prove countless other theories. Some of these theories include :

- The weak Goldbach conjecture - stating that all integers greater than 5 are the sum of three primes
- Mills' constants - numbers that allow you to generate prime numbers
- The theory that there will always be at least one prime between consecutive cubes
- The theory that there is a maximum bound between consecutive prime numbers

All of these theories are, in some way, related to the prime numbers. There is an important reason for this which I'll cover in a later section.

If the Riemann Hypothesis was proven to be true, there would be profound effects in fields such as cryptography. In public-key cryptosystems, like RSA, public keys are created using prime numbers. If someone wanted to try and decode information without knowing what the prime numbers were that created the key, they would have to try and guess what the prime numbers were. What keeps these algorithms secure is the fact that it can take a long time to calculate the prime numbers, especially some of the larger ones. In fact, the largest prime number discovered has over 23 million digits. However, if the Riemann hypothesis were true, then people would be able to calculate the prime numbers much quicker than before. This would make many of the current cryptography algorithms obsolete.

The Riemann Hypothesis does not just influence mathematics and cryptography, it also has great importance in quantum physics. It was discovered in 1996 that the arrangement of the zeta zeros exhibits the same statistical pattern as the spectra of energy levels (that is the possible values of energy of a quantum system) in quantum chaotic systems. Furthermore, it was conjectured in 1999 by Michael Berry and Jonathan Keating, that there will exist a quantum system, where the energy levels will correspond exactly to the non-trivial zeros of the Riemann Zeta Function. If this conjecture is true, it would prove the Riemann Hypothesis.

1.2.3 Complex Numbers and Key Operations

Complex numbers play a key part in the Riemann Hypothesis. When Riemann created the Riemann Zeta Function, he allowed the inputs and outputs to be complex numbers, through his ideas of analytic continuation. It is therefore important to know what complex numbers are, and how to do arithmetic with them.

To first understand complex numbers (denoted by the symbol \mathbb{C}), it is necessary to be familiar with the idea of imaginary numbers. There is no real number whose square root is a negative number, so mathematicians decided to invent numbers for this. It is denoted by the symbol i , for the imaginary unit.

Where:

$$i \equiv \sqrt{-1}$$

And thus:

$$i^2 \equiv -1$$

You can multiply the imaginary unit(i) by any real number to create an imaginary number. For example:

$$3i$$

$$2i$$

Which are both imaginary numbers. By combining both real numbers and imaginary numbers, you can create complex numbers. For example:

$$2 + 3i$$

Where the real part of the number is 2, and the imaginary part is $3i$.

$$4 - 7i$$

Where the real part of the number is 4, and the imaginary part is $-7i$. We often represent real numbers on a number line, however, this is impossible to do with complex numbers. Instead, one way to understand them is through a two-dimensional graph, or to give it its formal name, the complex plane. On the complex plane, there are two axes, a real axis and an imaginary axis. Any complex number can be plotted on the complex plane. We can think of a complex number as a set of coordinates that tell us where the number lies on the complex plane, with the real part being the x coordinate and the imaginary part being the y coordinate.

So if we wanted to plot the point $2 + 3i$ on the complex plane, it would look as follows:

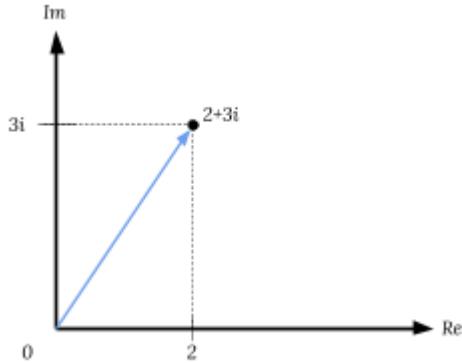


Figure 2: Argand Diagram of $2 + 3i$

This type of diagram is known as an Argand Diagram. And as you can see, we have plotted the point $2 + 3i$ at the coordinates $(2, 3)$ on the complex plane.

We can also do arithmetic with complex numbers - be that addition, subtraction, multiplication, division or exponentiation.

The sum of two complex numbers is the sum of both of the real parts of the numbers, plus the sum of the two complex parts of the numbers.

$$\begin{aligned}
 & (3 + 2i) + (1 + 3i) \\
 &= (3 + 1) + (2i + 3i) \\
 &= 4 + 5i
 \end{aligned}$$

Subtraction is also done using a similar method.

$$\begin{aligned}
 & (3 + 2i) - (1 + 3i) \\
 &= (3 + 2i) + (-1 - 3i) \\
 &= (3 - 1) + (2i - 3i) \\
 &= 2 - i
 \end{aligned}$$

To multiply two complex numbers, it is equivalent to expanding out two binomial brackets where:

$$\begin{aligned}
 & (a + b)(c + d) \\
 &= ac + ad + bc + bd
 \end{aligned}$$

So with two complex numbers this would look like:

$$\begin{aligned}
& (3 + i)(2 + 2i) \\
&= 6 + 6i + 2i + 2i^2 \\
&= 6 + 8i + 2i^2
\end{aligned}$$

We can then use the identity $i^2 \equiv -1$ to simplify this expression, so that:

$$\begin{aligned}
&= 6 + 8i + 2(-1) \\
&= 4 + 8i
\end{aligned}$$

But we can speed up this method by using the rule $(a + bi)(c + di) = (ac - bd) + (ad + bc)i$. For example:

$$\begin{aligned}
& (3 + i)(2 + 2i) \\
&= (3 \times 2 - 1 \times 2) + (3 \times 2 + 1 \times 2)i \\
&= 4 + 8i
\end{aligned}$$

We can derive this rule, to prove that it works for all complex numbers:

$$\begin{aligned}
RTP : & (a + bi)(c + di) = (ac - bd) + (ad + bc)i \\
LHS = & (a + bi)(c + di)
\end{aligned}$$

Distributing Terms:

$$= ac + adi + bci + bdi^2$$

Using $i^2 = -1$:

$$= ac + adi + bci - bd$$

Then rearranging:

$$\begin{aligned}
&= ac - bd + adi + bci \\
&= (ac - bd) + (ad + bc)i \\
&= RHS \\
&Q.E.D
\end{aligned}$$

To divide two complex numbers, we create a fraction and then rationalise the denominator, by using the identity $(a+b)(a-b)a^2 - b^2$ where $a, b \in \mathbb{C}$ (meaning that a and b are both complex numbers) For example:

$$\begin{aligned} & (3 - i) \div (2 - 2i) \\ &= \frac{3 - i}{2 - 2i} \end{aligned}$$

We can then rationalise the denominator by multiplying the numerator and denominator of the fraction by $(2 + 2i)$. This does not change the value of the expression but does allow for it to be simplified.

$$\begin{aligned} &= \frac{3 - i}{2 - 2i} \cdot \frac{2 + 2i}{2 + 2i} \\ &= \frac{(3 - i)(2 + 2i)}{(2 - 2i)(2 + 2i)} \end{aligned}$$

We can then distribute terms in the numerator and denominator, using the aforementioned multiplication rule:

$$\begin{aligned} &= \frac{(6 + 2) + (6 - 2)i}{4 - 4i^2} \\ &= \frac{8 + 4i}{4 - 4i^2} \\ &= \frac{8 + 4i}{4 - (-4)} \\ &= \frac{8 + 4i}{8} \\ &= 1 - \frac{1}{2}i \end{aligned}$$

There are also some functions that we can use on complex numbers to talk about the real and imaginary parts separately. The $\Re(z)$ function (also defined as $Re(z)$), outputs the real part of the complex variable z . So for example:

If we let

$$z = a + bi$$

Then

$$\Re(z) = a$$

Similarly, the $\Im(z)$ function (also defined as $Im(z)$) outputs the imaginary part of the complex variable z . For example:

If we let

$$z = a + bi$$

Then

$$\Im(z) = b$$

Although these functions have limited use in equations and mathematical usage, they prove very handy when needing to discuss complex variables. It is also very useful when computing functions, to be able to split up complex numbers into their real and imaginary parts.

We can also express imaginary numbers using the trigonometric functions, sine and cosine.

Where we have the complex number such that:

$$z = a + bi$$

It can be expressed such that:

$$z = r \cdot cis(\phi)$$

Where:

$$\begin{aligned} cis(\phi) &= \cos(\phi) + i \cdot \sin(\phi) \\ r &= |z| = \sqrt{a^2 + b^2} \\ \phi &= arg(z) = \arctan\left(\frac{b}{a}\right) \end{aligned}$$

This is known as the polar form of the complex number.

We can use this form to easily calculate the value when we raise a complex number to a real power, using De Moivre's Theorem. De Moivre's theorem states that for a complex number in the form

$$z = r(\cos(\phi) + i\sin(\phi))$$

If we raise z to the power n then:

$$\begin{aligned} z^n &= (r(\cos(\phi) + i\sin(\phi)))^n \\ &= r^n(\cos(n\phi) + i\sin(n\phi)) \end{aligned}$$

Which is true for

$$r, \phi, n \in \mathbb{R}, z \in \mathbb{C}$$

Which means that this formula does not work when we are raising any number to a complex power.

Say we have two complex numbers z and w and they are of the form $a + bi$. Such that $z = a + bi$ and $w = c + di$. To calculate z^w , the process is best split down into multiple steps.

First we calculate ρ and θ , where ρ is the modulus of z and θ the argument of z

$$\begin{aligned} \rho &= \sqrt{a^2 + b^2} \\ \theta &= \arctan \frac{b}{a} \end{aligned}$$

Then using these values, we can say that:

$$z^w = \rho^c e^{-d\theta} (\cos(d \ln \rho + c\theta) + i \sin(d \ln \rho + c\theta))$$

Which is true for

$$z, w \in \mathbb{C}$$

1.2.4 The Riemann Zeta Function

Previously I have mentioned multiple functions that play a key role in the Riemann Hypothesis, but now I aim to address and examine these functions in detail.

When discussing the Riemann Zeta Function the complex variable s is traditionally used where $s = \sigma + it$.

The Riemann Zeta Functions is defined as $\zeta(s)$ where:

$$\begin{aligned} \zeta(s) &= \sum_{n=1}^{\infty} \frac{1}{n^s} \\ &= \frac{1}{1^s} + \frac{1}{2^s} + \frac{1}{3^s} + \frac{1}{4^s} + \dots \end{aligned}$$

This was the equation that Leonhard Euler first introduced and studied, but it was Bernhard Riemann who defined this function for not just all of the real numbers, but all of the complex numbers. Riemann did this through the method of analytic continuation to expand the domain of the function. But by doing it he had to create a new function that would work for all possible input values. He produced what is known as Riemann's Functional Equation:

$$\zeta(s) = 2^s \pi^{s-1} \sin\left(\frac{\pi s}{2}\right) \Gamma(1-s)\zeta(1-s)$$

Where $\Gamma(n)$ is the gamma function, such that:

$$\Gamma(n) = \int_0^\infty n^{s-1} e^{-n} dn$$

From Riemann's Functional Equation, we can now see why the trivial zeros occur at even negative integers for s . This is all due to the sine function. If we let $s = -2n$ for $n \in \mathbb{N}$, (a negative even integer) then the functional equation becomes:

$$\begin{aligned} \zeta(-2n) &= 2^{-2n} \pi^{-2n-1} \sin\left(\frac{\pi(-2n)}{2}\right) \Gamma(1 - (-2n))\zeta(1 - (-2n)) \\ \Rightarrow \zeta(-2n) &= -2^{-2n} \pi^{-(2n+1)} \sin(n\pi) \Gamma(2n+1) \zeta(2n+1) \end{aligned}$$

Now we can see that the functional equation includes a factor of $\sin(n)$, but due to the nature of the sine function: $\sin(n) = 0$ for $n \in \mathbb{Z}$. As shown in this diagram of the function $y = \sin(x)$:

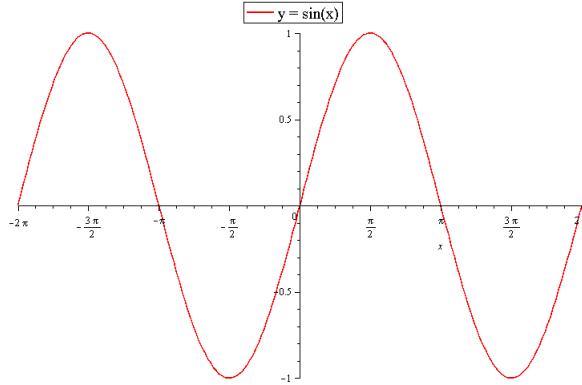


Figure 3: $y = \sin x$

And when the sine factor of the functional equation evaluates to zero, this causes the entire function to evaluate to zero, due to the fact that anything

multiplied by zero, is zero. This suggests that when s is an even integer, the zeta function evaluates to zero. But then comes the question, why does the zeta function only have zeros at the negative even integers, but not the positive ones? Well, this is because of the gamma function (Γ). The factor $\Gamma(1 - s)$ in the functional equation has simple poles at positive integers, or in other words, when $s \in \mathbb{N}$, $\Gamma(1 - s)$ is undefined. So for $s \in \mathbb{N}$, the sine function would evaluate to 0, but the gamma function would evaluate to an undefined value. These values cancel each other out, which means that the equation does not necessarily evaluate to 0 if $s \in \mathbb{N}$. This is why the trivial zeros are only found at negative even integers.

However, although Riemann's Functional Equation has significant importance; it is long, complex, and would be hard to compute; mainly due to the fact that it is recursive, with the $\zeta(1 - s)$ factor. Luckily, there are other equations that we can use to compute the Zeta function more efficiently. An example of this is by using the Dirichlet eta function, denoted by $\eta(n)$, such that:

$$\eta(s) = \sum_{n=1}^{\infty} \frac{(-1)^{n-1}}{n^s}$$

This function is also known as the alternating zeta function. It has the special property that:

$$\eta(s) = (1 - 2^{1-s}) \cdot \zeta(s)$$

We can now do arithmetic and rearranging of this function so that we can use it to compute $\zeta(s)$.

So rearranging for $\zeta(s)$:

$$\zeta(s) = \frac{1}{1 - 2^{1-s}} \cdot \eta(s)$$

Now, if we let $\phi_n = \log(n)$, where $\log(n)$ is the natural logarithm of n , then:

$$\begin{aligned} n^{it} &= e^{\log(n)it} \\ &= e^{it\phi_n} \\ &= \cos(t \cdot \phi_n) + i \sin(t \cdot \phi_n) \end{aligned}$$

Then if we express $\zeta(s)$ using $\eta(s)$ in its summation form, and split the variable s into $\sigma + it$, we derive that:

$$\zeta(\sigma + it) = \frac{2^{it}}{2^{it} - 2^{1-\sigma}} \cdot \sum_{n=1}^{\infty} \frac{(-1)^{n-1}}{n^\sigma} \cdot [\cos(t\phi_n) - i\sin(t\phi_n)]$$

Now, this equation is very long and complex, but it seems to be relatively simple to compute. However, due to the fact that the Dirichlet eta function is only defined for values where the real part of s is greater than one, it means that this form of the zeta function is only defined when $\Re(s) > 0$.

Similarly, we can manipulate the earlier function to find it in another form that will be easy to compute as part of a program.

If we take the equation from earlier that:

$$\zeta(s) = \frac{1}{1 - 2^{1-s}} \cdot \eta(s)$$

And substitute in the eta function where

$$\eta(s) = \sum_{n=1}^{\infty} \frac{(-1)^{n-1}}{n^s}$$

Then we can say that

$$\zeta(s) = \frac{1}{1 - 2^{1-s}} \sum_{n=1}^{\infty} \frac{(-1)^{n-1}}{n^s}$$

Then, by performing analytic continuation by using Hankel Functions (essentially very complicated mathematics that is beyond the scope of this project), it can be derived that:

$$\zeta(s) = \frac{1}{1 - 2^{1-s}} \sum_{n=0}^{\infty} \frac{1}{2^{n+1}} \sum_{k=0}^n (-1)^k \binom{n}{k} (k+1)^{-s}$$

Where $\binom{n}{k}$ is a binomial coefficient where:

$$\binom{n}{k} = \frac{n!}{k!(n-k)!}$$

Just like the previous function we derived, this does look very complicated, however for a computer, it is relatively simple to compute.

1.2.5 The Riemann Hypothesis and Prime Numbers

The Riemann Hypothesis is deeply connected to the prime numbers. If the Riemann Hypothesis was proven to be true, then the effect this would have on mathematics would be monumental.

Leonhard Euler derived a very nice equation from the Riemann Zeta Function, that involves the prime numbers. This function is known as Euler's Product Formula.

We already know that the zeta function can be defined by:

$$\zeta(s) = \sum_{n=1}^{\infty} \frac{1}{n^s}$$

Where:

$$\zeta(s) = \frac{1}{1^s} + \frac{1}{2^s} + \frac{1}{3^s} + \frac{1}{4^s} + \frac{1}{5^s} + \dots \quad (1)$$

Now if we multiply both sides by the second term: $\frac{1}{2^s}$

$$\frac{1}{2^s} \cdot \zeta(s) = \frac{1}{2^s} + \frac{1}{4^s} + \frac{1}{6^s} + \frac{1}{8^s} + \frac{1}{10^s} + \dots \quad (2)$$

Subtracting equation 2 from equation 1 removes all elements with a factor of 2:

$$\left(1 - \frac{1}{2^s}\right) \cdot \zeta(s) = 1 + \frac{1}{3^s} + \frac{1}{5^s} + \frac{1}{7^s} + \frac{1}{9^s} + \dots \quad (3)$$

Then multiplying again by the second term, $\frac{1}{3^s}$

$$\frac{1}{3^s} \left(1 - \frac{1}{2^s}\right) \zeta(s) = \frac{1}{3^s} + \frac{1}{9^s} + \frac{1}{15^s} + \frac{1}{21^s} + \frac{1}{27^s} + \dots \quad (4)$$

Subtracting equation 4 from equation 3 removes all elements with a factor of 3 as well as those with a factor of 2 from the right-hand side.

$$\left(1 - \frac{1}{3^s}\right) \left(1 - \frac{1}{2^s}\right) \zeta(s) = \frac{1}{5^s} + \frac{1}{7^s} + \frac{1}{11^s} + \frac{1}{13^s} + \frac{1}{17^s} + \dots$$

We can see that the right-hand side of the equation is being sieved. If we repeat this process infinitely many times by multiplying by $\frac{1}{p^s}$ where p is a prime number, and then subtracting. We end up with:

$$\dots \left(1 - \frac{1}{11^s}\right) \left(1 - \frac{1}{7^s}\right) \left(1 - \frac{1}{5^s}\right) \left(1 - \frac{1}{3^s}\right) \left(1 - \frac{1}{2^s}\right) \zeta(s) = 1$$

Then rearranging for $\zeta(s)$:

$$\zeta(s) = \frac{1}{(1 - \frac{1}{2^s})(1 - \frac{1}{3^s})(1 - \frac{1}{5^s})(1 - \frac{1}{7^s})(1 - \frac{1}{11^s})\dots}$$

We can then write this as an infinite product over all primes, p :

$$\zeta(s) = \prod_{p, \text{prime}} \frac{1}{1 - p^{-s}}$$

This function is only defined when $\Re(s) > 0$, due to the fact that negative numbers can not be prime. Furthermore, it would be hard to compute, due to the fact that you would be required to calculate the prime numbers first.

As well as Euler's Product Formula, there are many other functions that involve the prime numbers that are all related to the zeta function.

The prime number theorem was a theorem thought of by Carl Friedrich Gauss near the end of the 18th century. This theorem describes the distribution of the prime numbers. It formalises the intuitive idea that as numbers get larger, the prime numbers are less common, by precisely quantifying the rate at which this occurs. One way this theorem was modelled was through the prime counting function (denoted $\pi(N)$). Where $\pi(N)$ gives the number of primes that are less than or equal to N . Given this we can say that as $N \rightarrow \infty$ then $\frac{\pi(N)}{\log(N)} \rightarrow 1$, where $\log(N)$ is the natural logarithm of N . This, therefore, means that:

$$\pi(N) \sim \frac{N}{\log(N)}$$

This means we can approximate the numbers of primes less than or equal to N , by calculating $\frac{N}{\log(N)}$. For example, if we wanted to approximate the number of primes less than 100: Then our approximation would be:

$$\frac{100}{\log(100)} = 22$$

But the true value:

$$\pi(100) = 25$$

So there is some error in our approximation. However, the larger the number N , the better our approximation for $\pi(N)$. For example:

$$\pi(1,000,000) = 50,847,534$$

and

$$\frac{1,000,000}{\log(1,000,000)} = 48,254,942$$

where proportionally, the error is a lot smaller

However, Peter Dirichlet and Carl Friedrich Gauss came up with this a much better approximation for $\pi(N)$. They said that:

$$\pi(N) \sim Li(N)$$

Where $Li(N)$ is the logarithmic integral of N such that:

$$Li(N) = \int_0^N \frac{1}{\log(t)} dt$$

Where $\log(t)$ is the natural logarithm of t . Now if we wanted to use the logarithmic integral function to approximate $\pi(1,000,000)$, we get that:

$$Li(1,000,000) = 50,849,234$$

Which is only 1700 away from the true value.

As well as the prime counting function, we also have a similar function called the prime power function (denoted by $\Pi(N)$). In the prime counting function, you would get 1 point per prime number (less than or equal to N). But in the prime power function, you get 1 point per prime + $\frac{1}{2}$ point per prime squared + $\frac{1}{3}$ point per prime cubed and so on. As an equation this would be:

$$\begin{aligned} \Pi(N) &= \pi(N) + \frac{1}{2}\pi(N^{\frac{1}{2}}) + \frac{1}{3}\pi(N^{\frac{1}{3}}) + \dots \\ &= \sum_{r=1}^{\lfloor \log_2 N \rfloor} \pi(N^{\frac{1}{r}}) \end{aligned}$$

But how is this related to the Riemann Hypothesis? It turns out that the prime number theorem was proved by using the Riemann Zeta Function.

Riemann came up with a function for the Zeta Function where he described it in terms of the non-trivial zeros. He stated:

$$\zeta(s) = \left(\frac{\pi^{\frac{s}{2}}}{2(s-1)\Gamma(\frac{s}{2}-1)} \right) \cdot \prod_{\rho} \left(1 - \frac{1}{\rho} \right)$$

Where ρ are the non-trivial zeros of the Riemann Zeta Function.

Then through complex analysis and advanced calculus, it was derived that:

$$\Pi(x) - Li(x) = \sum_{\rho} Li(N^{\rho}) - \log(2) + \int_N^{\infty} \frac{1}{t(t^2-1)\log(t)} dt$$

Which tells us the difference or ‘error term’ between the prime counting function, and the prime power function. The main and most influential part of this error term is the sum of the logarithmic integrals of N^ρ .

Because ρ are the non-trivial zeros, the non-trivial zeros of the Riemann Zeta function are really controlling the size of this error term. If the Riemann Hypothesis were true and all of the non-trivial zeros lie on the critical strip, then this error term will be as small as possible.

Mathematicians were finally able to prove the prime number theorem by using the Riemann zeta function, by showing that the Riemann zeta function has no zeros on the line $\Re(s) = 1$. However, this error term is controlled by the non-trivial zeros of the Riemann zeta function, and it is still unproven whether all of the non-trivial zeros lie on the critical strip. But if the Riemann Hypothesis were true, then this error term is bounded by:

$$|\pi(N) - Li(N)| \leq c\sqrt{N} \cdot \log(N)$$

Where c is some constant

This means that there would also be a similar bound between consecutive prime numbers, such that:

$$p_{n+1} - p_n \leq c\sqrt{P_n} \cdot \log(p_n)$$

There are also many other consequences if the Riemann Hypothesis was proved to be true. For example, the Weak Goldbach Conjecture would also be proven true, stating that ‘All odd integers greater than 5 are the sum of three primes’. Furthermore, if the Riemann Hypothesis was true then there will always be a prime number between consecutive cubes, such that:

$$x^3 < p < (x + 1)^3$$

This would mean that you could define a constant θ such that $\lfloor \theta^{3^n} \rfloor$ is prime for all n . This is called a Mills’ Constant.

All of these theorems and conjectures highlight the importance of the Riemann hypothesis, and that if it was to be proven, it would lead to several major breakthroughs, not only in mathematics but quantum physics and computer science. The fact that the non-trivial zeros of the Riemann zeta function have such an importance in countless other fields just shows how influential the Riemann Hypothesis is.

1.2.6 Visualisations of the Riemann Hypothesis

There are numerous ways of visualising functions on graphs and plots. Throughout this next section, I will explore the different types of data visualisation techniques, as well as their positives and negatives.

The most common form of visualisation for the Riemann Hypothesis is showing how the output of the Riemann zeta function varies as you move along the critical strip. It plots the values of $\zeta(s)$ for $s = \frac{1}{2} + it$, where it is some imaginary number.

This graph shows us how the Zeta function varies along the critical strip and allows for us to identify the non-trivial zeros of the function.

Whereas most graphs show the input to the function along a horizontal axis and the output along a vertical axis, we cannot do this with the plot of the Riemann Zeta function because we are required to use both axes to represent complex numbers on the complex plane.

Some positives about this graph are that it is simple and easy to understand. However, it would require an input value for t , which is not shown on the graph, for the data to have any practical use.

However, we can expand on this graph and use it to help us to create a dynamic graph. A dynamic graph is one that changes with time. To plot a dynamic graph of the Riemann Zeta function, we could plot values of $\zeta(s)$ along the critical strip so that $\zeta(s) = \frac{1}{2} + it$. Where t would be our independent variable.

However, we would be changing t over time, where we would need a relationship between the time of the graph and t , which could be in the form of an equation.

If for example, we had it so that for every second, the value of t increases by 1, this would give us a dynamic graph that would plot the points of $\zeta(\frac{1}{2} + it)$ while the user is watching it. The graph would then be changing every second.

If we made it so that for every 0.1 seconds then t increased by 0.1, this would give us a much smoother plot and would be much more appealing to look at.

Although the graph at any given point in time would look the same as the previous graph, the fact that this graph is changing for the user to see makes it significantly more visually appealing. Furthermore, by changing the value of t over time, it allows for the user to get a much deeper understanding of how the

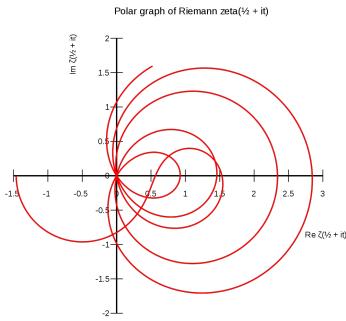


Figure 4:
Polar Graph of the Riemann Zeta Function

value of t affects the values of the Riemann Zeta Function.

Another way of representing functions that involve complex numbers is through domain colouring. This technique for visualising complex functions assigns different colours to each point on the complex plane. Not only does domain colouring look very appealing and intriguing it is also very useful to be able to plot functions that require four dimensions.

To graph a function with real inputs and outputs, two dimensions are required: one for the input and one for the output. But complex numbers are made up of two variables (the real and imaginary parts) and therefore two dimensions.

This means that in order to plot both the input and output of a complex function it requires four dimensions. The simplest way of doing this is by using the method of domain colouring.

In order to represent a function by using domain colouring, it is necessary to determine how the colours of the graph will be chosen.

There are multiple ways of doing this, but one of the most common ways is by taking the output of the function and using this to determine the hue and saturation of the colour.

For example, if we had an argand diagram for the complex number $x + iy$:




Figure 6: An argand diagram for the complex number $x + iy$

Then we could use the value of ϕ to determine the hue of the colour, and r to determine the brightness of the colour. If we did this for all outputs of a complex function, and then plotted them on a graph, then we would have a domain coloured graph.

Domain coloured graphs have multiple advantages: they look very interesting; they allow complex functions to be plotted using four dimensions; and they are useful to see the general trend of a complex function. However, these graphs are not ideal if you want to read off specific points.

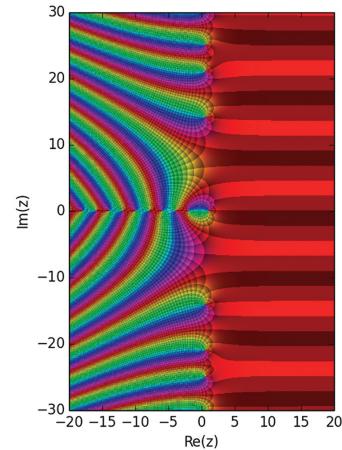


Figure 5: The Riemann Zeta Function Plotted Using Domain Colouring

Another method used to illustrate this data is through an interactive graph. An example of this could be where the user selects a complex number on the complex plane. This number is then input into the Riemann Zeta function and an animation is then displayed to show how that number gets translated by the Riemann Zeta Function. The graph would then display another data point that shows the output from the Riemann Zeta Function.

This type of graph is able to show the user how the Riemann Zeta function works and could even give insight into where the zeta zeros could be. Moreover, the interactive feature makes the graph a lot more engaging for the user.

We could also use interactive graphs to show how computers can approximate values for the Riemann Zeta function. Computers are unable to calculate the exact value of the output from the Riemann Zeta function, the reason of which I discuss later on, but it simply comes down to the fact that computers are unable to calculate the infinite series (where an infinite amount of numbers are added together) that are present in the functions. To get around this, you can compute these series to a high number that is not quite infinity, and still get a very accurate approximation.

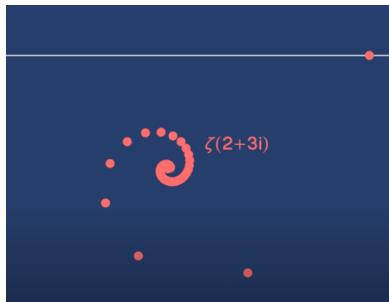


Figure 7: The approximation of $\zeta(2 + 3i)$

As each term in the series gets calculated, the approximation gets closer and closer to the true value. We can use this fact and display it on a graph. If a user selects a point on the complex plane, we can display the approximation for $\zeta(s)$ for 1 term, 2 terms ... all the way up until n terms (where n is a high enough number so that the approximation is extremely close to the true value). The resulting graph will show a spiral of data points that converge to one point; that is the output of the zeta function. This graph allows the user to understand how the infinite series works in the zeta function, as well as how

computers are able to compute the zeta function.

1.2.7 Data Storage

As part of this program, I aim to be able to store the values of the $\zeta(s)$ for specific values of s . There are multiple ways to store data sets such as different file types and databases. I will be exploring these data storage methods and finding which method is best suited for my program.

The simplest way of storing data is by storing it in a text (.txt) file. These files store plain text that can be read from and written to. There is limited functionality when it comes to storing data in text files; as you can only read from and write to them. This could be used to store relatively simple and small

amounts of data, but to store anything larger and more complex, text files won't be the best choice.

Another way of storing data is by using comma-separated values (CSV) files. These files consist of numerous records and fields, where each line is a record and the fields are separated by delimiters - often commas.

```
~ > cat example-csv-file.csv
Name,ID,Attendance
Alice,1,Present
Bob,2,Present
Charlie,3,Absent
Dave,4,Present
~ > █
```

Figure 8: An example CSV file

This type of storage for data has a lot more functionality than using plain text files. The use of field headers allows entire fields to be read or written to with ease and data can easily be sorted, grouped, and processed. However, some downsides of using the CSV data format are that only basic data can be stored. Complex tables and configurations cannot be used with CSV files. Furthermore, there is no distinction between text and numerical values which can make processing the data difficult.

Undoubtedly, one of the most efficient ways of storing large data sets is by using databases. More specifically, by using Structured Query Language (SQL).

SQL is a declarative programming language, making it very efficient to use. Databases allow for large amounts of data to be written and read very quickly.

Moreover, processing this data can be very simple with packages such as SQLite that allows SQL databases to be accessed with Python. SQL databases are efficient and can store large amounts of data, making them ideal for a project like this.

1.2.8 Programming Languages

There are multiple programming languages that I could - relatively easily - use for this project, but it is important to choose a language that is suited for the task at hand. Every language has its advantages and disadvantages. Throughout this section I will evaluate various languages and whether or not they would be suitable for this project. I will then give my overall verdict on which language I wish to use.

C++ is a fairly low-level compiled programming language. Its use of classes and memory manipulation allows for an extensive range of functionality. Furthermore, with countless libraries and support, there is almost no limit to what can be done in C++. This is one of the main benefits of this language, alongside the fact that it can run incredibly fast compared to some other interpreted languages, and that it can run on almost any machine. However, the actual coding in C++ is long and tedious. Especially for a project like mine where memory management is not too much of an issue, it seems unnecessary to have to code in C++.

Javascript is also another programming language that could be used for this project. Unlike C++, Javascript is used for more high-level projects, predominantly for web applications. Making a web app has many advantages, such as high accessibility for multiple users. However, this would require an internet connection to run, and the speed of the program would be significantly reduced compared to that of a compiled application,

Python 3 is a high-level interpreted programming language, with a wide range of libraries and packages to support it. The main advantage of Python is that the code has high readability. This allows for it to be understood by people, even if they are not familiar with the language. Although Python is an interpreted language, there are ways to compile the code into an executable file that can be run on machines that do not have the interpreter installed. As well as this, Python has wide support for user interfaces and the plotting of graphs.

Overall, I think that Python 3 will be the programming language that is most suited for my project. A web application is not what my users are looking for, so javascript would be impractical to use. The high readability and high-level features are what makes Python the optimal programming language for this project, over Javascript and C++.

1.2.9 Product Research

Throughout this section, I will be taking a look at other programs that have similar features to mine. I will talk about the advantages and disadvantages of each program and how I can incorporate some of their features into my project.

One of the most major programs I will look at is the web application WolframAlpha. This is a mathematical computation site, where users can input a maths query into a search bar. The answer to the query is then returned, along with information about the solution.

In this example, I input $\zeta(10+5i)$. The program then outputs a decimal approximation of the answer to my query, as well as a diagram showing the output on the complex plane. Further down the page, the program lists alternative ways that I could've written my input.

This application works very well for calculating specific values of the zeta function, but it does little to show the mathematics of what's happening to calculate the answer.



Figure 9: Wolfram Alpha

Another web application by Wolfram Research is the Riemann Zeta Function Page on Wolfram Mathworld.

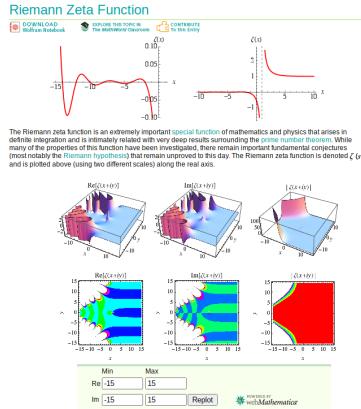


Figure 10: Wolfram Mathworld

very linear starting from top to bottom. Overall, I like the way that the graphs are presented and explained here, however, the large quantity of maths displayed can seem confusing and unrelated.

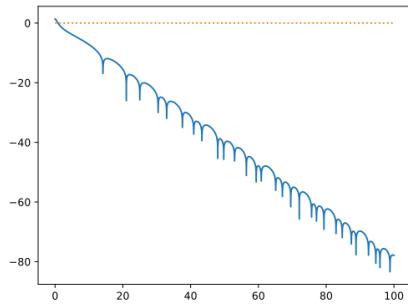


Figure 11: Verifying the Riemann Hypothesis by Aaron Meurer

lated and there isn't a user interface.

Overall this program contains some appealing and useful information and graphs but could be more refined.

25

This site explains the Riemann Hypothesis in great detail, giving the user a very thorough understanding of the subject. There are also multiple three-dimensional and domain coloured graphs that plot the Riemann Zeta Function. The user is able to change the scale of the plots to see how the zeta function changes, depending on the input. The web page contains a variety of different graphs and lots of maths along with explanations as to what is going on.

However, the maths on this page is very complex and it would be unlikely that people would understand this page if they didn't have some significant background knowledge into the Riemann Zeta function, or advanced maths in general. The page is also

The next program that I will look at is Verifying The Riemann hypothesis by Aaron Meurer.

He creates a program that finds the non-trivial zeros of the zeta function and displays this data on some very simple and understandable graphs. I like this program a lot because it contains a lot of relevant information.

Some positives of this program are that the graphs in it are presented and explained well so that anyone could understand what is going on. The only drawback is that this isn't a very extensive program. Only 2 graphs are calcu-

1.3 Project Objectives

My overall aim of this project is to be able to visualise and examine the Riemann Hypothesis, to make the complicated maths more accessible and to test whether the Hypothesis actually is true. I will be doing this by completing the following key objectives.

1. The program will be interactive and engaging for the user
 - (a) There will be various questions throughout the program that the user can answer
 - (b) The user will be able to make notes on any of the content in the program
 - (c) The user will be able to choose what they do and where they go in the program, not forced along a single route
 - (d) The user will be able to input their own values into various functions and graphs
2. The user will be able to save their progress through the program via a login system
 - (a) The login system should allow the user to:
 - i. Sign in to their account
 - ii. Create a new account
 - iii. Reset their password if they want to change it
 - iv. Reset their password if they have forgotten it
 - (b) Multiple users will be able to make separate accounts on the system
 - (c) The user's data such as passwords must be saved securely
 - (d) The user must be able to see how they have progressed throughout the program
3. The user will be given some background information about the Riemann Hypothesis such that almost anyone could feel comfortable using the program
 - (a) The user should be able to learn the historical background of the Riemann Hypothesis
 - (b) The user should be able to learn what imaginary and complex numbers are
 - (c) The user should be able to learn what the Riemann Hypothesis states
 - (d) The user should be able to learn about the practical applications of the Riemann Hypothesis

4. The program will allow the user to plot various graphs in order to develop their understanding of the Riemann Zeta function and allow them to learn about it
 - (a) A polar graph of the Riemann Zeta Function
 - (b) A graph of the prime counting function, and other related functions used to estimate it
 - (c) A graph of the zeroes of the Riemann Zeta Function
 - (d) A visualisation of the convergence of the infinite series in the Riemann Zeta Function
5. The user will be able to calculate specific values of the Riemann Zeta Function
 - (a) A single calculator, where the user inputs a complex input and receives an output
 - (b) A table calculator, where the user can calculate the zeta function for a range of input values
 - (c) A leaderboard showing how many values of the zeta function, each user has computed
 - (d) The program will allow the user to store these value(s) to a database and to a csv file
6. The user will be able to calculate the zeroes of the Riemann Zeta Function
 - (a) The user will input how many zeroes they want to calculate
 - (b) The program will calculate these zeroes
 - (c) The zeroes will be displayed to the user in a table
7. The user will be able to store the data that they have collected
 - (a) The program will include a database of multiple values and zeroes of the zeta function
 - i. The user will be able to store values of the zeta function
 - ii. The user will be able to store the non-trivial zeta zeros
 - iii. The user program will retrieve data from the database and display its contents suitably to the user
8. The Program will have a graphical user interface

1.4 Third-Party Input

Throughout the following section, I will be discussing the consultation and guidance that I have received from various third parties. This section will cover the significance of third party input, who my third parties are, how and why I will be conducting my research, a transcript of the actual interviews themselves and my conclusions and takeaways from them.

1.4.1 The Significance of Third Party Input

Collecting third party input is vital in creating a successful project. It will allow me to assess the progress that I have made so far in my project, and check that I am heading in the right direction. Having input from various different people allows for people to view the project in different ways, each giving their own advice towards it. Third-party input and feedback is extremely important because it can help me develop and improve my project.

1.4.2 Who are my Third Parties?

There are benefits and drawbacks to each person you have as a third party. These depend on their relationship with me, their experience with creating projects like these and their willingness to help; just to name a few factors.

For my third parties, I am using friends who are computer science and further maths students. The benefits of this are that they have good availability, and I can talk to them regularly about the project. Furthermore, they are very supportive and encouraging. Because they are further maths and computer science students, they are also very knowledgeable about the subject area. However, the drawbacks of having friends as third parties are that they are potentially biased towards my project and could be unwilling to criticise it. It could be hard for them to tell me what is wrong, or what could be improved.

1.4.3 How and Why I will be Conducting My Research

I will be conducting my third party research by conducting interviews with my third parties. By creating a list of questions, I am able to ask specific questions that are useful to me. I have tailored the questions such that I can use the answers to help improve my project.

The interviews start with me asking questions to the third parties and taking answers from them. At the end of the interview, the third parties have an opportunity to ask me any questions that they have about the project.

1.4.4 Interview Transcript - Student 1

Question: What will an end-user be able to gain from using this project, how would it be helpful to them?

Answer: As a maths and further maths student, I want to be able to extend my knowledge of these subjects. This project looks like a good resource that will allow someone to understand the Riemann Hypothesis.

Question: What features could be implemented into the project such that the end-users can accomplish what was mentioned in the previous question?

Answer: It would be very beneficial to the user to have an explanation of the theory behind the Riemann Hypothesis at the beginning of the program. I'd like to do a couple of example steps, so I can try and understand the program before I start using it. You could have an example graph and pause the graphing animation and explain at each point what is happening. As well as this, I would like the program to be interactive so that I can really control what is happening.

Question: How accessible would this project be for someone with little or no knowledge of the subject area?

Answer: Due to the nature of the project, it is not extremely accessible. However, for someone with an interest in mathematics, they may be more willing to research around the topic to gain an understanding

Question: What could be done such that people who have less experience with the subject matter are still able to understand the program? How could it still be relevant to them?

Answer: For people with less experience, you could add some of the background information and story about the Riemann Hypothesis and the investigation. Mention why it's so important, and how it came to be. Not just the maths but the history behind it.

Question: Which parts of the project interest you; what would you like to research further?

Answer: The links to cryptography interest me. The fact it's such a modern-day feature of life, actually using the function that was theorised so long ago. I am interested in the practical applications of the Riemann Hypothesis and how it actually relates to me.

Question: How would someone be able to use this project to extend their knowledge of this subject area?

Answer: You would be able to use the interactive interface to manipulate and break down the theory of the hypothesis, in order to gain a deeper understanding of it

Question: Which features of the project do you like, and why?

Answer: Visualising is helpful for exploring the project. I like the graphs, the fact it has a visual element is very appealing. It is easier to appreciate the graphs than just looking at mathematical equations.

Question: Which features of the project do you think could be improved?

Answer: The accessibility to the project could be improved; in terms of the mathematics knowledge needed to understand it as well as how the program can be physically accessed and run. For example, as a downloaded piece of software or as a web application.

Question: Have you used any similar programs to this? What were they like?

Answer: A program that seems similar to this that I have used is the practical investigation software Focus eLearning. I used this to carry out practical investigations and consolidate learning. I liked that it was accessible over the internet and that it gave me explanations of the theory, with a visual exploration of the theory it was trying to explain, in the form of the interactive practical experiment. However, I felt that the user interface was difficult to navigate.

The question they asked me: How will you refine the access of the project so that everyone can use it?

My answer: I will include a detailed description and explanation of the Riemann Hypothesis as part of the program to make sure that whatever your mathematical ability, you will still be able to use the program.

1.4.5 Interview Transcript - Student 2

Question: What will an end-user be able to gain from using this project, how would it be helpful to them?

Answer: The Riemann Hypothesis itself is used in so many areas such as in cryptography and quantum physics, talking about the practical uses of the hypothesis would be helpful for the user to gain an insight into why the hypothesis is so important. I am interested in the practical usage of theory in computing and physics. Being able to understand the Riemann Hypothesis visually is also very helpful. Being able to graphically plot the many functions will give a deeper understanding of the project. Furthermore, being able to change the input values to the functions would help so that the user can expand their knowledge of the function

Question: What features could be implemented into the project such that the end-users can accomplish what was mentioned in the previous question?

Answer: It would be very good to make the graphing program interactive. This can be done by changing the function's input values, but also being able to traverse the plot by scrolling around and zooming in and out by changing the scale. It would also be useful to have multiple graphs displayed on the same set of axes to compare values.

Following along with this interactive idea, I think that you could questions for the user to answer about the hypothesis, to help solidify their understanding of it. It could be beneficial to add sections where the user can write down their observations and any conclusions that they have drawn from the investigation.

To implement this, you could create a login system where a user creates a username and password, so that they would be able to save their progress in the program.

Question: How accessible would this project be for someone with little or no knowledge of the subject area?

Answer: I believe this project will be relatively accessible because it mainly involves just displaying maths functions, where it takes an input and gives an output. It's relatively easy for someone to use it without knowing the details of how it works. That is, to be able to use the program, but maybe not fully understand it. But then to get a deeper understanding of the project, it takes more in-depth knowledge.

Question: What could be done such that people who have less experience with the subject matter are still able to understand the program? How could it still be relevant to them?

Answer: Start off by just exploring and explaining the hypothesis, how it works and how the Riemann zeta function works. If the user wants to understand it further, you can go through the maths of how it works; explaining the Riemann Hypothesis in detail. You could graph the individual mathematical functions in order to break down the problem for the user to understand. You can use 3D graphs and different ways of representing the data. This could make it easier for the user to understand.

Question: Which parts of the project interest you; what would you like to research further?

Answer: I am very interested in the cryptography application of the Riemann hypothesis. You could showcase as part of this project, a cryptography program that utilises the Riemann hypothesis in a practical way.

Question: How would someone be able to use this project to extend their knowledge of this subject area?

Answer: By utilising the multiple mathematical functions of the Riemann Hypothesis, the user could investigate how changing the input values changes the output. This will help the user learn about the individual functions and their use cases. When combining these functions together, it is important for you to be able to show how changing one piece of data can entirely change the output of a function, especially if the functions are all linked together. You should create the program such that the users could use it to investigate the domains and ranges of the functions.

Question: Which features of the project do you like, and why?

Answer: I like the idea of having an introduction where you explain the practical uses of the Riemann Hypothesis, and where you can give an explanation of how to use the Riemann Hypothesis and Riemann Zeta Function in other programs such as in the RSA cryptosystem. I like how the user would be able to change and manipulate the graphs to their liking and how easy it is to compare values of separate functions. It's also a good idea to have a conclusion/summary to help the user fully understand the maths.

Question: Which features of the project do you think could be improved?

Answer: It would be good for the user to be able to draw their own custom graph functions on the same axes as the functions in the program because currently, you would not be able to compare the functions in the program to the user's own custom functions. A drawback of the project is that the maths could be too specific and intricate for the user to gain a proper understanding of the project. It would require a lot of research to fully understand the project and to be able to make the most of it.

Question: Have you used any similar programs to this? What were they like?

Answer: A program like this that I have used is desmos. Desmos, a graphing software, allows you to plot many graphs on top of each other, you can easily change the axes as well as any input values. What's bad about desmos is that it doesn't allow you to plot in 3D, it would be nice to see this in your project. Another program similar to this is Graphing Calculator 3D. This allows you to do what desmos does, but it plots in 3D. However, its downsides are that It's not very user friendly and the menus are not easy to navigate, so it can be hard for new users to understand how the software works.

Questions asked to me:

Question: What are the necessary system requirements?

Answer: The necessary system requirements for this program are not very high. The functions are very memory and time efficient so the specifications of the systems that the program is run on should not be an issue.

Question: What would help the software be more useful to the user?

Answer: If that program gave an in-depth explanation of the Riemann Hypothesis, the user can gain a full understanding of what is going on. Furthermore, examples of the practical applications of the Riemann Hypothesis, make the program more relevant to the user and makes this program practical use instead of just being theory.

Question: With such complicated functions, how long would it take to compute them?

Answer: The functions I have written are very memory and time-efficient, it will

not take an extensive amount of time to compute the required mathematical functions.

Question: To what degree of accuracy will the functions be plotted?

Answer: The user will have an option where they can increase or decrease the accuracy of the functions. However, this will come with the disadvantage that it will take longer to compute.

1.4.6 Interview Conclusion

There are multiple improvement points from these interviews that I have used to help develop the plan for my project.

One of my main improvement points is with the design and layout of the project. The program will have 3 main sections: the introduction, the investigation, and the summary.

The introduction section will let the user be able to read and learn about the Riemann Hypothesis, so they can get an understanding of it, before using the main program. This introduction aims at making the program more accessible to people, even if they have less experience with maths. It will also allow people to explore the Riemann Hypothesis' links to cryptography and other practical applications so that they can explore it in more detail.

After the introduction will be the actual practical investigation, this is where the user can plot graphs and really investigate the Riemann Hypothesis. They will be able to plot multiple graphs on the same axes in order to be able to compare values. The user will also be able to easily change the input values to many of these graphs so that they can investigate how this changes the outputs.

The final part of the program will be a summary; showcasing the results from the investigation that they have conducted, and detailing some of the key mathematics behind the investigation.

Breaking down the project into these three sections will allow for the User Interface of the program to be simple, such that the user can access all of the relevant parts of the program easily.

Another part of the project spoken about in these interviews was a login system to help save a user's progress through the program. There would be multiple points in the program where the user can answer questions about the hypothesis to check understanding, or for the user to just write down any conclusions that they make about the investigation and the Riemann Hypothesis. Thus, creating a login system would allow a user to save their progress in the program, and any of their answers and data can be stored in a database.

1.5 Modelling the Problem

In this section, I will report any modelling of my project that will inform the design stage. I will be covering how to compute certain mathematical functions and also try some prototypes for what the project will look like.

1.5.1 Prototypes

Throughout this next section, I will be prototyping some mathematical functions in Python that will allow me to compute the Zeta Function. I will then test each of the functions to make sure that they work as expected.

The majority of functions that I intend to use involve an infinite sum, which is something that we are unable to compute because it would be impossible to add up an infinite amount of numbers. Therefore we must approximate the value of the function by calculating it for a certain number of terms. For example, when calculating the zeta function where:

$$\zeta(s) = \sum_{n=1}^{\infty} n^{-s}$$

We can approximate the value but calculating the sum to such a high number, that the error difference is not significant. If we want to approximate the zeta function, we could compute:

$$\zeta(s) = \sum_{n=1}^{1 \times 10^6} n^{-s}$$

Which would not give us the exact value, but one close enough that we can still use.

First of all, is a function that computes the zeta function by its definition. $\zeta(s) = \sum_{n=1}^{\infty} n^{-s}$. This function is defined for $\Re(s) > 1$ and could look as follows in Python 3:

```
# calculates zeta(s) for any complex number where Re(s) > 1
# where \zeta(s)=\sum _{n=0}^{\infty }\frac{1}{n^s}
def zeta(s: complex) -> complex:
    TERMS = 5 * 10**3 # the number of terms that we wish to compute.
    result = 0
    # computes an approximation for the infinite sum
    for n in range(1, TERMS+1):
        result += 1/(n**s)
    # output the final result
    return result
```

First, we define the function $\text{zeta}(s)$, where s is a complex variable. Then the constant TERMS is defined then defined to be a large integer. This number determines how many times we calculate $\frac{1}{n^s}$ and therefore determines how accurate our approximation will be. Then in the for loop, we calculate n^{-s} for TERMS many times and sum it to our result. We then return the complex variable res in order to output from the function.

Here we can test the function to show if and when it works as expected, and also how accurate it is to the true value.

No.	Type	Input	Expected Output	Output	Result
1	Invalid	-1	ValueError	12502500.0	Fail
Comment		This output is neither the output we were expecting nor the correct output of $\zeta(-1)$. I will need to fix this by validating the input to check that it is within the defined range of the function			
2	Invalid	0	ValueError	5000.0	Fail
Comment		This is the same situation as test number 1			
3	Boundary	1	ValueError	9.095	Fail
Comment		This is the same situation as the previous tests			
4	Valid	1.5	2.61	2.584	Fail
Comment		Although this gives an output that is close to the expected output, it is not accurate enough. I need to increase the number of terms in order to get a more accurate output			
5	Valid	$5 + 10i$	1.025 $-0.015i$	1.025 $-0.015i$	Pass
Comment		This test gives a value that is extremely close to the true value. It seems that our approximation becomes more accurate as the input value increases.			

Based on the testing, I have made some adjustments to the function as seen here:

```
# calculates zeta(s) for any complex number where Re(s) > 1
# where \zeta(s)=\sum _{n=0}^{\infty }\frac{1}{n^s}
def zeta(s: complex) -> complex:
    # validate that Re(s) > 1
    if not s.real > 1:
        raise ValueError('Real part of input must be greater than 1')
    TERMS = 1 * 10**6 # the number of terms that we wish to compute.
    result = 0
    # computes an approximation for the infinite sum
    for n in range(1, TERMS+1):
        result += 1/(n**s)
    # output the final result
    return result
```

The first change I made was validating the input. Now if the real part of the input is less than 1, then a *ValueError* is raised. Secondly, I have increased the number of *TERMS* that are computed in order to make the program more accurate. Although this does make the program take more time, the time difference is hardly noticeable.

Now here are the testing results for the improved function.

No.	Type	Input	Expected Output	Output	Result
1	Invalid	-1	ValueError	ValueError	Pass
Comment		This works as expected; the error is raised			
2	Invalid	0	ValueError	ValueError	Pass
Comment		This works as expected; the error is raised			
3	Boundary	1	ValueError	ValueError	Pass
Comment		This works as expected; the error is raised			
4	Valid	1.5	2.61	2.61	Pass
Comment		This functions output is very close to the true value			
5	Valid	5 +10i	1.025 -0.015i	1.025 -0.015i	Pass
Comment		This functions output is very close to the true value			

Overall, this function is able to compute values of $\zeta(s)$ where $\Re(s) > 1$. It throws an error at incorrect inputs (which is good) and calculates $\zeta(s)$ relatively accurately. However, this approximation could be made more accurate by increasing the number of *TERMS*, although this could slow the program down significantly. Using this function to calculate $\zeta(s)$ to any useful degree of accuracy would take too much time to compute. Furthermore, this function only allows us to calculate values where $\Re(s) > 1$.

2 Documented Design

2.1 Structure Diagrams

The program will be made up of 4 main parts; that is the Login System, the Introduction, the Investigation, and the Summary.

The login system will allow users to either sign into an account or create an account with a username and password. All user information will be encrypted using hashing algorithms for security reasons, and the data will be stored in a database. The purpose of the login system is to allow the users to save their progress throughout the program. There will be various opportunities throughout the program for the user to write down answers to questions, or to record any observations that they make. This data will be stored specifically to their username such that when they next log in, they can continue from where they left off.

The introduction will be a visual section of the project that will demonstrate to the user how the program will work, as well as give an overview of what the riemann hypothesis is, why it's important, and how it is used in science and technology. The aim of this section is to provide the user with sufficient information and knowledge such that they will be able to effectively be able to use this program. Because quite a lot of mathematical knowledge is required to be able to properly use this program to its full potential, this section will try and provide some basic information of the project area for the user to feel more comfortable using the program.

The investigation will be the main bulk of the program. It will allow the user to plot graphs, find zeta zeros using a variety of methods, and investigate how prime numbers are related to the zeta function. The aim of this section is to get the user to investigate the hypothesis, collecting their own data that they can draw conclusions from.

Finally, the summary will be the last section of the program. Its purpose is to allow the user to reflect on their results, and see what conclusions they are able to draw from them. The summary will be split into 4 sections; a quick recap of the theory from the introduction section; followed by an overview of the user's results from the investigation. There will then be sections on whether their data proves/ disproves the Riemann hypothesis, how reliable the information from this program will be, and the impact on maths and computer science if the hypothesis is proven to be true.

2.1.1 Program Overview Structure Diagram

The following structure diagram for the program gives an overview of the main sections in the project:

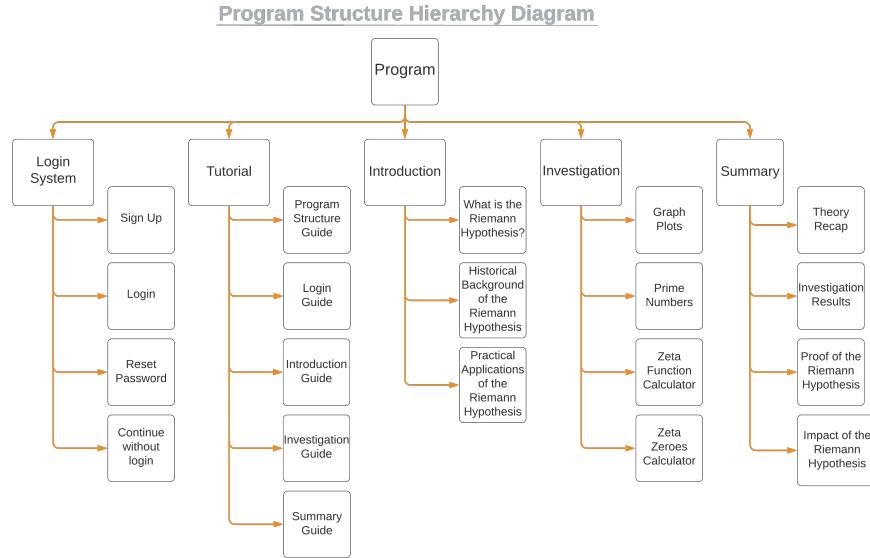


Figure 12: Structure Diagram for the program

As we can see from this diagram; the main program is split up into its 5 main sections: the Login System, the Tutorial, the Introduction, Investigation, and the Summary. Each of these main sections is then further broken down into its relevant subsections.

We can then break down each section into its subsections, which will in turn, be broken down into more sections.

2.1.2 Login System Structure Diagram

The login system's aim is to be able to allow a user to sign into an account, such that their progress with the program has been kept.

It will not be necessary for a user to login, however, if they do not log in, then their progress will not be saved.

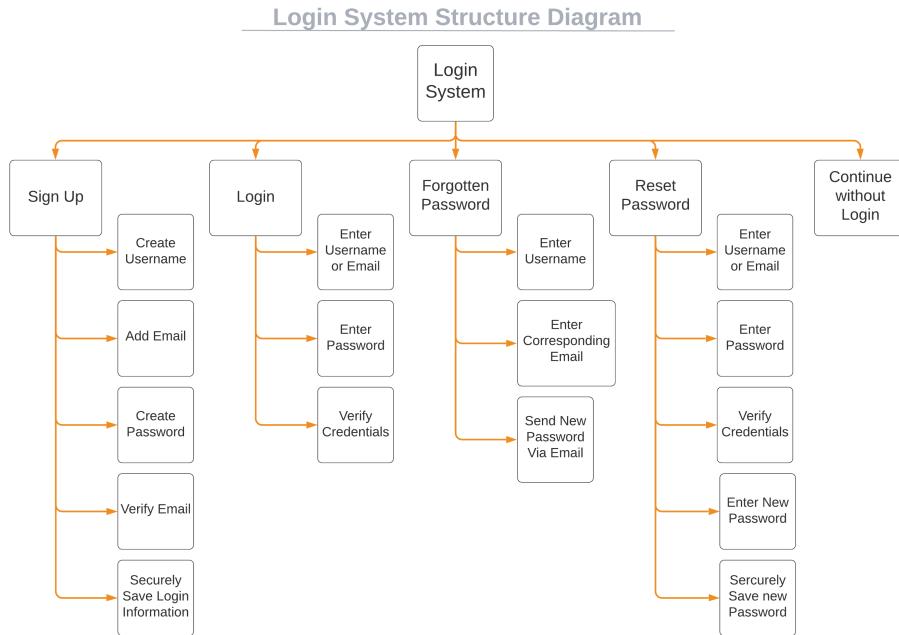


Figure 13: Login System Structure Diagram

There will be 5 sections to the login system that I create. The first of which allows the user to sign up and create an account. This is for first-time users of the programme, who want to be able to use it to its full functionality. The sign up process involves the user creating a unique username, adding a unique email to the account (used for when the user forgets their password), and creating a strong and complicated password. They will then be sent an email to the address that they entered, with a verification code. Once this code has been entered in the program, the user's login details will be encrypted and stored in a database. They will then advance to the next part of the program: the tutorial.

The login section will allow the user to sign in to an account that has already been created. They will be required to enter either their username or email, and their password. The program will check whether the username or email is valid (if it is in the database), and if the password associated to that account is the same as the one entered by the user. If the user gets the password wrong 3 times, then they will have to wait 1 minute before trying again. This is to stop

any attacks to try and guess user's passwords. Once a user has signed in, they will be taken to the tutorial section.

If a user has forgotten their password, then they will be able to reset it in the forgotten password section. The user will be required to enter either their username and email for that account. These credentials will need to be verified, and then if they are correct, a new password will be sent to the user by email. The user will then be sent straight to the Reset Password screen so that they can change the password to one that they will remember.

The reset password section will allow the user to change their password if they don't like the one they currently have, or if they have had to reset their password. They will have to enter their username and password, to confirm their identity. They will then enter a new strong and complicated password, and this will be the new password associated to their account.

The final section is the continue without login section. Without a login, the user will still be able to use all parts of the program, however, their data will not be saved.

2.1.3 Tutorial Structure Diagram

The tutorial is one of the key sections of the program. The tutorial will give the user a guide on how to use the program.

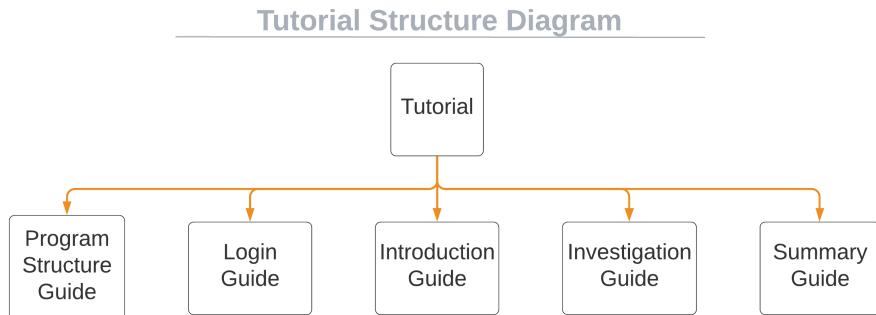


Figure 14: Tutorial Structure Diagram

The tutorial itself will be split up into 4 main parts; that is a guide on the structure of the program, and how to use each of the individual sections of the program.

Overall, the tutorial will be relatively simple, and will just give the user an understanding of how to use the program

The Program Structure Guide will inform the user of the layout of the project, and how each section is related to another. It will tell the user how to navigate pages, and how to use key features of the program that will require user input.

Next in the tutorial, will be the Login Guide. This will essentially just be a quick note to the user, about how to sign up and create a strong and complicated password, what to do if you forget your password, or want to change it; as well as explain why the user may or may not want to create an account, and how the program differs whether the user is signed in or not.

As for the Introduction Guide, it will show an example of what the introduction section will look like, and have labels to show how to navigate pages as well as what everything means.

Probably the most complex part of the tutorial section will be the Investigation section. This will inform the user of how to use, understand, and interpret the different graphs and plots. This section should give the user a simple understanding of how they can use the program to investigate the Riemann Hypothesis

The final section in the tutorial will be a Summary Guide, that is how to use the summary section of the program. This will be very similar to the Introduction Guide, but will have an emphasis on the user trying to draw conclusions from the data they have collected, instead of the just being able to understand what is going on.

The tutorial section will not have a lot of functionality, but its purpose is just to briefly describe to the user, how the program is intended to be used.

2.1.4 Introduction Structure Diagram

In the Introduction section of the program, the user will be able to develop their understanding of what the Riemann Hypothesis is and why its so important.

I will portray this information by splitting the Introduction into three smaller sections. You can see how this section will be split up in the Structure Diagram below:

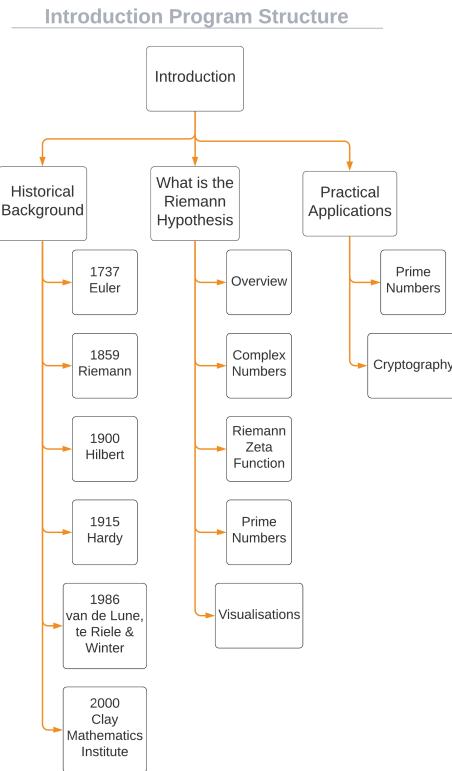


Figure 15: Introduction Structure Diagram

First of all is the historical background section. This shows how the Riemann Hypothesis has developed over time and showcases the context of the problem

Next is the section describing the Riemann Hypothesis. This section will include a lot of maths, but will also be written such that people with a limited mathematical understanding will still be able to understand what is being said.

The final part of the introduction is the Practical Applications section. This will inform the user why the Riemann Hypothesis affects us today and how it can actually be used.

2.1.5 Investigation Structure Diagram

The Investigation is the main part of the program and will allow the user to conduct their own research into the Riemann Hypothesis.

It will have 4 main section; The graphs, Prime Numbers, a zeta function calculator, and a zeta zeros calculator.

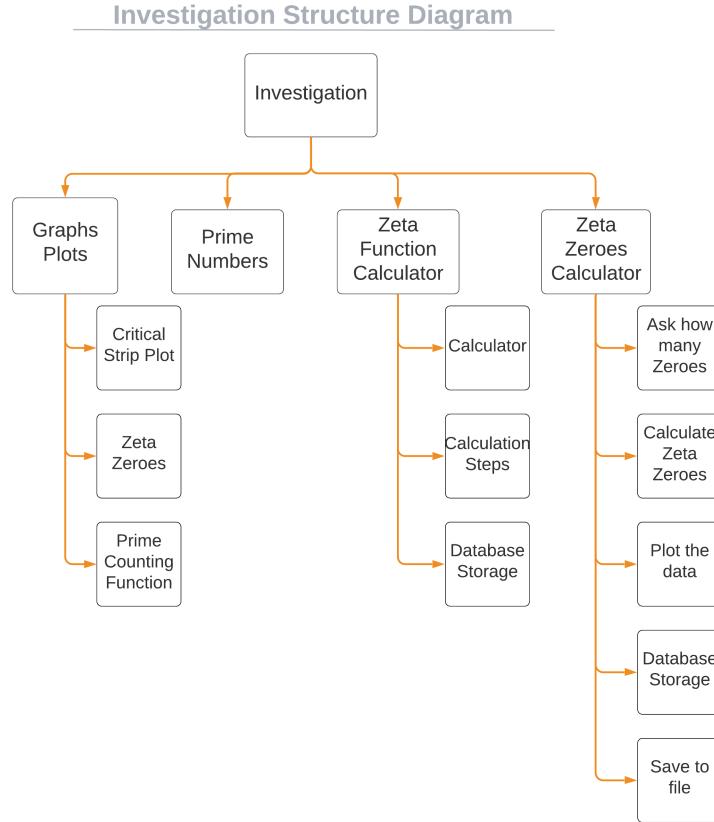


Figure 16: Investigation Structure Diagram

The first section will be the Graph Plot section. The aim of this section is to display to the user various graph plots that are related to the zeta function. This user will be able to change given inputs into the graph plots and be able to see the output visually.

The prime number section will show the user the correlation between the Riemann Zeta Function and the prime numbers. This section will showcase various graphs and mathematical functions for the user to explore.

Next is the zeta function calculator. This will be a relatively simple part of the investigation section. It will allow the user to input a number (or range of

numbers) into the calculator. It then calculates these values and will allow the user to store the data, either in a file or database.

Finally is the zeta zeroes calculator. This will calculate all of the zeta zeroes between two points given by the user, and with accuracy determined by the user. Similarly to the zeta function calculator, the user will also be able to store this data to a database or file, or even display the data in a graph plot.

2.1.6 Summary Structure Diagram

The final main section in the program will be the summary. It will be a recap of what the user should have learnt from using the program, and what to take away from it. It will be split up into a theory recap section, a results section, a conclusion and evaluation section and a section on the impact of the Riemann Hypothesis.

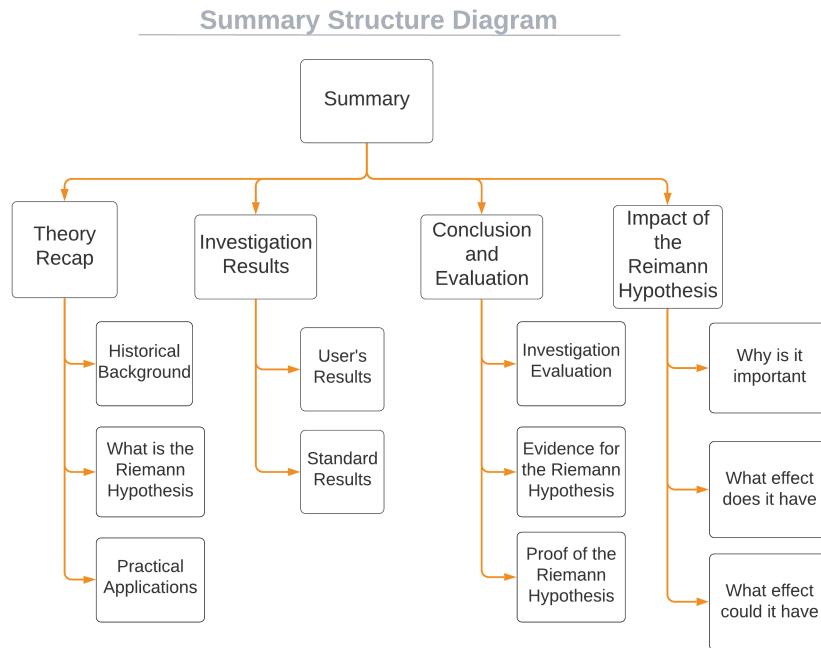


Figure 17: Summary Structure Diagram

The first part of the summary; the theory recap will essentially be a very cut down version of the introduction section. It will provide an overview of the problem such that the user can refresh their mind as to what the Riemann Hypothesis actually is.

As for the investigation results, this page aims to provide the results of the user's investigation. It will provide raw data as well as some visual aids such as

graphs. It will also compare the data collected by the user with the expected data.

Next is the conclusion and evaluation section. This section will detail to the user how accurate their results were to the true values, as well as any evidence and proof of the Riemann Hypothesis.

Finally, is the Impact of the Riemann Hypothesis. The aim of this section is to explain to the user why the Riemann Hypothesis is so important by explaining how it affects us.

Overall, I feel as if I have sufficiently broken down my project into a number of more manageable parts that will come together neatly to form the whole system.

2.2 Hierarchy Diagrams

2.3 System Flowcharts

2.4 Data Flow Diagrams

2.5 Object-Oriented Design

NEED TO ADD UI CLASSES

AND ALSO EXPLAIN HIGH LEVEL LOOP STUFF

SEE BOOK ON HOW TO DO PROPERLY

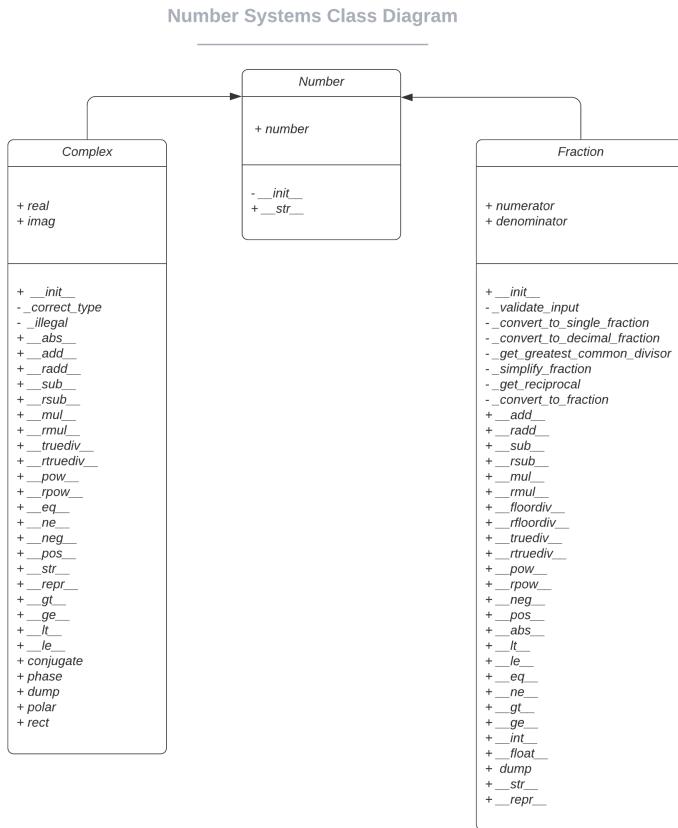


Figure 18: Number Systems Class Diagram

As part of this project I will need to be able to represent many types of numbers namely, fractions and complex numbers. The best way to do this is to use Classes and Object-Oriented Programming. I can create a data structure in python, such that they will be able to store all of the necessary data, and perform all the operations that I need.

All of the data types will inherit attributes and methods from a main ‘Number’ Class. This number class will have basic attributes and methods, allowing a number to be defined and printed.

The complex number class is a lot more substantial than the number class. It will allow for inputs in Rect form, or Modulus Argument Form. The methods in this class will allow for the user to add, subtract, multiply, divide, and use exponentials with complex numbers. There will also be a set of private functions in the class in order to change between cartesian and polar form.

As for the fraction class, it will take inputs of a numerator and denominator, and will allow the user to use public functions in order to perform operations and calculations involving fractions.

These classes will be able to let me sufficiently perform precise calculations with numbers. The fraction class removes any mathematical floating point errors from calculations, and the complex class will allow me to utilise imaginary and complex numbers in Python.

Some points to note; I have tailored this class diagram and the following pseudocode for a Python programme. Conventionally, when calling a function prefix notation is used. For example, if we have a simple function as follows:

Algorithm 1 Prefix add function

```
function ADD(a, b)
    return a + b
end function
```

Then we can see that it takes two inputs, a and b, and will return their sum.

To call this function, we will use prefix notation with the function name at the beginning, followed by the two parameters. Such as:

Algorithm 2 Calling the prefix add function

```
ADD(a, b)
```

However, in Python, we are able to create mathematical functions that allow for infix notation. This is a more natural way of calling maths functions. To allow for infix notation, we add two underscores to the beginning and end of the function name when we define it. So for some example python code:

```
# Python infix add function
def __add__(a, b):
    return a + b
```

We can run it by calling

```
# Python call infix add function
a = 1
b = 2
c = a + b
```

Which is infix notation. Now in this example, it may seem almost obsolete to create a function that already mimics the behaviour of what we are trying to achieve, however using this notation we are able to overwrite the existing infix notation in python, and even create new notation of any data types that we choose to create.

A simple example of this is with the fraction class. There is no inbuilt class for handling fractions in python, so we can create one and allow it to use infix notation.

If we have a fraction class that takes a numerator and denominator as an input, and have this function defined in the class, it would look as follows:

```
# Python __add__ as part of the Fraction Class
def __add__(self, other):
    """ self + other """
    other = self._convert_to_fraction(other, 'addition')
    resulting_numerator = self.numerator * other.denominator +
                          self.denominator * other.numerator
    resulting_denominator = self.denominator * other.denominator
    return (Fraction(resulting_numerator, resulting_denominator))
```

This function finds a common denominator for the fractions and then adds the numerators together.

To call this function to add $\frac{3}{4}$ and $\frac{1}{2}$, we would use infix notation as follows:

```
# Python calling __add__ for two instances of the class Fraction
Fraction(3, 4) + Fraction(1, 2)
```

Which would return the correct value of $\frac{5}{4}$.

As we can see from this example, we have created a python function that can be called using infix notation, rather than the standard postfix notation.

One other point to note is that python does not handle infix notation for user defined data types very well. If we want to compute the user defined *Fraction* + the Python Integer 3, this is okay. But due to the way python has been created, we would be unable to do Integer 3 + *Fraction*. For this we need to define another function called *radd*, short for right add. This allows us to still compute the infix addition, even when the user defined variable is on the right hand side of the addition sign. The *radd* function would use the already

created `__add__` function, but would have its arguments swapped and the code would look as follows:

```
# Python infix radd function
def __radd__(self, other):
    """ other + self """
    return self.__add__(other)
```

This would swap the arguments around so that the `__add__` function is then called with the parameters in the correct position.

2.6 Database Design

Throughout this next section, I will be explaining the structure of the database I will be using, creating data tables for each of the tables in the database, create designs for the key SQL queries that will be used, and I will create entity-relationship diagrams for the database.

2.6.1 Table Designs

In this subsection, I will be using data tables to represent the tables that will be present in my database.

Within my database, there will be 8 tables, which are:

1. Users Table
2. Questions Table
3. Answers Table
4. User Answer Table
5. Notes Table
6. Notes Responses Table
7. Zeta Table
8. User Zeta Table

In each data table, I will show the table name and the name of each of the fields in the table. For each of the fields, I will list whether it is a key of the table, it's datatype, any necessary validation using regular expressions, and some notes on the field.

With the regular expression used for validation, an item in the table will only be considered valid if the entire item itself is a match to the regex. For strings, I am limiting their size to 140 characters, such that the user will be unable to enter strings that are too long and potentially use up too much storage in the database.

Users Table

The purpose of the Users Table will be to store the login credentials for each user registered to the program. The table will store the username, email, and hashed password of each of the users. This is the table that will be referenced when a user creates an account, or goes to login to an existing account.

Table: Users				
Field	Key	Data Type	Validation	Notes
User_ID	Primary	Integer		
Username		String	\w{1,20}	Unique Username for each user
Email		String	.+@.+\\..+	
Password		String		A hashed version of the user's password

Table 1: Data table for the Users Table

Questions Table

Another table in the database is the Questions Table. At points throughout the program, the user will be asked questions. These are questions that the user can either get right or wrong and they are used to check that the user is able to use the program in the right way.

The table will store, for each question, the question number the actual question itself, and the correct answer to the question.

Table: Questions				
Field	Key	Data Type	Validation	Notes
Question_ID	Primary	Integer		
Question_No		Integer	\d+	The number of the question
Question		String	.{1,140}	Questions that is asked to the user
Answer		String	.{1,140}	The correct answer to the question

Table 2: Data table for the Questions Table

Answers Table

Users will be expected to give answers to the questions, throughout the program. The answers of each user will be stored in the Answers table.

Every answer will have an associated Answer_ID, which will be used in the User Answer table to determine answer corresponds to which user. The answer field will be used to record the various different answers said by the users, and the values in Answer, will be in the form of a set, such that two members in the Answer field will not be the same. The Question_ID field is then used to match each answer up with the question that it was answering.

Table: Answers				
Field	Key	Data Type	Validation	Notes
Answer_ID	Primary	Integer		
Answer		String	.{1,140}	
Question_ID		Integer		

Table 3: Data table for the Answers Table

User Answer Table

The User Answer table will link the user's answers to them. Formatting the table this way allows for minimal data to be stored. If the answer to one of the questions is 2, and the vast majority of users answer 2, then the value 2 will only need to be stored once in the answers table, we can then use the User Answers table to link the User_ID of everyone who answered 2, to the Answer_ID of 2, rather than saving an answer over and over again.

This table will only have two fields, the User_ID, and the Answer_ID.

Table: User Answer				
Field	Key	Data Type	Validation	Notes
User_ID		String		
Answer_ID		String		

Table 4: Data table for the User Answer Table

Notes Table

Similarly to the questions and answers that occur in the program, the user will also be able to make notes and comments on their findings.

The difference between notes and questions is that there are no wrong or right answers (or responses as I name them) for the notes, whereas the answer to a question will either be right or wrong.

Table: Notes				
Field	Key	Data Type	Validation	Notes
Notes_ID	Primary	Integer		
Note_No		Integer	\d+	The number of the note question
Question		String	.{1,140}	Questions that is asked to the user

Table 5: Data table for the Questions Table

Responses Table

The responses table will act to the Notes table in a similar way to how the Answers table has a relationship with the Question Table.

Whoever, there will of course be differences in how the tables relate to each other, how they are used, and differences in the information stored in each of the tables.

Unlike with the Questions and Answers, the Responses to the Notes will most likely by completely unique from user to user. Therefore, creating a User Responses table, similar to the User Answer table will not be necessary.

In the table will be stored each response, the Response_ID, which will be a unique identifier for each response, the Note_ID, which describes which note the response is for, and the User_ID, showing which user said the response.

Table: Responses				
Field	Key	Data Type	Validation	Notes
Response_ID	Primary	Integer		
Note_ID		Integer		
Response		String	.{1,140}	The user's response to the posed question
User_ID		Integer		

Table 6: Data table for the Questions Table

Zeta Table

The zeta table will be used to store values of the zeta function. The aim of this table is to be able to store possibly hundreds of input, output pairs for the zeta function.

These input and output values will be complex numbers in the form $a + bi$, where a and b are two integers

The Zeta_ID Field, will be used in the User Zeta table, to determine which users have computed which values of the zeta function.

Table: Zeta				
Field	Key	Data Type	Validation	Notes
Zeta_ID	Primary	String		
Input		String	\d+\+\d+i	
Output		String	\d+\+\d+i	

Table 7: Data table for the Zeta Table

User Zeta Table

The last table in the database will be the User Zeta table. Its fields will be Zeta_ID and User_ID and will be used to match up users and input-output pairs that have been calculated for the zeta function.

This table will be used to calculate which users have computed which values of the riemann zeta function.

Table: User Zeta				
Field	Key	Data Type	Validation	Notes
Zeta_ID		String		
User_ID		String		

Table 8: Data table for the User Zeta Table

2.6.2 Third Normal Form

2.6.3 Database-Program Connections

2.6.4 Entity-Relationship Diagrams

2.7 Key Algorithms Design

Throughout this section, I will be modelling some of the key algorithms used throughout this project. For each algorithm, I will describe how it works using structured English, represent it by using a flowchart, and then write the algorithm in Pseudocode and Python.

2.7.1 Euclidean Algorithm

The Euclidean Algorithm is a method for computing the greatest common divisor of two integers. The greatest common divisor is the largest number that divides into both of the numbers without a remainder. This algorithm is recursive.

It works by, first, taking in two integers a and b . These are the numbers for which the greatest common divisor will be found. I will explain how this algorithm works through the use of an example.

Say we want to find the greatest common divisor of 45 and 10. We would first take the largest of the two numbers, and set that equal to some multiple of the smaller number, plus some remainder.

$$45 = 10 \cdot n + r$$

Where n is the multiple of the smaller number, and r is the remainder. We can then compute what the values of n and r are. For this example, $n = 4$ and $r = 5$.

$$45 = 10 \cdot 4 + 5$$

Say we then use this as a general equation

$$a = b \cdot n + r$$

The next step (and every other step) of the algorithm is to take the value of b and move it to the left hand side of the equation, replacing the value of a . We then do a similar thing by replacing the value of n with the value of r . This process is repeated until $r = 0$.

Completing this step would look as follows:

$$10 = 5 \cdot n + r$$

Then working out the values of n and r

$$10 = 5 \cdot 2 + 0$$

And now the repeating process stops because $r = 0$. We then output the value of b , and that is the answer for the greatest common divisor of the two numbers a and b . So for this example, the greatest common divisor of 45 and 10 is 5.

Now, let's see how this algorithm works on a larger example, where we want to work out the greatest common divisor of 300 and 245.

$$300 = 245 \cdot n + r$$

$$300 = 245 \cdot 1 + 55$$

$$245 = 55 \cdot n + r$$

$$245 = 55 \cdot 4 + 25$$

$$25 = 5 \cdot n + r$$

$$25 = 5 \cdot 5 + 0$$

Then our answer is the value at position b in $a = b \cdot n + r$, which is 5. So the greatest common divisor of 300 and 245 is 5.

Now, earlier I mentioned that we start by taking the larger of the two inputs, and place that on the left hand side of the equation, but really, the algorithm works no matter which input starts on the right of the equation. Say instead of calculating the greatest common divisor of 300 and 245, we want to calculate the greatest common divisor of 245 and 300. We would start by forming the equation:

$$245 = 300 \cdot n + r$$

And then working out the values of n and r :

$$245 = 300 \cdot 0 + 245$$

For any set of values where the smaller input is at position a , we will always be left with $n = 0$ and $r = a$.

Following through with the algorithm, the next step would be:


$$300 = 245 \cdot n + r$$

This is exactly how we started the previous example. This shows that it doesn't matter which way round the two input numbers go in the algorithm, it will always compute the same number.

In other words, the greatest common divisor of a and b , is the same as the greatest common divisor of b and a , which intuitively makes sense.

Now using flowcharts, we can write the algorithm as follows:

Figure 19: Euclidean Algorithm Flowchart

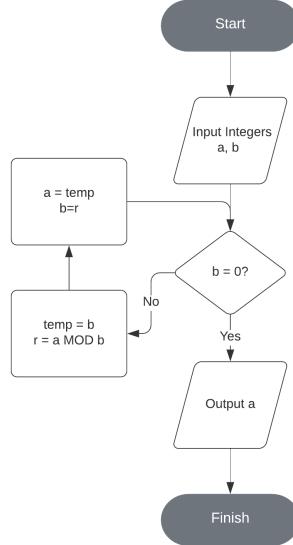

By representing the algorithm as a flowchart, we can see that it starts by receiving two integers a and b as an input, and then keeps on finding the values of n and r from the examples, until the value of b is 0. Implementing this as code, this looping could be done using a standard WHILE loop, but I think that implementing this algorithm as a recursive function would be more suitable.

Implementing this algorithm in pseudocode, it would look as follows:

Algorithm 3 Euclidean Algorithm Pseudocode

```

function GREATEST_COMMON_DIVISOR(a, b)
  if b = 0 then
    return a
  else
    return GREATEST_COMMON_DIVISOR(b, a MOD b) ▷ recursively call
    the function until b = 0
  end if
end function
  
```

We can see from this pseudocode, the recursive nature of this algorithm.

Then writing the Euclidean Algorithm in Python:

```
# Euclidean Algorithm
def greatest_common_divisor(a: int, b: int) -> int:
    if b == 0:
        return a
    else:
        # recursively call the function until b = 0
        return greatest_common_divisor(b, a % b)
```

This implementation of the Euclidean Algorithm in Python, is very efficient. Although it is recursive, and that can in some circumstances lead to a large amount of memory use - especially in Python - it would be relatively simple to unwind the stack at the end of the computation, because this function does not call any other functions and is relatively simple.

2.7.2 Riemann Zeta Function

One of the most important mathematical functions in this project is the Riemann Zeta Function. As mentioned in my analysis section, it can be defined as:

$$\zeta(s) = \sum_{n=1}^{\infty} \frac{1}{s^n}$$


Which can be rewritten as:

$$\zeta(s) = \frac{1}{1 - 2^{1-s}} \sum_{n=0}^{\infty} \frac{1}{2^{n+1}} \sum_{k=0}^n (-1)^k \binom{n}{k} (k+1)^{-s}$$

This is just one of many of the ways that $\zeta(s)$ can be defined. The main advantages of this definition are that it will allow inputs for any complex number s (apart from when $s = 1$ for which $\zeta(s)$ is undefined), and that it is fast to compute.

Using flowcharts, we can write this function as follows:

Figure 20: Zeta Function Flowchart

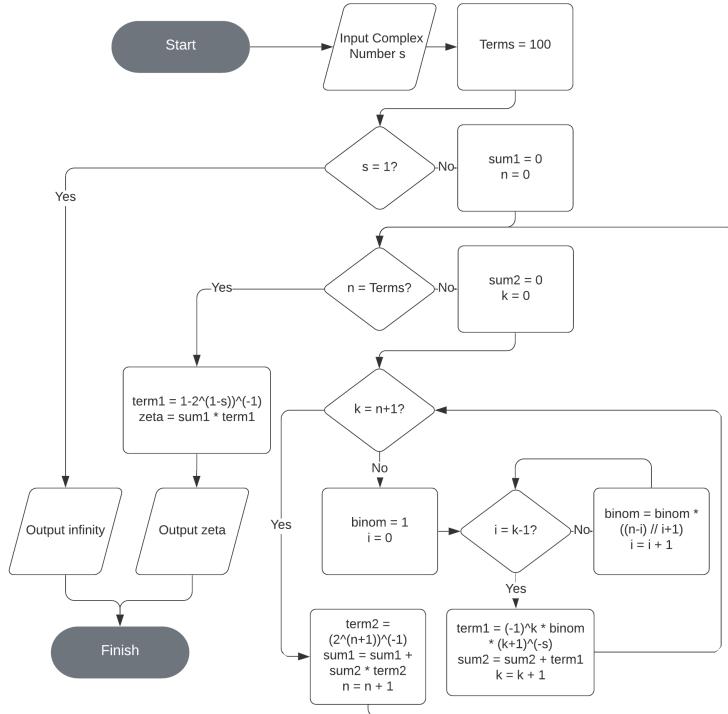

Unfortunately, with any computational implementation of the zeta function, it would be impossible to calculate an exact output for any given input. This is due to the fact that the zeta function, by definition is the sum of an infinite series.

It would be intractable to compute every single element in the series to be able to sum it. Because the infinite sum is convergent (except for $\zeta(1)$ which cannot be calculated), we can approximate the sum by calculating a very large number of terms in the sum, instead of an infinite amount. The number of terms we calculate in the sum is a trade-off between the time it takes to compute the function, and the accuracy of our answer.

This is what the variable `Term`, in the flowchart, is used for. Its aim is to replace the ∞ in the infinite loop, such that we can still compute $\zeta(s)$ to a high degree of accuracy, with the function still being relatively time efficient.

In a sense, we are changing our definition of the zeta function, so the function that we are actually calculating is this:

$$\zeta(s) \approx \frac{1}{1 - 2^{1-s}} \sum_{n=0}^{\text{Terms}} \frac{1}{2^{n+1}} \sum_{k=0}^n (-1)^k \binom{n}{k} (k+1)^{-s}$$


Which is a less accurate version of the zeta function, but is actually computable.

From the flowchart, we can see how the situation where $s = 1$ is handled. $\zeta(1)$ is undefined, so we would be unable to calculate this. Therefore, we have to check this special case, and if $s = 1$, then the function will **OUTPUT Infinity**, otherwise, it will just continue with the rest of the function.

The rest of the function, is essentially just creating two sequences and summing them. The flowchart represents this well, it allows us to visualise the looping nature of the sequences.

We can break down our formula for the approximation of $\zeta(s)$, which will make it clear how the flowchart is designed to work.

Figure 21: Decomposed Zeta Function

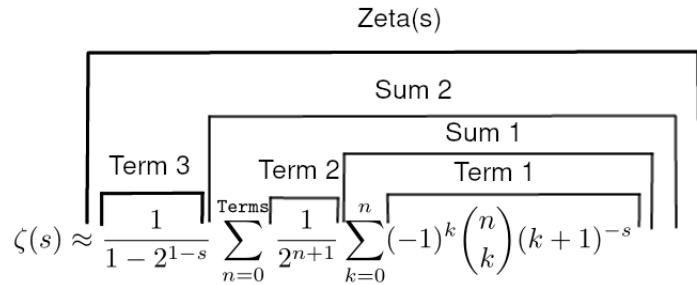

From this image, we can see that:

$$\zeta(s) = \text{Term3} \cdot \text{Sum2}$$

Where:

$$\text{Sum2} = \sum \text{Term2} \cdot \text{Sum1}$$

Where:

$$\text{Sum1} = \sum \text{Term1}$$

Then, all that has to be done is replace the values of **Term1**, **Term2**, and **Term3** with their respective values, and that is essentially what is being calculated.

By applying decomposition to the function, we can now easily see how the flowchart works, and now how to implement this function by using pseudocode.

Algorithm 4 Zeta Function Pseudocode

```
function ZETA(s)
    TERMS ← 100
    if s = 1 then
        return ∞
    else
        for n ← 0 to TERMS do
            sum1 ← 0
            for k ← 0 to n + 1 do
                sum2 ← sum2 + (-1)k ·  $\binom{n}{k}$  · (k + 1)-s
            end for
            sum1 ← sum1 + sum2 ·  $\frac{1}{2^{n+1}}$ 
        end for
        constant ← 1 - 21-s
        return  $\frac{\text{sum1}}{\text{constant}}$ 
    end if
end function
```

For sake of readability, I have omitted creating separate variables for `Term1`, `Term2`, and `Term3`. Instead, these can just be seen by the mathematical equations present in the Pseudocode.

I much prefer this representation of the function, as it easily allows you to see how the sums are implemented alongside the terms. The use of `for` loops makes it easy to see how we have a sum being calculated inside a sum.

With pseudocode, I have just been able to write the mathematical statements for readability sake, however, when implementing this as a programming language, it could look rather messy with long maths having to be written out. One area that would need addressing when converting this pseudocode to an actual language is with the binomial coefficient, that is $\binom{n}{k}$. I have previously mentioned this in my analysis, however:

$$\binom{n}{k} = \frac{n!}{k!(n-k)!}$$

Where:

$$\begin{aligned} x! &= \prod_{a=1}^x a \\ &= x \times (x-1) \times (x-2) \times (x-3) \times \cdots \times 3 \times 2 \times 1 \end{aligned}$$

Which is itself, the product of another series.

So when calculating the zeta function in this form, we are actually having to compute, the product of 3 series , within a series, within a series. This may not

seem at all time or space efficient, but these sums are a lot easier for a computer to compute than evaluating $\zeta(s)$ by its definition that is:

$$\zeta(s) = \sum_{n=1}^{\infty} \frac{1}{n^s}$$

To implement the binomial coefficient effectively, we would not be able to use it in its factorial form - this would take too long to compute. Instead, we can define the binomial coefficient another way.

If we take our equation for the definition of the binomial coefficient, and focus on the fraction of the right hand side:

$$\binom{n}{k} = \frac{n!}{k!(n-k)!}$$

We can divide the numerator and denominator by $(n-k)!$, then we have that:

$$\binom{n}{k} = \frac{\frac{n!}{(n-k)!}}{k!}$$

Then expanding the numerator:

$$\binom{n}{k} = \frac{\frac{n(n-1)(n-2)\dots(n-k+1)(n-k)(n-k-1)(n-k-2)\dots(2)(1)}{(n-k)(n-k-1)(n-k-2)\dots(2)(1)}}{k!}$$

Notice how the denominator of the numerator exactly repeats what is above it, this means that all of these terms can cancel, such that we are left with:

$$\binom{n}{k} = \frac{n(n-1)(n-2)\dots(n-k+2)(n-k+1)}{k!}$$

Which can be rewritten as:

$$\binom{n}{k} = \frac{n^k}{k!}$$

Where n^k is known as a falling factorial power and is defined as:

$$\begin{aligned} n^k &= n(n-1)(n-2)\dots(n-k+1) \\ &= \prod_{x=1}^k (n-(x-1)) \\ &= \prod_{x=1}^{k-1} (n-x) \end{aligned}$$

So looking back at how to use this to calculate the binomial coefficient, we can say that:

$$\begin{aligned}
\binom{n}{k} &= \frac{n!}{k!(n-k)!} \\
&= \frac{n^k}{k!} \\
&= \frac{n(n-1)(n-2)\dots(n-(k-1))}{k(k-1)(k-2)\dots1} \\
&= \prod_{i=1}^k \frac{n+1-i}{i} \\
&= \prod_{i=0}^{k-1} \frac{n-i}{i+1}
\end{aligned}$$

We now have a function, that we can be called from inside the zeta function, in order to calculate the appropriate binomial coefficient.

Implementing the binomial coefficient function as pseudocode would look as follows:

Algorithm 5 Binomial Coefficient Pseudocode

```

function BINOM( $n, k$ )
     $b \leftarrow 1$ 
    for  $i \leftarrow 0$  to  $k$  do
         $b = b \times \frac{n-i}{i+1}$ 
    end for
    return  $b$ 
end function

```

Rewriting our definition of the zeta function, with this new way of calculating the binomial coefficient, we can now say that:

$$\zeta(s) \approx \frac{1}{1 - 2^{1-s}} \sum_{n=0}^{\text{Terms}} \left(\frac{1}{2^{n+1}} \sum_{k=0}^n \left((-1)^k \left(\prod_{i=0}^{k-1} \frac{n-i}{i+1} \right) (k+1)^{-s} \right) \right)$$

We are then able to convert both the Zeta Function Pseudocode and the Binomial Coefficient Pseudocode into Python code

```
# Binomial Coefficient
# \binom{n}{k} = \prod_{i=0}^{k-1} \frac{n-i}{i+1}
def binom(n, k):
    v = 1
    for i in range(k):
        v *= (n - i) / (i + 1)
    return v

# Global Zeta Function
# \zeta(s) \approx \frac{1}{1-2^{1-s}} \sum_{n=0}^{\text{TERMS}} \left( \left( \frac{1}{2^{n+1}} \sum_{k=0}^n (-1)^k \left( \prod_{i=0}^{k-1} \frac{n-i}{i+1} \right) (k+1)^{-s} \right) \right)^{-1}
def zeta(s, TERMS=100):
    if s == 1:
        return float('inf')
    # \sum_{n=0}^{\text{TERMS}} \left( \left( \frac{1}{2^{n+1}} \sum_{k=0}^n (-1)^k \left( \prod_{i=0}^{k-1} \frac{n-i}{i+1} \right) (k+1)^{-s} \right) \right)^{-1}
    sum1 = 0
    for n in range(TERMS):
        # \sum_{k=0}^n \left( (-1)^k \binom{n}{k} (k+1)^{-s} \right)
        sum2 = 0
        for k in range(n + 1):
            sum2 += (-1) ** k * binom(n, k) * (k + 1) ** (-s)
        sum1 += sum2 * (1 / (2 ** (n+1)))
    return sum1 * (1 / (1 - 2 ** (1 - s)))
```

Now we have a very efficient program that can be used to calculate any value of $\zeta(s)$.

This function will be used extensively throughout my technical solution to plot graphs, find data points and to try to help provide some proof for the Riemann Hypothesis.

2.7.3 Circular Queue

For parts of my project, I will require a FIFO Queue Data Structure. I will be implementing this using a circular queue. This data structure will be a class, that has a set of methods that manipulate the data in the queue. The first of these methods will be the procedure that is called to initialise the queue. When an instance of the Queue class is created, the Queue class will require an input_queue parameter, which will have the beginning items of the queue in it. Potentially also a max_size parameter could be used if a static data structure is wanted by the user rather than a dynamic one. When the class is initialised, a

size variable will need to be created to keep track of the current length of the queue, as well as a max_size. The queue will then have to be created with the input queue at the front, and any remaining spaces left in the queue will have to be filled in with some filler character. Variables for the front and rear pointers of the queue will then need to be created.


One of the methods used in this implementation of a Circular Queue will be the is_full function. If the size of the queue is equal to it's maximum size, then the function will return true, otherwise it will return false.

Another method is the function is_empty. If the size of the queue is 0, then the function will return true, otherwise it will return false.

As well as this is the enQueue method, which will take a parameter of an item. In this procedure, the item is appended to the rear of the circular queue. This procedure can only be run if the queue is not already full, if it is full, then an error will be thrown. If the queue is not full, then the element in the queue that is at the position of the rear pointer will be set equal to the item that is being enqueued. The rear pointer will then need to be incremented. The rear pointer is increased by 1, but if this value goes above the max_size of the queue, then it will need to be set to 0. For this the mod function can be used. The variable for the size of the list will then need to be incremented by one.


Similar to this is deQueue, where an item is removed from the front of the queue and it's value is returned. This function can only be run if the queue is not already empty, otherwise an error will be thrown. The variable item will be used to hold the value of the element in the queue where it's index is equal to the front pointer. The element at this position can then be set to some blank / placeholder value. This is not necessary for computation but helps with readability when printing the queue. The front pointer will then need to be incremented by one, but be modded in a similar way to the rear queue during an enQueue. The size variable will need to be decremented by one and the item variable will be returned.

The flowcharts for each of these subroutines looks as follows:

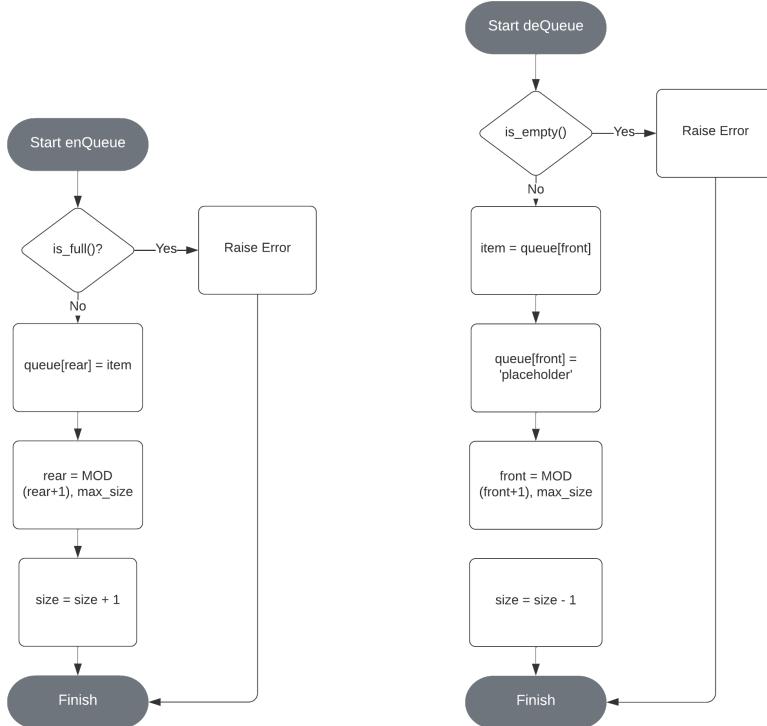

(a) `enQueue` method flowchart

(b) `deQueue` method flowchart

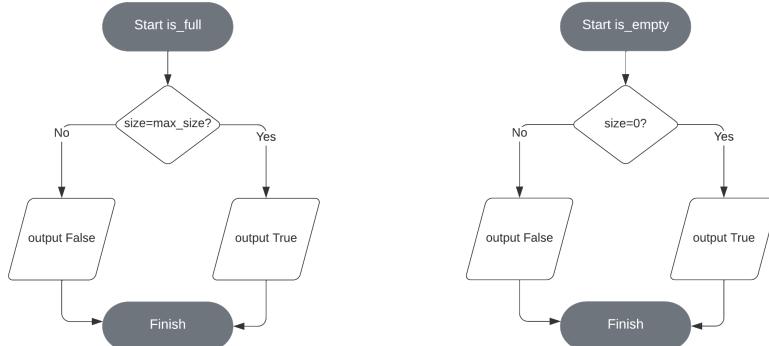

(c) `is_full` method flowchart

(d) `is_empty` method flowchart

Figure 22: Flowcharts for Circular Queue Methods

Implementing the circular queue in pseudocode looks as follows:

Algorithm 6 Circular Queue Pseudocode

```
1: class CIRCULAR_QUEUE(input_queue, max_size)
2:   public function __INIT__(self, input_queue, max_size)
3:     size  $\leftarrow$  length input_queue
4:     front  $\leftarrow$  0
5:     rear  $\leftarrow$  size
6:     if size  $>$  max_size then
7:       return Error
8:     else
9:       blanks  $\leftarrow$  list()
10:      no_of_blanks  $\leftarrow$  max_size - size
11:      for i  $\leftarrow$  0 to no_of_blanks do
12:        blanks = blanks + 'placeholder'
13:      end for
14:      queue  $\leftarrow$  input_queue + blanks
15:    end if
16:   end function
17:
18:   public procedure ENQUEUE(item)
19:     if IS_FULL() = True then
20:       return Error
21:     else
22:       queue[rear]  $\leftarrow$  item
23:       rear  $\leftarrow$  mod rear + 1, max_size
24:       size  $\leftarrow$  size + 1
25:     end if
26:   end procedure
```

Algorithm 7 Circular Queue Pseudocode Continued

```
27:   public function DEQUEUE(item)
28:     if IS_EMPTY() = True then
29:       return Error
30:     else
31:       item  $\leftarrow$  queue[front]
32:       queue[front]  $\leftarrow$  'placeholder'
33:       front  $\leftarrow$  mod front + 1, max_size
34:       size  $\leftarrow$  size - 1
35:       return item
36:     end if
37:   end function
38:
39:   public function IS_FULL()
40:     if size = max_size then
41:       return True
42:     else
43:       return False
44:     end if
45:   end function
46:
47:   public function IS_EMPTY()
48:     if size = 0 then
49:       return True
50:     else
51:       return False
52:     end if
53:   end function
54: end class
```

And then converting this pseudocode to python it will look as follows:

```
class Queue:

    """
    Implementation of a circular queue

    Contains the subroutines:
    - enqueue
    - dequeue
    - is_full
    - is_empty
    """


```

```

def __init__(self, input_queue, **kwargs):
    self.input_queue = input_queue
    self.size = len(self.input_queue)
    self.front = 0
    self.rear = len(self.input_queue)
    if 'max_size' in kwargs.keys():
        self.max_size = kwargs['max_size']
    else:
        self.max_size = len(self.input_queue)
    if self.size > self.max_size:
        raise IndexError("max_size must be greater than or equal to
                        the size of the input queue")
    else:
        self.blanks = [False for i in range(self.max_size -
                                             self.size)]
        self.queue = self.input_queue + self.blanks

def enqueue(self, item):
    """Append an item to the rear of the circular queue"""
    if self.is_full():
        raise IndexError("Tried to enqueue to a full queue")
    else:
        self.queue[self.rear] = item
        self.rear = (self.rear+1) % self.max_size
        self.size += 1

def dequeue(self):
    """Remove and return the value at the front of the circular
       queue"""
    if self.is_empty():
        raise IndexError("Tried to dequeue from an empty queue")
    else:
        item = self.queue[self.front]
        self.queue[self.front] = False
        self.front = (self.front+1) % self.max_size
        self.size -= 1
        return item

def is_full(self):
    """Check if the circular queue is full"""
    return self.size == self.max_size

def is_empty(self):
    """Check if the circular queue is empty"""
    return self.size == 0

```

2.7.4 Binary Insertion Sort

Throughout the program I will be required to sort sets of data. To sort the data, I will be using a binary insertion sort algorithm, due to it's low time and space complexity. Although not too efficient on large data sets, I should only be handling relatively small data sets during this program so the binary insertion sort should suffice for all sorting in the program.

A normal insertion sort works by having a queue which will originally contain each element in the original array. The item at the front of the queue will be removed from the queue and be placed in an array containing the elements in sorted order. When an element is taken from the queue and put in the sorted array, it is put in a position such that the elements either side of it are lower and higher than it. Once every element has been moved from the queue to it's correct position in the sorted list, the sorted list will contain every element that was in the original array but in sorted order.

A binary insertion sort is a variation of the normal insertion sort, but instead it uses a binary search, rather than a linear search to find the position that the element will go in the sorted list. This improves the time complexity of the program from $O(n)$ to $O(\log n)$.

In pseudocode, the algorithm for a binary insertion sort looks as follow:

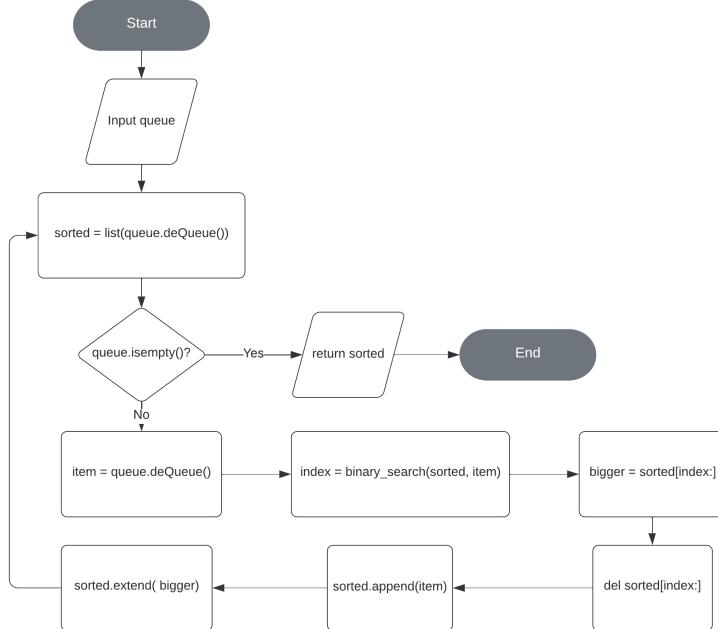


Figure 23: Binary Insertion Sort Flowchart

This algorithm written in pseudocode looks as follows:

Algorithm 8 Binary Insertion Sort Pseudocode

```
1: function BINARY_INSERTION_SORT(data)
2:   queue = Queue(data)
3:   sorted ← list()
4:   sorted ← sorted + queue.DEQUEUE()
5:   while not queue.IS_EMPTY() do
6:     index ← binary_search(sorted, item)
7:     bigger ← sorted[index :]
8:     delete sorted[index :]
9:   end while
10:  return sorted
11: end function
```

And then writing the algorithm in python:

```
def binary_insertion_sort(data, descending=False):

    """
    Sorts a list of data into ascending order using a binary insertion
    sort
    """

    try:
        array = list(map(float, data ))
    except ValueError:
        array = data
    queue = Queue(array)
    sorted = [queue.deQueue()]
    while not queue.is_empty():
        item = queue.deQueue()
        index = binary_search(sorted, item)
        bigger = sorted[index:]
        del sorted[index:]
        sorted.append(item)
        sorted.extend(bigger)
    if not descending:
        return sorted
    else:
        return sorted[::-1]
```

This python variation of the binary insertion sort algorithm also includes an option to return the sorted list in descending order, as well as the default ascending order.

2.8 Data Structure Design

2.9 File Structure

In this section, I will showcase the full planned File Structure for the program.

- **program**
 - **user_interface**
 - * **login_ui**
 - __init__.py
 - forgotten_password.py
 - forgotten_password2.py
 - login.py
 - reset_password.py
 - reset_password2.py
 - sign_up.py
 - * **tutorial_ui**
 - * __init__.py
 - * main_menu.py
 - __init__.py
 - login_section.py
 - main_section.py
 - main.py

Description of the file structure

2.10 HCI and Screen Designs

Throughout this section, I will be creating initial designs for my screen pages used throughout the program.

Each page will have a consistent structure and layout, such that it will not be confusing for a user to be able to use and navigate page.

I will not be showing the design of every page used - because they are largely similar - I will instead just be showcasing and explaining some of the designs for my most important or unique parts of the project.

2.10.1 Generic Template

The consistent design for my user interface will follow the following template design.

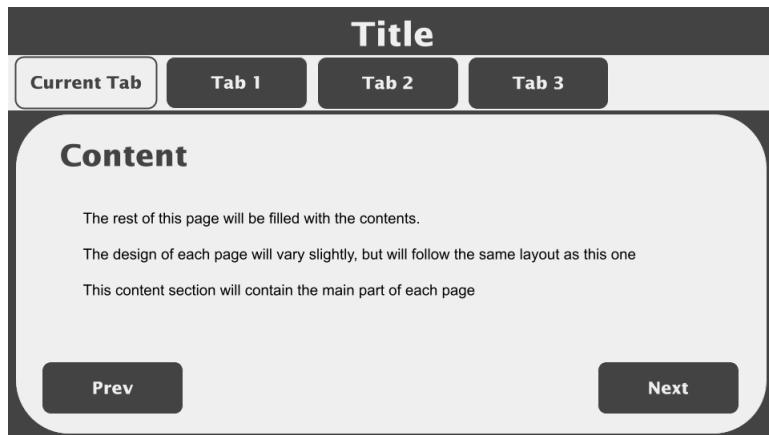


Figure 24: Generic Screen Design

At the top of the page is the title. This is there to show the user which page they are on.

Below this, is the tab line. Each tab on the bar will be a clickable button, that will take the user to a different screen. The user will be able to go through the tabs in whichever order they please, which may not necessarily be in the order they are arranged; although the program will be designed such that the next tab will follow on from the previous one.

The section with the title 'Content' will show the main part of each page. For example, if the page was showing a graph plot, it will be displayed in this section.

At the bottom of the page, are the previous and next buttons, this will display the previous and next tabs respectively. These button will allow for the user to navigate between each of the pages more easily.

2.10.2 Main Menu Screen Design

The main menu is the main entry point for the user into the program. This will be what the user first sees when they launch the program, and will display all of the possible menu options for them.

It is important that this page looks visually appealing, but is also very functional and allows for efficient traversal between screen pages.

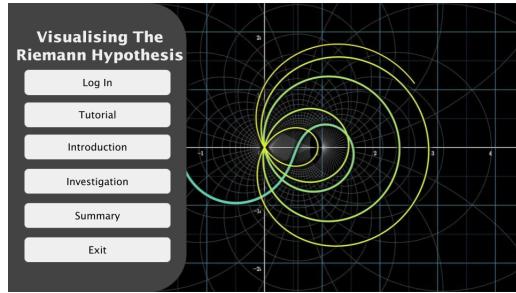


Figure 25: Main Menu Screen Design

On the left hand side, is displayed a menu of all of the sections of the program that the user is able to navigate to. It is recommended that the user goes through them in the order shows, however, they will be able to navigate the sections however they please.

Selecting each menu option will show a new page for that respective section, and close the main menu page. When the user is finished with that section, they will then be sent back to the main menu screen.

If the user chooses to log in, their username will be shown on the main menu screen, as demonstrated in the figure below.

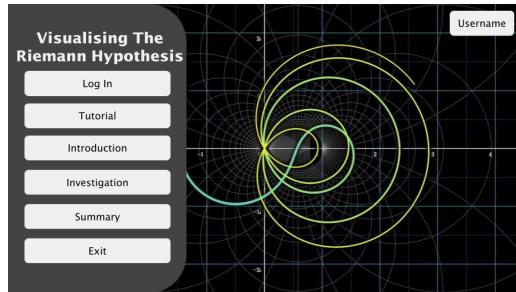


Figure 26: Logged In Main Menu Screen Design

2.10.3 Login Screen Design



Figure 27: Login Screen Design

From the figure above, we can see a prototype design for the Login Page. On the tab bar are the different options for the user. The login screen starts on the page that will be most-used, that is to be able to sign in to the program. However, the tab bar means that if a user wants to create an account, or reset their password, then they have the option there.

The user's password will not be visible when they type it in for security reasons, but in case they want to see what they have typed, then there is a show button for them.

If the user incorrectly types their username/password, then an error message will be displayed just above the submit button.

The submit button will take the user's input for their username and password, and check it against the stored values in the database. If they are incorrect, the error will be displayed, if the credentials are correct, then the user will be taken back to the main menu, and it will display their username, showing that they are logged in.

The user will then be able to go to any part of the program they wish, and have their data saved for the next time they want to use the program.

2.10.4 Graph Plots Screen Design

As part of the investigation section of the project, the user will have the opportunity to interact with various graphs. An example of how this would look is shown in the figure below.

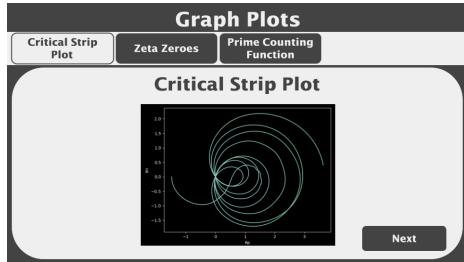


Figure 28: Graph Plot Screen Design

The graph will be animated, such that it updates in real time as the user is looking at it. The user will also be able to change input values into the graph plots.

2.10.5 Calculator Screen Design

Another part of the investigation section will be where the user can calculate values of the zeta function. The basic version will be where the user can enter a single input value, and an output value is calculated.

A more advanced version is where the user defines a range of value for the input, by given a start value, a stop value and a step value for the difference between the values.

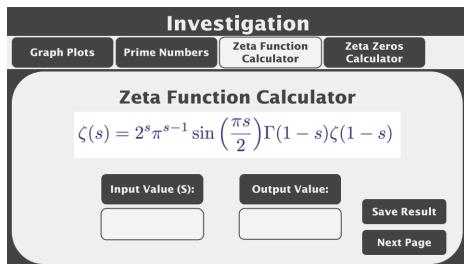


Figure 29: Zeta Function Calculator Screen Design

The user will then be able to store the output values from this calculator in a database. The database will contain values of zeta that every user who uses the program calculates, and each input output pair calculated will be stored with the user who found out the value, then there will be a leaderboard of who has calculated the most values for the zeta function.

3 Technical Solution

3.1 Program Re-design

While creating my solution to the problem, I realised that my initial design was lacking in some areas, and a lot if it needs to be updated.

3.1.1 Database Redesign

The first area that needed to be redesigned was the database. I realised that parts of my old design were almost obsolete and unnecessary, while my database was also not in complete third normal form. I redesigned that database, such that it now contains the following tables:

Users Table

The user's table is vastly unchanged from my original design. The main change is that I removed the User_ID Field, as it was obsolete and used the Username as the primary key as it will be unique for each user. This table will store the credentials for each user who has registered an account

Table: Users				
Field	Key	Data Type	Validation	Notes
Username	Primary	TEXT	\w{1,20}	Unique Username for each user
Email		TEXT	.+@.+\\..+	A unique email address for each user
Password		TEXT		A hashed version of the user's password

Table 9: Data table for the Users Table

User's Answers Table

The User's Answers table will be used to store the answers that each user has input to the various questions that are asked throughout the program.

Table: User's Answers				
Field	Key	Data Type	Validation	Notes
Question_No	Primary	INTEGER	\d+	The number of the question that is being answered
Username	Primary	TEXT	\w{1,20} ..+	The username of the user that is answering the question
UserAnswer		TEXT		The user's answer to the question

Table 10: Data table for the User's Answers Table

Notes Table

The Notes table will be used to store the notes that each user makes when they use the program, so that these notes can be loaded next time they log in

Table: Notes				
Field	Key	Data Type	Validation	Notes
Username	Primary	TEXT	\w{1,20}	The username of the user who is making the note
Section	Primary	TEXT	[a-zA-Z]	The section that the note is being made for
Text		TEXT		The user's note

Table 11: Data table for the Notes Table

Zeroes Table

The zeroes table will store the input for every zeta zero calculated and saved by users

Table: Zeroes				
Field	Key	Data Type	Validation	Notes
Zero_ID	Primary	INTEGER	\d+	A unique ID for this zeta zero
Zero_Real_Input		REAL	\d(\.\d+)?	The real part of the input for this zeta zero
Zero_Imag_Input		REAL	\d(\.\d+)?	The imaginary part of the input for this zeta zero

Table 12: Data table for the Zeroes Table

User Zeroes Table

The user zeroes will relate every zeta zero calculated back to the user who calculated it.

Table: User Zeroes				
Field	Key	Data Type	Validation	Notes
Zero_ID	Primary	INTEGER	\d+	A unique ID for this zeta zero
Username	Primary	TEXT	\w{1,20}	The user that computed this zeta zero

Table 13: Data table for the User Zeroes Table

Zeta Table

The zeta table will contain all of the stored inputs and outputs of the zeta function.

Table: Zeta				
Field	Key	Data Type	Validation	Notes
Zeta_ID	Primary	INTEGER	\d+	A unique ID for each input-output pair
Input_Real		REAL	\d(\.\d+)?	Real part of the input for this value
Input_Img		REAL	\d(\.\d+)?	Imaginary part of the input for this value
Output_Real		REAL	\d(\.\d+)?	Real part of the output for this value
Output_Img		REAL	\d(\.\d+)?	Imaginary part of the output for this value

Table 14: Data table for the Zeta Table

User Zeta Table

The user zeroes table will relate every zeta value calculated to the user who computed it.

Table: User Zeta				
Field	Key	Data Type	Validation	Notes
Zeta_ID	Primary	INTEGER	\d+	A unique ID for this zeta value
Username	Primary	TEXT	\w{1,20}	The user that computed this value

Table 15: Data table for the User Zeta Table

Correct Answers Table

The correct answers table lists all of the acceptable answers for the questions asked in the program.

Table: Correct Answers				
Field	Key	Data Type	Validation	Notes
Questions_No	Primary	INTEGER	\d+	The question that this answer is correct for
Correct Answer	Primary	TEXT	\w{+}	A valid answer for that question

Table 16: Data table for the Correct Answers Table

Questions Table

The questions table lists all of the questions that are asked in the program.

Table: Questions				
Field	Key	Data Type	Validation	Notes
Question_No	Primary	INTEGER	\d{+}	
Question	Primary	TEXT	\w{+}	The questions that is being asked

Table 17: Data table for the Questions Table

Entity Relationship Diagram

Now that the database has been properly designed, here is the entity relationship diagram for the database, showing all of the connections between tables

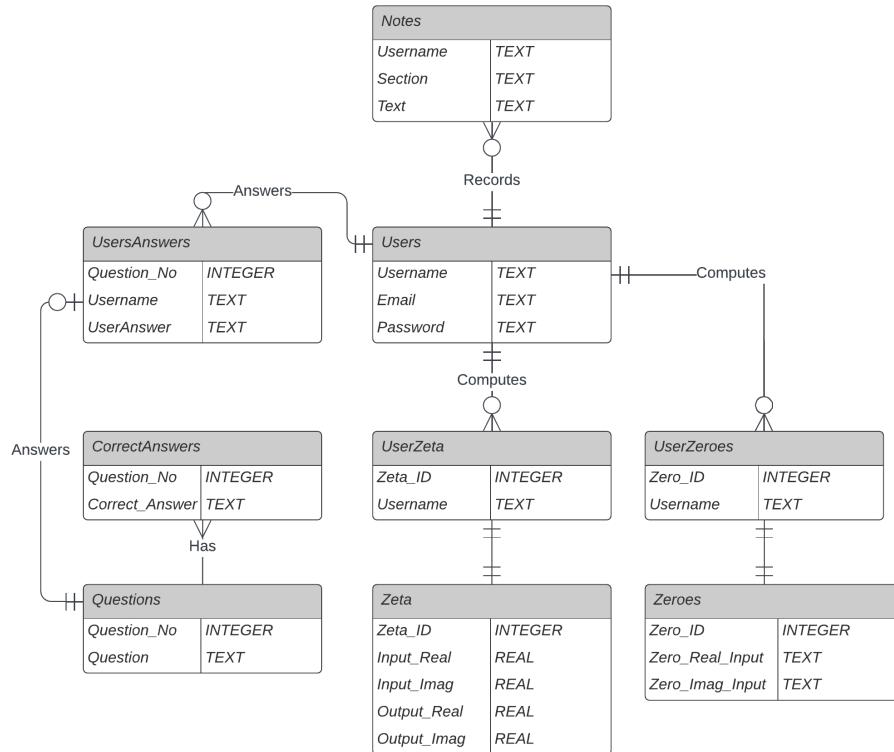


Figure 30: Database Entity Relationship Diagram

Third Normal Form

Unlike the previous database that I had designed, this database is now in third normal form. To be in third normal form, a database must meet the following criteria:

First Normal Form:

- All rows must be unique
- Each cell must contain a single value
- Data must be atomic

Second Normal Form:

- Must be of first normal form
- Contains no partial dependencies

Third Normal Form:

- Must be of second normal form
- Contains no non-key dependencies

Since redesigning the database, there are now no non-key dependencies, no partial dependencies, all data is atomic, each cell only contains one value and all of the rows are unique, meaning that this database is now in third normal form. This helps throughout the creation of my technical solution, as data will be easier to change and maintain, there will be no duplication of data, meaning that data integrity is maintained, and smaller tables with fewer fields allows for faster searches.

3.1.2 User Interface

3.2 Full Technical Solution

See <https://github.com/jackm245/Riemann-Hypothesis/> for the full write-up
Or Appendix A at the bottom of this document

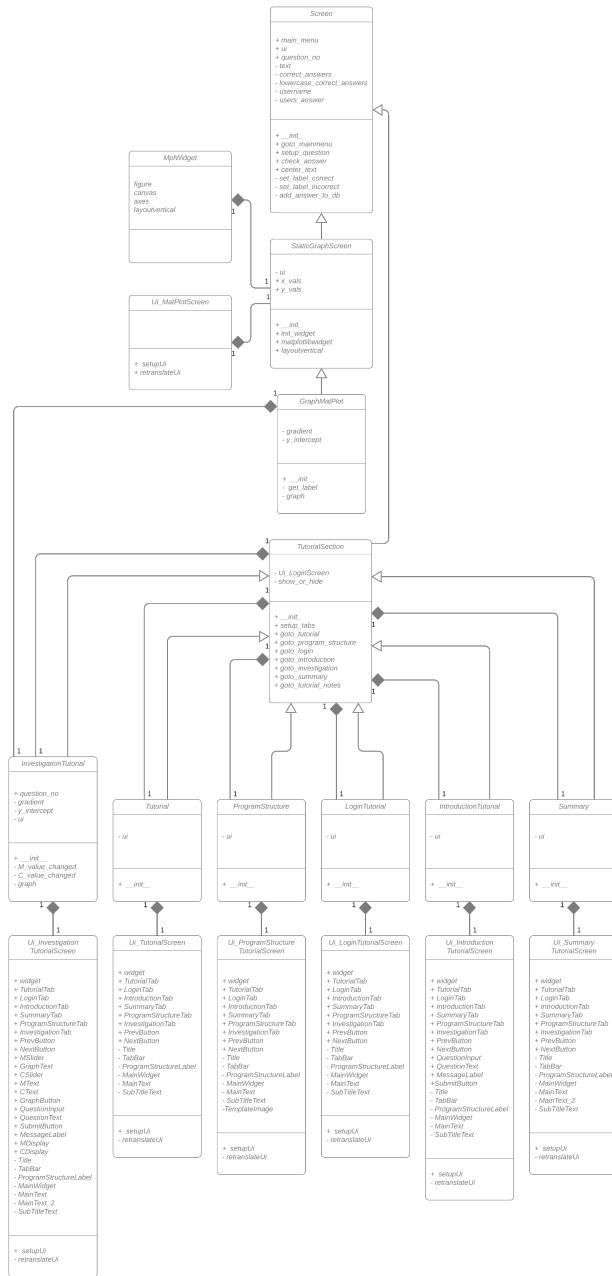


Figure 31: Tutorial Class Diagram

4 Appendix A - Technical Solution Code

main.py

```
"""
main.py
=====

This is the file from which the entire program is run
Includes the entry point into the program
"""

import sys
from PyQt5 import QtCore, QtGui, QtWidgets
from program import MainMenu, create_database

def main():
    """ The main entry point to the program """
    app = QtWidgets.QApplication(sys.argv)
    create_database()
    application = MainMenu()
    sys.exit(app.exec_())

if __name__ == '__main__':
    main()
```

program/__init__.py

```
"""
__init__.py
=====

Imports from program for main.py
"""


```

```
from .main_section import MainMenu
from .user_interface import Ui_MainMenu
from .utils import create_database
```

program/main_section.py

```
"""
main_section.py
=====

Contains the class used to interact with the GUI for the
main menu in the project
```

```

Includes the Main Menu and progress screen
"""

from PyQt5 import QtWidgets
from PyQt5.QtWidgets import QTableWidget, QTableWidgetItem, QHeaderView
from .user_interface import Ui_MainMenu, Ui_ProgressScreen
from .login_section import Login
from .introduction_section import Introduction
from .investigation_section import GraphPlot
from .tutorial_section import Tutorial
from .summary_section import Summary
from .notes import TutorialNotes
from .utils import User, Screen, database_select, database_query
import sys

class MainMenu(Screen):

    """
    This class configures the GUI for the main menu, and allows the user
    to interact with the GUI for this page
    """

    def __init__(self):
        super(MainMenu, self).__init__()
        self.ui = Ui_MainMenu()
        self.ui.setupUi(self)
        if User.GetSignedIn():
            self.ui.UsernameButton.setText(User.GetUsername())
            self.ui.UsernameButton.show()
        else:
            self.ui.UsernameButton.hide()
        self.ui.LogInButton.clicked.connect(self.goto_login)
        self.ui.TutorialButton.clicked.connect(self.goto_tutorial)
        self.ui.IntroductionButton.clicked.connect(self.goto_introduction)
        self.ui.InvestigationButton.clicked.connect(self.goto_investigation)
        self.ui.SummaryButton.clicked.connect(self.goto_summary)
        self.ui.ExitButton.clicked.connect(self.exit)
        self.ui.UsernameButton.clicked.connect(self.goto_progress)
        self.show()

    def goto_login(self):
        self.login = Login()
        self.hide()

    def goto_tutorial(self):
        self.tutorial = Tutorial()
        self.hide()

    def goto_introduction(self):

```

```

        self.introduction = Introduction()
        self.hide()

    def goto_investigation(self):
        self.investigation = GraphPlot()
        self.hide()

    def goto_summary(self):
        self.summary = Summary()
        self.hide()

    def goto_progress(self):
        self.progress = Progress()
        self.hide()

    def exit(self):
        sys.exit()

class Progress(Screen):

    """
    Progress
    """

    def __init__(self):
        super(Progress, self).__init__()
        self.ui = Ui_ProgressScreen()
        self.ui.setupUi(self)
        if User.GetSignedIn():
            self.ui.SubTitleText.setText(f'User: {User.GetUsername()}')
            self.setup_table()
        else:
            pass
        self.ui.BackButton.clicked.connect(self.goto_mainmenu)
        self.ui.NotesButton.clicked.connect(self.goto_notes)
        self.show()

    def goto_notes(self):
        self.notes = TutorialNotes()

    def setup_table(self):
        self.questions = database_select(['*'], ['Questions'])
        self.correct_answers = database_select(['*'], ['CorrectAnswers'])
        self.users_answers = database_query("SELECT Question_No,
                                             UsersAnswer FROM UsersAnswers WHERE Username=?",
                                             User.GetUsername())
        self.table_values = []
        for question_no, question in self.questions:
            if question_no == 0:

```

```

        continue
    answer = ''.join([str(items[1]) for items in
                     self.users_answers if items[0] == question_no])
    correct_answers = [str(items[1]).lower() for items in
                       self.correct_answers if items[0] == question_no]
    correct = answer in correct_answers
    self.table_values.append((question, answer, correct))
    self.ui.Table.setRowCount(len(self.table_values))
    for i, values in enumerate(self.table_values):
        for j, value in enumerate(values):
            self.ui.Table.setItem(i, j, QTableWidgetItem(str(value)))
    header = self.ui.Table.horizontalHeader()
    header.setSectionResizeMode(0, QtWidgets.QHeaderView.Stretch)
    header.setSectionResizeMode(1,
                               QtWidgets.QHeaderView.ResizeToContents)
    header.setSectionResizeMode(2,
                               QtWidgets.QHeaderView.ResizeToContents)

```

program/login_section.py

```

"""
login_section.py
=====

Contains all of the classes used to interact with the GUI for the
Login section of the project

Includes the Login, Sign Up, Forgotten Password, and Reset Password
Screens
"""

import re
import random
from PyQt5 import QtCore, QtGui, QtWidgets
from .user_interface import Ui_LoginScreen, Ui_SignUpScreen,
                           Ui_ForgottenPasswordScreen, Ui_ForgottenPassword2Screen,
                           Ui_ResetPasswordScreen, Ui_ResetPassword2Screen
from .utils import database_insert, database_select, database_query,
                  database_print, hash_password, check_password,
                  send_verification_email, User, Screen

class LoginSection(Screen):

    """
    A class inherited by all of the Screens/Page classes in the login
    section
    of the program

```

```

The functions defined in this class allow for different pages to be
loaded
and hidden, so that the user is able to navigate to different parts
of the
login section using the GUI

It also contains some functions which are commonly used in many of
the
Classes that inherit this class
"""

def __init__(self):
    super(LoginSection, self).__init__()
    self.show_or_hide = 'Show'
    self.show_or_hide_2 = 'Show'

def setup_tabs(self):
    try:
        self.ui.BackButton.clicked.connect(self.goto_mainmenu)
    except AttributeError:
        pass
    try:
        self.ui.LoginTab.clicked.connect(self.goto_login)
    except AttributeError:
        pass
    try:
        self.ui.SignUpTab.clicked.connect(self.goto_signup)
    except AttributeError:
        pass
    try:
        self.ui.ForgottenPasswordTab.clicked.connect(self.goto_forgotten_password)
    except AttributeError:
        pass
    try:
        self.ui.ResetPasswordTab.clicked.connect(self.goto_reset_password)
    except AttributeError:
        pass
    try:
        self.ui.ShowHideButton.clicked.connect(self.show_hide)
    except AttributeError:
        pass
    try:
        self.ui.ShowHideButton_2.clicked.connect(self.show_hide_2)
    except AttributeError:
        pass
    try:
        self.ui.SubmitButton.clicked.connect(self.submit)
    except AttributeError:
        pass

```

```

def goto_login(self):
    self.login = Login()
    self.hide()

def goto_signup(self):
    self.signup = SignUp()
    self.hide()

def goto_forgotten_password(self):
    self.forgotten_password = ForgottenPassword()
    self.hide()

def goto_reset_password(self):
    self.reset_password = ResetPassword()
    self.hide()

def show_hide(self):
    if self.show_or_hide == 'Show':
        self.ui.PasswordInput.setEchoMode(QtWidgets.QLineEdit.Normal)
        self.show_or_hide = 'Hide'
    else:
        self.ui.PasswordInput.setEchoMode(QtWidgets.QLineEdit.Password)
        self.show_or_hide = 'Show'
    self.ui.ShowHideButton.setText(self.show_or_hide)

def show_hide_2(self):
    if self.show_or_hide_2 == 'Show':
        self.ui.PasswordInput_2.setEchoMode(QtWidgets.QLineEdit.Normal)
        self.show_or_hide_2 = 'Hide'
    else:
        self.ui.PasswordInput_2.setEchoMode(QtWidgets.QLineEdit.Password)
        self.show_or_hide_2 = 'Show'
    self.ui.ShowHideButton_2.setText(self.show_or_hide_2)

def login(self):
    """Used as default login behaviour"""
    from .main_section import MainMenu
    self.username = self.ui.UsernameInput.text()
    self.password = self.ui.PasswordInput.text()
    try:
        self.correct_hashed_password = database_query("SELECT
            Password FROM Users WHERE Username=?",
            self.username)[0][0]
    except IndexError:
        self.ui.ErrorLabel.setText("Username or password is not
            valid")
    else:
        if not check_password(self.password,
            self.correct_hashed_password):

```

```

        self.ui.ErrorLabel.setText("Username or password is not
                                    valid")
    else:
        User.SetSignedIn(True)
        User.SetUsername(self.username)
        self.email = database_query("SELECT Email FROM Users
                                     WHERE Username=?", self.username)[0][0]
        User.SetEmail(self.email)
        self.main_menu = MainMenu()
        self.hide()

def are_invalid_passwords(self):
    """
    Inputs: self.password1: string, self.password2: string
    Outputs: strings or bool

    Checks to see if the input passwords are invalid

    If both of the input password are the same and meet the
    following criteria:
        - At least one uppercase letter
        - At least one lowercase letter
        - At least one digit
        - At least 8 characters long
    Then the bool value False is Output

    Otherwise, the passwords do not meet the criteria, so a string
    is output
    describing why they do not meet the criteria. This string has
    the bool
    value True
    """

    if not re.fullmatch('(?=.*?[a-z])(?=.*?[A-Z])(?=.*?[0-9]).{8,}', self.password1):
        return "Password must contain lower case, upper case,\n a
                number, and be at least 8 characters long"
    elif self.password1 != self.password2:
        return "Passwords do not match"
    else:
        return False

class ResetPassword2(LoginSection):
    """
    Displays the Second Screen in the Reset Password part of the Login
    Section

```

```

This is the screen where the user is actually able to permanently
    change
their password
"""

def __init__(self):
    super(ResetPassword2, self).__init__()
    self.ui = Ui_ResetPassword2Screen()
    self.ui.setupUi(self)
    self.setup_tabs()
    self.show()

def submit(self):
    self.password1 = self.ui.PasswordInput.text()
    self.password2 = self.ui.ConfirmPasswordInput.text()
    self.pwds_invalid = self.are_invalid_passwords()
    if self.pwds_invalid:
        self.ui.ErrorLabel.setText(self.pwds_invalid)
    else:
        database_query("UPDATE Users SET Password=? WHERE
            Username=?", hash_password(self.password1),
            User.GetUsername())
        from .main_section import MainMenu
        self.main_menu = MainMenu()
        self.hide()

class ResetPassword(LoginSection):

    """
    Displays the first screen in the Reset Password part of the Login
    Section

    On this screen, the user is required to login to confirm that the
        user is
    actually the person who owns the account
    """

    def __init__(self):
        super(ResetPassword, self).__init__()
        self.ui = Ui_ResetPasswordScreen()
        self.ui.setupUi(self)
        self.setup_tabs()
        self.show()

    def submit(self):
        from .main_section import MainMenu
        if self.login():
            self.reset_password_2 = ResetPassword2()
            self.hide()

```

```

class ForgottenPassword2(LoginSection):

    """
    Displays the second screen in the Forgotten Password part of the
    Login Section

    This is the screen where the user enter's the verification code that
    they
    have been emailed to confirm that they are the owners of that account

    The user will then be immediately taken to the ResetPassword screen,
    once
    they submit the correct verification code
    """

    def __init__(self, verification_code):
        super(ForgottenPassword2, self).__init__()
        self.verification_code = verification_code
        self.ui = Ui_ForgottenPassword2Screen()
        self.ui.setupUi(self)
        self.setup_tabs()
        self.show()

    def submit(self):
        # Check verification code
        self.user_input = self.ui.VerificationCodeInput.text()
        if self.user_input == self.verification_code:
            User.SetSignedIn(True)
            self.reset_password_2 = ResetPassword2()
            self.hide()
        else:
            self.ui.ErrorLabel.setText("Verification Code Incorrect")

class ForgottenPassword(LoginSection):

    """
    Displays the first screen in the Forgotten Password part of the
    Login Section

    This is the screen where the user is asked to enter the email
    associated
    with their account. An email is then sent to the user containing a
    6 digit pseudorandom security code that they will then have to enter
    on the
    following screen
    """

```

```

def __init__(self):
    super(ForgottenPassword, self).__init__()
    self.ui = Ui_ForgottenPasswordScreen()
    self.ui.setupUi(self)
    self.setup_tabs()
    self.show()

def submit(self):
    self.email = self.ui.EmailInput.text()
    self.selection = database_query("SELECT Email FROM Users WHERE
        Email=?", (self.email,))
    if len(self.selection) == 0:
        self.ui.ErrorLabel.setText("Email is not registered")
    else:
        # Send Email
        self.verificaton_code = ''.join(list(map(str,
            [random.randint(0, 9) for _ in range(6)])))
        self.username = database_query("SELECT Username FROM Users
            WHERE Email=?", self.email)[0][0]
        User.SetUsername(self.username)
        User.SetEmail(self.email)
        send_verification_email(self.verificaton_code)
        self.forgotten_password_2 =
            ForgottenPassword2(self.verificaton_code)
        self.hide()

class SignUp(LoginSection):

    """
    Displays Sign Up screen as part of the Login Section

    This is the screen where the user is able to create an account
    They enter their username, email, and password (twice). Given that
        this data
    is all valid, the data is stored to the database, and the user's
        account
    has been permenantly created.
    """

    def __init__(self):
        super(SignUp, self).__init__()
        self.ui = Ui_SignUpScreen()
        self.ui.setupUi(self)
        self.setup_tabs()
        self.show()

    def submit(self):
        from .main_section import MainMenu
        self.username = self.ui.UsernameInput.text()

```

```

        self.email = self.ui.EmailInput.text()
        self.password1 = self.ui.PasswordInput.text()
        self.password2 = self.ui.PasswordInput_2.text()
        self.pwds_invalid = self.are_invalid_passwords()
        # check is of right form
        if not re.fullmatch('\w{1,20}', self.username):
            self.ui.ErrorLabel.setText("Username must be at 1-20
                                         characters long\nand not contain special characters")
        elif not re.fullmatch('^.+@.+\\..+', self.email):
            self.ui.ErrorLabel.setText("Email address must be valid")
        elif self.pwds_invalid:
            self.ui.ErrorLabel.setText(self.pwds_invalid)
        else:
            self.username_query = database_select(['Username'], ['Users'])
            self.usernames = set([row[0].lower() for row in
                                 self.username_query])
            if self.username.lower() in self.usernames:
                self.ui.ErrorLabel.setText("Username already taken")
            else:
                self.emaill_query = database_select(['Email'], ['Users'])
                self.emails = set([row[0].lower() for row in
                                  self.emaill_query])
                if self.email.lower() in self.emails:
                    self.ui.ErrorLabel.setText("Email already taken")
                else:
                    self.hashed_password = hash_password(self.password1)
                    database_insert('Users', self.username, self.email,
                                    self.hashed_password)
                    User.SetSignedIn(True)
                    User.SetUsername(self.username)
                    User.SetEmail(self.email)
                    self.main_menu = MainMenu()
                    self.hide()

class Login(LoginSection):

    """
    Displays Login screen as part of the Login Section
    This screen is the main entry point to the login section
    """

    The user can use this screen to sign in to an account that they have
    previously created
    """

    def __init__(self):
        super(Login, self).__init__()
        self.ui = Ui_LoginScreen()
        self.ui.setupUi(self)
        self.setup_tabs()

```

```
    self.show()

    def submit(self):
        from .main_section import MainMenu
        if self.login():
            self.main_menu = MainMenu()
            self.hide()
```

program/tutorial_section.py

```
"""
tutorial_section.py
=====
```

Contains all of the classes used to interact with the GUI for the tutorial section of the project

Includes the Program Structure, Login, Introduction, Investigation and Summary Tutorial Screens

```
"""
```

```
from PyQt5 import QtWidgets, QtCore
from .user_interface import Ui_TutorialScreen,
    Ui_ProgramStructureTutorialScreen, Ui_IntroductionTutorialScreen,
    Ui_InvestigationTutorialScreen, Ui_LoginTutorialScreen,
    Ui_SummaryTutorialScreen
from .utils import User, Screen, StaticGraphScreen, database_query
from .notes import TutorialNotes

class TutorialSection(Screen):

    """
    A class inherited by all of the Screens/Page classes in the tutorial
    section
    of the program

    The functions defined in this class allow for different pages to be
    loaded
    and hidden, so that the user is able to navigate to different parts
    of the
    program using the GUI
    """

    def __init__(self):
        super(TutorialSection, self).__init__()

    def setup_tabs(self):
```

```

"""
Allows the tabs and buttons to run a function once clicked, if
they
exists on the web page that the tab/button was clicked on
"""

try:
    self.ui.TutorialTab.clicked.connect(self.goto_tutorial)
except AttributeError:
    pass
try:
    self.ui.ProgramStructureTab.clicked.connect(self.goto_program_structure)
except AttributeError:
    pass
try:
    self.ui.LoginTab.clicked.connect(self.goto_login)
except AttributeError:
    pass
try:
    self.ui.IntroductionTab.clicked.connect(self.goto_introduction)
except AttributeError:
    pass
try:
    self.ui.InvestigationTab.clicked.connect(self.goto_investigation)
except AttributeError:
    pass
try:
    self.ui.SummaryTab.clicked.connect(self.goto_summary)
except AttributeError:
    pass

"""

The goto functions are run when a tab is clicked. They load a new
page,
and hide the old page.
"""

def goto_tutorial(self):
    self.tutorial= Tutorial()
    self.hide()

def goto_program_structure(self):
    self.program_structure = ProgramStructure()
    self.hide()

def goto_login(self):
    self.login = LoginTutorial()
    self.hide()

def goto_introduction(self):

```

```

        self.introduction = IntroductionTutorial()
        self.hide()

    def goto_investigation(self):
        self.investigation = InvestigationTutorial()
        self.hide()

    def goto_summary(self):
        self.summary = SummaryTutorial()
        self.hide()

    def goto_tutorial_notes(self):
        self.tutorial_notes = TutorialNotes()

class Tutorial(TutorialSection):

    """
    The Tutorial Screen is the main entry point to the tutorial section
    of the
    program
    This class displays said screen to the user
    """

    def __init__(self):
        super(Tutorial, self).__init__()
        self.ui = Ui_TutorialScreen()
        self.ui.setupUi(self)
        self.setup_tabs()
        self.ui.PrevButton.clicked.connect(self.goto_mainmenu)
        self.ui.NextButton.clicked.connect(self.goto_program_structure)
        self.show()

class ProgramStructure(TutorialSection):

    """
    This class displays the second screen in the tutorial section: the
    program
    structure tutorial
    """

    def __init__(self):
        super(ProgramStructure, self).__init__()
        self.ui = Ui_ProgramStructureTutorialScreen()
        self.ui.setupUi(self)
        self.setup_tabs()
        self.ui.PrevButton.clicked.connect(self.goto_tutorial)
        self.ui.NextButton.clicked.connect(self.goto_login)

```

```

        self.show()

class LoginTutorial(TutorialSection):
    """
    This class displays the third screen in the tutorial section: the
    login tutorial
    """

    def __init__(self):
        super(LoginTutorial, self).__init__()
        self.ui = Ui_LoginTutorialScreen()
        self.ui.setupUi(self)
        self.setup_tabs()
        self.ui.PreviousButton.clicked.connect(self.goto_program_structure)
        self.ui.NextButton.clicked.connect(self.goto_introduction)
        self.show()

class IntroductionTutorial(TutorialSection):
    """
    This class displays the fourth screen in the tutorial section: the
    introduction tutorial
    """

    def __init__(self):
        super(IntroductionTutorial, self).__init__()
        self.question_no = 1
        self.ui = Ui_IntroductionTutorialScreen()
        self.ui.setupUi(self)
        self.setup_tabs()
        self.setup_question()
        self.ui.PreviousButton.clicked.connect(self.goto_login)
        self.ui.NextButton.clicked.connect(self.goto_investigation)
        self.show()

class InvestigationTutorial(TutorialSection):
    """
    This class displays the fifth screen in the tutorial section: the
    investigation tutorial
    """

    def __init__(self):
        super(InvestigationTutorial, self).__init__()
        self.gradient = 0
        self.y_intercept = 0

```

```

        self.question_no = 2
        self.ui = Ui_InvestigationTutorialScreen()
        self.ui.setupUi(self)
        self.setup_tabs()
        self.setup_question()
        self.ui.PrevButton.clicked.connect(self.goto_introduction)
        self.ui.NextButton.clicked.connect(self.goto_summary)
        self.ui.MSlider.valueChanged.connect(self.M_value_changed)
        self.ui.CSlider.valueChanged.connect(self.C_value_changed)
        self.ui.GraphButton.clicked.connect(self.graph)
        self.show()

    def M_value_changed(self):
        """Update the gradient display when the slider is changed"""
        self.gradient = self.ui.MSlider.value()
        self.ui.MDisplay.setText(self.center_text(str(self.gradient)))

    def C_value_changed(self):
        """Update the y-intercept display when the slider is changed"""
        self.y_intercept = self.ui.CSlider.value()
        self.ui.CDisplay.setText(self.center_text(str(self.y_intercept)))

    def graph(self):
        """Display a new screen with the graph on it"""
        self.plot = GraphMatPlot(self.gradient, self.y_intercept)

class GraphMatPlot(StaticGraphScreen):

    """
    The class will display the graph in the the investigation tutorial
    section
    It will graph the function y=mx+c where m and c are given by the user
    """

    def __init__(self, gradient, y_intercept):
        super(GraphMatPlot, self).__init__()
        self.y_intercept = y_intercept
        self.gradient = gradient
        self.x_vals = list(range(6))
        self.y_vals = [self.gradient * num + self.y_intercept for num in
                      self.x_vals]
        self.show()
        self.graph()

    def get_label(self, value, gradient=False):
        """
        Format the y-intercept and gradient properly so that it looks
        correct

```

```

when printed out in the graph legend.
"""

if gradient:
    match value:
        case -1:
            return '-x'
        case 0:
            return ''
        case 1:
            return 'x'
        case _:
            return f'{value}x'
elif value == 0:
    if self.gradient == 0:
        return '0'
    else:
        return ''
elif value > 0 and self.gradient != 0:
    return f'+{value}'
else:
    return str(value)

def graph(self):
    """Plot the graph of the function y=mx+c"""
    self.gradient_label = self.get_label(self.gradient, True)
    self.intercept_label = self.get_label(self.y_intercept, False)
    self.matplotlibwidget.axes.plot(
        self.x_vals, self.y_vals,
        label=f'y={self.gradient_label}{self.intercept_label}',
        color='blue')
    self.matplotlibwidget.axes.grid()
    self.matplotlibwidget.axes.legend(loc='upper left')
    self.matplotlibwidget.canvas.draw()

class SummaryTutorial(TutorialSection):

    """
    This class displays the sixth and last screen in the tutorial
    section: the
    summary tutorial
    """

    def __init__(self):
        super(SummaryTutorial, self).__init__()
        self.ui = Ui_SummaryTutorialScreen()
        self.ui.setupUi(self)
        self.setup_tabs()
        self.ui.PreviousButton.clicked.connect(self.goto_investigation)

```

```
    self.ui.NextButton.clicked.connect(self.goto_mainmenu)
    self.ui.NotesButton.clicked.connect(self.goto_tutorial_notes)
    self.show()
```

program/tutorial_section.py

```
"""
introduction_section.py
=====

Contains all of the classes used to interact with the GUI for the
introduction section of the project

Includes the classes:
- IntroductionSection
- Introduction
- HistoricalBackground
- WhatIsTheRiemannHypothesis
- PracticalApplications
"""

from PyQt5 import QtWidgets
from .user_interface import Ui_IntroductionScreen,
    Ui_HistoricalBackgroundScreen, Ui_WhatIsTheRiemannHypothesisScreen,
    Ui_PracticalApplicationsScreen
from .utils import User, Screen
from .notes import IntroductionNotes

class IntroductionSection(Screen):

    """
    A class inherited by all of the Screens/Page classes in the
    introduction
    section of the program

    The functions defined in this class allow for different pages to be
    loaded
    and hidden, so that the user is able to navigate to different parts
    of the
    program using the GUI
    """

    def __init__(self):
        super(IntroductionSection, self).__init__()

    def setup_tabs(self):
        try:
            self.ui.IntroductionTab.clicked.connect(self.goto_introduction)
```

```

        except AttributeError:
            pass
        try:
            self.ui.HistoricalBackgroundTab.clicked.connect(self.goto_historical_background)
        except AttributeError:
            pass
        try:
            self.ui.WhatIsTheRHTab.clicked.connect(self.goto_what_is_the_riemann_hypothesis)
        except AttributeError:
            pass
        try:
            self.ui.PracticalApplicationsTab.clicked.connect(self.goto_practical_applications)
        except AttributeError:
            pass
        try:
            self.ui.NotesButton.clicked.connect(self.goto_introduction_notes)
        except AttributeError:
            pass

    def goto_introduction(self):
        self.introduction = Introduction()
        self.hide()

    def goto_historical_background(self):
        self.historical_background = HistoricalBackground()
        self.hide()

    def goto_what_is_the_riemann_hypothesis(self):
        self.what_is_the_rh = WhatIsTheRiemannHypothesis()
        self.hide()

    def goto_practical_applications(self):
        self.practical_applications = PracticalApplications()
        self.hide()

    def goto_introduction_notes(self):
        self.introduction_notes = IntroductionNotes()

class Introduction(IntroductionSection):

    """
    The Introduction Screen is the main entry point to the introduction
    section of the
    program
    """

    def __init__(self):
        super(Introduction, self).__init__()
        self.ui = Ui_IntroductionScreen()

```

```

        self.ui.setupUi(self)
        self.setup_tabs()
        self.ui.PrevButton.clicked.connect(self.goto_mainmenu)
        self.ui.NextButton.clicked.connect(self.goto_historical_background)
        self.show()

class HistoricalBackground(IntroductionSection):
    """
    A class used to interact with the Historical Background GUI screen
    """

    def __init__(self):
        super(HistoricalBackground, self).__init__()
        self.ui = Ui_HistoricalBackgroundScreen()
        self.ui.setupUi(self)
        self.setup_tabs()
        self.ui.PrevButton.clicked.connect(self.goto_introduction)
        self.ui.NextButton.clicked.connect(self.goto_what_is_the_riemann_hypothesis)
        self.show()

class WhatIsTheRiemannHypothesis(IntroductionSection):
    """
    A class used to interact with the What Is The Riemann Hypothesis GUI
    screen
    """

    def __init__(self):
        super(WhatIsTheRiemannHypothesis, self).__init__()
        self.question_no = 3
        self.ui = Ui_WhatIsTheRiemannHypothesisScreen()
        self.ui.setupUi(self)
        self.setup_tabs()
        self.setup_question()
        self.ui.PrevButton.clicked.connect(self.goto_historical_background)
        self.ui.NextButton.clicked.connect(self.goto_practical_applications)
        self.show()

class PracticalApplications(IntroductionSection):
    """
    Practical Applications
    """

    def __init__(self):
        super(PracticalApplications, self).__init__()

```

```
        self.question_no = 4
        self.ui = Ui_PracticalApplicationsScreen()
        self.ui.setupUi(self)
        self.setup_tabs()
        self.setup_question()
        self.ui.PrevButton.clicked.connect(self.goto_what_is_the_riemann_hypothesis)
        self.ui.NextButton.clicked.connect(self.goto_mainmenu)
        self.show()
```

program/investigation_section.py

```
"""
investigation_section.py
=====

Contains all of the classes used to interact with the GUI for the
investigation section of the project

Includes the screens for the investigation section
"""

import sys
import matplotlib
import numpy as np
from matplotlib.figure import Figure
from PyQt5 import QtCore, QtGui, QtWidgets
from PyQt5.QtWidgets import QTableWidgetItem, QHeaderView
from matplotlib.backends.backend_qt5agg import FigureCanvasQTAgg as
    FigureCanvas
from .notes import InvestigationNotes
from .user_interface import Ui_PolarGraphScreen,
    Ui_PrimeCountingFunctionScreen, Ui_GraphPlotsScreen,
    Ui_ZetaZeroesPlotScreen, Ui_PrimeNumbersScreen,
    Ui_CalculatorScreen, Ui_SingleCalculatorScreen,
    Ui_TableCalculatorScreen, Ui_TableCalculator2Screen,
    Ui_CalculateZeroesScreen, Ui_CalculateZeroes2Screen,
    Ui_CalculatorLeaderboardScreen, Ui_MatPlotScreen, Ui_ZeroesScreen,
    Ui_ZetaApproximationScreen
from .utils import zeta, sieve_of_eratosthenes, prime_power_function,
    prime_counting_function_estimation, logarithmic_integral,
    binary_insertion_sort, save_zeta_zeroes_to_file,
    save_zeta_values_to_file, make_int, make_complex, is_zeta_zero,
    Screen, User, database_query, database_insert, database_select,
    get_id, database_print, DynamicGraphScreen, Complex

class InvestigationSection(Screen):

    """


```

A class inherited by all of the Screens/Page classes in the investigation section of the program

The functions defined in this class allow for different pages to be loaded and hidden, so that the user is able to navigate to different parts of the program using the GUI

```

def __init__(self):
    super(InvestigationSection, self).__init__()

def setup_tabs(self):
    try:
        self.ui.NotesButton.clicked.connect(self.goto_investigation_notes)
    except AttributeError:
        pass
    try:
        self.ui.ZetaZeroesPlotTab.clicked.connect(self.goto_zeta_zeroes_plot)
    except AttributeError:
        pass
    try:
        self.ui.PrimeTab.clicked.connect(self.goto_prime)
    except AttributeError:
        pass
    try:
        self.ui.PrimesTab.clicked.connect(self.goto_primes)
    except AttributeError:
        pass
    try:
        self.ui.CalculatorTab.clicked.connect(self.goto_calculator)
    except AttributeError:
        pass
    try:
        self.ui.ZeroesTab.clicked.connect(self.goto_zeroes)
    except AttributeError:
        pass
    try:
        self.ui.PolarTab.clicked.connect(self.goto_polar)
    except AttributeError:
        pass
    try:
        self.ui.GraphsTab.clicked.connect(self.goto_graph_plots)
    except AttributeError:
        pass
    try:
        self.ui.TableTab.clicked.connect(self.goto_table_calculator)
    except AttributeError:
        pass

```

```

        pass
    try:
        self.ui.LeaderboardTab.clicked.connect(self.goto_calculator_leaderboard)
    except AttributeError:
        pass
    try:
        self.ui.SingleTab.clicked.connect(self.goto_single)
    except AttributeError:
        pass
    try:
        self.ui.ZetaApproximationTab.clicked.connect(self.goto_zeta_approximation)
    except AttributeError:
        pass

    def goto_polar(self):
        self.polar = PolarGraph()
        self.hide()

    def goto_zeroes(self):
        self.zeroes = Zeroes()
        self.hide()

    def goto_prime(self):
        self.prime = PrimeCountingFunction()
        self.hide()

    def goto_zeta_zeroes_graph(self):
        self.zeta_zeroes_graph = ZetaZeroesMatPlot()

    def goto_pcf_graph(self):
        self.graph = PrimeCountingFunctionMatPlot()

    def goto_graph_plots(self):
        self.polar = GraphPlot()
        self.hide()

    def goto_primes(self):
        self.primes = PrimeNumbers()
        self.hide()

    def goto_calculator(self):
        self.calculator = Calculator()
        self.hide()

    def goto_zeta_zeroes_plot(self):
        self.zeroes_plot = ZetaZeroesPlot()
        self.hide()

    def goto_calculate_zeroes(self):
        self.zeroes = CalculateZeroes()

```

```

    self.hide()

def goto_calculate_zeroes_2(self):
    self.ui.ErrorLabel.setText(self.center_text(f'Calculating...'))
    self.calculate_zeroes()
    if self.zeroes_calculated:
        self.calculate_zeroes_2 = CalculateZeroes2(self.zeroes)
        self.hide()

def goto_single(self):
    self.single = SingleCalculator()
    self.hide()

def goto_table_calculator(self):
    self.table_calculator = TableCalculator()
    self.hide()

def goto_table_calculator_2(self):
    self.calculate_zeta()
    if self.table_values:
        self.table_calculator_2 = TableCalculator2(self.table_values)
        self.hide()

def goto_calculator_leaderboard(self):
    self.calculator_leaderboard = CalculatorLeaderboard()
    self.hide()

def goto_investigation_notes(self):
    self.investigation_notes = InvestigationNotes()

def goto_zeta_approximation(self):
    self.zeta_approximation = ZetaApproximation()
    self.hide()

def validate_input(self, complex_user_input, split_char):
    split_input = complex_user_input.split(split_char)
    assert 0 < len(split_input) <= 2
    if len(split_input) == 2:
        assert complex_user_input[-1] in ['i', 'j']
        split_input[1] = split_input[1][:-1]
    return Complex(*split_input)

def get_valid_complex_input(self, complex_user_input):
    is_real_negative = False
    try:
        complex_input = self.validate_input(complex_user_input, '+')
    except (AssertionError, ValueError):
        try:
            if complex_user_input[0] == '-':
                complex_user_input = complex_user_input[1:]

```

```

        is_real_negative = True
complex_input = self.validate_input(complex_user_input,
        '→')
if is_real_negative:
    complex_input = Complex((-1)*complex_input.get_real(),
        (-1)*complex_input.get_imag())
else:
    complex_input = Complex(complex_input.get_real(),
        (-1)*complex_input.get_imag())
except (AssertionError, ValueError):
    complex_input = None
return complex_input

class CalculateZeroes2(InvestigationSection):

    """
    The CalculateZeroes2 class is used to display the zeta zeroes that
    have
    been calculated by the user

    The user then has the option to save these to the database or to a
    file
    """

    def __init__(self, zeroes):
        super(CalculateZeroes2, self).__init__()
        self.zeroes = zeroes
        self.ui = Ui_CalculateZeroes2Screen()
        self.ui.setupUi(self)
        self.setup_tabs()
        self.ui.PrevButton.clicked.connect(self.goto_calculate_zeroes)
        self.ui.NextButton.clicked.connect(self.goto_zeroes)
        self.ui.DatabaseButton.clicked.connect(self.saveto_database)
        self.ui.FileButton.clicked.connect(self.saveto_file)
        self.ui.ZetaTable.setRowCount(len(self.zeroes))
        for i, values in enumerate(self.zeroes):
            for j in range(len(values)):
                self.ui.ZetaTable.setItem(i,j,
                    QTableWidgetItem(str(values[j])))
        self.ui.ZetaTable.horizontalHeader().setStretchLastSection(True)
        self.ui.ZetaTable.horizontalHeader().setSectionResizeMode(
            QHeaderView.Stretch)
        self.ui.ZetaTable.setColumnWidth(1, 100)
        self.show()

    def saveto_database(self):
        if User.GetUsername():
            database_inputs = database_select(['Zero_Real_Input',
                'Zero_Img_Input'], ['Zeroes'])

```

```

        for real, imag in self.zeroses:
            # if there is a row with the same real and imag
            in_table = False
            for ri, ii in database_inputs:
                if ri == real and ii == imag:
                    in_table = True
            # only add to database if not already in database
            if not in_table:
                self.Zeta_Zero_ID = get_id('Zero_ID', 'Zeroes')
                database_insert('Zeroes', self.Zeta_Zero_ID, real,
                               imag)
                database_insert('UserZeroes', self.Zeta_Zero_ID,
                               User.GetUsername())
            self.ui.ErrorLabel.setText(self.center_text('Zeroes saved to
                                                       database'))
        else:
            self.ui.ErrorLabel.setText(self.center_text(f'You must be
                                                       signed in to be able to '
                                                       'save to the database'))


    def saveto_file(self):
        filepath = 'files/zeta_zeroes.csv'
        fieldnames = ['InputReal', 'InputImag']
        save_zeta_zeroes_to_file(self.zeroses, filepath,
                                 fieldnames=fieldnames)
        self.ui.ErrorLabel.setText(self.center_text(f'Table contents
                                                   written to {filepath}'))


class CalculateZeroes(InvestigationSection):

    """
    The CalculateZeroes class is used to ask for input from the user as
    to how
    many zeta zeroes they want to calculate. It then calculates these
    values
    and displays them in the CalculateZeroes2 screen
    """

    def __init__(self):
        super(CalculateZeroes, self).__init__()
        self.ui = Ui_CalculateZeroesScreen()
        self.zeroses = []
        self.ui.setupUi(self)
        self.setup_tabs()
        self.ui.PreviousButton.clicked.connect(self.goto_zeroes)
        self.ui.NextButton.clicked.connect(self.goto_zeroes)
        self.ui.CalculateButton.clicked.connect(self.goto_calculate_zeroes_2)
        self.show()

```

```

def calculate_zeroes(self):
    self.no_of_zeroes_input = self.ui.NoOfZeroesInput.text()
    self.no_of_zeroes = make_int(self.no_of_zeroes_input)
    self.zeroes_calculated = False
    if self.no_of_zeroes:
        if 0 < self.no_of_zeroes <= 100:
            self.zeroes_calculated = True
            self.zeroes = []
            count = 0
            while len(self.zeroes) < self.no_of_zeroes:
                accuracy = count // 500 + 100
                real = 1/2
                imag = count / accuracy
                if is_zeta_zero(real, imag) and (real, round(imag, 1)) not in self.zeroes:
                    self.zeroes.append((real, round(imag, 1)))
                count += 1
        else:
            self.ui.ErrorLabel.setText(self.center_text('No. of Zeroes must be between 1 and 100'))
    else:
        self.ui.ErrorLabel.setText(self.center_text('No. Of Zeroes must be a positive integer between 1 and 100'))

class Zeroes(InvestigationSection):

    """
    """

    def __init__(self):
        super(Zeroes, self).__init__()
        self.question_no = 5
        self.ui = Ui_ZeroesScreen()
        self.ui.setupUi(self)
        self.setup_tabs()
        self.setup_question()
        self.ui.PrevButton.clicked.connect(self.goto_calculator)
        self.ui.NextButton.clicked.connect(self.goto_mainmenu)
        self.ui.CalculateButton.clicked.connect(self.goto_calculate_zeroes)
        self.show()

class CalculatorLeaderboard(InvestigationSection):

    """
    The CalculatorLeaderboard class is used to display how many zeta values been calculated by each user
    """

```

```

def __init__(self):
    super(CalculatorLeaderboard, self).__init__()
    self.ui = Ui_CalculatorLeaderboardScreen()
    self.ui.setupUi(self)
    self.setup_tabs()
    self.get_rows()
    self.sort_rows()
    self.ui.PreviousButton.clicked.connect(self.goto_table_calculator)
    self.ui.NextButton.clicked.connect(self.goto_zeroes)
    self.ui.ZetaTable.setRowCount(len(self.sorted_rows))
    for i, row in enumerate(self.sorted_rows):
        for j in range(len(row)):
            self.ui.ZetaTable.setItem(i,j,
                                      QTableWidgetItem(str(row[j])))
    self.ui.ZetaTable.horizontalHeader().setStretchLastSection(True)
    self.ui.ZetaTable.horizontalHeader().setSectionResizeMode(
        QHeaderView.Stretch)
    self.ui.ZetaTable.setColumnWidth(1, 100)
    self.show()

def get_rows(self):
    self.rows = []
    self.usernames = [username[0] for username in
                     database_select(['Username'], ['Users'])]
    for username in self.usernames:
        number_of_zeta_values_calculated = len(database_query(
            'SELECT * FROM UserZeta WHERE Username=?', username))
        self.rows.append((username, number_of_zeta_values_calculated))

def sort_rows(self):
    # sort rows by number of zeta values calculated
    self.sorted_numbers = binary_insertion_sort(
        set([row[-1] for row in self.rows]), descending=True)
    self.sorted_rows = []
    for _ in range(len(self.rows)):
        for row in self.rows:
            if row[-1] == self.sorted_numbers[0]:
                self.sorted_rows.append(row)
                self.rows.remove(row)
            if self.sorted_numbers[0] not in [row[-1] for row in
                                             self.rows]:
                del self.sorted_numbers[0]

class TableCalculator2(InvestigationSection):

    """
    The TableCalculator2 class is used to display the output values of
    the zeta

```

```

function for a range of input values, that were entered by the user
    on the
previous page

The user then has the option to save these to the database or to a
    file
"""

def __init__(self, table_values):
    super(TableCalculator2, self).__init__()
    self.table_values = table_values
    self.ui = Ui_TableCalculator2Screen()
    self.ui.setupUi(self)
    self.setup_tabs()
    self.ui.PreviousButton.clicked.connect(self.goto_table_calculator)
    self.ui.NextButton.clicked.connect(self.goto_calculator_leaderboard)
    self.ui.DatabaseButton.clicked.connect(self.saveto_database)
    self.ui.FileButton.clicked.connect(self.saveto_file)
    self.ui.ZetaTable.setRowCount(len(self.table_values))
    for i, values in enumerate(self.table_values):
        for j in range(len(values)):
            self.ui.ZetaTable.setItem(i,j,
                QTableWidgetItem(str(values[j])))
    self.ui.ZetaTable.horizontalHeader().setStretchLastSection(True)
    self.ui.ZetaTable.horizontalHeader().setSectionResizeMode(
        QHeaderView.Stretch)
    self.ui.ZetaTable.setColumnWidth(1, 100)
    self.show()

def saveto_database(self):
    """NEEDS FIXING, which ones to save to db"""
    if User.GetUsername():
        database_inputs = database_select(['Input_Real',
            'Input_Img'], ['Zeta'])
        print('dbi', database_inputs)
        for input, output in self.table_values:
            print(f'in {input} out{output}')
            if (input.get_real(), input.get_imag()) not in
                database_inputs:
                self.Zeta_ID = get_id('Zeta_ID', 'Zeta')
                database_insert('Zeta', self.Zeta_ID,
                    input.get_real(), input.get_imag(),
                    output.get_real(), output.get_imag())
                database_insert('UserZeta', self.Zeta_ID,
                    User.GetUsername())
        self.ui.ErrorLabel.setText(self.center_text('Values saved to
            database'))
    else:
        self.ui.ErrorLabel.setText(self.center_text(f'You must be
            signed in to be able to '))

```

```

        'save to the database')))

def saveto_file(self):
    FILEPATH = 'files/zeta_values.csv'
    save_zeta_values_to_file(self.table_values, FILEPATH)
    self.ui.ErrorLabel.setText(self.center_text(f'Table contents
written to {FILEPATH}'))


class TableCalculator(InvestigationSection):

    """
    The TableCalculator class is used to display a calculator where
    the user is able to calculate the value of the zeta function for a
    range of
    input values of their choosing
    """

    def __init__(self):
        super(TableCalculator, self).__init__()
        self.ui = Ui_TableCalculatorScreen()
        self.ui.setupUi(self)
        self.setup_tabs()
        self.ui.PrevButton.clicked.connect(self.goto_single)
        self.ui.NextButton.clicked.connect(self.goto_calculator_leaderboard)
        self.ui.CalculateButton.clicked.connect(self.goto_table_calculator_2)
        self.show()

    def calculate_zeta(self):
        self.start_input = self.ui.StartInput.text()
        self.step_input = self.ui.StepInput.text()
        self.range_input = self.ui.NoOfValuesInput.text()
        self.start_complex =
            self.get_valid_complex_input(self.start_input)
        self.step_complex = self.get_valid_complex_input(self.step_input)
        self.range = make_int(self.range_input)
        print(self.start_complex, self.step_complex)
        if self.start_complex is not None and self.step_complex is not
            None:
            if 1 <= self.range <= 100:
                self.ui.ErrorLabel.setText('')
                self.input_values = [
                    self.start_complex + self.step_complex * i
                    for i in range(self.range)]
                zetas = [zeta(value.get_real(), value.get_imag()) for
                    value in self.input_values]
                self.output_values = [
                    Complex(round(i.get_real(), 3),
                    round(i.get_imag(), 3)) for i in zetas]
                self.table_values = list(zip(

```

```

                self.input_values, self.output_values))
        else:
            self.ui.ErrorLabel.setText(self.center_text('No. Of
                Values must be a positive \
                integer between 1 and 100'))
            self.table_values = False
    else:
        self.ui.ErrorLabel.setText(self.center_text('Start Value and
            Step must be complex \
            numbers of the form a+bi'))
        self.table_values = False

class SingleCalculator(InvestigationSection):

    """
    The SingleCalculator class is used to display a calculator where
    the user is able to calculate the value of the zeta function for a
    given
    input of their choosing

    The user then has the option to save this values to the database or
    to a file
    """

    def __init__(self):
        super(SingleCalculator, self).__init__()
        self.ui = Ui_SingleCalculatorScreen()
        self.ui.setupUi(self)
        self.setup_tabs()
        self.zeta_value = []
        self.valid_input = False
        self.ui.PrevButton.clicked.connect(self.goto_calculator)
        self.ui.NextButton.clicked.connect(self.goto_table_calculator)
        self.ui.CalculateButton.clicked.connect(self.calculate_zeta)
        self.ui.DatabaseButton.clicked.connect(self.saveto_database)
        self.ui.FileButton.clicked.connect(self.saveto_file)
        self.show()

    def calculate_zeta(self):
        self.zeta_user_input = str(self.ui.ZetaInput.text()).strip()
        self.zeta_input =
            self.get_valid_complex_input(self.zeta_user_input)
        print(self.zeta_input)
        if self.zeta_input is not None:
            self.zeta_output = zeta(self.zeta_input.get_real(),
                self.zeta_input.get_imag())
            self.zeta_output_printable =
                Complex(round(self.zeta_output.get_real(), 3),
                    round(self.zeta_output.get_imag(), 3))

```

```

        self.zeta_value = [(self.zeta_input,
                            self.zeta_output_printable)]
        self.ui.ZetaOutput.setText(str(self.zeta_output_printable)[1:-1])
        self.ui.ErrorLabel.setText('')
    else:
        self.ui.ErrorLabel.setText(self.center_text('Input must be a
                                                complex number of the form a+bi'))
        self.ui.ZetaOutput.setText('')

    def saveto_database(self):
        self.calculate_zeta()
        # may have to add error checking here
        # self.zeta_user_input = str(self.ui.ZetaInput.text()).strip()
        # self.zeta_input =
            # self.get_valid_complex_input(self.zeta_user_input)
        if self.zeta_input is not None:
            if User.GetSignedIn():
                database_inputs = database_select(['Input_Real',
                                                    'Input_Img'], ['Zeta'])
                self.zeta_input_real = self.zeta_input.get_real()
                self.zeta_input_imag = self.zeta_input.get_imag()
                self.zeta_output_real =
                    self.zeta_output_printable.get_real()
                self.zeta_output_imag =
                    self.zeta_output_printable.get_imag()
                if (self.zeta_input_real, self.zeta_input_imag) not in
                    database_inputs:
                    self.Zeta_ID = get_id('Zeta_ID', 'Zeta')
                    database_insert('Zeta',
                                    self.Zeta_ID,
                                    self.zeta_input_real,
                                    self.zeta_input_imag,
                                    self.zeta_output_real,
                                    self.zeta_output_imag)
                    database_insert('UserZeta', self.Zeta_ID,
                                   User.GetUsername())
                    self.ui.ErrorLabel.setText(self.center_text('Value
                                                saved to database'))
            else:
                self.ui.ErrorLabel.setText(self.center_text('Value has
                                                already been recorded in the database'))
        else:
            self.ui.ErrorLabel.setText(
                self.center_text('You must be signed in to be able
                                to '
                                'save to the database'))
    else:
        self.ui.ErrorLabel.setText(
            self.center_text('Input value is not valid'))

```

```

def saveto_file(self):
    self.calculate_zeta()
    FILEPATH = 'files/zeta_values.csv'
    save_zeta_values_to_file(self.zeta_value, FILEPATH)
    self.ui.ErrorLabel.setText(self.center_text(f'Values written to
                                                {FILEPATH}'))


class Calculator(InvestigationSection):

    """
    The Calculator class is used to display the calculator screen where
    the user can choose to calculate the value of the zeta function for
    a single
    value or for a table of values
    """
    def __init__(self):
        super(Calculator, self).__init__()
        self.question_no = 7
        self.ui = Ui_CalculatorScreen()
        self.ui.setupUi(self)
        self.setup_tabs()
        self.setup_question()
        self.ui.PrevButton.clicked.connect(self.goto_primes)
        self.ui.NextButton.clicked.connect(self.goto_zeroes)
        self.ui.ZetaCalculatorButton.clicked.connect(self.goto_single)
        self.show()

class PrimeNumbers(InvestigationSection):

    """
    The PrimeNumbers class is used to display the prime numbers screen
    where
    the user is given information about the prime numbers and how they
    relate
    to the riemann zeta function
    """
    def __init__(self):
        super(PrimeNumbers, self).__init__()
        self.ui = Ui_PrimeNumbersScreen()
        self.ui.setupUi(self)
        self.setup_tabs()
        self.ui.PrevButton.clicked.connect(self.goto_graph_plots)
        self.ui.NextButton.clicked.connect(self.goto_calculator)
        self.show()

```

```

class ZetaApproximationMatPlot(DynamicGraphScreen):

    """
    The ZetaApproximation Mat Plot
    """

    def __init__(self, complex_input):
        super(ZetaApproximationMatPlot, self).__init__()
        self.complex_input = complex_input
        self.show()

    def update_figure(self):
        self.zeta_value = zeta(self.complex_input.get_real(),
                               self.complex_input.get_imag(), self.count)
        self.x_vals.append(self.zeta_value.get_real())
        self.y_vals.append(self.zeta_value.get_imag())
        self.matplotlibwidget.axes.cla()
        self.matplotlibwidget.axes.plot(self.x_vals, self.y_vals,
                                        color='green')
        self.matplotlibwidget.canvas.draw()
        self.count += 1


class ZetaApproximation(InvestigationSection):

    """
    The ZetaApproximation
    """

    def __init__(self):
        super(ZetaApproximation, self).__init__()
        self.ui = Ui_ZetaApproximationScreen()
        self.ui.setupUi(self)
        self.setup_tabs()
        self.ui.PrevButton.clicked.connect(self.goto_prime)
        self.ui.NextButton.clicked.connect(self.goto_primes)
        self.ui.GraphButton.clicked.connect(self.get_complex_input)
        self.show()

    def get_complex_input(self):
        self.graph_user_input = str(self.ui.GraphInput.text()).strip()
        self.graph_input =
            self.get_valid_complex_input(self.graph_user_input)
        # make sure that the value entered is within range
        if self.graph_input is None:
            self.ui.ErrorLabel.setText(self.center_text('Input must be a
                complex number of the form a+bi'))
            self.ui.ZetaOutput.setText('')
        else:
            self.zeta_approximation_graph =

```

```

ZetaApproximationMatPlot(self.graph_input)

class PrimeCountingFunctionMatPlot(DynamicGraphScreen):

    """
    The PrimeCountingFunction class is used to display a graph of the
    prime coutning function, the prime power function, the logarithmic
    integral
    function and (x/log x) as an approximation for the prime counting
    function
    """

    def __init__(self):
        super(PrimeCountingFunctionMatPlot, self).__init__()
        self.y_vals_pcf = []
        self.y_vals_x_logx= []
        self.y_vals_li = []
        self.y_vals_ppf = []
        self.count = 2
        self.show()

    def update_figure(self):
        self.x_vals.append(self.count)
        self.y_vals_pcf.append(sieve_of_eratosthenes(self.count).size)
        self.y_vals_x_logx.append(prime_counting_function_estimation(self.count))
        self.y_vals_li.append(logarithmic_integral(self.count))
        self.y_vals_ppf.append(prime_power_function(self.count))
        self.matplotlibwidget.axes.cla()
        self.matplotlibwidget.axes.scatter(self.x_vals, self.y_vals_pcf,
            label='Prime Counting Function')
        self.matplotlibwidget.axes.plot(self.x_vals, self.y_vals_x_logx,
            label='x / log(x)', color='red')
        self.matplotlibwidget.axes.plot(self.x_vals, self.y_vals_li,
            label='Logarithmic Integral', color='green')
        self.matplotlibwidget.axes.plot(self.x_vals, self.y_vals_ppf,
            label='Prime Power Function', color='blue')
        self.matplotlibwidget.axes.legend(loc='upper left')
        self.matplotlibwidget.canvas.draw()
        self.count += 1

class PrimeCountingFunction(InvestigationSection):

    """
    The PrimeCountingFunction class is used to display the prime
    counting function
    screen
    """

```

```

    """
def __init__(self):
    super(PrimeCountingFunction, self).__init__()
    self.ui = Ui_PrimeCountingFunctionScreen()
    self.ui.setupUi(self)
    self.setup_tabs()
    self.ui.PrevButton.clicked.connect(self.goto_zeta_zeroes_plot)
    self.ui.NextButton.clicked.connect(self.goto_graph_plots)
    self.ui.GraphButton.clicked.connect(self.goto_pcf_graph)
    self.show()

class ZetaZeroesMatPlot(DynamicGraphScreen):

    """
The ZetaZeroesMatPlot class is used to display a graph of the zeroes
of the
riemann zeta function
"""

    def __init__(self):
        super(ZetaZeroesMatPlot, self).__init__()
        self.show()

    def update_figure(self):
        self.accuracy = self.count//500 + 100
        if is_zeta_zero(1/2, self.count/self.accuracy):
            self.x_vals.append(1/2)
            self.y_vals.append(self.count/self.accuracy)
        self.matplotlibwidget.axes.cla()

        self.matplotlibwidget.axes.scatter(self.x_vals, self.y_vals)
        self.matplotlibwidget.axes.set_ylim(0)
        self.matplotlibwidget.axes.set_xlim(0, 1)
        self.matplotlibwidget.canvas.draw()
        self.count += 1

class ZetaZeroesPlot(InvestigationSection):

    """
The ZetaZeroes class is used to display the Zeroes screen in the
investigation
section

This is where the user is able to read about what the zeta zeroes
are, and
be able to display a graph of the zeta zeroes
"""

```

```

def __init__(self):
    super(ZetaZeroesPlot, self).__init__()
    self.question_no=6
    self.ui = Ui_ZetaZeroesPlotScreen()
    self.ui.setupUi(self)
    self.setup_tabs()
    self.setup_question()
    self.ui.PrevButton.clicked.connect(self.goto_polar)
    self.ui.NextButton.clicked.connect(self.goto_prime)
    self.ui.GraphButton.clicked.connect(self.goto_zeta_zeroes_graph)
    self.show()

class PolarGraphMatPlot(DynamicGraphScreen):

    """
    The PolarGraphMatPlot class is used to display the polar graph of
        the riemann
    zeta function
    """

    def __init__(self, real_input):
        super(PolarGraphMatPlot, self).__init__()
        self.real_input = real_input
        self.show()

    def update_figure(self):
        new_zeta = zeta(self.real_input, self.count/25)
        self.x_vals.append(new_zeta.get_real())
        self.y_vals.append(new_zeta.get_imag())
        self.matplotlibwidget.axes.cla()
        self.matplotlibwidget.axes.plot(self.x_vals, self.y_vals, 'r')
        self.matplotlibwidget.canvas.draw()
        self.count += 1

class PolarGraph(InvestigationSection):

    """
    The PolarGraph class is used to display the Polar Graph Screen

    This is where the user is able to read about polar graphs, and be
        able to
    display a polar graph of the riemann zeta function
    """

    def __init__(self):
        super(PolarGraph, self).__init__()

```

```

        self.ui = Ui_PolarGraphScreen()
        self.ui.setupUi(self)
        self.setup_tabs()
        self.ui.PrevButton.clicked.connect(self.goto_graph_plots)
        self.ui.NextButton.clicked.connect(self.goto_zeta_zeroes_plot)
        self.ui.GraphButton.clicked.connect(self.polar_graph)
        self.show()

    def polar_graph(self):
        self.real_input = self.ui.GraphInput.text()
        try:
            self.real_input = float(self.real_input)
        except ValueError:
            self.ui.ErrorLabel.setText(self.center_text("Error: Input
                must be whole number or a decimal"))
        else:
            if self.real_input == 1:
                self.ui.ErrorLabel.setText(self.center_text("Error: Input
                    must not be equal to 1"))
            elif not -10 < self.real_input < 45:
                self.ui.ErrorLabel.setText(self.center_text("Error: Input
                    value must be between -10 and 45"))
            else:
                self.ui.ErrorLabel.setText('')
                self.graph = PolarGraphMatPlot(self.real_input)

    class GraphPlot(InvestigationSection):

        """
        This class is used to display the Graph Plots screen in the
        investigation section

        This is the first screen that the user will see in the investigation
        section
        and will allow them to display many different types of graphs
        """

        def __init__(self):
            super(GraphPlot, self).__init__()
            self.ui = Ui_GraphPlotsScreen()
            self.ui.setupUi(self)
            self.setup_tabs()
            self.ui.GraphPlotsButton.clicked.connect(self.goto_polar)
            self.ui.PrevButton.clicked.connect(self.goto_mainmenu)
            self.ui.NextButton.clicked.connect(self.goto_primes)
            self.show()

```

program/summary_section.py

```
"""
summary_section.py
=====

Contains all of the classes used to interact with the GUI for the
summary section of the project

Includes the main SummarySection class which is inherited by the Summary,
TheoryRecap, InvestigationResults, Conclusion, Impact
"""

from PyQt5 import QtWidgets
from PyQt5.QtWidgets import QTableWidget, QTableWidgetItem, QHeaderView
from .user_interface import Ui_SummaryScreen, Ui_TheoryRecapScreen,
    Ui_InvestigationResultsScreen, Ui_ConclusionScreen, Ui_ImpactScreen
from .utils import User, Screen, database_select, Complex
from .notes import SummaryNotes

class SummarySection(Screen):

    """
    A class inherited by all of the Screens/Page classes in the summary
    section of the program

    The functions defined in this class allow for different pages to be
    loaded
    and hidden, so that the user is able to navigate to different parts
    of the
    program using the GUI
    """

    def __init__(self):
        super(SummarySection, self).__init__()

    def setup_tabs(self):

        """
        Allows the tabs and buttons to run a function once clicked, if
        they
        exists on the web page that the tab/button was clicked on
        """

        self.ui.SummaryTab.clicked.connect(self.goto_summary)
        self.ui.TheoryRecapTab.clicked.connect(self.goto_theory_recap)
        self.ui.InvestigationResultsTab.clicked.connect(self.goto_investigation_results)
        self.ui.ConclusionTab.clicked.connect(self.goto_conclusion)
        self.ui.ImpactTab.clicked.connect(self.goto_impact)
```

```

try:
    self.ui.NotesButton.clicked.connect(self.goto_summary_notes)
except AttributeError:
    pass

"""
The goto functions are run when a tab is clicked. They load a new
page,
and hide the old page.
"""

def goto_summary(self):
    self.summary = Summary()
    self.hide()

def goto_theory_recap(self):
    self.theory_recap = TheoryRecap()
    self.hide()

def goto_investigation_results(self):
    self.investigation_results = InvestigationResults()
    self.hide()

def goto_conclusion(self):
    self.conclusion = Conclusion()
    self.hide()

def goto_impact(self):
    self.impact = Impact()
    self.hide()

def goto_summary_notes(self):
    self.summary_notes = SummaryNotes()

class Summary(SummarySection):

"""
The Summary Screen is the main entry point of the summary section of
the
program. This class displays the summary screen to the user.
"""

def __init__(self):
    super(Summary, self).__init__()
    self.question_no = 8
    self.ui = Ui_SummaryScreen()
    self.ui.setupUi(self)
    self.setup_tabs()
    self.setup_question()

```

```

        self.ui.PrevButton.clicked.connect(self.goto_mainmenu)
        self.ui.NextButton.clicked.connect(self.goto_theory_recap)
        self.show()

class TheoryRecap(SummarySection):
    """
    Theory Recap Screen class displays this screen to the user as part
    of the sumary section of this program
    """

    def __init__(self):
        super(TheoryRecap, self).__init__()
        self.question_no = 9
        self.ui = Ui_TheoryRecapScreen()
        self.ui.setupUi(self)
        self.setup_tabs()
        self.setup_question()
        self.ui.PrevButton.clicked.connect(self.goto_summary)
        self.ui.NextButton.clicked.connect(self.goto_investigation_results)
        self.show()

class InvestigationResults(SummarySection):
    """
    The Investigation Results Screen class displays this screen to the
    user as part
    of the sumary section of this program
    """

    def __init__(self):
        super(InvestigationResults, self).__init__()
        self.ui = Ui_InvestigationResultsScreen()
        self.ui.setupUi(self)
        self.ui.PrevButton.clicked.connect(self.goto_theory_recap)
        self.ui.NextButton.clicked.connect(self.goto_conclusion)
        self.setup_tabs()
        self.setup_table()
        self.show()

    def setup_table(self):
        """
        Populates the table on this screen with a list of inputs and
        outputs of the zeta function
        """

        self.values = database_select(['*'], ['Zeta'])
        self.table_values = [(Complex(value[1], value[2]),
                             Complex(value[3], value[4])) for value in self.values]

```

```

        self.ui.ZetaTable.setRowCount(len(self.table_values))
        for i, values in enumerate(self.table_values):
            for j in range(len(values)):
                self.ui.ZetaTable.setItem(i,j,
                                         QTableWidgetItem(str(values[j])))
        self.ui.ZetaTable.horizontalHeader().setStretchLastSection(True)
        self.ui.ZetaTable.horizontalHeader().setSectionResizeMode(
            QHeaderView.Stretch)
        self.ui.ZetaTable.setColumnWidth(1, 100)

class Conclusion(SummarySection):
    """
    The Conclusion Screen class displays this screen to the user as part
    of the summary section of this program
    """

    def __init__(self):
        super(Conclusion, self).__init__()
        self.ui = Ui_ConclusionScreen()
        self.ui.setupUi(self)
        self.setup_tabs()
        self.ui.PrevButton.clicked.connect(self.goto_investigation_results)
        self.ui.NextButton.clicked.connect(self.goto_impact)
        self.show()

class Impact(SummarySection):
    """
    The Impact Screen class displays this screen to the user as part
    of the summary section of this program
    """

    def __init__(self):
        super(Impact, self).__init__()
        self.question_no = 10
        self.ui = Ui_ImpactScreen()
        self.ui.setupUi(self)
        self.setup_tabs()
        self.setup_question()
        self.ui.PrevButton.clicked.connect(self.goto_conclusion)
        self.ui.NextButton.clicked.connect(self.goto_mainmenu)
        self.show()

```

[program/notes.py](#)

```

notes.py
=====

Contains all of the classes used to interact with the GUI for the
user to be able to take notes in the program

Includes notes screens for the tutorial, introduction, investigation and
summary
screens
"""

from PyQt5 import QtCore, QtGui, QtWidgets
from .utils import Screen, database_query, database_insert, User, get_id
from .user_interface import Ui_TutorialNotesScreen,
                           Ui_IntroductionNotesScreen, Ui_InvestigationNotesScreen,
                           Ui_SummaryNotesScreen

class Notes(Screen):

    """
    A class inherited by all of the Screens/Page classes in the notes
    section
    of the program

    The functions defined in this class allow for different pages to be
    loaded
    and hidden, so that the user is able to navigate to different parts
    of the
    program using the GUI
    """

    def __init__(self):
        super(Notes, self).__init__()

    def goto_tutorial_notes(self):
        self.tutorial_notes = TutorialNotes()
        self.hide()

    def goto_introduction_notes(self):
        self.introduction_notes = IntroductionNotes()
        self.hide()

    def goto_investigation_notes(self):
        self.investigation_notes = InvestigationNotes()
        self.hide()

    def goto_summary_notes(self):
        self.summary_notes = SummaryNotes()

```

```

    self.hide()

def exit_notes(self):
    self.hide()

def saveto_database(self):
    self.text = self.ui.NotesText.toPlainText()
    database_query("DELETE FROM Notes WHERE Section=? AND
        Username=?", self.section, User.GetUsername())
    database_insert('Notes', User.GetUsername(), self.section,
        self.text)
    self.set_text_saved()

def set_text_saved(self):
    self.ui.SavedText.setStyleSheet("color: rgb(0, 140, 0);\n"
        "font: 18pt \"Sans Serif\";")  

    self.ui.SavedText.setText('Saved!')

def set_text_unsaved(self):
    self.ui.SavedText.setStyleSheet("color: rgb(255, 0, 0);\n"
        "font: 18pt \"Sans Serif\";")  

    self.ui.SavedText.setText('Unsaved')

def set_text(self):
    self.db_text = database_query("SELECT Text FROM Notes WHERE
        Section=? AND Username=?", self.section, User.GetUsername())
    if len(self.db_text) == 0:
        self.text = ''
    else:
        self.text = self.db_text[0][0]
    self.set_note_text(self.text)

def set_note_text(self, text, color='rgb(69, 69, 69)'):
    self.ui.NotesText.setHtml("<!DOCTYPE HTML PUBLIC "-//W3C//DTD
        HTML 4.0//EN\""
        "\nhttp://www.w3.org/TR/REC-html40/strict.dtd\">\n"
        "<html><head><meta name=\"qrichtext\" content=\"1\" /><style
            type=\"text/css\">\n"
        "p, li { white-space: pre-wrap; }\n"
        f"</style></head><body style=\" font-family:'Sans Serif';
            font-size:18pt; font-weight:400; font-style:normal;
            color:{color};\">\n"
        f"<p style=\" margin-top:0px; margin-bottom:0px;
            margin-left:0px; margin-right:0px; -qt-block-indent:0;
            text-indent:0px;\">{text}</p></body></html>")

def not_signed_in(self):
    self.set_note_text('You must be signed in to be able to make
        notes',
        color='rgb(255, 0, 0)')

```

```

        self.ui.NotesText.setReadOnly(True)

    def signed_in(self):
        self.ui.NotesText.setReadOnly(False)
        self.set_text()
        self.ui.NotesText.textChanged.connect(self.set_text_unsaved)
        self.ui.TutorialTab.clicked.connect(self.goto_tutorial_notes)
        self.ui.IntroductionTab.clicked.connect(self.goto_introduction_notes)
        self.ui.InvestigationTab.clicked.connect(self.goto_investigation_notes)
        self.ui.SummaryTab.clicked.connect(self.goto_summary_notes)
        self.ui.SaveButton.clicked.connect(self.saveto_database)

    class TutorialNotes(Notes):
        """
        The TutorialNotes class is used to allow the user to take notes on
        the
        tutorial section of the program
        """
        def __init__(self):
            super(TutorialNotes, self).__init__()
            self.section = 'Tutorial'
            self.ui = Ui_TutorialNotesScreen()
            self.ui.setupUi(self)
            self.ui.BackButton.clicked.connect(self.exit_notes)
            if User.GetSignedIn():
                self.signed_in()
                self.ui.NextButton.clicked.connect(self.goto_introduction_notes)
            else:
                self.not_signed_in()
            self.show()

    class IntroductionNotes(Notes):
        """
        The IntroductionNotes class is used to allow the user to take notes
        on the
        introduction section of the program
        """
        def __init__(self):
            super(IntroductionNotes, self).__init__()
            self.section = 'Introduction'
            self.ui = Ui_IntroductionNotesScreen()
            self.ui.setupUi(self)
            self.ui.BackButton.clicked.connect(self.exit_notes)
            if User.GetSignedIn():

```

```

        self.signed_in()
        self.ui.NextButton.clicked.connect(self.goto_investigation_notes)
    else:
        self.not_signed_in()
    self.show()

class InvestigationNotes(Notes):
    """
    The InvestigationNotes class is used to allow the user to take notes
    on the
    investigation section of the program
    """

    def __init__(self):
        super(InvestigationNotes, self).__init__()
        self.section = 'Investigation'
        self.ui = Ui_InvestigationNotesScreen()
        self.ui.setupUi(self)
        self.ui.BackButton.clicked.connect(self.exit_notes)
        if User.GetSignedIn():
            self.signed_in()
            self.ui.NextButton.clicked.connect(self.goto_summary_notes)
        else:
            self.not_signed_in()
        self.show()

class SummaryNotes(Notes):
    """
    The SummaryNotes class is used to allow the user to take notes on the
    summary section of the program
    """

    def __init__(self):
        super(SummaryNotes, self).__init__()
        self.section = 'Summary'
        self.ui = Ui_SummaryNotesScreen()
        self.ui.setupUi(self)
        self.ui.BackButton.clicked.connect(self.exit_notes)
        if User.GetSignedIn():
            self.signed_in()
        else:
            self.not_signed_in()
        self.show()

```

program/utils/__init__.py

```
"""
__init__.py
=====
Imports for utils
"""

from .mathematical_functions import zeta, sieve_of_eratosthenes,
    prime_power_function, prime_counting_function_estimation,
    logarithmic_integral, is_zeta_zero, make_int, make_complex
from .computational_functions import binary_insertion_sort,
    save_zeta_zeroes_to_file, save_zeta_values_to_file
from .database_functions import database_insert, database_select,
    database_query, database_print, create_database, get_id
from .cryptography_functions import hash_password, check_password
from .email_functions import send_verification_email
from .user import User
from .screen_design import Screen, StaticGraphScreen, DynamicGraphScreen
from .number_systems import Number, Complex
```

program/utils/computational_functions.py

```
"""
computational_functions.py
=====

Contains subroutines and classes that are used for various different
algorithms

Subroutines:
    - binary_search
    - binary_insertion_sort
    - save_zeta_zeroes_to_file
    - save_zeta_values_to_file
    - save_zeta_to_file
    - change_datatype

Classes
    - Queue
"""

import random
import time
import csv
import re
import os
```

```

def binary_search(data, target):

    """
    For a set of unique elements that are sorted in ascending order
        (data),
    this function will return the index where target is in the data,
        with time
    complexity O(log n)
    """

    low = 0
    high = len(data)
    if target < min(data):
        return 0
    elif target > max(data):
        return len(data)
    else:
        while True:
            mid = (high+low) // 2
            if data[mid] < target < data[mid+1]:
                return mid+1
            elif target < data[mid]:
                high=mid
            elif target > data[mid]:
                low=mid
            else:
                raise ValueError('Error: Input list was not a set')

def binary_insertion_sort(data, descending=False):

    """
    Sorts a list of data into ascending order using a binary insertion
        sort
    """

    try:
        array = list(map(float, data ))
    except ValueError:
        array = data
    queue = Queue(array)
    sorted = [queue.deQueue()]
    while not queue.isEmpty():
        item = queue.deQueue()
        index = binary_search(sorted, item)
        bigger = sorted[index:]
        del sorted[index:]
        sorted.append(item)
        sorted.extend(bigger)

```

```

        if not descending:
            return sorted
        else:
            return sorted[::-1]

class Queue:

    """
    Implementation of a circular queue
    Contains the subroutines:
    - enQueue
    - deQueue
    - is_full
    - is_empty
    """

    def __init__(self, input_queue, **kwargs):
        self.input_queue = input_queue
        self.size = len(self.input_queue)
        self.front = 0
        self.rear = len(self.input_queue)
        if 'max_size' in kwargs.keys():
            self.max_size = kwargs['max_size']
        else:
            self.max_size = len(self.input_queue)
        if self.size > self.max_size:
            raise IndexError("max_size must be greater than or equal to
                             the \
                             size of the input queue")
        else:
            self.blanks = [False for i in range(self.max_size -
                                                self.size)]
            self.queue = self.input_queue + self.blanks

    def enQueue(self, item):

        """
        Appends an item to the rear of the circular queue
        """

        if self.is_full():
            raise IndexError("Tried to enqueue to a full queue")
        else:
            self.queue[self.rear] = item
            self.rear = (self.rear+1) % self.max_size
            self.size += 1

```

```

def deQueue(self):

    """
    Remove and return the value at the front of the circular queue
    """

    if self.is_empty():
        raise IndexError("Tried to dequeue from an empty queue")
    else:
        item = self.queue[self.front]
        self.queue[self.front] = False
        self.front = (self.front+1) % self.max_size
        self.size -= 1
        return item

def is_full(self):

    """
    Check if the circular queue is full
    """

    return self.size == self.max_size

def is_empty(self):

    """
    Check if the circular queue is empty
    """

    return self.size == 0

def __str__(self):

    """
    Return a printable value of the queue
    """

    return 'Queue(' + ', '.join([str(i) for i in self.queue]) + ')'

def save_zeta_values_to_file(table_values, filepath,
                             fieldnames=['InputReal', 'InputImag', 'OutputReal',
                                         'OutputImag']):
    """
    Given a list of corresponding inputs and outputs of the zeta
    function,
    save these sets of values to a file.
    """

```

```

csv_values = [list(map(str,
    [input.get_real(), input.get_imag(), output.get_real(),
     output.get_imag()]))
    for input, output in table_values]
regex = r'-?\d+\.\d+'
index = 0
save_zeta_to_file(csv_values, filepath, regex, index, fieldnames)

def save_zeta_zeroes_to_file(table_values, filepath,
    fieldnames=['InputReal', 'InputImag', 'OutputReal',
    'OutputImag']):
    """
    Given a list of zeroes/roots of the zeta function,
    save these zeroes to a file
    """
    csv_values = [list(map(str, [real, imag])) for real, imag in
        table_values]
    regex = r'-?\d+\.\d+'
    index = 1
    save_zeta_to_file(csv_values, filepath, regex, index, fieldnames)

def save_zeta_to_file(csv_values, filepath, regex, index, fieldnames):
    """
    Given a list of imaginary numbers, combine these with the contents
    of the
    file that they are going to be saved to, sort these values using the
    first
    real number, and save them back into the csv file
    """
    if not os.path.isfile(filepath):
        os.mknod(filepath)
    with open(filepath, 'r') as csv_file:
        csv_reader = csv.reader(csv_file)
        for row in csv_reader:
            if row != fieldnames:
                csv_values.append(list(map(str, row)))
    sorting_dict = {list(map(float,
        re.findall(regex, ','.join(row))))[index]: row for row in
        csv_values}
    sorted_keys = binary_insertion_sort(list(set(sorting_dict.keys())))
    sorted_values = [sorting_dict[key] for key in sorted_keys]
    with open(filepath, 'w') as csv_file:
        csv_writer = csv.writer(csv_file)
        csv_writer.writerow(fieldnames)

```

```

        for row in sorted_values:
            csv_writer.writerow(row)

def change_datatype(value, datatype):
    """
    Change the datatype of a value, if the datatype is given as a
    string, and not
    as a python keyword
    """

    match str(datatype):
        case 'int':
            return int(value)
        case 'str':
            return str(value)
        case 'float':
            return float(value)
        case 'bool':
            return bool(value)
        case 'list':
            return list(value)
        case 'complex':
            return Complex(value)
        case 'fraction':
            return Fraction(value)
        case _:
            raise TypeError(f'Trying to change value \'{value}\' \
                           to invalid datatype \'{datatype}\'')

```

program/utils/cryptography_functions.py

```

=====
cryptography_functions.py
=====

Contains subroutines that are used for encryption and hashing

These subroutines include:
- get_pepper
- hash_password
- check_password
=====
```

```

import argon2
from argon2 import PasswordHasher as ph
```

```

def get_pepper():

    """
    Returns the value of the pepper that is used in this program to help
    secure the hashes in the database
    """

    return 'Sr4QkXyIhv4SijjxAWxU'


def hash_password(password):

    """
    Takes in a password as a parameter and returns the hashed version of
    this
    password using the pepper and the argon2 encryption algorithm
    """

    hash = ph().hash(get_pepper() + password)
    return hash


def check_password(password, hash):

    """
    Used to check whether a given hash is the hashed version of a
    password

    Because hashing cannot be undone to check whether the hash is the
    same as a
    password, it is required that the password is hashed, and if this
    hash is the
    same as the one we are comparing it to, then the passwords are the
    same.
    """

    try:
        valid = ph().verify(hash, get_pepper() + password)
    except argon2.exceptions.VerifyMismatchError:
        return False
    else:
        return True

```

`program/utils/database_functions.py`

```

"""
database_functions.py
=====

```

```

Contains subroutines that are used to query and interact with SQL
databases

These subroutines include:
- database_select
- database_insert
- database_query
- database_print
- database_print
- create_users_table
- create_correct_answers_table
- create_questions_table
- create_user_answer_table
- create_notes_table
- create_zeta_table
- create_user_zeta_table
- create_zeroes_table
- create_user_zeroes_table
- create_database
- delete_table
- delete_database
- reset_database
- get_next_id
- get_id
"""

import sqlite3
import os
from .file_handling import touch, remove

def database_select(headings, tables):
    """
    database_select takes in a list of heading and tables as inputs, and
    returns
    the query from selecting these from the SQL database
    """

    query = f"SELECT {', '.join(headings)} FROM {', '.join(tables)}"
    return database_query(query)

def database_insert(table, *args):
    """
    database_insert inserts the arguments into a desired table in the
    database
"""

```

```

"""
query = f"INSERT INTO {table} VALUES ({', '.join('?' for _ in
args)})"
database_query(query, *args)

def database_query(query, *args, database='database.db'):
    """
    database_query takes in a query as an input, along with any required
    arguments.
    the function executes the query on the database.
    This allows the database to be queried from any point in the program
    without
    having to pass a database variable into every function, or by using
    a global
    variable
"""

conn = sqlite3.connect(database)
cursor = conn.cursor()
cursor.execute(query, args)
rows = cursor.fetchall()
conn.commit()
conn.close()
return rows

def database_print():
    """
    database_print was mainly used for testing purposes. This function
    gets the
    name of every table in the database, prints to the console, each
    table, with
    the data in each table
"""

    print('*'*16)
    print('= DATABASE =')
    print('*'*16)
    tables = [table[0] for table in database_query("""SELECT name FROM
        sqlite_master
    WHERE type='table'""")]
    for table in tables:
        name = f"- Table: {table} -"
        border = '-' * len(name)
        print(f'{border}\n{name}\n{border}')
        print(''.join([column[1] for column in database_query(f"PRAGMA

```

```

        table_info({table}))])
rows = database_select(['*'], [table])
for row in rows:
    print(row)
print('=' * 20)

def create_users_table():

    """ Create the Users table in the database """

    database_query(""" CREATE TABLE Users(
Username text PRIMARY KEY,
Email text,
Password text
)""")

def create_correct_answers_table(questions_and_answers):

    """ Create the Answers table in the database """

    database_query(""" CREATE TABLE CorrectAnswers(
Question_No integer,
CorrectAnswer text,
PRIMARY KEY (Question_No, CorrectAnswer)
)""")
    for question_no, dict in enumerate(questions_and_answers):
        for answer in dict["Answers"]:
            database_insert('CorrectAnswers', question_no, answer)

def create_questions_table(questions_and_answers):

    """ Create the Questions table in the database """

    database_query(""" CREATE TABLE Questions(
Question_No integer PRIMARY KEY,
Question text
)""")
    for question_no, dict in enumerate(questions_and_answers):
        database_insert('Questions', question_no, dict["Question"])

def create_user_answer_table():

    """ Create the User Answer table in the database """

    database_query(""" CREATE TABLE UsersAnswers(
Question_No integer,

```

```

        Username integer,
        UsersAnswer integer,
        PRIMARY KEY (Question_No, Username)
    )""")

def create_notes_table():

    """ Create the Notes table in the database """

    database_query(""" CREATE TABLE Notes(
        Username integer,
        Section text,
        Text text,
        PRIMARY KEY (Username, Section)
    )""")

def create_zeta_table():

    """ Create the Zeta table in the database """

    database_query(""" CREATE TABLE Zeta(
        Zeta_ID integer PRIMARY KEY,
        Input_Real REAL,
        Input_Imag REAL,
        Output_Real REAL,
        Output_imag REAL
    )""")

def create_user_zeta_table():

    """ Create the User Zeta table in the database """

    database_query(""" CREATE TABLE UserZeta(
        Zeta_ID integer,
        Username integer,
        PRIMARY KEY (Zeta_ID, Username)
    )""")

def create_zeroes_table():

    """ Create the Zeroes table in the database """

    database_query(""" CREATE TABLE Zeroes(
        Zero_ID integer PRIMARY KEY,
        Zero_Real_Input real,
        Zero_Img_Input real
    )""")

```

```

        )""")

def create_user_zeroes_table():

    """ Create the User Zeta Zeroes table in the database """

    database_query(""" CREATE TABLE UserZeroes(
    Zero_ID integer,
    Username integer,
    PRIMARY KEY (Zero_ID, Username)
)""")

def delete_table(table):
    try:
        database_query(f"DROP TABLE IF EXISTS {table}")
    except sqlite3.OperationalError as error:
        print(error)

def create_database(database='database.db'):

    """
    Create the database and all of the tables if it doesn't already exist
    """

    if not os.path.isfile(database):
        touch(database)
    QUESTIONS_AND_ANSWERS = [
        {'Question': 'Error',
         'Answers': ['Error']},
        {'Question': 'What is the name of this program? Visualising the
                     ___ Hypothesis',
         'Answers': ['Riemann']},
        {'Question': 'What is 1+1?',
         'Answers': ['2', 'Two']},
        {'Question': 'Which character is used to denote the imaginary
                     unit?',
         'Answers': ['i', 'j']},
        {'Question': 'What is one practical application of the Riemann
                     Hypothesis?',
         'Answers': ['Cryptography', 'Quantum Physics', 'Prime
                     Numbers']},
        {'Question': 'What is the value of the first non-trivial zeta
                     zero?',
         'Answers': ['14.1', '0.5+14.1i', '0.5 + 14.1i', '0.5+14.1j',
                     '0.5 + 14.1j']},
        {'Question': 'What is hypothesised to be the real part of every
                     non-trivial zero of the riemann zeta function?',}
    ]

```

```

        'Answers': ['0.5', '1/2']},
{'Question': 'What is the value of (5+5i)',
 'Answers': ['0.974+0.012i', '0.974+0.012j']},
{'Question': 'What prize would you get from the Clay Mathematics
 Institute if you managed to prove the Riemann Hypothesis?',
 'Answers': ['$1000000', '$1,000,000', 'One Million Dollars',
 'A Million Dollars']},
{'Question': 'What is the name of Riemann\'s 1859 paper where he
 first conjectured the Riemann Hypothesis?',
 'Answers': ['On The Number Of Primes Less Than a Given
 Magnitude']},
{'Question': 'What type of numbers would proving the Riemann
 Hypothesis have an impact over?',
 'Answers': ['Prime Numbers', 'Primes', 'Prime']}]
]
create_users_table()
create_correct_answers_table(QUESTIONS_AND_ANSWERS)
create_questions_table(QUESTIONS_AND_ANSWERS)
create_user_answer_table()
create_notes_table()
create_zeta_table()
create_user_zeta_table()
create_zeroes_table()
create_user_zeroes_table()

def delete_database(database='database.db'):

    """ remove the database file, thus deleting the database """

    remove(database)

def reset_database(database='database.db'):

    """ clear all of the data from inside the database """

    delete_database()
    create_database()

def get_next_id(IDs, ID=0):
    if ID not in IDs:
        return ID
    else:
        return get_next_id(IDs, ID+1)

def get_id(ID, table):
    selection = database_select([ID], [table])

```

```
IDs = set([row[0] for row in selection])
ID_Number = get_next_id(IDs)
return ID_Number
```

program/utils/email_functions.py

```
"""
email_functions.py
=====

Contains function that are used to send emails to the user's email
address

These Functions include:
- send_verification_email
- send_email
"""

from dotenv import load_dotenv, find_dotenv
import smtplib
import os
from .user import User

def send_verification_email(code):

    """
    The send_verification_email function is used when the user has
    forgotten
    their password, so an email is sent to them, with a verification code

    This function loads the sending email's address and password from a
    .env file
    And then sends an email to the user with the verification code
    """

    load_dotenv(find_dotenv())
    from_addr = os.getenv("EMAIL")
    password = os.getenv("PASSWORD")
    message = f"Dear {User.GetUsername()}\nThank you for using the
    Riemann " \
        f"Hypothesis Program\nYour verification code is: {code}\n" \
        "If this was not you, please make sure that your account is
        secured"
    send_email(from_addr, User.GetEmail(), 'Verification', message,
               password)
```

```
def send_email(from_addr, to_addr, subject, message, password,
               smtpserver='smtp.gmail.com:587'):

    """
    The send_email function is used to send an email to a given email
    address
    """

    header = f'Subject: {subject}\n'
    header += f'To: {to_addr}\n'
    message = header + message
    server = smtplib.SMTP(smtpserver)
    server.starttls()
    server.login(from_addr, password)
    problems = server.sendmail(from_addr, to_addr, message)
    server.quit()
```

program/utils/file_handling.py

```
"""
file_handling.py
=====

Contains subroutines that are used to create and delete files

These subroutines include:
- touch
- remove
"""

import os

def touch(path):
    """ Create a file if it does not already exist """
    try:
        with open(path, 'a'):
            os.utime(path, None)
    except Error:
        pass

def remove(path):
    """ Remove a file if it exists """
    try:
        os.remove(path)
    except Error:
        pass
```

program/utils/mathematical_functions.py

```
"""
mathematical_functions.py
=====

Contains many mathematical functions that are used throughout the program

These Functions include:
- ncr
- count
- zeta
- is_zeta_zero
- sieve_of_eratosthenes
- prime_counting_function_estimation
- integration
- exponential_integral
- logarithmic_integral
- prime_power_function
- make_complex
- make_int
"""

from itertools import islice
from functools import reduce
import numpy as np
from operator import mul
from math import ceil, sqrt, log, floor
import scipy.integrate as integrate
from .number_systems import Complex

def ncr(n, r):
    """
    Binomial Coefficient Calculator
    {n \choose r} = \frac{n!}{r! (n-r)!}, \text{ for } n \geq r > 0
    """
    r = min(r, n-r)
    numerator = reduce(mul, range(n, n-r, -1), 1)
    denominator = reduce(mul, range(1, r+1), 1)
    return numerator // denominator

def count(start=0, step=1):
    """
    Returns a generator object which contains all values from start
    """
```

```

        to whenever the generator will be stopped iterating over, with a
        given step
e.g count() -> 1 2 3 4 5 ...
    count(10, 2) -> 10 12 14 16 ...
"""

n = start
while True:
    yield n
    n += step

def zeta(real_term, imag_term, number_of_terms=100):

    """
Riemann Zeta Function
\zeta(s) = \sum_{n=1}^{\infty} \frac{1}{n^s}
    = \frac{1}{2^{1-s}} \sum_{n=0}^{\infty} \frac{(-1)^n}{2^{n+1}}
      \sum_{k=0}^n (-1)^k \binom{n}{k} (k+1)^{-s}
This function is implemented using generators
"""

s = complex(real_term, imag_term)
if s == 1:
    return Complex('inf')
else:
    const = 1 / (1 - 2 ** (1 - s))
    term = (1 / 2 ** (s - 1)) * sum((-1) ** k * ncr(n, k) * (k + 1)
                                         ** (-s)
                                         for k in range(n + 1)) for n in
                                         count())
    summation = sum(islice(term, number_of_terms))
    zeta = const * summation
    return Complex(zeta)

def is_zeta_zero(real, imag):

    """
Given a complex number, the function checks to see if this number is
approximately a root (zero) of the Riemann Zeta Function
"""

    zeta_value = zeta(real, imag)
    return abs(zeta_value) < 10e-3

def sieve_of_eratosthenes(limit):

"""

```

```

The Sieve of Eratosthenes return a list of all of the prime numbers
    up to
a given limit
"""

limit = floor(limit)
possible_primes = np.ones(limit, dtype=bool)
possible_primes[0:2:1] = False
for i in range(2, ceil(sqrt(limit)))::
    possible_primes[i*i:limit:i] = False
return np.flatnonzero(possible_primes)

def prime_counting_function_estimation(N):

"""
Computes  $\frac{n}{\log(n)}$  in order to estimate the prime counting
function
"""

return N/log(N)

def integration(func, lower_limit, upper_limit, strips=int(1e6)):

"""
For a given function func, return the definite integral between
limits lower_limit and upper_limit with accuracy: strips
This is an implementation of the trapezium formula
"""

strip_width = (upper_limit - lower_limit) / strips
term1 = sum(func(lower_limit + strip_width * h) for h in range(1,
    strips))
term2 = 0.5*(func(upper_limit) + func(lower_limit))
area = strip_width * (term1 + term2)
return area

def exponential_integral(x, lower_limit=1e-7, upper_limit=10000):

"""
Exponential integral function
\mathrm{Ei}(x) = \int_{-x}^{\infty} \frac{e^{-t}}{t} dt
"""

def func(t):
    return np.exp(t) / t

lower_limit = min(np.abs(x), lower_limit)

```

```

upper_limit = max(np.abs(x), upper_limit)
if x > 0:
    return (integrate.quad(func, -upper_limit, -lower_limit)[0]
            + integrate.quad(func, lower_limit, x)[0])
else:
    return integrate.quad(func, -upper_limit, x)[0]

def logarithmic_integral(N):
    """
    Logarithmic Integral
    \mathrm{Li}(x) = \int_{0}^x \frac{dt}{\ln t}
    """
    return exponential_integral(log(N))

def prime_power_function(N):
    """
    Prime Power Function
    \mathrm{Pi}(N) = \pi(N) + \frac{1}{2}\pi(N^{\frac{1}{2}}) + \dots
    = \sum_{r=1}^{\lfloor \log_2 N \rfloor} \pi(N^{\frac{1}{r}})
    """
    total = 0
    for r in range(1, floor(log(N, 2))+1):
        total += sieve_of_eratosthenes(N**(1/r)).size
    return total

def make_complex(number):
    """
    Given the variable number which is of form a+bi or a+bj and of any
    datatype,
    and where a and b are integers, return this number as one with
    the complex datatype
    """
    try:
        number_complex = Complex(number.replace('i', 'j'))
    except ValueError as e:
        return False
    else:
        return number_complex

```

```

def make_int(number):

    """
    Given the variable number, return this number with the int datatype
        if possible
    otherwise, return False
    """

    try:
        number_int = int(number)
    except ValueError as e:
        return False
    else:
        return number_int

```

program/utils/number_systems.py

```

"""
number_systems.py
=====

Contains classes used to represent different types of numbers using
a user-defined abstract datatype,

Classes:
- Number
- Complex
"""

from math import sin, cos, atan2, sqrt, exp, log
import re

class Number:

    """ A generic class for numbers"""

    def __init__(self, number):
        self.__number = number

    def get_number(self):
        return self.__number

    def __str__(self):
        print(self.__number)

class Complex(Number):

```

```

"""
Operations and arithmetic involving complex numbers
Operations include:
    + addition
    - subtraction
    * multiplication
    / division
    ** exponentiation
    == equal to
    != not equal to
    abs
    str
    repr
    conjugate
    phase
    dump
    polar
    rect
    get_real
    get_imag
"""

def __init__(self, *args, rect=True):
    super().__init__([*args])
    self.args = args
    self.rect = rect
    if not self.rect:
        # make complex if input in polar coordinates form
        r = float(self.args[0])
        phi = float(self.args[1])
        self.__real = r * cos(phi)
        self.__imag = r * sin(phi)
    else:
        if isinstance(self.args[0], Complex):
            # make complex if input in Complex form
            self.__real = self.args[0].get_real()
            self.__imag = self.args[0].get_imag()
        elif isinstance(self.args[0], complex):
            # make complex if input in python complex form
            self.__real = self.args[0].real
            self.__imag = self.args[0].imag
        else:
            # make complex if input in rect coordinates form
            self.__real = float(self.args[0])
            if len(self.args) > 1:
                self.__imag = float(args[1])
            elif self.args[0] == "inf":
                self.__imag = float(self.args[0])
            else:

```

```

        self.__imag = 0

    def __correct_type(self, number):
        """
        correct_type uses polymorphism to change number to the Complex
        datatype
        """

        if isinstance(number, Complex):
            return number
        elif isinstance(number, (float,int)):
            number = Complex(number)
        elif not (hasattr(number, 'real') and hasattr(number, 'imag')):
            raise TypeError('Number must have a real and imaginary part')
        else:
            raise TypeError(f'Number of type {type(number)} not of
                           correct format')
        return number

    def __illegal(self, op):
        """ Run when an illegal operation for complex numbers is trying
        to be computed """
        print(f'Unable to compute \'{op}\'\nThis operation is illegal
              for complex numbers')

    ### Arithmetic Operations ###
    def __abs__(self):
        """
        abs(self)
        returns the absolute value (magnitude)
        """
        return sqrt(self.__real**2 + self.__imag**2)

    def __add__(self, other):
        """ self + other """
        other = self.__correct_type(other)
        return Complex(self.__real + other.__real, self.__imag +
                      other.__imag)

    def __radd__(self,other):
        """ other + self """
        return self.__add__(other)

    def __sub__(self, other):

```

```

    """ self - other """
    other = self.__correct_type(other)
    return Complex(self.__real - other.__real, self.__imag -
                  other.__imag)

def __rsub__(self, other):
    """ other - self """
    return self.__sub__(other)

def __mul__(self, other):
    """
    self * other
    uses formula (a+bi)(c+di) = (ac-bd) + (ad+bc)i
    """
    other = self.__correct_type(other)
    return Complex(self.__real*other.__real -
                  self.__imag*other.__imag,
                  self.__real*other.__imag + self.__imag*other.__real)

def __rmul__(self, other):
    """ other * self """
    return self.__mul__(other)

def __truediv__(self, other):
    """ self / other """
    other = self.__correct_type(other)
    denominator = float(other.__real**2 + other.__imag**2)
    return
        Complex((self.__real*other.__real+self.__imag*other.__imag)/denominator,
                (self.__imag*other.__real-self.__real*other.__imag)/denominator)

def __rtruediv__(self, other):
    """ other / self """
    return self.__truediv__(other)

def __pow__(self, other):
    """
    self ** other
    self^other = \rho^c e^{-d\theta}(\cos(d\ln\rho + c\theta)+i
                                         \sin(d\ln\rho + c\theta))
    where self = a+bi, other=c+di, \theta=\arctan(\frac{b}{a}),
          \rho=\sqrt{a^2 + b^2}
    """
    other = self.__correct_type(other)

```

```

rho, theta = self.polar()
c = other.get_real()
d = other.get_imag()
mod = rho ** c * exp(-d * theta)
arg = d * log(rho) + c * theta
return Complex(mod, arg, rect=False)

def __rpow__(self, other):
    """ other ** self """
    return self.__pow__(other)

def __eq__(self, other):
    """ self == other """
    other = self.__correct_type(other)
    return self.__real == other.__real and self.__imag ==
        other.__imag

def __ne__(self, other):
    """ self != other """
    return not(self.__eq__(other))

def __neg__(self):
    """ -self """
    return Complex(-self.__real, -self.__imag)

def __pos__(self):
    """ +self """
    return Complex(+self.__real, +self.__imag)

### Printing and Display ###
def __str__(self):
    """ str(self) """
    if self.__imag >= 0:
        return '(%s+%si)' % (self.__real, self.__imag)
    else:
        return '(%s-%si)' % (self.__real, abs(self.__imag))

def __repr__(self):
    """ repr(self) """
    return 'Complex(%s, %s)' % (self.__real, self.__imag)

### illegal operations ###

```

```

def __gt__(self, other):
    """ self > other"""
    self.__illegal(f'{self} > {other}')

def __ge__(self, other):
    """ self >= other"""
    self.__illegal(f'{self} >= {other}')

def __lt__(self, other):
    """ self < other"""
    self.__illegal(f'{self} < {other}')

def __le__(self, other):
    """ self <= other"""
    self.__illegal(f'{self} <= {other}')


### Miscellaneous Functions ###

def conjugate(self):
    """ (a+bi).conjugate() returns (a-bi) """
    return Complex(self.__real, -self.__imag)

def phase(self):
    """ self.phase() returns the argument of the complex number"""
    return atan2(self.__imag, self.__real)

def dump(self):
    """ self.dump() returns all of the functions attributes"""
    return self.__dict__

def polar(self):
    """ self.polar() returns the modulus and argument of the complex
        number"""
    return (self.__abs__(), self.phase())

def rect(self):
    """ self.rect() returns the rect coordinates of the complex
        number"""
    return (self.__real, self.__imag)

def get_real(self):
    """ self.get_real() returns the real part of the complex

```

```

        number"""
    return self.__real

    def get_imag(self):
        """ self.get_imag() returns the imaginary part of the complex
            number"""
        return self.__imag

```

program/utils/screen*design*.py

```

"""
screen_design.py
=====

Contains the Screen class
"""

from PyQt5 import QtCore, QtGui, QtWidgets
import matplotlib
from matplotlib.backends.backend_qt5agg import FigureCanvasQTAgg as
    FigureCanvas
from matplotlib.figure import Figure
from ..user_interface import Ui_MatPlotScreen
from .database_functions import database_query, database_insert,
    database_select, get_id
from .user import User

class Screen(QtWidgets.QDialog):

    """
    The Screen Class is inherited by all of the other classes that are
    used
    to interact with the GUI

    The purpose of this class is to set some default values, and
        automatically
    run functions that are common to every class that inherits it

    It also contains some functions which are commonly run by classes
        that
    inherit it
"""

    def __init__(self):
        super(Screen, self).__init__()
        self.setFixedSize(1340)
        self.setFixedHeight(720)

```

```

def goto_mainmenu(self):
    from ..main_section import MainMenu
    self.main_menu = MainMenu()
    self.hide()

def setup_question(self):
    """
    This function is only called if there is a question that the
    user can answer on that page

    This function will set the QuestionText label in the gui to the
    question that is being asked, and if the user is signed in,
    and has previously answered the question correctly, then
    their previous answer will be displayed
    """
    self.ui.SubmitButton.clicked.connect(self.check_answer)
    self.ui.QuestionText.setStyleSheet("font-size: 16pt;
        font-weight: 600;")
    self.text = database_query("SELECT Question FROM Questions WHERE
        Question_No=?", self.question_no)[0][0]
    self.correct_answers = [answer[0] for answer in
        database_query("SELECT CorrectAnswer From CorrectAnswers
            WHERE Question_No=?", self.question_no)]
    self.lowercase_correct_answers = list(map(lambda answer :
        answer.lower(), self.correct_answers))
    self.ui.QuestionText.setText(self.center_text(self.text))
    if User.GetSignedIn():
        self.usernames = [username[0] for username in
            database_query("SELECT Username FROM UsersAnswers WHERE
                Question_No=?", self.question_no)]
        if User.GetUsername() in self.usernames:
            self.users_answer = str(database_query("SELECT
                UsersAnswer FROM UsersAnswers WHERE Question_No=? AND
                Username=?", self.question_no,
                User.GetUsername())[0][0])
            if self.users_answer.lower() in
                self.lowercase_correct_answers:
                self.ui.QuestionInput.setText(self.users_answer)
                self.set_label_correct()

    def check_answer(self):
        self.users_answer = self.ui.QuestionInput.text().lower()
        if self.users_answer.lower() in self.lowercase_correct_answers:
            self.set_label_correct()
        else:
            self.set_label_incorrect()
        if User.GetSignedIn():
            self.add_answer_to_db()

```

```

def set_label_correct(self):
    self.ui.MessageLabel.setStyleSheet("color: rgb(0, 140, 0);\n"
        "font: 18pt \\"Sans Serif\\\";")\n    self.ui.MessageLabel.setText(self.center_text('Correct!'))\n    self.ui.QuestionInput.setReadOnly(True)\n\ndef set_label_incorrect(self):\n    self.ui.MessageLabel.setStyleSheet("color: rgb(255, 0, 0);\n        \"font: 18pt \\"Sans Serif\\\";")\n    self.ui.MessageLabel.setText(self.center_text('Incorrect, try\nagain'))\n\ndef add_answer_to_db(self):\n    """\n        This function is only run if the user is already signed in\n        Add the User's Answer to the question to the database, whether\n            it's\n        right or wrong\n\n        Will add the user's answer to UserAnswer table\n        If User had already answered the question, the record in the\n            database\n        will need to be deleted before the new one is inserted.\n    """\n    database_query("DELETE FROM UsersAnswers WHERE Username=? AND\n        Question_No=?", User.GetUsername(), self.question_no)\n    database_insert('UsersAnswers', self.question_no,\n        User.GetUsername(), self.users_answer)\n\ndef center_text(self, text):\n    return f'<html><head/><body><p\n        align=\"center\">{text}</p></body></html>'\\n\n\nclass MplWidget(Screen):\n    """ A Matplotlib Widget """\n\n    def __init__(self, parent=None):\n        super(MplWidget, self).__init__()\n        self.figure = Figure()\n        self.canvas = FigureCanvas(self.figure)\n        self.axes = self.figure.add_subplot(111)\n        self.layoutvertical = QtWidgets.QVBoxLayout(self)\n        self.layoutvertical.addWidget(self.canvas)\n\n\nclass StaticGraphScreen(Screen):\n    """\n        Static Graph Screen

```

```

    """
def __init__(self):
    super(StaticGraphScreen, self).__init__()
    self.ui = Ui_MatPlotScreen()
    self.ui.setupUi(self)
    self.init_widget()
    self.x_vals = []
    self.y_vals= []

def init_widget(self):
    self.matplotlibwidget = MplWidget()
    self.layoutvertical = QtWidgets.QVBoxLayout(self)
    self.layoutvertical.addWidget(self.matplotlibwidget)

```

```
class DynamicGraphScreen(StaticGraphScreen):
```

```

    """
Dynamic Graph Screen
"""

```

```

def __init__(self):
    super(DynamicGraphScreen, self).__init__()
    self.timer = QtCore.QTimer(self)
    self.timer.timeout.connect(self.update_figure)
    self.timer.start(100)
    self.count = 0

def update_figure(self):
    self.x_vals.append(self.count)
    self.y_vals.append(self.count)
    self.matplotlibwidget.axes.cla()
    self.matplotlibwidget.axes.plot(self.x_vals, self.y_vals,
        label=f'y=x', color='blue')
    self.matplotlibwidget.axes.legend(loc='upper left')
    self.matplotlibwidget.canvas.draw()
    self.count += 1

```

```
program/utils/user.py
```

```

"""
user.py
=====

```

Contains the ProgramUser class

A single instance of this class is used to store the current user's credentials and data

```

"""
The ProgramUser class is used to store the user's credentials

The class contains Setter and Getter methods in order to interact
with these
credentials throughout the runtime of the program
"""

class ProgramUser():

    """
    The ProgramUser class is used to store the user's credentials

    The class contains Setter and Getter methods in order to interact
    with these
    credentials throughout the runtime of the program
    """

    def __init__(self, signed_in=False, username=None, email=None):
        super(ProgramUser, self).__init__()
        self.signed_in = signed_in
        self.username = username
        self.email = email

    def SetSignedIn(self, signed_in):
        self.signed_in = signed_in

    def SetUsername(self, username):
        self.username = username

    def SetEmail(self, email):
        self.email = email

    def GetSignedIn(self):
        return self.signed_in

    def GetUsername(self):
        return self.username

    def GetEmail(self):
        return self.email

"""

This instance of the ProgramUser is imported by various other namespaces
and is used throughout the program, in order to interact with the
ProgramUser
class
"""

User = ProgramUser()

```

program/user_interface/_init__.py

"""

```

__init__.py
=====
Imports for the user_interface
"""

from .main_menu import Ui_MainMenu
from .login_ui import Ui_ForgottenPasswordScreen,
    Ui_ForgottenPassword2Screen, Ui_LoginScreen,
    Ui_ResetPasswordScreen, Ui_ResetPassword2Screen, Ui_SignUpScreen
from .tutorial_ui import Ui_TutorialScreen,
    Ui_ProgramStructureTutorialScreen, Ui_IntroductionTutorialScreen,
    Ui_InvestigationTutorialScreen, Ui_LoginTutorialScreen,
    Ui_SummaryTutorialScreen
from .investigation_ui import Ui_PolarGraphScreen,
    Ui_PrimeCountingFunctionScreen, Ui_GraphPlotsScreen,
    Ui_ZetaZeroesPlotScreen, Ui_PrimeNumbersScreen,
    Ui_CalculatorScreen, Ui_SingleCalculatorScreen,
    Ui_TableCalculatorScreen, Ui_TableCalculator2Screen,
    Ui_ZeroesScreen, Ui_CalculateZeroesScreen,
    Ui_CalculateZeroes2Screen, Ui_CalculatorLeaderboardScreen,
    Ui_ZetaApproximationScreen
from .introduction_ui import Ui_IntroductionScreen,
    Ui_HistoricalBackgroundScreen, Ui_WhatIsTheRiemannHypothesisScreen,
    Ui_PracticalApplicationsScreen
from .summary_ui import Ui_SummaryScreen, Ui_TheoryRecapScreen,
    Ui_InvestigationResultsScreen, Ui_ConclusionScreen, Ui_ImpactScreen
from .notes_ui import Ui_TutorialNotesScreen,
    Ui_IntroductionNotesScreen, Ui_InvestigationNotesScreen,
    Ui_SummaryNotesScreen
from .mat_plot import Ui_MatPlotScreen
from .progress import Ui_ProgressScreen

```

program/user_interface/main_menu.py

```

"""
main_menu.py
=====
A GUI for the main menu page
"""

from PyQt5 import QtCore, QtGui, QtWidgets

class Ui_MainMenu(object):

    def setupUi(self, MainMenu):
        MainMenu.setObjectName("MainMenu")
        MainMenu.setEnabled(True)

```

```

MainMenu.resize(1340, 720)
sizePolicy =
    QtWidgets.QSizePolicy(QtWidgets.QSizePolicy.Expanding,
    QtWidgets.QSizePolicy.Expanding)
sizePolicy.setHorizontalStretch(0)
sizePolicy.setVerticalStretch(0)
sizePolicy.setHeightForWidth(MainMenu.sizePolicy().hasHeightForWidth())
MainMenu.setSizePolicy(sizePolicy)
self.MainWidget = QtWidgets.QWidget(MainMenu)
self.MainWidget.setGeometry(QtCore.QRect(0, 0, 1340, 720))
sizePolicy =
    QtWidgets.QSizePolicy(QtWidgets.QSizePolicy.Expanding,
    QtWidgets.QSizePolicy.Expanding)
sizePolicy.setHorizontalStretch(0)
sizePolicy.setVerticalStretch(0)
sizePolicy.setHeightForWidth(self.MainWidget.sizePolicy().hasHeightForWidth())
self.MainWidget.setSizePolicy(sizePolicy)
self.MainWidget.setObjectName("MainWidget")
self.SideWidget = QtWidgets.QWidget(self.MainWidget)
self.SideWidget.setGeometry(QtCore.QRect(-50, 0, 512, 720))
self.SideWidget.setStyleSheet("background-color:rgb(69, 69, 69)
;\n"
"border-radius:40px;")
self.SideWidget.setObjectName("SideWidget")
self.Title = QtWidgets.QLabel(self.SideWidget)
self.Title.setGeometry(QtCore.QRect(70, 30, 421, 121))
self.Title.setStyleSheet("font: 36pt \\"Sans Serif\"";
    "color:rgb(239, 239, 239)")
self.Title.setObjectName("Title")
self.InvestigationButton = QtWidgets.QPushButton(self.SideWidget)
self.InvestigationButton.setGeometry(QtCore.QRect(170, 410, 231,
    61))
self.InvestigationButton.setCursor(QtGui.QCursor(QtCore.Qt.PointingHandCursor))
self.InvestigationButton.setStyleSheet("background-color:
    rgb(239, 239, 239);\n"
"border-radius:20px;\n"
"font: 18pt \\"Sans Serif\\";")
self.InvestigationButton.setObjectName("InvestigationButton")
self.LogInButton = QtWidgets.QPushButton(self.SideWidget)
self.LogInButton.setGeometry(QtCore.QRect(170, 170, 231, 61))
self.LogInButton.setCursor(QtGui.QCursor(QtCore.Qt.PointingHandCursor))
self.LogInButton.setStyleSheet("background-color: rgb(239,
    239);\n"
"border-radius:20px;\n"
"font: 18pt \\"Sans Serif\\";")
self.LogInButton.setCheckable(False)
self.LogInButton.setChecked(False)
self.LogInButton.setObjectName("LogInButton")
self.TutorialButton = QtWidgets.QPushButton(self.SideWidget)
self.TutorialButton.setGeometry(QtCore.QRect(170, 250, 231, 61))

```

```

        self.TutorialButton.setCursor(QtGui.QCursor(Qt.Core.Qt.PointingHandCursor))
        self.TutorialButton.setStyleSheet("background-color: rgb(239,
            239, 239);\n"
    "border-radius:20px;\n"
    "font: 18pt \\"Sans Serif\\\";")
        self.TutorialButton.setObjectName("TutorialButton")
        self.IntroductionButton = QtWidgets.QPushButton(self.SideWidget)
        self.IntroductionButton.setGeometry(QtCore.QRect(170, 330, 231,
            61))
        self.IntroductionButton.setCursor(QtGui.QCursor(QtCore.Qt.PointingHandCursor))
        self.IntroductionButton.setStyleSheet("background-color:
            rgb(239, 239, 239);\n"
    "border-radius:20px;\n"
    "font: 18pt \\"Sans Serif\\\";")
        self.IntroductionButton.setObjectName("IntroductionButton")
        self.SummaryButton = QtWidgets.QPushButton(self.SideWidget)
        self.SummaryButton.setGeometry(QtCore.QRect(170, 490, 231, 61))
        self.SummaryButton.setCursor(QtGui.QCursor(QtCore.Qt.PointingHandCursor))
        self.SummaryButton.setStyleSheet("background-color: rgb(239,
            239, 239);\n"
    "border-radius:20px;\n"
    "font: 18pt \\"Sans Serif\\\";")
        self.SummaryButton.setObjectName("SummaryButton")
        self.ExitButton = QtWidgets.QPushButton(self.SideWidget)
        self.ExitButton.setGeometry(QtCore.QRect(170, 570, 231, 61))
        self.ExitButton.setCursor(QtGui.QCursor(QtCore.Qt.PointingHandCursor))
        self.ExitButton.setStyleSheet("background-color: rgb(239, 239,
            239);\n"
    "border-radius:20px;\n"
    "font: 18pt \\"Sans Serif\\\";")
        self.ExitButton.setObjectName("ExitButton")
        self.BackgroundImage = QtWidgets.QLabel(self.MainWidget)
        self.BackgroundImage.setGeometry(QtCore.QRect(0, 0, 1340, 720))
        sizePolicy =
            QtWidgets.QSizePolicy(QtWidgets.QSizePolicy.Expanding,
            QtWidgets.QSizePolicy.Expanding)
        sizePolicy.setHorizontalStretch(0)
        sizePolicy.setVerticalStretch(0)
        sizePolicy.setHeightForWidth(self.BackgroundImage.sizePolicy().hasHeightForWidth())
        self.BackgroundImage.setSizePolicy(sizePolicy)
        self.BackgroundImage.setText("")
        self.BackgroundImage.setPixmap(QtGui.QPixmap("ui/..../media/zeta-graph.jpg"))
        self.BackgroundImage.setScaledContents(True)
        self.BackgroundImage.setObjectName("BackgroundImage")
        self.UsernameButton = QtWidgets.QPushButton(self.MainWidget)
        self.UsernameButton.setGeometry(QtCore.QRect(1140, 20, 180, 50))
        self.UsernameButton.setCursor(QtGui.QCursor(QtCore.Qt.PointingHandCursor))
        self.UsernameButton.setStyleSheet("background-color: rgb(239,
            239, 239);\n"
    "border-radius:20px;\n"

```

```

"font: 15pt \\"Sans Serif\\\";\n"
"padding:3px;")  

    self.UsernameButton.setObjectName("UsernameButton")
    self.BackgroundImage.raise_()
    self.SideWidget.raise_()
    self.UsernameButton.raise_()  

    self.retranslateUi(MainMenu)
    QtCore.QMetaObject.connectSlotsByName(MainMenu)  

    def retranslateUi(self, MainMenu):
        _translate = QtCore.QCoreApplication.translate
        MainMenu.setWindowTitle(_translate("MainMenu", "Visualizing The
            Riemann Hypothesis - Main Menu"))
        self.Title.setText(_translate("MainMenu", "<html><head/><body><p>
            align=&\"center\\"><span style=\" font-size:28pt;
            font-weight:600;\\\">Visualising The</span></p><p>
            align=&\"center\\"><span style=\" font-size:28pt;
            font-weight:600;\\\">Riemann
            Hypothesis</span></p></body></html>"))
        self.InvestigationButton.setText(_translate("MainMenu",
            "Investigation"))
        self.LogInButton.setText(_translate("MainMenu", "Log In"))
        self.TutorialButton.setText(_translate("MainMenu", "Tutorial"))
        self.IntroductionButton.setText(_translate("MainMenu",
            "Introduction"))
        self.SummaryButton.setText(_translate("MainMenu", "Summary"))
        self.ExitButton.setText(_translate("MainMenu", "Exit"))
        self.UsernameButton.setText(_translate("MainMenu", "Username"))

```

program/user_interface/mat_plot.py

```

"""
mat_plot.py
=====
A GUI for every mat plot graph page
"""

from PyQt5 import QtCore, QtGui, QtWidgets

class Ui_MatPlotScreen(object):

    def setupUi(self, MatPlotScreen):
        MatPlotScreen.setObjectName("MatPlotScreen")
        MatPlotScreen.resize(1340, 720)
        MatPlotScreen.setSizeGripEnabled(False)

```

```

    self.retranslateUi(MatPlotScreen)
    QtCore.QMetaObject.connectSlotsByName(MatPlotScreen)

    def retranslateUi(self, MatPlotScreen):
        _translate = QtCore.QCoreApplication.translate
        MatPlotScreen.setWindowTitle(_translate("MatPlotScreen",
            "Visualising the Riemann Hypothesis - Zeta Zeroes"))

```

program/user_interface/progress.py

```

"""
progress.py
=====
A GUI for the progress page
"""

from PyQt5 import QtCore, QtGui, QtWidgets

class Ui_ProgressScreen(object):

    def setupUi(self, ProgressScreen):
        ProgressScreen.setObjectName("ProgressScreen")
        ProgressScreen.resize(1340, 723)
        ProgressScreen.setSizeGripEnabled(False)
        self.widget = QtWidgets.QWidget(ProgressScreen)
        self.widget.setGeometry(QtCore.QRect(0, 0, 1340, 720))
        self.widget.setStyleSheet("background-color: rgb(69, 69, 69);")
        self.widget.setObjectName("widget")
        self.Title = QtWidgets.QLabel(self.widget)
        self.Title.setGeometry(QtCore.QRect(575, 20, 191, 51))
        self.Title.setStyleSheet("font: 36pt \\"Sans Serif\\";
                               color:rgb(239, 239, 239);")
        self.Title.setObjectName("Title")
        self.TabBar = QtWidgets.QWidget(self.widget)
        self.TabBar.setGeometry(QtCore.QRect(0, 80, 1340, 80))
        self.TabBar.setStyleSheet("background-color: rgb(239, 239,
                               239);")
        self.TabBar.setObjectName("TabBar")
        self.ProgressTab = QtWidgets.QPushButton(self.TabBar)
        self.ProgressTab.setGeometry(QtCore.QRect(10, 5, 200, 70))
        self.ProgressTab.setCursor(QtGui.QCursor(QtCore.Qt.PointingHandCursor))
        self.ProgressTab.setStyleSheet("border: 2px solid;\n"
"border-radius: 20px;\n"
"border-color:rgb(69, 69, 69);\n"
"background-color: rgb(239, 239, 239);\n"
"font: 18pt \\"Sans Serif\\"; color:rgb(69, 69, 69);\n"
""))

```

```

    self.ProgressTab.setObjectName("ProgressTab")
    self.MainWidget = QtWidgets.QWidget(self.widget)
    self.MainWidget.setGeometry(QtCore.QRect(10, 170, 1320, 540))
    self.MainWidget.setStyleSheet("background-color: rgb(239, 239,
        239);\n"
"border-radius: 20px;")
    self.MainWidget.setObjectName("MainWidget")
    self.BackButton = QtWidgets.QPushButton(self.MainWidget)
    self.BackButton.setGeometry(QtCore.QRect(10, 460, 200, 70))
    self.BackButton.setCursor(QtGui.QCursor(QtCore.Qt.PointingHandCursor))
    self.BackButton.setStyleSheet("border: 2px solid;\n"
"border-radius: 20px;\n"
"border-color:rgb(69, 69, 69);\n"
"background-color: rgb(69, 69, 69);\n"
"font: 18pt \"Sans Serif\"; color:rgb(239, 239, 239);\n"
"")
    self.BackButton.setObjectName("BackButton")
    self.SubTitleText = QtWidgets.QLabel(self.MainWidget)
    self.SubTitleText.setGeometry(QtCore.QRect(40, 20, 251, 51))
    self.SubTitleText.setStyleSheet("font: 25pt \"Sans Serif\";
        color:rgb(69, 69, 69);\n"
"background-color: rgb(239, 239, 239); padding: 5px;")
    self.SubTitleText.setObjectName("SubTitleText")
    self.MessageLabel = QtWidgets.QLabel(self.MainWidget)
    self.MessageLabel.setGeometry(QtCore.QRect(410, 470, 530, 41))
    self.MessageLabel.setStyleSheet("color: rgb(0, 140, 0);\n"
"font: 18pt \"Sans Serif\";")
    self.MessageLabel.setAlignment(QtCore.Qt.AlignBottom|QtCore.Qt.AlignHCenter)
    self.MessageLabel.setObjectName("MessageLabel")
    self.NotesButton = QtWidgets.QPushButton(self.MainWidget)
    self.NotesButton.setGeometry(QtCore.QRect(570, 460, 200, 70))
    self.NotesButton.setCursor(QtGui.QCursor(QtCore.Qt.PointingHandCursor))
    self.NotesButton.setStyleSheet("border: 2px solid;\n"
"border-radius: 20px;\n"
"border-color:rgb(69, 69, 69);\n"
"background-color: rgb(69, 69, 69);\n"
"font: 18pt \"Sans Serif\"; color:rgb(239, 239, 239);\n"
"")
    self.NotesButton.setObjectName("NotesButton")
    self.Table = QtWidgets.QTableWidget(self.MainWidget)
    self.Table.setGeometry(QtCore.QRect(30, 70, 1261, 371))
    font = QtGui.QFont()
    font.setPointSize(12)
    self.Table.setFont(font)
    self.Table.setSizeAdjustPolicy(QtWidgets.QAbstractScrollArea.AdjustToContents)
    self.Table.setEditTriggers(QtWidgets.QAbstractItemView.NoEditTriggers)
    self.Table.setAlternatingRowColors(True)
    self.Table.setSelectionMode(QtWidgets.QAbstractItemView.NoSelection)
    self.Table.setObjectName("Table")
    self.Table.setColumnCount(3)

```

```

        self.Table.setRowCount(0)
        item = QtWidgets.QTableWidgetItem()
        item.setTextAlignment(QtCore.Qt.AlignCenter)
        font = QtGui.QFont()
        font.setPointSize(16)
        font.setBold(True)
        font.setWeight(75)
        item.setFont(font)
        self.Table.setHorizontalHeaderItem(0, item)
        item = QtWidgets.QTableWidgetItem()
        item.setTextAlignment(QtCore.Qt.AlignCenter)
        font = QtGui.QFont()
        font.setPointSize(16)
        font.setBold(True)
        font.setWeight(75)
        item.setFont(font)
        self.Table.setHorizontalHeaderItem(1, item)
        item = QtWidgets.QTableWidgetItem()
        item.setTextAlignment(QtCore.Qt.AlignCenter)
        font = QtGui.QFont()
        font.setPointSize(16)
        font.setBold(True)
        font.setWeight(75)
        item.setFont(font)
        self.Table.setHorizontalHeaderItem(2, item)

        self.retranslateUi(ProgressScreen)
        QtCore.QMetaObject.connectSlotsByName(ProgressScreen)

    def retranslateUi(self, ProgressScreen):
        _translate = QtCore.QCoreApplication.translate
        ProgressScreen.setWindowTitle(_translate("ProgressScreen",
            "Visualising the Riemann Hypothesis - Progress"))
        self.Title.setText(_translate("ProgressScreen", "Progress"))
        self.ProgressTab.setText(_translate("ProgressScreen",
            "Progress"))
        self.BackButton.setText(_translate("ProgressScreen", "Back"))
        self.SubTitleText.setText(_translate("ProgressScreen",
            "<html><head/><body><p><span style=\""
            "font-weight:600;\">Username</span></p></body></html>"))
        self.MessageLabel.setText(_translate("ProgressScreen",
            "<html><head/><body><p>"
            "align=\"center\"><br/></p></body></html>"))
        self.NotesButton.setText(_translate("ProgressScreen", "Notes"))
        item = self.Table.horizontalHeaderItem(0)
        item.setText(_translate("ProgressScreen", "Question"))
        item = self.Table.horizontalHeaderItem(1)
        item.setText(_translate("ProgressScreen", "Answer"))
        item = self.Table.horizontalHeaderItem(2)
        item.setText(_translate("ProgressScreen", "Correct"))

```

program/user_interface/introduction_ui/__init__.py

```
"""
__init__.py
=====
Imports for the introduction_ui
"""

from .introduction import Ui_IntroductionScreen
from .historical_background import Ui_HistoricalBackgroundScreen
from .what_is_the_riemann_hypothesis import
    Ui_WhatIsTheRiemannHypothesisScreen
from .practical_applications import Ui_PracticalApplicationsScreen
```

program/user_interface/introduction_ui/historical_background.py

```
"""
historical_background.py
=====
A GUI for the historical background page of the introduction section
"""

from PyQt5 import QtCore, QtGui, QtWidgets

class Ui_HistoricalBackgroundScreen(object):

    def setupUi(self, HistoricalBackgroundScreen):
        HistoricalBackgroundScreen.setObjectName("HistoricalBackgroundScreen")
        HistoricalBackgroundScreen.resize(1340, 723)
        HistoricalBackgroundScreen.setSizeGripEnabled(False)
        self.widget = QtWidgets.QWidget(HistoricalBackgroundScreen)
        self.widget.setGeometry(QtCore.QRect(0, 0, 1340, 720))
        self.widget.setStyleSheet("background-color: rgb(69, 69, 69);")
        self.widget.setObjectName("widget")
        self.Title = QtWidgets.QLabel(self.widget)
        self.Title.setGeometry(QtCore.QRect(545, 20, 251, 51))
        self.Title.setStyleSheet("font: 36pt \\"Sans Serif\\";
                               color:rgb(239, 239, 239)")
        self.Title.setObjectName("Title")
        self.TabBar = QtWidgets.QWidget(self.widget)
        self.TabBar.setGeometry(QtCore.QRect(0, 80, 1340, 80))
        self.TabBar.setStyleSheet("background-color: rgb(239, 239,
                                         239);")
        self.TabBar.setObjectName("TabBar")
```

```

self.IntroductionTab = QtWidgets.QPushButton(self.TabBar)
self.IntroductionTab.setGeometry(QtCore.QRect(10, 5, 200, 70))
self.IntroductionTab.setCursor(QtGui.QCursor(QtCore.Qt.PointingHandCursor))
self.IntroductionTab.setStyleSheet("border: 2px solid;\n"
    "border-radius: 20px;\n"
    "border-color:rgb(69, 69, 69);\n"
    "background-color: rgb(69, 69, 69);\n"
    "font: 18pt \\"Sans Serif\\"; color:rgb(239, 239, 239);\n"
    "")
self.IntroductionTab.setObjectName("IntroductionTab")
self.HistoricalBackgroundLabel = QtWidgets.QLabel(self.TabBar)
self.HistoricalBackgroundLabel.setGeometry(QtCore.QRect(220, 5,
    200, 70))
self.HistoricalBackgroundLabel.setStyleSheet("border: 2px
    solid;\n"
    "border-radius: 20px;\n"
    "border-color:rgb(69, 69, 69);\n"
    "background-color: rgb(239, 239, 239);\n"
    "font: 18pt \\"Sans Serif\\"; color:rgb(69, 69, 69);\n"
    "")
self.HistoricalBackgroundLabel.setObjectName("HistoricalBackgroundLabel")
self.HistoricalBackgroundTab = QtWidgets.QPushButton(self.TabBar)
self.HistoricalBackgroundTab.setGeometry(QtCore.QRect(220, 5,
    200, 70))
self.HistoricalBackgroundTab.setCursor(QtGui.QCursor(QtCore.Qt.PointingHandCursor))
self.HistoricalBackgroundTab.setStyleSheet("border-radius:
    20px;\n"
    "background-color: rgba(0, 0, 0, 0);\n"
    "font: 18pt \\"Sans Serif\\";\n"
    "")
self.HistoricalBackgroundTab.setText("")
self.HistoricalBackgroundTab.setObjectName("HistoricalBackgroundTab")
self.WhatIsTheRHTab = QtWidgets.QPushButton(self.TabBar)
self.WhatIsTheRHTab.setGeometry(QtCore.QRect(430, 5, 240, 70))
self.WhatIsTheRHTab.setCursor(QtGui.QCursor(QtCore.Qt.PointingHandCursor))
self.WhatIsTheRHTab.setStyleSheet("border-radius: 20px;\n"
    "background-color: rgba(0, 0, 0, 0);\n"
    "font: 18pt \\"Sans Serif\\";\n"
    "")
self.WhatIsTheRHTab.setText("")
self.WhatIsTheRHTab.setObjectName("WhatIsTheRHTab")
self.WhatIsTheRHLabel = QtWidgets.QLabel(self.TabBar)
self.WhatIsTheRHLabel.setGeometry(QtCore.QRect(430, 5, 241, 70))
self.WhatIsTheRHLabel.setStyleSheet("border: 2px solid;\n"
    "border-radius: 20px;\n"
    "border-color:rgb(69, 69, 69);\n"
    "background-color: rgb(69, 69, 69);\n"
    "font: 18pt \\"Sans Serif\\"; color:rgb(239, 239, 239);\n"
    "")
self.WhatIsTheRHLabel.setObjectName("WhatIsTheRHLabel")

```

```

self.PracticalApplicationsLabel = QtWidgets.QLabel(self.TabBar)
self.PracticalApplicationsLabel.setGeometry(QtCore.QRect(680, 5,
    200, 70))
self.PracticalApplicationsLabel.setStyleSheet("border: 2px
    solid;\n"
    "border-radius: 20px;\n"
    "border-color:rgb(69, 69, 69);\n"
    "background-color: rgb(69, 69, 69);\n"
    "font: 18pt \"Sans Serif\"; color:rgb(239, 239, 239);\n"
    "")
self.PracticalApplicationsLabel.setObjectName("PracticalApplicationsLabel")
self.PracticalApplicationsTab =
    QtWidgets.QPushButton(self.TabBar)
self.PracticalApplicationsTab.setGeometry(QtCore.QRect(680, 5,
    201, 70))
self.PracticalApplicationsTab.setCursor(QtGui.QCursor(QtCore.Qt.PointingHandCursor))
self.PracticalApplicationsTab.setStyleSheet("border-radius:
    20px;\n"
    "background-color: rgba(0, 0, 0, 0);\n"
    "font: 18pt \"Sans Serif\";\n"
    "")
self.PracticalApplicationsTab.setText("")
self.PracticalApplicationsTab.setObjectName("PracticalApplicationsTab")
self.WhatIsTheRLabel.raise_()
self.IntroductionTab.raise_()
self.HistoricalBackgroundLabel.raise_()
self.HistoricalBackgroundTab.raise_()
self.WhatIsTheRHTab.raise_()
self.PracticalApplicationsLabel.raise_()
self.PracticalApplicationsTab.raise_()
self.MainWidget = QtWidgets.QWidget(self.widget)
self.MainWidget.setGeometry(QtCore.QRect(10, 170, 1320, 540))
self.MainWidget.setStyleSheet("background-color: rgb(239, 239,
    239);\n"
    "border-radius: 20px;")
self.MainWidget.setObjectName("MainWidget")
self.PrevButton = QtWidgets.QPushButton(self.MainWidget)
self.PrevButton.setGeometry(QtCore.QRect(10, 460, 200, 70))
self.PrevButton.setCursor(QtGui.QCursor(QtCore.Qt.PointingHandCursor))
self.PrevButton.setStyleSheet("border: 2px solid;\n"
    "border-radius: 20px;\n"
    "border-color:rgb(69, 69, 69);\n"
    "background-color: rgb(69, 69, 69);\n"
    "font: 18pt \"Sans Serif\"; color:rgb(239, 239, 239);\n"
    "")
self.PrevButton.setObjectName("PrevButton")
self.NextButton = QtWidgets.QPushButton(self.MainWidget)
self.NextButton.setGeometry(QtCore.QRect(1110, 460, 200, 70))
self.NextButton.setCursor(QtGui.QCursor(QtCore.Qt.PointingHandCursor))
self.NextButton.setStyleSheet("border: 2px solid;\n"

```

```

        "border-radius: 20px;\n"
        "border-color:rgb(69, 69, 69);\n"
        "background-color: rgb(69, 69, 69);\n"
        "font: 18pt \"Sans Serif\"; color:rgb(239, 239, 239);\n"
        ""))
self.NextButton.setObjectName("NextButton")
self.SubTitleText = QtWidgets.QLabel(self.MainWidget)
self.SubTitleText.setGeometry(QtCore.QRect(40, 20, 381, 41))
self.SubTitleText.setStyleSheet("font: 25pt \"Sans Serif\";
    color:rgb(69, 69, 69);\n"
    "background-color: rgb(239, 239, 239); padding: 5px;")
self.SubTitleText.setObjectName("SubTitleText")
self.MainText = QtWidgets.QLabel(self.MainWidget)
self.MainText.setGeometry(QtCore.QRect(40, 60, 1251, 401))
self.MainText.setStyleSheet("font: 13pt \"Sans Serif\";
    color:rgb(69, 69, 69);\n"
    "background-color: rgb(239, 239, 239); padding: 5px;")
self.MainText.setWordWrap(True)
self.MainText.setObjectName("MainText")
self.NotesButton = QtWidgets.QPushButton(self.MainWidget)
self.NotesButton.setGeometry(QtCore.QRect(570, 460, 200, 70))
self.NotesButton.setCursor(QtGui.QCursor(Qt.PointingHandCursor))
self.NotesButton.setStyleSheet("border: 2px solid;\n"
    "border-radius: 20px;\n"
    "border-color:rgb(69, 69, 69);\n"
    "background-color: rgb(69, 69, 69);\n"
    "font: 18pt \"Sans Serif\"; color:rgb(239, 239, 239);\n"
    "")
self.NotesButton.setObjectName("NotesButton")
self.SubTitleText.raise_()
self.MainText.raise_()
self.PrevButton.raise_()
self.NextButton.raise_()
self.NotesButton.raise_()

self.retranslateUi(HistoricalBackgroundScreen)
QtCore.QMetaObject.connectSlotsByName(HistoricalBackgroundScreen)

def retranslateUi(self, HistoricalBackgroundScreen):
    _translate = QtCore.QCoreApplication.translate
    HistoricalBackgroundScreen.setWindowTitle(_translate("HistoricalBackgroundScreen",
        "Visualising the Riemann Hypothesis - Introduction"))
    self.Title.setText(_translate("HistoricalBackgroundScreen",
        "Introduction"))
    self.IntroductionTab.setText(_translate("HistoricalBackgroundScreen",
        "Introduction"))
    self.HistoricalBackgroundLabel.setText(_translate("HistoricalBackgroundScreen",
        "<html><head/><body><p
            align=\"center\">Historical<br>Background</p></body></html>"))
    self.WhatIsTheRHLLabel.setText(_translate("HistoricalBackgroundScreen",

```

```

    "<html><head/><body><p align=\"center\">What is
    the<br>Riemann Hypothesis</p></body></html>"))
self.PracticalApplicationsLabel.setText(_translate("HistoricalBackgroundScreen",
    "<html><head/><body><p
    align=\"center\">Practical<br>Applications</p></body></html>"))
self.PrevButton.setText(_translate("HistoricalBackgroundScreen",
    "Prev"))
self.NextButton.setText(_translate("HistoricalBackgroundScreen",
    "Next"))
self.SubTitleText.setText(_translate("HistoricalBackgroundScreen",
    "<html><head/><body><p><span style=\"
    font-weight:600;\">Historical
    Background</span></p></body></html>"))
self.MainText.setText(_translate("HistoricalBackgroundScreen",
    "<html><head/><body><p>The Riemann Hypothesis originates
    from a mathematical problem from hundreds of years back. In
    the 1730's, Leonhard Euler (A very smart mathematician),
    has been investigating the function that went on to be known
    as the Riemann Zeta Function. In 1737, Euler was able to
    prove that this function could be written as a product of
    prime numbers, this is known as Euler's product
    formula.</p><p>In 1859, Bernhard Riemann published a paper
    'On the Number of Primes Less Than a Given Magnitude'. In
    this paper, he investigates the function previously looked
    at by Euler, but extends its definition to include Complex
    Numbers, as well as Real Numbers. It is in this paper that
    the Riemann Hypothesis was born. The Riemann Hypothesis
    states that the Riemann zeta function has its zeros only at
    the negative even integers and complex numbers with real
    part 0.5.</p><p>In 1900, the mathematician David Hilbert
    released a list of mathematical problems that were all
    unsolved at the time. He called for other mathematicians to
    try and solve these problems. These problems included the a
    Proof of the Riemann Hypothesis, and many problems relating
    to it; many of which are still unsolved to this day</p><p>In
    1915, GH Hardy managed to prove that there were an infinite
    amount of numbers for which the Riemann Hypothesis was true,
    this showed that proving the Riemann Hypothesis would
    require a full proof, rather than a proof by exhaustion.
    </p><p>In 1986 van de Lune, te Riele & Winter managed to
    find values for 1500000001 Zeta Zeroes.</p><p>Then in 2000,
    the Clay Mathematics Institute named the Riemann Hypothesis
    as one of their 'Millennium Problems', with a reward of
    $1,000,000 for anyone who manages to prove
    it.</p></body></html>"))
self.NotesButton.setText(_translate("HistoricalBackgroundScreen",
    "Notes"))

```

program/user_interface/introduction_ui/introduction.py

```
"""
introduction.py
=====
A GUI for the introduction page of the introduction section
"""

from PyQt5 import QtCore, QtGui, QtWidgets

class Ui_IntroductionScreen(object):

    def setupUi(self, IntroductionScreen):
        IntroductionScreen.setObjectName("IntroductionScreen")
        IntroductionScreen.resize(1340, 723)
        IntroductionScreen.setSizeGripEnabled(False)
        self.widget = QtWidgets.QWidget(IntroductionScreen)
        self.widget.setGeometry(QtCore.QRect(0, 0, 1340, 720))
        self.widget.setStyleSheet("background-color: rgb(69, 69, 69);")
        self.widget.setObjectName("widget")
        self.Title = QtWidgets.QLabel(self.widget)
        self.Title.setGeometry(QtCore.QRect(545, 20, 251, 51))
        self.Title.setStyleSheet("font: 36pt \"Sans Serif\";\n"
                               "color:rgb(239, 239, 239);")
        self.Title.setObjectName("Title")
        self.TabBar = QtWidgets.QWidget(self.widget)
        self.TabBar.setGeometry(QtCore.QRect(0, 80, 1340, 80))
        self.TabBar.setStyleSheet("background-color: rgb(239, 239,\n"
                               "239);")
        self.TabBar.setObjectName("TabBar")
        self.IntroductionTab = QtWidgets.QPushButton(self.TabBar)
        self.IntroductionTab.setGeometry(QtCore.QRect(10, 5, 200, 70))
        self.IntroductionTab.setCursor(QtGui.QCursor(QtCore.Qt.PointingHandCursor))
        self.IntroductionTab.setStyleSheet("border: 2px solid;\n"
                                         "border-radius: 20px;\n"
                                         "border-color:rgb(69, 69, 69);\n"
                                         "background-color: rgb(239, 239, 239);\n"
                                         "font: 18pt \"Sans Serif\"; color:rgb(69, 69, 69);\n"
                                         "")
        self.IntroductionTab.setObjectName("IntroductionTab")
        self.HistoricalBackgroundLabel = QtWidgets.QLabel(self.TabBar)
        self.HistoricalBackgroundLabel.setGeometry(QtCore.QRect(220, 5,\n"
                                         200, 70))
        self.HistoricalBackgroundLabel.setStyleSheet("border: 2px\n"
                                                 "solid;\n"
                                                 "border-radius: 20px;\n"
                                                 "border-color:rgb(69, 69, 69);\n"
                                                 "background-color: rgb(69, 69, 69);\n"
                                                 "font: 18pt \"Sans Serif\"; color:rgb(239, 239, 239);\n"
                                                 "")
```

```

        ""))
self.HistoricalBackgroundLabel.setObjectName("HistoricalBackgroundLabel")
self.HistoricalBackgroundTab = QtWidgets.QPushButton(self.TabBar)
self.HistoricalBackgroundTab.setGeometry(QtCore.QRect(220, 5,
    200, 70))
self.HistoricalBackgroundTab.setCursor(QtGui.QCursor(QtCore.Qt.PointingHandCursor))
self.HistoricalBackgroundTab.setStyleSheet("border-radius:
    20px;\n
    "background-color: rgba(0, 0, 0, 0);\n
    "font: 18pt \"Sans Serif\";\n
    ")
self.HistoricalBackgroundTab.setText("")
self.HistoricalBackgroundTab.setObjectName("HistoricalBackgroundTab")
self.WhatIsTheRHTab = QtWidgets.QPushButton(self.TabBar)
self.WhatIsTheRHTab.setGeometry(QtCore.QRect(430, 5, 240, 70))
self.WhatIsTheRHTab.setCursor(QtGui.QCursor(QtCore.Qt.PointingHandCursor))
self.WhatIsTheRHTab.setStyleSheet("border-radius: 20px;\n
    "background-color: rgba(0, 0, 0, 0);\n
    "font: 18pt \"Sans Serif\";\n
    ")
self.WhatIsTheRHTab.setText("")
self.WhatIsTheRHTab.setObjectName("WhatIsTheRHTab")
self.WhatIsTheRHLabel = QtWidgets.QLabel(self.TabBar)
self.WhatIsTheRHLabel.setGeometry(QtCore.QRect(430, 5, 241, 70))
self.WhatIsTheRHLabel.setStyleSheet("border: 2px solid;\n
    "border-radius: 20px;\n
    "border-color:rgb(69, 69, 69);\n
    "background-color: rgb(69, 69, 69);\n
    "font: 18pt \"Sans Serif\"; color:rgb(239, 239, 239);\n
    ")
self.WhatIsTheRHLabel.setObjectName("WhatIsTheRHLabel")
self.PracticalApplicationsLabel = QtWidgets.QLabel(self.TabBar)
self.PracticalApplicationsLabel.setGeometry(QtCore.QRect(680, 5,
    200, 70))
self.PracticalApplicationsLabel.setStyleSheet("border: 2px
    solid;\n
    "border-radius: 20px;\n
    "border-color:rgb(69, 69, 69);\n
    "background-color: rgb(69, 69, 69);\n
    "font: 18pt \"Sans Serif\"; color:rgb(239, 239, 239);\n
    ")
self.PracticalApplicationsLabel.setObjectName("PracticalApplicationsLabel")
self.PracticalApplicationsTab =
    QtWidgets.QPushButton(self.TabBar)
self.PracticalApplicationsTab.setGeometry(QtCore.QRect(680, 5,
    201, 70))
self.PracticalApplicationsTab.setCursor(QtGui.QCursor(QtCore.Qt.PointingHandCursor))
self.PracticalApplicationsTab.setStyleSheet("border-radius:
    20px;\n
    "background-color: rgba(0, 0, 0, 0);\n
    "

```

```

        "font: 18pt \\"Sans Serif\\\";\n"
        ""))
self.PracticalApplicationsTab.setText("")
self.PracticalApplicationsTab.setObjectName("PracticalApplicationsTab")
self.WhatIsTheRLabel.raise_()
self.IntroductionTab.raise_()
self.HistoricalBackgroundLabel.raise_()
self.HistoricalBackgroundTab.raise_()
self.WhatIsTheRHTab.raise_()
self.PracticalApplicationsLabel.raise_()
self.PracticalApplicationsTab.raise_()
self.MainWidget = QtWidgets.QWidget(self.widget)
self.MainWidget.setGeometry(QtCore.QRect(10, 170, 1320, 540))
self.MainWidget.setStyleSheet("background-color: rgb(239, 239,
239);\n"
"border-radius: 20px;")
self.MainWidget.setObjectName("MainWidget")
self.PreviousButton = QtWidgets.QPushButton(self.MainWidget)
self.PreviousButton.setGeometry(QtCore.QRect(10, 460, 200, 70))
self.PreviousButton.setCursor(QtGui.QCursor(QtCore.Qt.PointingHandCursor))
self.PreviousButton.setStyleSheet("border: 2px solid;\n"
"border-radius: 20px;\n"
"border-color:rgb(69, 69, 69);\n"
"background-color: rgb(69, 69, 69);\n"
"font: 18pt \\"Sans Serif\\"; color:rgb(239, 239, 239);\n"
"")
self.PreviousButton.setObjectName("PreviousButton")
self.NextButton = QtWidgets.QPushButton(self.MainWidget)
self.NextButton.setGeometry(QtCore.QRect(1110, 460, 200, 70))
self.NextButton.setCursor(QtGui.QCursor(QtCore.Qt.PointingHandCursor))
self.NextButton.setStyleSheet("border: 2px solid;\n"
"border-radius: 20px;\n"
"border-color:rgb(69, 69, 69);\n"
"background-color: rgb(69, 69, 69);\n"
"font: 18pt \\"Sans Serif\\"; color:rgb(239, 239, 239);\n"
"")
self.NextButton.setObjectName("NextButton")
self.SubTitleText = QtWidgets.QLabel(self.MainWidget)
self.SubTitleText.setGeometry(QtCore.QRect(40, 20, 381, 41))
self.SubTitleText.setStyleSheet("font: 25pt \\"Sans Serif\\";
color:rgb(69, 69, 69);\n"
"background-color: rgb(239, 239, 239); padding: 5px;")
self.SubTitleText.setObjectName("SubTitleText")
self.MainText = QtWidgets.QLabel(self.MainWidget)
self.MainText.setGeometry(QtCore.QRect(40, 60, 1251, 401))
self.MainText.setStyleSheet("font: 13pt \\"Sans Serif\\";
color:rgb(69, 69, 69);\n"
"background-color: rgb(239, 239, 239); padding: 5px;")
self.MainText.setWordWrap(True)
self.MainText.setObjectName("MainText")

```

```

        self.NotesButton = QtWidgets.QPushButton(self.MainWidget)
        self.NotesButton.setGeometry(QtCore.QRect(570, 460, 200, 70))
        self.NotesButton.setCursor(QtGui.QCursor(QtCore.Qt.PointingHandCursor))
        self.NotesButton.setStyleSheet("border: 2px solid;\n"
                                      "border-radius: 20px;\n"
                                      "border-color:rgb(69, 69, 69);\n"
                                      "background-color: rgb(69, 69, 69);\n"
                                      "font: 18pt \"Sans Serif\"; color:rgb(239, 239, 239);\n"
                                      "")
        self.NotesButton.setObjectName("NotesButton")
        self.SubTitleText.raise_()
        self.MainText.raise_()
        self.PrevButton.raise_()
        self.NextButton.raise_()
        self.NotesButton.raise_()

        self.retranslateUi(IntroductionScreen)
        QtCore.QMetaObject.connectSlotsByName(IntroductionScreen)

    def retranslateUi(self, IntroductionScreen):
        _translate = QtCore.QCoreApplication.translate
        IntroductionScreen.setWindowTitle(_translate("IntroductionScreen",
                                                     "Visualising the Riemann Hypothesis - Introduction"))
        self.Title.setText(_translate("IntroductionScreen",
                                     "Introduction"))
        self.IntroductionTab.setText(_translate("IntroductionScreen",
                                              "Introduction"))
        self.HistoricalBackgroundLabel.setText(_translate("IntroductionScreen",
                                                       "<html><head/><body><p align=\"center\">Historical<br>Background</p></body></html>"))
        self.WhatIsTheRHLLabel.setText(_translate("IntroductionScreen",
                                               "<html><head/><body><p align=\"center\">What is
                                               the<br>Riemann Hypothesis</p></body></html>"))
        self.PracticalApplicationsLabel.setText(_translate("IntroductionScreen",
                                                       "<html><head/><body><p
                                                       align=\"center\">Practical<br>Applications</p></body></html>"))
        self.PrevButton.setText(_translate("IntroductionScreen", "Prev"))
        self.NextButton.setText(_translate("IntroductionScreen", "Next"))
        self.SubTitleText.setText(_translate("IntroductionScreen",
                                           "<html><head/><body><p><span style=\"
                                           font-weight:600;\">Introduction</span></p></body></html>"))
        self.MainText.setText(_translate("IntroductionScreen",
                                       "<html><head/><body><p>This is the introduction section of
                                       the program. The purpose of this section is to teach you
                                       about the Riemann Hypothesis.</p><p><br/></p><p>This section
                                       will cover some important theory behind the Hypothesis, such
                                       as the Historical Background behind the problem, What the
                                       Riemann Hypothesis actually is, and the Practical
                                       Applications of the hypothesis - why it is actually
                                       important.</p><p><br/></p><p>There is a lot of fundamental

```

```
theory in this section that you should know to be able to
use this program to its full extent, so make sure that you
keep on clicking the notes buttons on each screen so that
you can record useful information.</p></body></html">))
self.NotesButton.setText(_translate("IntroductionScreen",
"Notes"))
```

program/user_interface/introduction.ui/practical_applications.py

```
"""
practical_applications.py
=====
A GUI for the practical applications page of the introduction section
"""

from PyQt5 import QtCore, QtGui, QtWidgets

class Ui_PracticalApplicationsScreen(object):

    def setupUi(self, PracticalApplicationsScreen):
        PracticalApplicationsScreen.setObjectName("PracticalApplicationsScreen")
        PracticalApplicationsScreen.resize(1340, 723)
        PracticalApplicationsScreen.setSizeGripEnabled(False)
        self.widget = QtWidgets.QWidget(PracticalApplicationsScreen)
        self.widget.setGeometry(QtCore.QRect(0, 0, 1340, 720))
        self.widget.setStyleSheet("background-color: rgb(69, 69, 69);")
        self.widget.setObjectName("widget")
        self.Title = QtWidgets.QLabel(self.widget)
        self.Title.setGeometry(QtCore.QRect(545, 20, 251, 51))
        self.Title.setStyleSheet("font: 36pt \\"Sans Serif\\";
                               color:rgb(239, 239, 239)")
        self.Title.setObjectName("Title")
        self.TabBar = QtWidgets.QWidget(self.widget)
        self.TabBar.setGeometry(QtCore.QRect(0, 80, 1340, 80))
        self.TabBar.setStyleSheet("background-color: rgb(239, 239,
                                         239);")
        self.TabBar.setObjectName("TabBar")
        self.IntroductionTab = QtWidgets.QPushButton(self.TabBar)
        self.IntroductionTab.setGeometry(QtCore.QRect(10, 5, 200, 70))
        self.IntroductionTab.setCursor(QtGui.QCursor(QtCore.Qt.PointingHandCursor))
        self.IntroductionTab.setStyleSheet("border: 2px solid;\n"
                                         "border-radius: 20px;\n"
                                         "border-color:rgb(69, 69, 69);\n"
                                         "background-color: rgb(69, 69, 69);\n"
                                         "font: 18pt \\"Sans Serif\\"; color:rgb(239, 239, 239);\n"
                                         ""))
        self.IntroductionTab.setObjectName("IntroductionTab")
```

```

    self.HistoricalBackgroundLabel = QtWidgets.QLabel(self.TabBar)
    self.HistoricalBackgroundLabel.setGeometry(QtCore.QRect(220, 5,
        200, 70))
    self.HistoricalBackgroundLabel.setStyleSheet("border: 2px
        solid;\n"
        "border-radius: 20px;\n"
        "border-color:rgb(69, 69, 69);\n"
        "background-color: rgb(69, 69, 69);\n"
        "font: 18pt \"Sans Serif\"; color:rgb(239, 239, 239);\n"
        "")
    self.HistoricalBackgroundLabel.setObjectName("HistoricalBackgroundLabel")
    self.HistoricalBackgroundTab = QtWidgets.QPushButton(self.TabBar)
    self.HistoricalBackgroundTab.setGeometry(QtCore.QRect(220, 5,
        200, 70))
    self.HistoricalBackgroundTab.setCursor(QtGui.QCursor(QtCore.Qt.PointingHandCursor))
    self.HistoricalBackgroundTab.setStyleSheet("border-radius:
        20px;\n"
        "background-color: rgba(0, 0, 0, 0);\n"
        "font: 18pt \"Sans Serif\";\n"
        "")
    self.HistoricalBackgroundTab.setText("")
    self.HistoricalBackgroundTab.setObjectName("HistoricalBackgroundTab")
    self.WhatIsTheRHTab = QtWidgets.QPushButton(self.TabBar)
    self.WhatIsTheRHTab.setGeometry(QtCore.QRect(430, 5, 240, 70))
    self.WhatIsTheRHTab.setCursor(QtGui.QCursor(QtCore.Qt.PointingHandCursor))
    self.WhatIsTheRHTab.setStyleSheet("border-radius: 20px;\n"
        "background-color: rgba(0, 0, 0, 0);\n"
        "font: 18pt \"Sans Serif\";\n"
        "")
    self.WhatIsTheRHTab.setText("")
    self.WhatIsTheRHTab.setObjectName("WhatIsTheRHTab")
    self.WhatIsTheRHLabel = QtWidgets.QLabel(self.TabBar)
    self.WhatIsTheRHLabel.setGeometry(QtCore.QRect(430, 5, 241, 70))
    self.WhatIsTheRHLabel.setStyleSheet("border: 2px solid;\n"
        "border-radius: 20px;\n"
        "border-color:rgb(69, 69, 69);\n"
        "background-color: rgb(69, 69, 69);\n"
        "font: 18pt \"Sans Serif\"; color:rgb(239, 239, 239);\n"
        "")
    self.WhatIsTheRHLabel.setObjectName("WhatIsTheRHLabel")
    self.PracticalApplicationsLabel = QtWidgets.QLabel(self.TabBar)
    self.PracticalApplicationsLabel.setGeometry(QtCore.QRect(680, 5,
        200, 70))
    self.PracticalApplicationsLabel.setStyleSheet("border: 2px
        solid;\n"
        "border-radius: 20px;\n"
        "border-color:rgb(69, 69, 69);\n"
        "background-color: rgb(239, 239, 239);\n"
        "font: 18pt \"Sans Serif\"; color:rgb(69, 69, 69);\n"
        ")

```

```

        self.PracticalApplicationsLabel.setObjectName("PracticalApplicationsLabel")
        self.PracticalApplicationsTab =
            QtWidgets.QPushButton(self.TabBar)
        self.PracticalApplicationsTab.setGeometry(QtCore.QRect(680, 5,
            201, 70))
        self.PracticalApplicationsTab.setCursor(QtGui.QCursor(QtCore.Qt.PointingHandCursor))
        self.PracticalApplicationsTab.setStyleSheet("border-radius:
            20px;\n
            "background-color: rgba(0, 0, 0, 0);\n
            "font: 18pt \"Sans Serif\";\n
            ")
        self.PracticalApplicationsTab.setText("")
        self.PracticalApplicationsTab.setObjectName("PracticalApplicationsTab")
        self.WhatIsTheRHLLabel.raise_()
        self.IntroductionTab.raise_()
        self.HistoricalBackgroundLabel.raise_()
        self.HistoricalBackgroundTab.raise_()
        self.WhatIsTheRHTab.raise_()
        self.PracticalApplicationsLabel.raise_()
        self.PracticalApplicationsTab.raise_()
        self.MainWidget = QtWidgets.QWidget(self.widget)
        self.MainWidget.setGeometry(QtCore.QRect(10, 170, 1320, 540))
        self.MainWidget.setStyleSheet("background-color: rgb(239, 239,
            239);\n
            "border-radius: 20px;")
        self.MainWidget.setObjectName("MainWidget")
        self.PrevButton = QtWidgets.QPushButton(self.MainWidget)
        self.PrevButton.setGeometry(QtCore.QRect(10, 460, 200, 70))
        self.PrevButton.setCursor(QtGui.QCursor(QtCore.Qt.PointingHandCursor))
        self.PrevButton.setStyleSheet("border: 2px solid;\n
            "border-radius: 20px;\n
            "border-color:rgb(69, 69, 69);\n
            "background-color: rgb(69, 69, 69);\n
            "font: 18pt \"Sans Serif\"; color:rgb(239, 239, 239);\n
            ")
        self.PrevButton.setObjectName("PrevButton")
        self.NextButton = QtWidgets.QPushButton(self.MainWidget)
        self.NextButton.setGeometry(QtCore.QRect(1110, 460, 200, 70))
        self.NextButton.setCursor(QtGui.QCursor(QtCore.Qt.PointingHandCursor))
        self.NextButton.setStyleSheet("border: 2px solid;\n
            "border-radius: 20px;\n
            "border-color:rgb(69, 69, 69);\n
            "background-color: rgb(69, 69, 69);\n
            "font: 18pt \"Sans Serif\"; color:rgb(239, 239, 239);\n
            ")
        self.NextButton.setObjectName("NextButton")
        self.SubTitleText = QtWidgets.QLabel(self.MainWidget)
        self.SubTitleText.setGeometry(QtCore.QRect(40, 20, 561, 41))
        self.SubTitleText.setStyleSheet("font: 25pt \"Sans Serif\";
            color:rgb(69, 69, 69);\n"

```

```

        "background-color: rgb(239, 239, 239); padding: 5px;")  

self.SubTitleText.setObjectName("SubTitleText")  

self.MainText = QtWidgets.QLabel(self.MainWidget)  

self.MainText.setGeometry(QtCore.QRect(40, 60, 1251, 401))  

self.MainText.setStyleSheet("font: 13pt \"Sans Serif\";  

    color:rgb(69, 69, 69);\n"  

        "background-color: rgb(239, 239, 239); padding: 5px;")  

self.MainText.setAlignment(QtCore.Qt.AlignLeading|QtCore.Qt.AlignLeft|QtCore.Qt.AlignTop)  

self.MainText.setWordWrap(True)  

self.MainText.setObjectName("MainText")  

self.NotesButton = QtWidgets.QPushButton(self.MainWidget)  

self.NotesButton.setGeometry(QtCore.QRect(570, 460, 200, 70))  

self.NotesButton.setCursor(QtGui.QCursor(QtCore.Qt.PointingHandCursor))  

self.NotesButton.setStyleSheet("border: 2px solid;\n"  

    "border-radius: 20px;\n"  

    "border-color:rgb(69, 69, 69);\n"  

    "background-color: rgb(69, 69, 69);\n"  

    "font: 18pt \"Sans Serif\"; color:rgb(239, 239, 239);\n"  

    "")  

self.NotesButton.setObjectName("NotesButton")  

self.QuestionText = QtWidgets.QLabel(self.MainWidget)  

self.QuestionText.setGeometry(QtCore.QRect(390, 290, 561, 51))  

self.QuestionText.setStyleSheet("font: 13pt \"Sans Serif\";  

    color:rgb(69, 69, 69);\n"  

        "background-color: rgb(239, 239, 239); padding: 5px;")  

self.QuestionText.setWordWrap(True)  

self.QuestionText.setObjectName("QuestionText")  

self.QuestionInput = QtWidgets.QLineEdit(self.MainWidget)  

self.QuestionInput.setGeometry(QtCore.QRect(410, 350, 231, 60))  

self.QuestionInput.setStyleSheet("background-color: rgb(239,  

    239, 239);\n"  

    "color: rgb(69, 69, 69);\n"  

    "font: 18pt \"Sans Serif\";\n"  

    "border: 2px solid;\n"  

    "border-radius: 20px;\n"  

    "border-color:rgb(69, 69, 69);")  

self.QuestionInput.setText("")  

self.QuestionInput.setEchoMode(QtWidgets.QLineEdit.Normal)  

self.QuestionInput.setCursorPosition(0)  

self.QuestionInput.setAlignment(QtCore.Qt.AlignCenter)  

self.QuestionInput.setObjectName("QuestionInput")  

self.SubmitButton = QtWidgets.QPushButton(self.MainWidget)  

self.SubmitButton.setGeometry(QtCore.QRect(690, 350, 131, 60))  

self.SubmitButton.setCursor(QtGui.QCursor(QtCore.Qt.PointingHandCursor))  

self.SubmitButton.setStyleSheet("border: 2px solid;\n"  

    "border-radius: 20px;\n"  

    "border-color:rgb(69, 69, 69);\n"  

    "background-color: rgb(69, 69, 69);\n"  

    "font: 18pt \"Sans Serif\"; color:rgb(239, 239, 239);\n"  

    "")
```

```

        self.SubmitButton.setObjectName("SubmitButton")
        self.MessageLabel = QtWidgets.QLabel(self.MainWidget)
        self.MessageLabel.setGeometry(QtCore.QRect(440, 410, 461, 41))
        self.MessageLabel.setStyleSheet("color: rgb(255, 0, 0);\n"
                                       "font: 18pt \"Sans Serif\";")
        self.MessageLabel.setObjectName("MessageLabel")
        self.SubTitleText.raise_()
        self.MainText.raise_()
        self.PrevButton.raise_()
        self.NextButton.raise_()
        self.NotesButton.raise_()
        self.QuestionInput.raise_()
        self.SubmitButton.raise_()
        self.QuestionText.raise_()
        self.MessageLabel.raise_()

    self.retranslateUi(PracticalApplicationsScreen)
    QtCore.QMetaObject.connectSlotsByName(PracticalApplicationsScreen)

def retranslateUi(self, PracticalApplicationsScreen):
    _translate = QtCore.QCoreApplication.translate
    PracticalApplicationsScreen.setWindowTitle(_translate("PracticalApplicationsScreen",
                                                       "Visualising the Riemann Hypothesis - Introduction"))
    self.Title.setText(_translate("PracticalApplicationsScreen",
                                 "Introduction"))
    self.IntroductionTab.setText(_translate("PracticalApplicationsScreen",
                                           "Introduction"))
    self.HistoricalBackgroundLabel.setText(_translate("PracticalApplicationsScreen",
                                                      "<html><head/><body><p align=\"center\">Historical<br>Background</p></body></html>"))
    self.WhatIsTheRHLabel.setText(_translate("PracticalApplicationsScreen",
                                           "<html><head/><body><p align=\"center\">What is<br>the<br>Riemann Hypothesis</p></body></html>"))
    self.PracticalApplicationsLabel.setText(_translate("PracticalApplicationsScreen",
                                                      "<html><head/><body><p align=\"center\">Practical<br>Applications</p></body></html>"))
    self.PrevButton.setText(_translate("PracticalApplicationsScreen",
                                      "Prev"))
    self.NextButton.setText(_translate("PracticalApplicationsScreen",
                                      "Next"))
    self.SubTitleText.setText(_translate("PracticalApplicationsScreen",
                                         "<html><head/><body><p><span style=\"font-weight:600;\">Practical<br>Applications</span></p></body></html>"))
    self.MainText.setText(_translate("PracticalApplicationsScreen",
                                   "<html><head/><body><p>Although the Riemann Hypothesis uses<br>a lot of theoretical mathematics, that isn't to say that it<br>doesn't have any practical applications.</p><p>If the Riemann<br>Hypothesis was proven to be true, then that would mean that<br>many of theories and conjectures would always be true. For</p></body></html>"))

```

```

example: The weak Goldbach conjecture - stating that all
integers greater than 5 are the sum of three primes; Mills
constants - numbers that allow you to generate prime
numbers, The theory that there will always be at least one
prime between consecutive cubes; and the theory that there
is a maximum bound between consecutive prime
numbers.</p><p>All of these conjectures involve prime
numbers, and their distribution. If the Riemann Hypothesis
and thus these conjectures were true, then very large prime
numbers would be very easy to generate. This would make
fields such as cryptography - that heavily rely on large
prime numbers being hard to compute - change. Current
cryptography algorithms would become obsolete and would have
to be replaced with more secure ones.</p><p>The Riemann
Hypothesis also has a very interesting correlation to
quantum physics. It was discovered in 1996 that the
arrangement of the zeta zeroes exhibits the same pattern as
the possible values of energy in a quantum chaotic system.
</p></body></html>"))
self.NotesButton.setText(_translate("PracticalApplicationsScreen",
        "Notes"))
self.QuestionText.setText(_translate("PracticalApplicationsScreen",
        "<html><head/><body><p><br/></p></body></html>"))
self.QuestionInput.setPlaceholderText(_translate("PracticalApplicationsScreen",
        "Answer"))
self.SubmitButton.setText(_translate("PracticalApplicationsScreen",
        "Submit"))
self.MessageLabel.setText(_translate("PracticalApplicationsScreen",
        "<html><head/><body><p>
align=\"center\"><br/></p></body></html>"))

```

program/user_interface/introduction_ui/what_is_the_riemann_hypothesis.py

```

"""
what_is_the_riemann_hypothesis.py
=====
A GUI for the what is the riemann hypothesis page of the introduction
section
"""

from PyQt5 import QtCore, QtGui, QtWidgets

class Ui_WhatIsTheRiemannHypothesisScreen(object):

    def setupUi(self, WhatIsTheRiemannHypothesisScreen):
        WhatIsTheRiemannHypothesisScreen.setObjectName("WhatIsTheRiemannHypothesisScreen")
        WhatIsTheRiemannHypothesisScreen.resize(1340, 723)

```

```

WhatIsTheRiemannHypothesisScreen.setSizeGripEnabled(False)
self.widget = QtWidgets.QWidget(WhatIsTheRiemannHypothesisScreen)
self.widget.setGeometry(QtCore.QRect(0, 0, 1340, 720))
self.widget.setStyleSheet("background-color: rgb(69, 69, 69);")
self.widget.setObjectName("widget")
self.Title = QtWidgets.QLabel(self.widget)
self.Title.setGeometry(QtCore.QRect(545, 20, 251, 51))
self.Title.setStyleSheet("font: 36pt \\"Sans Serif\\";
    color:rgb(239, 239, 239)")
self.Title.setObjectName("Title")
self.TabBar = QtWidgets.QWidget(self.widget)
self.TabBar.setGeometry(QtCore.QRect(0, 80, 1340, 80))
self.TabBar.setStyleSheet("background-color: rgb(239, 239,
    239);")
self.TabBar.setObjectName("TabBar")
self.IntroductionTab = QtWidgets.QPushButton(self.TabBar)
self.IntroductionTab.setGeometry(QtCore.QRect(10, 5, 200, 70))
self.IntroductionTab.setCursor(QtGui.QCursor(QtCore.Qt.PointingHandCursor))
self.IntroductionTab.setStyleSheet("border: 2px solid;\n"
    "border-radius: 20px;\n"
    "border-color:rgb(69, 69, 69);\n"
    "background-color: rgb(69, 69, 69);\n"
    "font: 18pt \\"Sans Serif\\"; color:rgb(239, 239, 239);\n"
    "")
self.IntroductionTab.setObjectName("IntroductionTab")
self.HistoricalBackgroundLabel = QtWidgets.QLabel(self.TabBar)
self.HistoricalBackgroundLabel.setGeometry(QtCore.QRect(220, 5,
    200, 70))
self.HistoricalBackgroundLabel.setStyleSheet("border: 2px
    solid;\n"
    "border-radius: 20px;\n"
    "border-color:rgb(69, 69, 69);\n"
    "background-color: rgb(69, 69, 69);\n"
    "font: 18pt \\"Sans Serif\\"; color:rgb(239, 239, 239);\n"
    "")
self.HistoricalBackgroundLabel.setObjectName("HistoricalBackgroundLabel")
self.HistoricalBackgroundTab = QtWidgets.QPushButton(self.TabBar)
self.HistoricalBackgroundTab.setGeometry(QtCore.QRect(220, 5,
    200, 70))
self.HistoricalBackgroundTab.setCursor(QtGui.QCursor(QtCore.Qt.PointingHandCursor))
self.HistoricalBackgroundTab.setStyleSheet("border-radius:
    20px;\n"
    "background-color: rgba(0, 0, 0, 0);\n"
    "font: 18pt \\"Sans Serif\\";\n"
    "")
self.HistoricalBackgroundTab.setText("")
self.HistoricalBackgroundTab.setObjectName("HistoricalBackgroundTab")
self.WhatIsTheRHTab = QtWidgets.QPushButton(self.TabBar)
self.WhatIsTheRHTab.setGeometry(QtCore.QRect(430, 5, 240, 70))
self.WhatIsTheRHTab.setCursor(QtGui.QCursor(QtCore.Qt.PointingHandCursor))

```

```

        self.WhatIsTheRHTab.setStyleSheet("border-radius: 20px;\n"
                                         "background-color: rgba(0, 0, 0, 0);\n"
                                         "font: 18pt \"Sans Serif\";\n"
                                         "")
        self.WhatIsTheRHTab.setText("")
        self.WhatIsTheRHTab.setObjectName("WhatIsTheRHTab")
        self.WhatIsTheRHLabel = QtWidgets.QLabel(self.TabBar)
        self.WhatIsTheRHLabel.setGeometry(QtCore.QRect(430, 5, 241, 70))
        self.WhatIsTheRHLabel.setStyleSheet("border: 2px solid;\n"
                                         "border-radius: 20px;\n"
                                         "border-color:rgb(69, 69, 69);\n"
                                         "background-color: rgb(239, 239, 239);\n"
                                         "font: 18pt \"Sans Serif\"; color:rgb(69, 69, 69);\n"
                                         "")
        self.WhatIsTheRHLabel.setObjectName("WhatIsTheRHLabel")
        self.PracticalApplicationsLabel = QtWidgets.QLabel(self.TabBar)
        self.PracticalApplicationsLabel.setGeometry(QtCore.QRect(680, 5,
                                                               200, 70))
        self.PracticalApplicationsLabel.setStyleSheet("border: 2px
                                                     solid;\n"
                                                     "border-radius: 20px;\n"
                                                     "border-color:rgb(69, 69, 69);\n"
                                                     "background-color: rgb(69, 69, 69);\n"
                                                     "font: 18pt \"Sans Serif\"; color:rgb(239, 239, 239);\n"
                                                     "")
        self.PracticalApplicationsLabel.setObjectName("PracticalApplicationsLabel")
        self.PracticalApplicationsTab =
            QtWidgets.QPushButton(self.TabBar)
        self.PracticalApplicationsTab.setGeometry(QtCore.QRect(680, 5,
                                                               201, 70))
        self.PracticalApplicationsTab.setCursor(QtGui.QCursor(QtCore.Qt.PointingHandCursor))
        self.PracticalApplicationsTab.setStyleSheet("border-radius:
                                                   20px;\n"
                                                   "background-color: rgba(0, 0, 0, 0);\n"
                                                   "font: 18pt \"Sans Serif\";\n"
                                                   "")
        self.PracticalApplicationsTab.setText("")
        self.PracticalApplicationsTab.setObjectName("PracticalApplicationsTab")
        self.WhatIsTheRHLabel.raise_()
        self.IntroductionTab.raise_()
        self.HistoricalBackgroundLabel.raise_()
        self.HistoricalBackgroundTab.raise_()
        self.WhatIsTheRHTab.raise_()
        self.PracticalApplicationsLabel.raise_()
        self.PracticalApplicationsTab.raise_()
        self.MainWidget = QtWidgets.QWidget(self.widget)
        self.MainWidget.setGeometry(QtCore.QRect(10, 170, 1320, 540))
        self.MainWidget.setStyleSheet("background-color: rgb(239, 239,
                                                       239);\n"
                                     "border-radius: 20px;")

```

```

self.MainWidget.setObjectName("MainWidget")
self.PrevButton = QtWidgets.QPushButton(self.MainWidget)
self.PrevButton.setGeometry(QtCore.QRect(10, 460, 200, 70))
self.PrevButton.setCursor(QtGui.QCursor(QtCore.Qt.PointingHandCursor))
self.PrevButton.setStyleSheet("border: 2px solid;\n"
                             "border-radius: 20px;\n"
                             "border-color:rgb(69, 69, 69);\n"
                             "background-color: rgb(69, 69, 69);\n"
                             "font: 18pt \"Sans Serif\"; color:rgb(239, 239, 239);\n"
                             "")
self.PrevButton.setObjectName("PrevButton")
self.NextButton = QtWidgets.QPushButton(self.MainWidget)
self.NextButton.setGeometry(QtCore.QRect(1110, 460, 200, 70))
self.NextButton.setCursor(QtGui.QCursor(QtCore.Qt.PointingHandCursor))
self.NextButton.setStyleSheet("border: 2px solid;\n"
                             "border-radius: 20px;\n"
                             "border-color:rgb(69, 69, 69);\n"
                             "background-color: rgb(69, 69, 69);\n"
                             "font: 18pt \"Sans Serif\"; color:rgb(239, 239, 239);\n"
                             "")
self.NextButton.setObjectName("NextButton")
self.SubTitleText = QtWidgets.QLabel(self.MainWidget)
self.SubTitleText.setGeometry(QtCore.QRect(40, 20, 561, 41))
self.SubTitleText.setStyleSheet("font: 25pt \"Sans Serif\";\n"
                               "color:rgb(69, 69, 69);\n"
                               "background-color: rgb(239, 239, 239); padding: 5px;")
self.SubTitleText.setObjectName("SubTitleText")
self.MainText = QtWidgets.QLabel(self.MainWidget)
self.MainText.setGeometry(QtCore.QRect(40, 60, 1251, 281))
self.MainText.setStyleSheet("font: 13pt \"Sans Serif\";\n"
                           "color:rgb(69, 69, 69);\n"
                           "background-color: rgb(239, 239, 239); padding: 5px;")
self.MainText.setAlignment(QtCore.Qt.AlignLeading|QtCore.Qt.AlignLeft|QtCore.Qt.AlignTop)
self.MainText.setWordWrap(True)
self.MainText.setObjectName("MainText")
self.QuestionText = QtWidgets.QLabel(self.MainWidget)
self.QuestionText.setGeometry(QtCore.QRect(390, 360, 561, 31))
self.QuestionText.setStyleSheet("font: 13pt \"Sans Serif\";\n"
                               "color:rgb(69, 69, 69);\n"
                               "background-color: rgb(239, 239, 239); padding: 5px;")
self.QuestionText.setWordWrap(True)
self.QuestionText.setObjectName("QuestionText")
self.QuestionInput = QtWidgets.QLineEdit(self.MainWidget)
self.QuestionInput.setGeometry(QtCore.QRect(540, 400, 101, 60))
self.QuestionInput.setStyleSheet("background-color: rgb(239,\n"
                                "239, 239);\n"
                                "color: rgb(69, 69, 69);\n"
                                "font: 18pt \"Sans Serif\";\n"
                                "border: 2px solid;\n"
                                "border-radius: 20px;\n"

```

```

        "border-color:rgb(69, 69, 69);")
self.QuestionInput.setText("")
self.QuestionInput.setEchoMode(QtWidgets.QLineEdit.Normal)
self.QuestionInput.setCursorPosition(0)
self.QuestionInput.setAlignment(QtCore.Qt.AlignCenter)
self.QuestionInput.setObjectName("QuestionInput")
self.SubmitButton = QtWidgets.QPushButton(self.MainWidget)
self.SubmitButton.setGeometry(QtCore.QRect(690, 400, 131, 60))
self.SubmitButton.setCursor(QtGui.QCursor(QtCore.Qt.PointingHandCursor))
self.SubmitButton.setStyleSheet("border: 2px solid;\n"
                               "border-radius: 20px;\n"
                               "border-color:rgb(69, 69, 69);\n"
                               "background-color: rgb(69, 69, 69);\n"
                               "font: 18pt \"Sans Serif\"; color:rgb(239, 239, 239);\n"
                               "")
self.SubmitButton.setObjectName("SubmitButton")
self.MessageLabel = QtWidgets.QLabel(self.MainWidget)
self.MessageLabel.setGeometry(QtCore.QRect(440, 480, 461, 41))
self.MessageLabel.setStyleSheet("color: rgb(255, 0, 0);\n"
                               "font: 18pt \"Sans Serif\";")
self.MessageLabel.setObjectName("MessageLabel")
self.SubTitleText.raise_()
self.MainText.raise_()
self.PrevButton.raise_()
self.NextButton.raise_()
self.QuestionText.raise_()
self.QuestionInput.raise_()
self.SubmitButton.raise_()
self.MessageLabel.raise_()

self.retranslateUi(WhatIsTheRiemannHypothesisScreen)
QtCore.QMetaObject.connectSlotsByName(WhatIsTheRiemannHypothesisScreen)

def retranslateUi(self, WhatIsTheRiemannHypothesisScreen):
    _translate = QtCore.QCoreApplication.translate
    WhatIsTheRiemannHypothesisScreen.setWindowTitle(_translate("WhatIsTheRiemannHypothesisScreen",
                                                               "Visualising the Riemann Hypothesis - Introduction"))
    self.Title.setText(_translate("WhatIsTheRiemannHypothesisScreen",
                                 "Introduction"))
    self.IntroductionTab.setText(_translate("WhatIsTheRiemannHypothesisScreen",
                                             "Introduction"))
    self.HistoricalBackgroundLabel.setText(_translate("WhatIsTheRiemannHypothesisScreen",
                                                       "<html><head/><body><p align=\"center\">Historical<br>Background</p></body></html>"))
    self.WhatIsTheRHLLabel.setText(_translate("WhatIsTheRiemannHypothesisScreen",
                                              "<html><head/><body><p align=\"center\">What is<br>Riemann Hypothesis</p></body></html>"))
    self.PracticalApplicationsLabel.setText(_translate("WhatIsTheRiemannHypothesisScreen",
                                                       "<html><head/><body><p align=\"center\">Practical<br>Applications</p></body></html>"))

```

```

        self.PrevButton.setText(_translate("WhatIsTheRiemannHypothesisScreen",
                                         "Prev"))
        self.NextButton.setText(_translate("WhatIsTheRiemannHypothesisScreen",
                                         "Next"))
        self.SubTitleText.setText(_translate("WhatIsTheRiemannHypothesisScreen",
                                         "<html><head/><body><p><span style=\""
                                         "font-weight:600;\">What is the Riemann
                                         Hypothesis</span></p></body></html>"))
        self.MainText.setText(_translate("WhatIsTheRiemannHypothesisScreen",
                                         "<html><head/><body><p>In his 1859 Paper \'On the Number of
                                         Primes Less Than a Given Magnitude\', Bernhard Riemann
                                         explored and researched the prime numbers. He did this using
                                         the riemann zeta function, which is the sum from 1 to
                                         infinity of n to the power -s, where s is the input to the
                                         function. </p><p>Riemann used a process called analytic
                                         continuation to allow this function to be true for not just
                                         all real numbers, but also imaginary and complex numbers.
                                         Imaginary numbers are denoted by the imaginary unit i, where
                                         i is the square root of -1, a number that is undefined using
                                         just the real numbers. A complex number is one that has a
                                         real part and an imaginary part. <br/>Riemann used complex
                                         numbers in the Riemann Zeta function and found something
                                         very interesting. First was that whenever the input to the
                                         function was a negative even integer, then the function
                                         always output 0. Second, was that the function will also
                                         output Zero when the imaginary part of the input is between
                                         zero and one. The first point was relatively easy to explain
                                         as to why it happened, leading to the negative even integers
                                         being known as the trivial zeroes for this function.
                                         However, the second point was a little bit harder to
                                         explain. Riemann managed to prove this point, but also
                                         noticed that these zeroes only occur when the imaginary part
                                         of the input is 1/2. This was not so easy to prove, and thus
                                         these zeroes were known as the nontrivial zeroes.</p><p>The
                                         Riemann Hypothesis states that \'the real part of every
                                         nontrivial zero of the Riemann Zeta Function is 1/2\'.
                                         </p></body></html>"))
        self.QuestionText.setText(_translate("WhatIsTheRiemannHypothesisScreen",
                                         "<html><head/><body><p><br/></p></body></html>"))
        self.QuestionInput.setPlaceholderText(_translate("WhatIsTheRiemannHypothesisScreen",
                                         "Answer"))
        self.SubmitButton.setText(_translate("WhatIsTheRiemannHypothesisScreen",
                                         "Submit"))
        self.MessageLabel.setText(_translate("WhatIsTheRiemannHypothesisScreen",
                                         "<html><head/><body><p
                                         align=\"center\"><br/></p></body></html>"))

```

`program/user_interface/investigation.ui/__init__.py`

```

"""
__init__.py
=====
Imports for the investigation_ui
"""

from .calculator import Ui_CalculatorScreen
from .single_calculator import Ui_SingleCalculatorScreen
from .table_calculator import Ui_TableCalculatorScreen
from .table_calculator_2 import Ui_TableCalculator2Screen
from .calculator_leaderboard import Ui_CalculatorLeaderboardScreen
from .graph_plots import Ui_GraphPlotsScreen
from .polar_graph import Ui_PolarGraphScreen
from .prime_counting_function import Ui_PrimeCountingFunctionScreen
from .prime_numbers import Ui_PrimeNumbersScreen
from .zeroes import Ui_ZeroesScreen
from .calculate_zeroes import Ui_CalculateZeroesScreen
from .calculate_zeroes_2 import Ui_CalculateZeroes2Screen
from .zeta_zeroes_plot import Ui_ZetaZeroesPlotScreen
from .zeta_approximation import Ui_ZetaApproximationScreen

```

program/user_interface/investigation_ui/calculate_zeroes.py

```

"""
calculate_zeroes.py
=====
A GUI for the calculate zeroes page of the investigation section
"""

from PyQt5 import QtCore, QtGui, QtWidgets

class Ui_CalculateZeroesScreen(object):

    def setupUi(self, CalculateZeroesScreen):
        CalculateZeroesScreen.setObjectName("CalculateZeroesScreen")
        CalculateZeroesScreen.resize(1340, 720)
        CalculateZeroesScreen.setSizeGripEnabled(False)
        self.widget = QtWidgets.QWidget(CalculateZeroesScreen)
        self.widget.setGeometry(QtCore.QRect(0, 0, 1340, 720))
        self.widget.setStyleSheet("background-color: rgb(69, 69, 69);")
        self.widget.setObjectName("widget")
        self.Title = QtWidgets.QLabel(self.widget)
        self.Title.setGeometry(QtCore.QRect(540, 20, 261, 51))
        self.Title.setStyleSheet("font: 36pt \\"Sans Serif\\";\n"
                               "color:rgb(239, 239, 239);")
        self.Title.setObjectName("Title")

```

```

self.TabBar = QtWidgets.QWidget(self.widget)
self.TabBar.setGeometry(QtCore.QRect(0, 80, 1340, 80))
self.TabBar.setStyleSheet("background-color: rgb(239, 239,
    239);")
self.TabBar.setObjectName("TabBar")
self.ZeroesTab = QtWidgets.QPushButton(self.TabBar)
self.ZeroesTab.setGeometry(QtCore.QRect(10, 5, 220, 70))
self.ZeroesTab.setCursor(QtGui.QCursor(QtCore.Qt.PointingHandCursor))
self.ZeroesTab.setStyleSheet("border: 2px solid;\n"
    "border-radius: 20px;\n"
    "border-color:rgb(69, 69, 69);\n"
    "background-color: rgb(239, 239,239);\n"
    "font: 18pt \\"Sans Serif\\"; color:rgb(69, 69, 69);\n"
    "")
self.ZeroesTab.setObjectName("ZeroesTab")
self.MainWidget = QtWidgets.QWidget(self.widget)
self.MainWidget.setGeometry(QtCore.QRect(10, 170, 1320, 540))
self.MainWidget.setStyleSheet("background-color: rgb(239, 239,
    239);\n"
    "border-radius: 20px;")
self.MainWidget.setObjectName("MainWidget")
self.PrevButton = QtWidgets.QPushButton(self.MainWidget)
self.PrevButton.setGeometry(QtCore.QRect(10, 460, 200, 70))
self.PrevButton.setCursor(QtGui.QCursor(QtCore.Qt.PointingHandCursor))
self.PrevButton.setStyleSheet("border: 2px solid;\n"
    "border-radius: 20px;\n"
    "border-color:rgb(69, 69, 69);\n"
    "background-color: rgb(69, 69, 69);\n"
    "font: 18pt \\"Sans Serif\\"; color:rgb(239, 239, 239);\n"
    "")
self.PrevButton.setObjectName("PrevButton")
self.NextButton = QtWidgets.QPushButton(self.MainWidget)
self.NextButton.setGeometry(QtCore.QRect(1110, 460, 200, 70))
self.NextButton.setCursor(QtGui.QCursor(QtCore.Qt.PointingHandCursor))
self.NextButton.setStyleSheet("border: 2px solid;\n"
    "border-radius: 20px;\n"
    "border-color:rgb(69, 69, 69);\n"
    "background-color: rgb(69, 69, 69);\n"
    "font: 18pt \\"Sans Serif\\"; color:rgb(239, 239, 239);\n"
    "")
self.NextButton.setObjectName("NextButton")
self.NoOfZeroesInput = QtWidgets.QLineEdit(self.MainWidget)
self.NoOfZeroesInput.setGeometry(QtCore.QRect(405, 190, 531, 81))
self.NoOfZeroesInput.setStyleSheet("background-color: rgb(239,
    239, 239);\n"
    "color: rgb(69, 69, 69);\n"
    "font: 18pt \\"Sans Serif\\";\n"
    "border: 2px solid;\n"
    "border-radius: 20px;\n"
    "border-color:rgb(69, 69, 69);")

```

```

        self.NoOfZeroesInput.setText("")
        self.NoOfZeroesInput.setObjectName("NoOfZeroesInput")
        self.NoOfZeroesText = QtWidgets.QLabel(self.MainWidget)
        self.NoOfZeroesText.setGeometry(QtCore.QRect(120, 80, 1101, 61))
        self.NoOfZeroesText.setStyleSheet("font: 36pt \"Sans Serif\";
                                         color:rgb(69, 69, 69);\n"
                                         "background-color: rgb(239, 239, 239); padding: 5px;\n"
                                         "text-decoration: underline;")
        self.NoOfZeroesText.setObjectName("NoOfZeroesText")
        self.CalculateButton = QtWidgets.QPushButton(self.MainWidget)
        self.CalculateButton.setGeometry(QtCore.QRect(590, 400, 141, 91))
        self.CalculateButton.setCursor(QtGui.QCursor(QtCore.Qt.PointingHandCursor))
        self.CalculateButton.setStyleSheet("border: 2px solid;\n"
                                         "border-radius: 20px;\n"
                                         "border-color:rgb(69, 69, 69);\n"
                                         "background-color: rgb(69, 69, 69);\n"
                                         "font: 18pt \"Sans Serif\"; color:rgb(239, 239, 239);\n"
                                         "")
        self.CalculateButton.setObjectName("CalculateButton")
        self.ErrorLabel = QtWidgets.QLabel(self.MainWidget)
        self.ErrorLabel.setGeometry(QtCore.QRect(390, 300, 701, 61))
        self.ErrorLabel.setStyleSheet("color: rgb(255, 0, 0);\n"
                                     "font: 18pt \"Sans Serif\";")
        self.ErrorLabel.setObjectName("ErrorLabel")

        self.retranslateUi(CalculateZeroesScreen)
        QtCore.QMetaObject.connectSlotsByName(CalculateZeroesScreen)

    def retranslateUi(self, CalculateZeroesScreen):
        _translate = QtCore.QCoreApplication.translate
        CalculateZeroesScreen.setWindowTitle(_translate("CalculateZeroesScreen",
                                                       "Visualising the Riemann Hypothesis - Zeta Zeroes"))
        self.Title.setText(_translate("CalculateZeroesScreen", "Zeta
                                                       Zeroes"))
        self.ZeroesTab.setText(_translate("CalculateZeroesScreen",
                                         "Zeroes Calculator"))
        self.PrevButton.setText(_translate("CalculateZeroesScreen",
                                         "Prev"))
        self.NextButton.setText(_translate("CalculateZeroesScreen",
                                         "Next"))
        self.NoOfZeroesInput.setPlaceholderText(_translate("CalculateZeroesScreen",
                                                       " Enter Number of Zeroes"))
        self.NoOfZeroesText.setText(_translate("CalculateZeroesScreen",
                                             "<html><head/><body><p align=\"right\"><span style=\"
                                             font-weight:600;\">How many zeroes would you like to
                                             calculate?</span></p></body></html>"))
        self.CalculateButton.setText(_translate("CalculateZeroesScreen",
                                               "Calculate\n"))
    """))
    self.ErrorLabel.setText(_translate("CalculateZeroesScreen",

```

```
"<html><head/><body><p align=\"center\"><br/></p></body></html>")
```

program/user_interface/investigation_ui/calculate_zeroes_2.py

```
"""
calculate_zeroes_2.py
=====
A GUI for the calculate zeroes 2 page of the investigation section
"""

from PyQt5 import QtCore, QtGui, QtWidgets

class Ui_CalculateZeroes2Screen(object):

    def setupUi(self, CalculateZeroes2Screen):
        CalculateZeroes2Screen.setObjectName("CalculateZeroes2Screen")
        CalculateZeroes2Screen.resize(1340, 735)
        CalculateZeroes2Screen.setSizeGripEnabled(False)
        self.widget = QtWidgets.QWidget(CalculateZeroes2Screen)
        self.widget.setGeometry(QtCore.QRect(0, 0, 1340, 720))
        self.widget.setStyleSheet("background-color: rgb(69, 69, 69);")
        self.widget.setObjectName("widget")
        self.Title = QtWidgets.QLabel(self.widget)
        self.Title.setGeometry(QtCore.QRect(540, 20, 261, 51))
        self.Title.setStyleSheet("font: 36pt \"Sans Serif\";\n"
                               "color:rgb(239, 239, 239);")
        self.Title.setObjectName("Title")
        self.TabBar = QtWidgets.QWidget(self.widget)
        self.TabBar.setGeometry(QtCore.QRect(0, 80, 1340, 80))
        self.TabBar.setStyleSheet("background-color: rgb(239, 239,\n"
                               "239);")
        self.TabBar.setObjectName("TabBar")
        self.ZeroesTab = QtWidgets.QPushButton(self.TabBar)
        self.ZeroesTab.setGeometry(QtCore.QRect(10, 5, 220, 70))
        self.ZeroesTab.setCursor(QtGui.QCursor(QtCore.Qt.PointingHandCursor))
        self.ZeroesTab.setStyleSheet("border: 2px solid;\n"
                                   "border-radius: 20px;\n"
                                   "border-color:rgb(69, 69, 69);\n"
                                   "background-color: rgb(239, 239,239);\n"
                                   "font: 12pt \"Sans Serif\"; color:rgb(69, 69, 69);\n"
                                   "")
        self.ZeroesTab.setObjectName("ZeroesTab")
        self.MainWidget = QtWidgets.QWidget(self.widget)
        self.MainWidget.setGeometry(QtCore.QRect(10, 170, 1320, 540))
        self.MainWidget.setStyleSheet("background-color: rgb(239, 239,\n"
                                   "239);\n"
                                   "")
```

```

    "border-radius: 20px;")  

self.MainWidget.setObjectName("MainWidget")  

self.PrevButton = QtWidgets.QPushButton(self.MainWidget)  

self.PrevButton.setGeometry(QtCore.QRect(10, 460, 200, 70))  

self.PrevButton.setCursor(QtGui.QCursor(QtCore.Qt.PointingHandCursor))  

self.PrevButton.setStyleSheet("border: 2px solid;\n"  

    "border-radius: 20px;\n"  

    "border-color:rgb(69, 69, 69);\n"  

    "background-color: rgb(69, 69, 69);\n"  

    "font: 12pt \"Sans Serif\"; color:rgb(239, 239, 239);\n"  

    "")  

self.PrevButton.setObjectName("PrevButton")  

self.NextButton = QtWidgets.QPushButton(self.MainWidget)  

self.NextButton.setGeometry(QtCore.QRect(1110, 460, 200, 70))  

self.NextButton.setCursor(QtGui.QCursor(QtCore.Qt.PointingHandCursor))  

self.NextButton.setStyleSheet("border: 2px solid;\n"  

    "border-radius: 20px;\n"  

    "border-color:rgb(69, 69, 69);\n"  

    "background-color: rgb(69, 69, 69);\n"  

    "font: 12pt \"Sans Serif\"; color:rgb(239, 239, 239);\n"  

    "")  

self.NextButton.setObjectName("NextButton")  

self.SubTitleText = QtWidgets.QLabel(self.MainWidget)  

self.SubTitleText.setGeometry(QtCore.QRect(40, 20, 381, 41))  

self.SubTitleText.setStyleSheet("font: 25pt \"Sans Serif\";  

    color:rgb(69, 69, 69);\n"  

    "background-color: rgb(239, 239, 239); padding: 5px;")  

self.SubTitleText.setObjectName("SubTitleText")  

self.ErrorLabel = QtWidgets.QLabel(self.MainWidget)  

self.ErrorLabel.setGeometry(QtCore.QRect(365, 390, 611, 61))  

self.ErrorLabel.setStyleSheet("color: rgb(255, 0, 0);\n"  

    "font: 18pt \"Sans Serif\";")  

self.ErrorLabel.setObjectName("ErrorLabel")  

self.ZetaTable = QtWidgets.QTableWidget(self.MainWidget)  

self.ZetaTable.setGeometry(QtCore.QRect(510, 30, 300, 351))  

self.ZetaTable.setObjectName("ZetaTable")  

self.ZetaTable.setColumnCount(2)  

self.ZetaTable.setRowCount(0)  

item = QtWidgets QTableWidgetItem()  

item.setTextAlignment(QtCore.Qt.AlignCenter)  

font = QtGui.QFont()  

font.setPointSize(16)  

font.setBold(True)  

font.setWeight(75)  

item.setFont(font)  

self.ZetaTable.setHorizontalHeaderItem(0, item)  

item = QtWidgets QTableWidgetItem()  

item.setTextAlignment(QtCore.Qt.AlignCenter)  

font = QtGui.QFont()  

font.setPointSize(16)

```

```

font.setBold(True)
font.setWeight(75)
item.setFont(font)
self.ZetaTable.setHorizontalHeaderItem(1, item)
self.DatabaseButton = QtWidgets.QPushButton(self.MainWidget)
self.DatabaseButton.setGeometry(QtCore.QRect(440, 460, 200, 70))
self.DatabaseButton.setCursor(QtGui.QCursor(QtCore.Qt.PointingHandCursor))
self.DatabaseButton.setStyleSheet("border: 2px solid;\n"
                                  "border-radius: 20px;\n"
                                  "border-color:rgb(69, 69, 69);\n"
                                  "background-color: rgb(69, 69, 69);\n"
                                  "font: 12pt \"Sans Serif\"; color:rgb(239, 239, 239);\n"
                                  "")
self.DatabaseButton.setObjectName("DatabaseButton")
self.FileButton = QtWidgets.QPushButton(self.MainWidget)
self.FileButton.setGeometry(QtCore.QRect(700, 460, 200, 70))
self.FileButton.setCursor(QtGui.QCursor(QtCore.Qt.PointingHandCursor))
self.FileButton.setStyleSheet("border: 2px solid;\n"
                                  "border-radius: 20px;\n"
                                  "border-color:rgb(69, 69, 69);\n"
                                  "background-color: rgb(69, 69, 69);\n"
                                  "font: 12pt \"Sans Serif\"; color:rgb(239, 239, 239);\n"
                                  "")
self.FileButton.setObjectName("FileButton")
self.retranslateUi(CalculateZeroes2Screen)
QtCore.QMetaObject.connectSlotsByName(CalculateZeroes2Screen)

def retranslateUi(self, CalculateZeroes2Screen):
    _translate = QtCore.QCoreApplication.translate
    CalculateZeroes2Screen.setWindowTitle(_translate("CalculateZeroes2Screen",
                                                       "Visualising the Riemann Hypothesis - Zeta Zeroes"))
    self.Title.setText(_translate("CalculateZeroes2Screen", "Zeta
Zeroes"))
    self.ZeroesTab.setText(_translate("CalculateZeroes2Screen",
                                    "Zeroes Calculator"))
    self.PrevButton.setText(_translate("CalculateZeroes2Screen",
                                    "Prev"))
    self.NextButton.setText(_translate("CalculateZeroes2Screen",
                                    "Next"))
    self.SubTitleText.setText(_translate("CalculateZeroes2Screen",
                                         "<html><head/><body><p><span style=\"
font-weight:600;\">Zeta Zeroes</span></p></body></html>"))
    self.ErrorLabel.setText(_translate("CalculateZeroes2Screen",
                                         "<html><head/><body><p>
align=\"center\"<br/></p></body></html>"))
    item = self.ZetaTable.horizontalHeaderItem(0)
    item.setText(_translate("CalculateZeroes2Screen", "Re(s")))
    item = self.ZetaTable.horizontalHeaderItem(1)
    item.setText(_translate("CalculateZeroes2Screen", "Im(s")))
    self.DatabaseButton.setText(_translate("CalculateZeroes2Screen",

```

```
        "Save to database"))
self.FileButton.setText(_translate("CalculateZeroes2Screen",
        "Save to file"))
```

program/user_interface/investigation_ui/calculator.py

```
"""
calculator.py
=====
A GUI for the calculator page of the investigation section
"""

from PyQt5 import QtCore, QtGui, QtWidgets

class Ui_CalculatorScreen(object):

    def setupUi(self, CalculatorScreen):
        CalculatorScreen.setObjectName("CalculatorScreen")
        CalculatorScreen.resize(1340, 713)
        CalculatorScreen.setSizeGripEnabled(False)
        self.widget = QtWidgets.QWidget(CalculatorScreen)
        self.widget.setGeometry(QtCore.QRect(0, 0, 1340, 720))
        self.widget.setStyleSheet("background-color: rgb(69, 69, 69);")
        self.widget.setObjectName("widget")
        self.Title = QtWidgets.QLabel(self.widget)
        self.Title.setGeometry(QtCore.QRect(520, 20, 300, 51))
        self.Title.setStyleSheet("font: 36pt \"Sans Serif\";
            color:rgb(239, 239, 239)")
        self.Title.setAlignment(QtCore.Qt.AlignCenter)
        self.Title.setObjectName("Title")
        self.TabBar = QtWidgets.QWidget(self.widget)
        self.TabBar.setGeometry(QtCore.QRect(0, 80, 1340, 80))
        self.TabBar.setStyleSheet("background-color: rgb(239, 239,
            239);")
        self.TabBar.setObjectName("TabBar")
        self.GraphsTab = QtWidgets.QPushButton(self.TabBar)
        self.GraphsTab.setGeometry(QtCore.QRect(10, 5, 200, 70))
        self.GraphsTab.setCursor(QtGui.QCursor(QtCore.Qt.PointingHandCursor))
        self.GraphsTab.setStyleSheet("border: 2px solid;\n"
            "border-radius: 20px;\n"
            "border-color:rgb(69, 69, 69);\n"
            "background-color: rgb(69, 69, 69);\n"
            "font: 18pt \"Sans Serif\"; color:rgb(239, 239, 239);\n"
            ""))
        self.GraphsTab.setObjectName("GraphsTab")
        self.PrimesTab = QtWidgets.QPushButton(self.TabBar)
        self.PrimesTab.setGeometry(QtCore.QRect(220, 5, 200, 70))
```

```

self.PrimesTab.setCursor(QtGui.QCursor(QtCore.Qt.PointingHandCursor))
self.PrimesTab.setStyleSheet("border: 2px solid;\n"
                            "border-radius: 20px;\n"
                            "border-color:rgb(69, 69, 69);\n"
                            "background-color: rgb(69, 69, 69);\n"
                            "font: 18pt \"Sans Serif\"; color:rgb(239, 239, 239);\n"
                            "")
self.PrimesTab.setObjectName("PrimesTab")
self.CalculatorTab = QtWidgets.QPushButton(self.TabBar)
self.CalculatorTab.setGeometry(QtCore.QRect(430, 5, 200, 70))
self.CalculatorTab.setCursor(QtGui.QCursor(QtCore.Qt.PointingHandCursor))
self.CalculatorTab.setStyleSheet("border: 2px solid;\n"
                            "border-radius: 20px;\n"
                            "border-color:rgb(69, 69, 69);\n"
                            "background-color: rgb(239, 239, 239);\n"
                            "font: 18pt \"Sans Serif\"; color:rgb(69, 69, 69);\n"
                            "")
self.CalculatorTab.setObjectName("CalculatorTab")
self.ZeroesTab = QtWidgets.QPushButton(self.TabBar)
self.ZeroesTab.setGeometry(QtCore.QRect(640, 5, 200, 70))
self.ZeroesTab.setCursor(QtGui.QCursor(QtCore.Qt.PointingHandCursor))
self.ZeroesTab.setStyleSheet("border: 2px solid;\n"
                            "border-radius: 20px;\n"
                            "border-color:rgb(69, 69, 69);\n"
                            "background-color: rgb(69, 69, 69);\n"
                            "font: 18pt \"Sans Serif\"; color:rgb(239, 239, 239);\n"
                            "")
self.ZeroesTab.setObjectName("ZeroesTab")
self.MainWidget = QtWidgets.QWidget(self.widget)
self.MainWidget.setGeometry(QtCore.QRect(10, 170, 1320, 540))
self.MainWidget.setStyleSheet("background-color: rgb(239, 239,
                            239);\n"
                            "border-radius: 20px;")
self.MainWidget.setObjectName("MainWidget")
self.PrevButton = QtWidgets.QPushButton(self.MainWidget)
self.PrevButton.setGeometry(QtCore.QRect(10, 460, 200, 70))
self.PrevButton.setCursor(QtGui.QCursor(QtCore.Qt.PointingHandCursor))
self.PrevButton.setStyleSheet("border: 2px solid;\n"
                            "border-radius: 20px;\n"
                            "border-color:rgb(69, 69, 69);\n"
                            "background-color: rgb(69, 69, 69);\n"
                            "font: 18pt \"Sans Serif\"; color:rgb(239, 239, 239);\n"
                            "")
self.PrevButton.setObjectName("PrevButton")
self.NextButton = QtWidgets.QPushButton(self.MainWidget)
self.NextButton.setGeometry(QtCore.QRect(1110, 460, 200, 70))
self.NextButton.setCursor(QtGui.QCursor(QtCore.Qt.PointingHandCursor))
self.NextButton.setStyleSheet("border: 2px solid;\n"
                            "border-radius: 20px;\n"
                            "border-color:rgb(69, 69, 69);\n"
                            )

```

```

        "background-color: rgb(69, 69, 69);\n"
        "font: 18pt \"Sans Serif\"; color:rgb(239, 239, 239);\n"
        ""))
self.NextButton.setObjectName("NextButton")
self.SubTitleText = QtWidgets.QLabel(self.MainWidget)
self.SubTitleText.setGeometry(QtCore.QRect(40, 20, 681, 51))
self.SubTitleText.setStyleSheet("font: 25pt \"Sans Serif\";
    color:rgb(69, 69, 69);\n"
        "background-color: rgb(239, 239, 239); padding: 5px;")
self.SubTitleText.setObjectName("SubTitleText")
self.MainText = QtWidgets.QLabel(self.MainWidget)
self.MainText.setGeometry(QtCore.QRect(40, 80, 1251, 121))
self.MainText.setStyleSheet("font: 13pt \"Sans Serif\";
    color:rgb(69, 69, 69);\n"
        "background-color: rgb(239, 239, 239); padding: 5px;")
self.MainText.setWordWrap(True)
self.MainText.setObjectName("MainText")
self.ZetaCalculatorButton =
    QtWidgets.QPushButton(self.MainWidget)
self.ZetaCalculatorButton.setGeometry(QtCore.QRect(440, 460,
    200, 70))
self.ZetaCalculatorButton.setCursor(QtGui.QCursor(QtCore.Qt.PointingHandCursor))
self.ZetaCalculatorButton.setStyleSheet("border: 2px solid;\n"
    "border-radius: 20px;\n"
    "border-color:rgb(69, 69, 69);\n"
    "background-color: rgb(69, 69, 69);\n"
    "font: 18pt \"Sans Serif\"; color:rgb(239, 239, 239);\n"
    ""))
self.ZetaCalculatorButton.setObjectName("ZetaCalculatorButton")
self.NotesButton = QtWidgets.QPushButton(self.MainWidget)
self.NotesButton.setGeometry(QtCore.QRect(700, 460, 200, 70))
self.NotesButton.setCursor(QtGui.QCursor(QtCore.Qt.PointingHandCursor))
self.NotesButton.setStyleSheet("border: 2px solid;\n"
    "border-radius: 20px;\n"
    "border-color:rgb(69, 69, 69);\n"
    "background-color: rgb(69, 69, 69);\n"
    "font: 18pt \"Sans Serif\"; color:rgb(239, 239, 239);\n"
    ""))
self.NotesButton.setObjectName("NotesButton")
self.QuestionText = QtWidgets.QLabel(self.MainWidget)
self.QuestionText.setGeometry(QtCore.QRect(420, 210, 501, 101))
self.QuestionText.setStyleSheet("font: 25pt \"Sans Serif\";
    color:rgb(69, 69, 69);\n"
        "background-color: rgb(239, 239, 239); padding: 5px;")
self.QuestionText.setAlignment(QtCore.Qt.AlignBottom|QtCore.Qt.AlignHCenter)
self.QuestionText.setWordWrap(True)
self.QuestionText.setObjectName("QuestionText")
self.QuestionInput = QtWidgets.QLineEdit(self.MainWidget)
self.QuestionInput.setGeometry(QtCore.QRect(410, 330, 230, 60))
self.QuestionInput.setStyleSheet("background-color: rgb(239,

```

```

239, 239);\n"
    "color: rgb(69, 69, 69);\n"
    "font: 18pt \"Sans Serif\";\n"
    "border: 2px solid;\n"
    "border-radius: 20px;\n"
    "border-color:rgb(69, 69, 69);")
self.QuestionInput.setText("")
self.QuestionInput.setCursorPosition(0)
self.QuestionInput.setAlignment(QtCore.Qt.AlignCenter)
self.QuestionInput.setObjectName("QuestionInput")
self.SubmitButton = QtWidgets.QPushButton(self.MainWidget)
self.SubmitButton.setGeometry(QtCore.QRect(700, 330, 121, 61))
self.SubmitButton.setCursor(QtGui.QCursor(QtCore.Qt.PointingHandCursor))
self.SubmitButton.setStyleSheet("border: 2px solid;\n"
                               "border-radius: 20px;\n"
                               "border-color:rgb(69, 69, 69);\n"
                               "background-color: rgb(69, 69, 69);\n"
                               "font: 18pt \"Sans Serif\"; color:rgb(239, 239, 239);\n"
                               "")
self.SubmitButton.setObjectName("SubmitButton")
self.MessageLabel = QtWidgets.QLabel(self.MainWidget)
self.MessageLabel.setGeometry(QtCore.QRect(410, 400, 530, 41))
self.MessageLabel.setStyleSheet("color: rgb(0, 140, 0);\n"
                               "font: 18pt \"Sans Serif\";")
self.MessageLabel.setAlignment(QtCore.Qt.AlignBottom|QtCore.Qt.AlignHCenter)
self.MessageLabel.setObjectName("MessageLabel")

self.retranslateUi(CalculatorScreen)
QtCore.QMetaObject.connectSlotsByName(CalculatorScreen)

def retranslateUi(self, CalculatorScreen):
    _translate = QtCore.QCoreApplication.translate
    CalculatorScreen.setWindowTitle(_translate("CalculatorScreen",
                                              "Visualising the Riemann Hypothesis - Investigation"))
    self.Title.setText(_translate("CalculatorScreen",
                                 "Investigation"))
    self.GraphsTab.setText(_translate("CalculatorScreen", "Graphs"))
    self.PrimesTab.setText(_translate("CalculatorScreen", "Primes"))
    self.CalculatorTab.setText(_translate("CalculatorScreen",
                                         "Calculator"))
    self.ZeroesTab.setText(_translate("CalculatorScreen", "Zeroes"))
    self.PrevButton.setText(_translate("CalculatorScreen", "Prev"))
    self.NextButton.setText(_translate("CalculatorScreen", "Next"))
    self.SubTitleText.setText(_translate("CalculatorScreen",
                                         "<html><head/><body><p><span style=\"\n"
                                         "font-weight:600;\\>Calculating the Riemann Zeta\n"
                                         "Function</span></p></body></html>"))
    self.MainText.setText(_translate("CalculatorScreen",
                                    "<html><head/><body><p>By hand, working out values of the\n"
                                    "Riemann Zeta Function, is almost impossible and would take a

```

```

lot of effort. However, using a computer program to do this
instead is a much better idea.</p><p>Press the Zeta
Calculator button below to calculate various values of the
zeta function, you could even see if you manage to find a
zeta zero.</p><p>Be sure to also answer this
question!</p></body></html">))
self.ZetaCalculatorButton.setText(_translate("CalculatorScreen",
    "Zeta Calculator"))
self.NotesButton.setText(_translate("CalculatorScreen", "Notes"))
self.QuestionText.setText(_translate("CalculatorScreen",
    "<html><head/><body><p align=\"center\"><span style=\""
    "font-size:16pt;"
    "font-weight:600;\">Question</span></p></body></html>"))
self.QuestionInput.setPlaceholderText(_translate("CalculatorScreen",
    "Answer"))
self.SubmitButton.setText(_translate("CalculatorScreen",
    "Submit"))
self.MessageLabel.setText(_translate("CalculatorScreen",
    "<html><head/><body><p"
    "align=\"center\"><br/></p></body></html>"))

```

program/user_interface/investigation.ui/calculator_leaderboard.py

```

"""
calculator_leaderboard.py
=====
A GUI for the calculator leaderboard page of the investigation section
"""

from PyQt5 import QtCore, QtGui, QtWidgets

class Ui_CalculatorLeaderboardScreen(object):
    def setupUi(self, CalculatorLeaderboardScreen):
        CalculatorLeaderboardScreen.setObjectName("CalculatorLeaderboardScreen")
        CalculatorLeaderboardScreen.resize(1340, 720)
        CalculatorLeaderboardScreen.setSizeGripEnabled(False)
        self.widget = QtWidgets.QWidget(CalculatorLeaderboardScreen)
        self.widget.setGeometry(QtCore.QRect(0, 0, 1340, 720))
        self.widget.setStyleSheet("background-color: rgb(69, 69, 69);")
        self.widget.setObjectName("widget")
        self.Title = QtWidgets.QLabel(self.widget)
        self.Title.setGeometry(QtCore.QRect(560, 20, 221, 51))
        self.Title.setStyleSheet("font: 36pt \"Sans Serif\";"
                               "color:rgb(239, 239, 239);")
        self.Title.setObjectName("Title")
        self.TabBar = QtWidgets.QWidget(self.widget)
        self.TabBar.setGeometry(QtCore.QRect(0, 80, 1340, 80))

```

```

        self.TabBar.setStyleSheet("background-color: rgb(239, 239,
            239);")
        self.TabBar.setObjectName("TabBar")
        self.SingleTab = QtWidgets.QPushButton(self.TabBar)
        self.SingleTab.setGeometry(QtCore.QRect(10, 5, 200, 70))
        self.SingleTab.setCursor(QtGui.QCursor(QtCore.Qt.PointingHandCursor))
        self.SingleTab.setStyleSheet("border: 2px solid;\n"
"border-radius: 20px;\n"
"border-color:rgb(69, 69, 69);\n"
"background-color: rgb(69, 69, 69);\n"
"font: 18pt \\"Sans Serif\\"; color:rgb(239, 239, 239);\n"
"")
        self.SingleTab.setObjectName("SingleTab")
        self.TableTab = QtWidgets.QPushButton(self.TabBar)
        self.TableTab.setGeometry(QtCore.QRect(220, 5, 200, 70))
        self.TableTab.setCursor(QtGui.QCursor(QtCore.Qt.PointingHandCursor))
        self.TableTab.setStyleSheet("border: 2px solid;\n"
"border-radius: 20px;\n"
"border-color:rgb(69, 69, 69);\n"
"background-color: rgb(69, 69, 69);\n"
"font: 18pt \\"Sans Serif\\"; color:rgb(239, 239, 239);\n"
"")
        self.TableTab.setObjectName("TableTab")
        self.LeaderboardTab = QtWidgets.QPushButton(self.TabBar)
        self.LeaderboardTab.setGeometry(QtCore.QRect(430, 5, 200, 70))
        self.LeaderboardTab.setCursor(QtGui.QCursor(QtCore.Qt.PointingHandCursor))
        self.LeaderboardTab.setStyleSheet("border: 2px solid;\n"
"border-radius: 20px;\n"
"border-color:rgb(69, 69, 69);\n"
"background-color: rgb(239, 239, 239);\n"
"font: 18pt \\"Sans Serif\\"; color:rgb(69, 69, 69);\n"
"")
        self.LeaderboardTab.setObjectName("LeaderboardTab")
        self.MainWidget = QtWidgets.QWidget(self.widget)
        self.MainWidget.setGeometry(QtCore.QRect(10, 170, 1320, 540))
        self.MainWidget.setStyleSheet("background-color: rgb(239, 239,
            239);")
        self.MainWidget.setObjectName("MainWidget")
        self.PrevButton = QtWidgets.QPushButton(self.MainWidget)
        self.PrevButton.setGeometry(QtCore.QRect(10, 460, 200, 70))
        self.PrevButton.setCursor(QtGui.QCursor(QtCore.Qt.PointingHandCursor))
        self.PrevButton.setStyleSheet("border: 2px solid;\n"
"border-radius: 20px;\n"
"border-color:rgb(69, 69, 69);\n"
"background-color: rgb(69, 69, 69);\n"
"font: 18pt \\"Sans Serif\\"; color:rgb(239, 239, 239);\n"
"")
        self.PrevButton.setObjectName("PrevButton")
        self.NextButton = QtWidgets.QPushButton(self.MainWidget)

```

```

        self.NextButton.setGeometry(QtCore.QRect(1110, 460, 200, 70))
        self.NextButton.setCursor(QtGui.QCursor(Qt.PointingHandCursor))
        self.NextButton.setStyleSheet("border: 2px solid;\n"
"border-radius: 20px;\n"
"border-color:rgb(69, 69, 69);\n"
"background-color: rgb(69, 69, 69);\n"
"font: 18pt \"Sans Serif\"; color:rgb(239, 239, 239);\n"
""")
        self.NextButton.setObjectName("NextButton")
        self.SubTitleText = QtWidgets.QLabel(self.MainWidget)
        self.SubTitleText.setGeometry(QtCore.QRect(40, 20, 381, 41))
        self.SubTitleText.setStyleSheet("font: 25pt \"Sans Serif\";
                                         color:rgb(69, 69, 69);\n"
"background-color: rgb(239, 239, 239); padding: 5px;")
        self.SubTitleText.setObjectName("SubTitleText")
        self.ErrorLabel = QtWidgets.QLabel(self.MainWidget)
        self.ErrorLabel.setGeometry(QtCore.QRect(400, 400, 541, 61))
        self.ErrorLabel.setStyleSheet("color: rgb(255, 0, 0);\n"
"font: 18pt \"Sans Serif\";")
        self.ErrorLabel.setObjectName("ErrorLabel")
        self.ZetaTable = QtWidgets.QTableWidget(self.MainWidget)
        self.ZetaTable.setGeometry(QtCore.QRect(370, 30, 600, 351))
        self.ZetaTable.setObjectName("ZetaTable")
        self.ZetaTable.setColumnCount(2)
        self.ZetaTable.setRowCount(0)
        item = QtWidgets.QTableWidgetItem()
        item.setTextAlignment(QtCore.Qt.AlignCenter)
        font = QtGui.QFont()
        font.setPointSize(16)
        font.setBold(True)
        font.setWeight(75)
        item.setFont(font)
        self.ZetaTable.setHorizontalHeaderItem(0, item)
        item = QtWidgets.QTableWidgetItem()
        item.setTextAlignment(QtCore.Qt.AlignCenter)
        font = QtGui.QFont()
        font.setPointSize(16)
        font.setBold(True)
        font.setWeight(75)
        item.setFont(font)
        self.ZetaTable.setHorizontalHeaderItem(1, item)

        self.retranslateUi(CalculatorLeaderboardScreen)
        QtCore.QMetaObject.connectSlotsByName(CalculatorLeaderboardScreen)

    def retranslateUi(self, CalculatorLeaderboardScreen):
        _translate = QtCore.QCoreApplication.translate
        CalculatorLeaderboardScreen.setWindowTitle(_translate("CalculatorLeaderboardScreen",
                                                               "Visualising the Riemann Hypothesis - Calculator"))
        self.Title.setText(_translate("CalculatorLeaderboardScreen",

```

```

    "Calculator"))
self.SingleTab.setText(_translate("CalculatorLeaderboardScreen",
    "Single"))
self.TableTab.setText(_translate("CalculatorLeaderboardScreen",
    "Table"))
self.LeaderboardTab.setText(_translate("CalculatorLeaderboardScreen",
    "Leaderboard"))
self.PrevButton.setText(_translate("CalculatorLeaderboardScreen",
    "Prev"))
self.NextButton.setText(_translate("CalculatorLeaderboardScreen",
    "Next"))
self.SubTitleText.setText(_translate("CalculatorLeaderboardScreen",
    "<html><head/><body><p><span style=\""
    "font-weight:600;\">Zeta
    Leaderboard</span></p></body></html>"))
self.ErrorLabel.setText(_translate("CalculatorLeaderboardScreen",
    "<html><head/><body><p>
    align=\"center\"><br/></p></body></html>"))
item = self.ZetaTable.horizontalHeaderItem(0)
item.setText(_translate("CalculatorLeaderboardScreen",
    "Username"))
item = self.ZetaTable.horizontalHeaderItem(1)
item.setText(_translate("CalculatorLeaderboardScreen", "Number
    of Values Computed"))

```

program/user_interface/investigation_ui/graph_plots.py

```

"""
graph_plots.py
=====
A GUI for the graph plots page of the investigation section
"""

from PyQt5 import QtCore, QtGui, QtWidgets

class Ui_GraphPlotsScreen(object):

    def setupUi(self, GraphPlotsScreen):
        GraphPlotsScreen.setObjectName("GraphPlotsScreen")
        GraphPlotsScreen.resize(1340, 720)
        GraphPlotsScreen.setSizeGripEnabled(False)
        self.widget = QtWidgets.QWidget(GraphPlotsScreen)
        self.widget.setGeometry(QtCore.QRect(0, 0, 1340, 720))
        self.widget.setStyleSheet("background-color: rgb(69, 69, 69);")
        self.widget.setObjectName("widget")
        self.Title = QtWidgets.QLabel(self.widget)
        self.Title.setGeometry(QtCore.QRect(540, 20, 271, 51))

```

```

        self.Title.setStyleSheet("font: 36pt \\"Sans Serif\\";
                               color:rgb(239, 239, 239)")
        self.Title.setObjectName("Title")
        self.TabBar = QtWidgets.QWidget(self.widget)
        self.TabBar.setGeometry(QtCore.QRect(0, 80, 1340, 80))
        self.TabBar.setStyleSheet("background-color: rgb(239, 239,
                               239);")
        self.TabBar.setObjectName("TabBar")
        self.GraphsTab = QtWidgets.QPushButton(self.TabBar)
        self.GraphsTab.setGeometry(QtCore.QRect(10, 5, 200, 70))
        self.GraphsTab.setCursor(QtGui.QCursor(QtCore.Qt.PointingHandCursor))
        self.GraphsTab.setStyleSheet("border: 2px solid;\n"
"border-radius: 20px;\n"
"border-color:rgb(69, 69, 69);\n"
"background-color: rgb(239, 239, 239);\n"
"font: 18pt \\"Sans Serif\\"; color:rgb(69, 69, 69);\n"
"")
        self.GraphsTab.setObjectName("GraphsTab")
        self.PrimesTab = QtWidgets.QPushButton(self.TabBar)
        self.PrimesTab.setGeometry(QtCore.QRect(220, 5, 200, 70))
        self.PrimesTab.setCursor(QtGui.QCursor(QtCore.Qt.PointingHandCursor))
        self.PrimesTab.setStyleSheet("border: 2px solid;\n"
"border-radius: 20px;\n"
"border-color:rgb(69, 69, 69);\n"
"background-color: rgb(69, 69, 69);\n"
"font: 18pt \\"Sans Serif\\"; color:rgb(239, 239, 239);\n"
"")
        self.PrimesTab.setObjectName("PrimesTab")
        self.CalculatorTab = QtWidgets.QPushButton(self.TabBar)
        self.CalculatorTab.setGeometry(QtCore.QRect(430, 5, 200, 70))
        self.CalculatorTab.setCursor(QtGui.QCursor(QtCore.Qt.PointingHandCursor))
        self.CalculatorTab.setStyleSheet("border: 2px solid;\n"
"border-radius: 20px;\n"
"border-color:rgb(69, 69, 69);\n"
"background-color: rgb(69, 69, 69);\n"
"font: 18pt \\"Sans Serif\\"; color:rgb(239, 239, 239);\n"
"")
        self.CalculatorTab.setObjectName("CalculatorTab")
        self.ZeroesTab = QtWidgets.QPushButton(self.TabBar)
        self.ZeroesTab.setGeometry(QtCore.QRect(640, 5, 200, 70))
        self.ZeroesTab.setCursor(QtGui.QCursor(QtCore.Qt.PointingHandCursor))
        self.ZeroesTab.setStyleSheet("border: 2px solid;\n"
"border-radius: 20px;\n"
"border-color:rgb(69, 69, 69);\n"
"background-color: rgb(69, 69, 69);\n"
"font: 18pt \\"Sans Serif\\"; color:rgb(239, 239, 239);\n"
"")
        self.ZeroesTab.setObjectName("ZeroesTab")
        self.MainWidget = QtWidgets.QWidget(self.widget)
        self.MainWidget.setGeometry(QtCore.QRect(10, 170, 1320, 540))

```

```

        self.MainWidget.setStyleSheet("background-color: rgb(239, 239,
            239);\n"
"border-radius: 20px;")
        self.MainWidget.setObjectName("MainWidget")
        self.PrevButton = QtWidgets.QPushButton(self.MainWidget)
        self.PrevButton.setGeometry(QtCore.QRect(10, 460, 200, 70))
        self.PrevButton.setCursor(QtGui.QCursor(QtCore.Qt.PointingHandCursor))
        self.PrevButton.setStyleSheet("border: 2px solid;\n"
"border-radius: 20px;\n"
"border-color:rgb(69, 69, 69);\n"
"background-color: rgb(69, 69, 69);\n"
"font: 18pt \\"Sans Serif\\"; color:rgb(239, 239, 239);\n"
""")
        self.PrevButton.setObjectName("PrevButton")
        self.NextButton = QtWidgets.QPushButton(self.MainWidget)
        self.NextButton.setGeometry(QtCore.QRect(1110, 460, 200, 70))
        self.NextButton.setCursor(QtGui.QCursor(QtCore.Qt.PointingHandCursor))
        self.NextButton.setStyleSheet("border: 2px solid;\n"
"border-radius: 20px;\n"
"border-color:rgb(69, 69, 69);\n"
"background-color: rgb(69, 69, 69);\n"
"font: 18pt \\"Sans Serif\\"; color:rgb(239, 239, 239);\n"
""")
        self.NextButton.setObjectName("NextButton")
        self.GraphPlotsButton = QtWidgets.QPushButton(self.MainWidget)
        self.GraphPlotsButton.setGeometry(QtCore.QRect(440, 460, 200,
            70))
        self.GraphPlotsButton.setCursor(QtGui.QCursor(QtCore.Qt.PointingHandCursor))
        self.GraphPlotsButton.setStyleSheet("border: 2px solid;\n"
"border-radius: 20px;\n"
"border-color:rgb(69, 69, 69);\n"
"background-color: rgb(69, 69, 69);\n"
"font: 18pt \\"Sans Serif\\"; color:rgb(239, 239, 239);\n"
""")
        self.GraphPlotsButton.setObjectName("GraphPlotsButton")
        self.SubTitleText = QtWidgets.QLabel(self.MainWidget)
        self.SubTitleText.setGeometry(QtCore.QRect(40, 20, 681, 51))
        self.SubTitleText.setStyleSheet("font: 25pt \\"Sans Serif\\";
            color:rgb(69, 69, 69);\n"
"background-color: rgb(239, 239, 239); padding: 5px;")
        self.SubTitleText.setObjectName("SubTitleText")
        self.MainText = QtWidgets.QLabel(self.MainWidget)
        self.MainText.setGeometry(QtCore.QRect(40, 80, 1251, 341))
        self.MainText.setStyleSheet("font: 13pt \\"Sans Serif\\";
            color:rgb(69, 69, 69);\n"
"background-color: rgb(239, 239, 239); padding: 5px;")
        self.MainText.setWordWrap(True)
        self.MainText.setObjectName("MainText")
        self.ErrorLabel = QtWidgets.QLabel(self.MainWidget)
        self.ErrorLabel.setGeometry(QtCore.QRect(450, 410, 461, 41))

```

```

        self.ErrorLabel.setStyleSheet("color: rgb(255, 0, 0);\n"
"font: 12pt \"Sans Serif\";\n"
        self.ErrorLabel.setObjectName("ErrorLabel")
        self.NotesButton = QtWidgets.QPushButton(self.MainWidget)
        self.NotesButton.setGeometry(QtCore.QRect(700, 460, 200, 70))
        self.NotesButton.setCursor(QtGui.QCursor(QtCore.Qt.PointingHandCursor))
        self.NotesButton.setStyleSheet("border: 2px solid;\n"
"border-radius: 20px;\n"
"border-color:rgb(69, 69, 69);\n"
"background-color: rgb(69, 69, 69);\n"
"font: 18pt \"Sans Serif\"; color:rgb(239, 239, 239);\n"
""")
        self.NotesButton.setObjectName("NotesButton")

        self.retranslateUi(GraphPlotsScreen)
        QtCore.QMetaObject.connectSlotsByName(GraphPlotsScreen)

    def retranslateUi(self, GraphPlotsScreen):
        _translate = QtCore.QCoreApplication.translate
        GraphPlotsScreen.setWindowTitle(_translate("GraphPlotsScreen",
            "Visualising the Riemann Hypothesis - Investigation"))
        self.Title.setText(_translate("GraphPlotsScreen",
            "Investigation"))
        self.GraphsTab.setText(_translate("GraphPlotsScreen", "Graphs"))
        self.PrimesTab.setText(_translate("GraphPlotsScreen", "Primes"))
        self.CalculatorTab.setText(_translate("GraphPlotsScreen",
            "Calculator"))
        self.ZeroesTab.setText(_translate("GraphPlotsScreen", "Zeroes"))
        self.PrevButton.setText(_translate("GraphPlotsScreen", "Prev"))
        self.NextButton.setText(_translate("GraphPlotsScreen", "Next"))
        self.GraphPlotsButton.setText(_translate("GraphPlotsScreen",
            "Graphs Plots"))
        self.SubTitleText.setText(_translate("GraphPlotsScreen",
            "<html><head></head><body><p><span style=\"\n"
            "font-weight:600;\\">Visualising the Riemann\n"
            "Hypothesis</span></p></body></html>"))
        self.MainText.setText(_translate("GraphPlotsScreen",
            "<html><head></head><body><p>As mentioned in the Investigation\n"
            "Section, there are numerous ways that the Riemann\n"
            "Hypothesis can be visualised.</p><p>The main way of\n"
            "visualising the Riemann Hypothesis is through the use of\n"
            "graphs, allowing for a visual representation of many\n"
            "different mathematical functions.</p><p>One of the most\n"
            "famous graphs of the Riemann Hypothesis is the polar graph\n"
            "of the Riemann Zeta Function, along the line Re(s) = 0.5.\n"
            "Polar Graphs allow for complex (2 dimensional) numbers to be\n"
            "represented visually. Unlike usual graphs where the x axis\n"
            "is the input to the function, and the y-axis is the output,\n"
            "the polar graph is only capable of displaying the output of\n"
            "the function, however, if the input domain is already

```

```

defined and known, then this is not an
issue<br/></p><p>Another graph used is the graph of the zeta
zeroes. This graph plots complex numbers on an argand
diagram, where these complex numbers are the roots, or
zeroes of the Riemann Zeta Function. If that input is passed
into the Riemann Zeta Function, and produces a result of 0,
then that point is plotted onto the
Graph.</p><p><br/></p><p>The last graph I am using to
visualise the Riemann Hypothesis is the graph of the Prime
Counting Function, and other functions that are used to
approximate this. This allows you to visualise Carl Gauss\'
Prime Number Theorem, describing the distribution of prime
numbers - A theorem that was proved using the Riemann
Hypothesis</p><p><br/></p></body></html>"))
self.ErrorLabel.setText(_translate("GraphPlotsScreen",
"<html><head/><body><p"
align="center"><br/></p></body></html>"))
self.NotesButton.setText(_translate("GraphPlotsScreen", "Notes"))

```

program/user_interface/investigation_ui/polar_graph.py

```

"""
polar_graph.py
=====
A GUI for the polar graph page of the investigation section
"""

from PyQt5 import QtCore, QtGui, QtWidgets

class Ui_PolarGraphScreen(object):

    def setupUi(self, PolarGraphScreen):
        PolarGraphScreen.setObjectName("PolarGraphScreen")
        PolarGraphScreen.resize(1340, 720)
        PolarGraphScreen.setSizeGripEnabled(False)
        self.widget = QtWidgets.QWidget(PolarGraphScreen)
        self.widget.setGeometry(QtCore.QRect(0, 0, 1340, 720))
        self.widget.setStyleSheet("background-color: rgb(69, 69, 69);")
        self.widget.setObjectName("widget")
        self.Title = QtWidgets.QLabel(self.widget)
        self.Title.setGeometry(QtCore.QRect(550, 20, 281, 51))
        self.Title.setStyleSheet("font: 36pt \\"Sans Serif\\";
                               color:rgb(239, 239, 239);")
        self.Title.setObjectName("Title")
        self.TabBar = QtWidgets.QWidget(self.widget)
        self.TabBar.setGeometry(QtCore.QRect(0, 80, 1340, 80))
        self.TabBar.setStyleSheet("background-color: rgb(239, 239,

```

```

        239);")
    self.TabBar.setObjectName("TabBar")
    self.PolarTab = QtWidgets.QPushButton(self.TabBar)
    self.PolarTab.setGeometry(QtCore.QRect(10, 5, 200, 70))
    self.PolarTab.setCursor(QtGui.QCursor(QtCore.Qt.PointingHandCursor))
    self.PolarTab.setStyleSheet("border: 2px solid;\n"
"border-radius: 20px;\n"
"border-color:rgb(69, 69, 69);\n"
"background-color: rgb(239, 239, 239);\n"
"font: 18pt \"Sans Serif\"; color:rgb(69, 69, 69);\n"
"")

    self.PolarTab.setObjectName("PolarTab")
    self.ZetaZeroesPlotTab = QtWidgets.QPushButton(self.TabBar)
    self.ZetaZeroesPlotTab.setGeometry(QtCore.QRect(220, 5, 200, 70))
    self.ZetaZeroesPlotTab.setCursor(QtGui.QCursor(QtCore.Qt.PointingHandCursor))
    self.ZetaZeroesPlotTab.setStyleSheet("border: 2px solid;\n"
"border-radius: 20px;\n"
"border-color:rgb(69, 69, 69);\n"
"background-color: rgb(69, 69, 69);\n"
"font: 18pt \"Sans Serif\"; color:rgb(239, 239, 239);\n"
"")

    self.ZetaZeroesPlotTab.setObjectName("ZetaZeroesPlotTab")
    self.PrimeTab = QtWidgets.QPushButton(self.TabBar)
    self.PrimeTab.setGeometry(QtCore.QRect(430, 5, 200, 70))
    self.PrimeTab.setCursor(QtGui.QCursor(QtCore.Qt.PointingHandCursor))
    self.PrimeTab.setStyleSheet("border: 2px solid;\n"
"border-radius: 20px;\n"
"border-color:rgb(69, 69, 69);\n"
"background-color: rgb(69, 69, 69);\n"
"font: 18pt \"Sans Serif\"; color:rgb(239, 239, 239);\n"
"")

    self.PrimeTab.setObjectName("PrimeTab")
    self.ZetaApproximationLabel = QtWidgets.QLabel(self.TabBar)
    self.ZetaApproximationLabel.setGeometry(QtCore.QRect(640, 5,
200, 70))
    self.ZetaApproximationLabel.setStyleSheet("border: 2px solid;\n"
"border-radius: 20px;\n"
"border-color:rgb(69, 69, 69);\n"
"background-color: rgb(69, 69, 69);\n"
"font: 18pt \"Sans Serif\"; color:rgb(239, 239, 239);\n"
"")

    self.ZetaApproximationLabel.setObjectName("ZetaApproximationLabel")
    self.ZetaApproximationTab = QtWidgets.QPushButton(self.TabBar)
    self.ZetaApproximationTab.setGeometry(QtCore.QRect(640, 5, 200,
70))
    self.ZetaApproximationTab.setCursor(QtGui.QCursor(QtCore.Qt.PointingHandCursor))
    self.ZetaApproximationTab.setStyleSheet("border-radius: 20px;\n"
"background-color: rgba(0, 0, 0, 0);\n"
"font: 18pt \"Sans Serif\";\n"
"")


```

```

        self.ZetaApproximationTab.setText("")
        self.ZetaApproximationTab.setObjectName("ZetaApproximationTab")
        self.MainWidget = QtWidgets.QWidget(self.widget)
        self.MainWidget.setGeometry(QtCore.QRect(10, 170, 1320, 540))
        self.MainWidget.setStyleSheet("background-color: rgb(239, 239,
            239);\n"
"border-radius: 20px;")
        self.MainWidget.setObjectName("MainWidget")
        self.PrevButton = QtWidgets.QPushButton(self.MainWidget)
        self.PrevButton.setGeometry(QtCore.QRect(10, 460, 200, 70))
        self.PrevButton.setCursor(QtGui.QCursor(QtCore.Qt.PointingHandCursor))
        self.PrevButton.setStyleSheet("border: 2px solid;\n"
"border-radius: 20px;\n"
"border-color:rgb(69, 69, 69);\n"
"background-color: rgb(69, 69, 69);\n"
"font: 18pt \\"Sans Serif\\"; color:rgb(239, 239, 239);\n"
"")
        self.PrevButton.setObjectName("PrevButton")
        self.NextButton = QtWidgets.QPushButton(self.MainWidget)
        self.NextButton.setGeometry(QtCore.QRect(1110, 460, 200, 70))
        self.NextButton.setCursor(QtGui.QCursor(QtCore.Qt.PointingHandCursor))
        self.NextButton.setStyleSheet("border: 2px solid;\n"
"border-radius: 20px;\n"
"border-color:rgb(69, 69, 69);\n"
"background-color: rgb(69, 69, 69);\n"
"font: 18pt \\"Sans Serif\\"; color:rgb(239, 239, 239);\n"
"")
        self.NextButton.setObjectName("NextButton")
        self.GraphButton = QtWidgets.QPushButton(self.MainWidget)
        self.GraphButton.setGeometry(QtCore.QRect(680, 460, 200, 70))
        self.GraphButton.setCursor(QtGui.QCursor(QtCore.Qt.PointingHandCursor))
        self.GraphButton.setStyleSheet("border: 2px solid;\n"
"border-radius: 20px;\n"
"border-color:rgb(69, 69, 69);\n"
"background-color: rgb(69, 69, 69);\n"
"font: 18pt \\"Sans Serif\\"; color:rgb(239, 239, 239);\n"
"")
        self.GraphButton.setObjectName("GraphButton")
        self.GraphInput = QtWidgets.QLineEdit(self.MainWidget)
        self.GraphInput.setGeometry(QtCore.QRect(460, 460, 200, 70))
        self.GraphInput.setStyleSheet("background-color: rgb(239, 239,
            239);\n"
"color: rgb(69, 69, 69);\n"
"font: 18pt \\"Sans Serif\\";\n"
"border: 2px solid;\n"
"border-radius: 20px;\n"
"border-color:rgb(69, 69, 69);\n"
"text-align: center;")

        self.GraphInput.setText("")
        self.GraphInput.setCursorPosition(0)

```

```

        self.GraphInput.setObjectName("GraphInput")
        self.SubTitleText = QtWidgets.QLabel(self.MainWidget)
        self.SubTitleText.setGeometry(QtCore.QRect(40, 20, 821, 41))
        self.SubTitleText.setStyleSheet("font: 25pt \\"Sans Serif\\";
                                      color:rgb(69, 69, 69);\n"
"background-color: rgb(239, 239, 239); padding: 5px;")
        self.SubTitleText.setObjectName("SubTitleText")
        self.MainText = QtWidgets.QLabel(self.MainWidget)
        self.MainText.setGeometry(QtCore.QRect(50, 80, 1251, 341))
        self.MainText.setStyleSheet("font: 13pt \\"Sans Serif\\";
                                   color:rgb(69, 69, 69);\n"
"background-color: rgb(239, 239, 239); padding: 5px;")
        self.MainText.setWordWrap(True)
        self.MainText.setObjectName("MainText")
        self.ErrorLabel = QtWidgets.QLabel(self.MainWidget)
        self.ErrorLabel.setGeometry(QtCore.QRect(450, 410, 461, 41))
        self.ErrorLabel.setStyleSheet("color: rgb(255, 0, 0);\n"
"font: 12pt \\"Sans Serif\\";")
        self.ErrorLabel.setObjectName("ErrorLabel")

        self.retranslateUi(PolarGraphScreen)
        QtCore.QMetaObject.connectSlotsByName(PolarGraphScreen)

    def retranslateUi(self, PolarGraphScreen):
        _translate = QtCore.QCoreApplication.translate
        PolarGraphScreen.setWindowTitle(_translate("PolarGraphScreen",
                                                "Visualising the Riemann Hypothesis - Investigation"))
        self.Title.setText(_translate("PolarGraphScreen", "Graph Plots"))
        self.PolarTab.setText(_translate("PolarGraphScreen", "Polar"))
        self.ZetaZeroesPlotTab.setText(_translate("PolarGraphScreen",
                                                "Zeroes"))
        self.PrimeTab.setText(_translate("PolarGraphScreen", "Prime"))
        self.ZetaApproximationLabel.setText(_translate("PolarGraphScreen",
                                                       "<html><head/><body><p align=\"center\">
                                                       Zeta<br>Approximation</p></body></html>"))
        self.PrevButton.setText(_translate("PolarGraphScreen", "Prev"))
        self.NextButton.setText(_translate("PolarGraphScreen", "Next"))
        self.GraphButton.setText(_translate("PolarGraphScreen", "Graph"))
        self.GraphInput.setToolTip(_translate("PolarGraphScreen",
                                              "<html><head/><body><p align=\"center\">
                                              Re(s)</p></body></html>"))
        self.GraphInput.setPlaceholderText(_translate("PolarGraphScreen",
                                                    "Re(s)"))
        self.SubTitleText.setText(_translate("PolarGraphScreen",
                                             "<html><head/><body><p><span style=\"
                                             font-weight:600;\">Polar Graph of the Riemann Zeta
                                             Function</span></p></body></html>"))
        self.MainText.setText(_translate("PolarGraphScreen",
                                       "<html><head/><body><p>The polar graph of the Riemann Zeta
                                       Function, is very well known due to it's mesmerising shape,

```

```

and mathematical beauty.</p><p>The zeta function has two
inputs and two outputs, that is a real and imaginary input,
and a real and imaginary output.</p><p>The graph takes 1
input, this corresponds to the real input to the zeta
function. The imaginary input is determined by time. Time
and the imaginary input are directly proportional, such that
as time increases, the imaginary input increases by a linear
amount.</p><p>Then at any given time, the graph will plot
the point that is the output of the zeta function at that
moment, and all of the previous outputs. Because the graph
depends on time, it will be constantly changing, and
plotting new points.</p><br/></p><p>Try it out below!
Enter 0.5 for the best results.</p></body></html>"))
self.ErrorLabel.setText(_translate("PolarGraphScreen",
"<html><head/><body><p"
align=\"center\"><br/></p></body></html>"))

```

program/user_interface/investigation_ui/prime_counting_function.py

```

"""
prime_coutning_function.py
=====
A GUI for the prime counting function page of the investigation section
"""

```

```

from PyQt5 import QtCore, QtGui, QtWidgets

class Ui_PrimeCountingFunctionScreen(object):
    def setupUi(self, PrimeCountingFunctionScreen):
        PrimeCountingFunctionScreen.setObjectName("PrimeCountingFunctionScreen")
        PrimeCountingFunctionScreen.resize(1340, 720)
        PrimeCountingFunctionScreen.setSizeGripEnabled(False)
        self.widget = QtWidgets.QWidget(PrimeCountingFunctionScreen)
        self.widget.setGeometry(QtCore.QRect(0, 0, 1340, 720))
        self.widget.setStyleSheet("background-color: rgb(69, 69, 69);")
        self.widget.setObjectName("widget")
        self.Title = QtWidgets.QLabel(self.widget)
        self.Title.setGeometry(QtCore.QRect(550, 20, 251, 51))
        self.Title.setStyleSheet("font: 36pt \\"Sans Serif\\";
                               color:rgb(239, 239, 239)")
        self.Title.setObjectName("Title")
        self.TabBar = QtWidgets.QWidget(self.widget)
        self.TabBar.setGeometry(QtCore.QRect(0, 80, 1340, 80))
        self.TabBar.setStyleSheet("background-color: rgb(239, 239,
                               239);")
        self.TabBar.setObjectName("TabBar")
        self.ZetaZeroesPlotTab = QtWidgets.QPushButton(self.TabBar)

```

```

        self.ZetaZeroesPlotTab.setGeometry(QtCore.QRect(220, 5, 200, 70))
        self.ZetaZeroesPlotTab.setCursor(QtGui.QCursor(Qt.Core.Qt.PointingHandCursor))
        self.ZetaZeroesPlotTab.setStyleSheet("border: 2px solid;\n"
"border-radius: 20px;\n"
"border-color:rgb(69, 69, 69);\n"
"background-color: rgb(69, 69, 69);\n"
"font: 18pt \"Sans Serif\"; color:rgb(239, 239, 239);\n"
")
        self.ZetaZeroesPlotTab.setObjectName("ZetaZeroesPlotTab")
        self.PolarTab = QtWidgets.QPushButton(self.TabBar)
        self.PolarTab.setGeometry(QtCore.QRect(10, 5, 200, 70))
        self.PolarTab.setCursor(QtGui.QCursor(Qt.Core.Qt.PointingHandCursor))
        self.PolarTab.setStyleSheet("border: 2px solid;\n"
"border-radius: 20px;\n"
"border-color:rgb(69, 69, 69);\n"
"background-color: rgb(69, 69, 69);\n"
"font: 18pt \"Sans Serif\"; color:rgb(239, 239, 239);\n"
")
        self.PolarTab.setObjectName("PolarTab")
        self.PrimeTab = QtWidgets.QPushButton(self.TabBar)
        self.PrimeTab.setGeometry(QtCore.QRect(430, 5, 200, 70))
        self.PrimeTab.setCursor(QtGui.QCursor(Qt.Core.Qt.PointingHandCursor))
        self.PrimeTab.setStyleSheet("border: 2px solid;\n"
"border-radius: 20px;\n"
"border-color:rgb(69, 69, 69);\n"
"background-color: rgb(239, 239, 239);\n"
"font: 18pt \"Sans Serif\"; color:rgb(69, 69, 69);\n"
")
        self.PrimeTab.setObjectName("PrimeTab")
        self.ZetaApproximationTab = QtWidgets.QPushButton(self.TabBar)
        self.ZetaApproximationTab.setGeometry(QtCore.QRect(640, 5, 200,
70))
        self.ZetaApproximationTab.setCursor(QtGui.QCursor(Qt.Core.Qt.PointingHandCursor))
        self.ZetaApproximationTab.setStyleSheet("border-radius: 20px;\n"
"background-color: rgba(0, 0, 0, 0);\n"
"font: 18pt \"Sans Serif\";\n"
")
        self.ZetaApproximationTab.setText("")
        self.ZetaApproximationTab.setObjectName("ZetaApproximationTab")
        self.ZetaApproximationLabel = QtWidgets.QLabel(self.TabBar)
        self.ZetaApproximationLabel.setGeometry(QtCore.QRect(640, 5,
200, 70))
        self.ZetaApproximationLabel.setStyleSheet("border: 2px solid;\n"
"border-radius: 20px;\n"
"border-color:rgb(69, 69, 69);\n"
"background-color: rgb(69, 69, 69);\n"
"font: 18pt \"Sans Serif\"; color:rgb(239, 239, 239);\n"
")
        self.ZetaApproximationLabel.setObjectName("ZetaApproximationLabel")
        self.ZetaZeroesPlotTab.raise_()

```

```

        self.PolarTab.raise_()
        self.PrimeTab.raise_()
        self.ZetaApproximationLabel.raise_()
        self.ZetaApproximationTab.raise_()
        self.MainWidget = QtWidgets.QWidget(self.widget)
        self.MainWidget.setGeometry(QtCore.QRect(10, 170, 1320, 540))
        self.MainWidget.setStyleSheet("background-color: rgb(239, 239,
                                      239);\n"
                                     "border-radius: 20px;")
        self.MainWidget.setObjectName("MainWidget")
        self.PrevButton = QtWidgets.QPushButton(self.MainWidget)
        self.PrevButton.setGeometry(QtCore.QRect(10, 460, 200, 70))
        self.PrevButton.setCursor(QtGui.QCursor(QtCore.Qt.PointingHandCursor))
        self.PrevButton.setStyleSheet("border: 2px solid;\n"
                                     "border-radius: 20px;\n"
                                     "border-color:rgb(69, 69, 69);\n"
                                     "background-color: rgb(69, 69, 69);\n"
                                     "font: 18pt \\"Sans Serif\\"; color:rgb(239, 239, 239);\n"
                                     "")
        self.PrevButton.setObjectName("PrevButton")
        self.NextButton = QtWidgets.QPushButton(self.MainWidget)
        self.NextButton.setGeometry(QtCore.QRect(1110, 460, 200, 70))
        self.NextButton.setCursor(QtGui.QCursor(QtCore.Qt.PointingHandCursor))
        self.NextButton.setStyleSheet("border: 2px solid;\n"
                                     "border-radius: 20px;\n"
                                     "border-color:rgb(69, 69, 69);\n"
                                     "background-color: rgb(69, 69, 69);\n"
                                     "font: 18pt \\"Sans Serif\\"; color:rgb(239, 239, 239);\n"
                                     "")
        self.NextButton.setObjectName("NextButton")
        self.GraphButton = QtWidgets.QPushButton(self.MainWidget)
        self.GraphButton.setGeometry(QtCore.QRect(570, 460, 200, 70))
        self.GraphButton.setCursor(QtGui.QCursor(QtCore.Qt.PointingHandCursor))
        self.GraphButton.setStyleSheet("border: 2px solid;\n"
                                     "border-radius: 20px;\n"
                                     "border-color:rgb(69, 69, 69);\n"
                                     "background-color: rgb(69, 69, 69);\n"
                                     "font: 18pt \\"Sans Serif\\"; color:rgb(239, 239, 239);\n"
                                     "")
        self.GraphButton.setObjectName("GraphButton")
        self.SubTitleText = QtWidgets.QLabel(self.MainWidget)
        self.SubTitleText.setGeometry(QtCore.QRect(40, 20, 681, 41))
        self.SubTitleText.setStyleSheet("font: 25pt \\"Sans Serif\\";
                                       color:rgb(69, 69, 69);\n"
                                     "background-color: rgb(239, 239, 239); padding: 5px;")
        self.SubTitleText.setObjectName("SubTitleText")
        self.MainText = QtWidgets.QLabel(self.MainWidget)
        self.MainText.setGeometry(QtCore.QRect(40, 80, 1251, 361))
        self.MainText.setStyleSheet("font: 13pt \\"Sans Serif\\";
                                   color:rgb(69, 69, 69);\n"
                                 )

```

```

"background-color: rgb(239, 239, 239); padding: 5px;")  
        self.MainText.setWordWrap(True)  
        self.MainText.setObjectName("MainText")  
  
        self.retranslateUi(PrimeCountingFunctionScreen)  
        QtCore.QMetaObject.connectSlotsByName(PrimeCountingFunctionScreen)  
  
    def retranslateUi(self, PrimeCountingFunctionScreen):  
        _translate = QtCore.QCoreApplication.translate  
        PrimeCountingFunctionScreen.setWindowTitle(_translate("PrimeCountingFunctionScreen",  
            "Visualising the Riemann Hypothesis - Investigation"))  
        self.Title.setText(_translate("PrimeCountingFunctionScreen",  
            "Graph Plots"))  
        self.ZetaZeroesPlotTab.setText(_translate("PrimeCountingFunctionScreen",  
            "Zeroes"))  
        self.PolarTab.setText(_translate("PrimeCountingFunctionScreen",  
            "Polar"))  
        self.PrimeTab.setText(_translate("PrimeCountingFunctionScreen",  
            "Prime"))  
        self.ZetaApproximationLabel.setText(_translate("PrimeCountingFunctionScreen",  
            "<html><head/><body><p  
            align=\"center\">Zeta<br/>Approximation</p></body></html>"))  
        self.PrevButton.setText(_translate("PrimeCountingFunctionScreen",  
            "Prev"))  
        self.NextButton.setText(_translate("PrimeCountingFunctionScreen",  
            "Next"))  
        self.GraphButton.setText(_translate("PrimeCountingFunctionScreen",  
            "Graph"))  
        self.SubTitleText.setText(_translate("PrimeCountingFunctionScreen",  
            "<html><head/><body><p><span style=\" font-weight:600;\">The  
            Prime Counting Function</span></p></body></html>"))  
        self.MainText.setText(_translate("PrimeCountingFunctionScreen",  
            "<html><head/><body><p>The prime number theorem was a  
            theorem thought of by Carl Friedrich Gauss near the end of  
            the 18th century. This theorem describes the distribution of  
            the prime numbers. It formalises the intuitive idea that as  
            numbers get larger, the prime numbers are less common, by  
            precisely quantifying the rate at which this occurs. One way  
            this theorem was modelled was through the prime counting  
            function (denoted (N)). Where (N) gives the number of primes  
            that are less than or equal to N . Given this we can say  
            that as N  then (N)/log(N) 1, where log(N) is the natural  
            logarithm of N This, therefore, means that: (N)  
            N/log(N).</p><p>This means we can approximate the numbers of  
            primes less than or equal to N, by calculating N/log(N).  
            However, Peter Dirichlet and Carl Friedrich Gauss came up  
            this a much better approximation for (N). They said that:  
            (N) Li(N), where Li(N) is the logarithmic integral of N.  
            Using Li(N) is much more accurate than using N/log(N). As  
            well as the prime counting function, we also have a similar

```

function called the prime power function (denoted by (N)). In the prime counting function, you would get 1 point per prime number (less than or equal to N). But in the prime power function, you get 1 point per prime + $1/2$ point per prime squared + $1/3$ point per prime cubed and so on.</p><p>But how is this related to the Riemann Hypothesis? It turns out that the prime number theorem was proved by using the Riemann Zeta Function. If the Riemann Hypothesis were true, then the difference between the prime counting function, and prime power function was be as small as possible. This is significant as it would lead to many other conjectures involving prime numbers to also be proven true.</p><p>Press the graph button to see the distribution of prime numbers, and how this is approximated using other functions.</p></body></html>))

program/user_interface/investigation.ui/prime_numbers.py

```
"""
prime_numbers.py
=====
A GUI for the prime numbers page of the investigation section
"""

from PyQt5 import QtCore, QtGui, QtWidgets

class Ui_PrimeNumbersScreen(object):

    def setupUi(self, PrimeNumbersScreen):
        PrimeNumbersScreen.setObjectName("PrimeNumbersScreen")
        PrimeNumbersScreen.resize(1340, 720)
        PrimeNumbersScreen.setSizeGripEnabled(False)
        self.widget = QtWidgets.QWidget(PrimeNumbersScreen)
        self.widget.setGeometry(QtCore.QRect(0, 0, 1340, 720))
        self.widget.setStyleSheet("background-color: rgb(69, 69, 69);")
        self.widget.setObjectName("widget")
        self.Title = QtWidgets.QLabel(self.widget)
        self.Title.setGeometry(QtCore.QRect(540, 20, 291, 51))
        self.Title.setStyleSheet("font: 36pt \\"Sans Serif\\";
                               color:rgb(239, 239, 239)")
        self.Title.setObjectName("Title")
        self.TabBar = QtWidgets.QWidget(self.widget)
        self.TabBar.setGeometry(QtCore.QRect(0, 80, 1340, 80))
        self.TabBar.setStyleSheet("background-color: rgb(239, 239,
                                         239);")
        self.TabBar.setObjectName("TabBar")
        self.GraphsTab = QtWidgets.QPushButton(self.TabBar)
```

```

        self.GraphsTab.setGeometry(QtCore.QRect(10, 5, 200, 70))
        self.GraphsTab.setCursor(QtGui.QCursor(Qt.PointingHandCursor))
        self.GraphsTab.setStyleSheet("border: 2px solid;\n"
"border-radius: 20px;\n"
"border-color:rgb(69, 69, 69);\n"
"background-color: rgb(69, 69, 69);\n"
"font: 18pt \"Sans Serif\"; color:rgb(239, 239, 239);\n"
""")
        self.GraphsTab.setObjectName("GraphsTab")
        self.PrimesTab = QtWidgets.QPushButton(self.TabBar)
        self.PrimesTab.setGeometry(QtCore.QRect(220, 5, 200, 70))
        self.PrimesTab.setCursor(QtGui.QCursor(Qt.PointingHandCursor))
        self.PrimesTab.setStyleSheet("border: 2px solid;\n"
"border-radius: 20px;\n"
"border-color:rgb(69, 69, 69);\n"
"background-color: rgb(239, 239, 239);\n"
"font: 18pt \"Sans Serif\"; color:rgb(69, 69, 69);\n"
""")
        self.PrimesTab.setObjectName("PrimesTab")
        self.CalculatorTab = QtWidgets.QPushButton(self.TabBar)
        self.CalculatorTab.setGeometry(QtCore.QRect(430, 5, 200, 70))
        self.CalculatorTab.setCursor(QtGui.QCursor(Qt.PointingHandCursor))
        self.CalculatorTab.setStyleSheet("border: 2px solid;\n"
"border-radius: 20px;\n"
"border-color:rgb(69, 69, 69);\n"
"background-color: rgb(69, 69, 69);\n"
"font: 18pt \"Sans Serif\"; color:rgb(239, 239, 239);\n"
""")
        self.CalculatorTab.setObjectName("CalculatorTab")
        self.ZeroesTab = QtWidgets.QPushButton(self.TabBar)
        self.ZeroesTab.setGeometry(QtCore.QRect(640, 5, 200, 70))
        self.ZeroesTab.setCursor(QtGui.QCursor(Qt.PointingHandCursor))
        self.ZeroesTab.setStyleSheet("border: 2px solid;\n"
"border-radius: 20px;\n"
"border-color:rgb(69, 69, 69);\n"
"background-color: rgb(69, 69, 69);\n"
"font: 18pt \"Sans Serif\"; color:rgb(239, 239, 239);\n"
""")
        self.ZeroesTab.setObjectName("ZeroesTab")
        self.MainWidget = QtWidgets.QWidget(self.widget)
        self.MainWidget.setGeometry(QtCore.QRect(10, 170, 1320, 540))
        self.MainWidget.setStyleSheet("background-color: rgb(239, 239,
239);\n"
"border-radius: 20px;")
        self.MainWidget.setObjectName("MainWidget")
        self.PreviousButton = QtWidgets.QPushButton(self.MainWidget)
        self.PreviousButton.setGeometry(QtCore.QRect(10, 460, 200, 70))
        self.PreviousButton.setCursor(QtGui.QCursor(Qt.PointingHandCursor))
        self.PreviousButton.setStyleSheet("border: 2px solid;\n"
"border-radius: 20px;\n"
)

```

```

"border-color:rgb(69, 69, 69);\n"
"background-color: rgb(69, 69, 69);\n"
"font: 18pt \\"Sans Serif\\"; color:rgb(239, 239, 239);\n"
""")
    self.PrevButton.setObjectName("PrevButton")
    self.NextButton = QtWidgets.QPushButton(self.MainWidget)
    self.NextButton.setGeometry(QtCore.QRect(1110, 460, 200, 70))
    self.NextButton.setCursor(QtGui.QCursor(Qt.PointingHandCursor))
    self.NextButton.setStyleSheet("border: 2px solid;\n"
"border-radius: 20px;\n"
"border-color:rgb(69, 69, 69);\n"
"background-color: rgb(69, 69, 69);\n"
"font: 18pt \\"Sans Serif\\"; color:rgb(239, 239, 239);\n"
""")
    self.NextButton.setObjectName("NextButton")
    self.SubTitleText = QtWidgets.QLabel(self.MainWidget)
    self.SubTitleText.setGeometry(QtCore.QRect(40, 20, 681, 41))
    self.SubTitleText.setStyleSheet("font: 25pt \\"Sans Serif\\";
                                  color:rgb(69, 69, 69);\n"
"background-color: rgb(239, 239, 239); padding: 5px;")
    self.SubTitleText.setObjectName("SubTitleText")
    self.MainText = QtWidgets.QLabel(self.MainWidget)
    self.MainText.setGeometry(QtCore.QRect(40, 80, 1251, 341))
    self.MainText.setStyleSheet("font: 13pt \\"Sans Serif\\";
                               color:rgb(69, 69, 69);\n"
"background-color: rgb(239, 239, 239); padding: 5px;")
    self.MainText.setWordWrap(True)
    self.MainText.setObjectName("MainText")
    self.NotesButton = QtWidgets.QPushButton(self.MainWidget)
    self.NotesButton.setGeometry(QtCore.QRect(570, 460, 200, 70))
    self.NotesButton.setCursor(QtGui.QCursor(Qt.PointingHandCursor))
    self.NotesButton.setStyleSheet("border: 2px solid;\n"
"border-radius: 20px;\n"
"border-color:rgb(69, 69, 69);\n"
"background-color: rgb(69, 69, 69);\n"
"font: 18pt \\"Sans Serif\\"; color:rgb(239, 239, 239);\n"
""")
    self.NotesButton.setObjectName("NotesButton")

    self.retranslateUi(PrimeNumbersScreen)
    QtCore.QMetaObject.connectSlotsByName(PrimeNumbersScreen)

def retranslateUi(self, PrimeNumbersScreen):
    _translate = QtCore.QCoreApplication.translate
    PrimeNumbersScreen.setWindowTitle(_translate("PrimeNumbersScreen",
                                                "Visualising the Riemann Hypothesis - Investigation"))
    self.Title.setText(_translate("PrimeNumbersScreen",
                                "Investigation"))
    self.GraphsTab.setText(_translate("PrimeNumbersScreen",
                                    "Graphs"))

```

```

        self.PrimesTab.setText(_translate("PrimeNumbersScreen",
                                         "Primes"))
        self.CalculatorTab.setText(_translate("PrimeNumbersScreen",
                                         "Calculator"))
        self.ZeroesTab.setText(_translate("PrimeNumbersScreen",
                                         "Zeroes"))
        self.PrevButton.setText(_translate("PrimeNumbersScreen", "Prev"))
        self.NextButton.setText(_translate("PrimeNumbersScreen", "Next"))
        self.SubTitleText.setText(_translate("PrimeNumbersScreen",
                                         "<html><head/><body><p><span style=\""
                                         "font-weight:600;\">Prime Numbers</span></p></body></html>"))
        self.MainText.setText(_translate("PrimeNumbersScreen",
                                         "<html><head/><body><p>The Riemann Hypothesis and Prime
                                         Numbers go hand in hand. A prime number is a number larger
                                         than 1, such that it is only divisible by 1 and the number
                                         itself. </p><p>Just like with the non-trivial zeroes, there
                                         is not real way to calculate prime numbers apart from trial
                                         and error. However, we are able to use the Riemann
                                         Hypothesis in order to understand the distribution of prime
                                         numbers, and if the Riemann Hypothesis was proven to be
                                         true, we would be able to calculate certain values of prime
                                         numbers using a formula. </p><p>Another connection between
                                         the Riemann Hypothesis and the prime numbers, is that
                                         Leonhard Euler proved that the zeta function could be
                                         written as an infinite product over all of the primes such
                                         that  $(s) = (1/(1-p^{-s}))$ , where p is a prime
                                         number.</p><p>Furthermore if the Riemann Hypothesis was
                                         proven to be true, it would mean that the Weak Goldbach
                                         Conjecture is also true, which states that 'All odd
                                         integers greater than 5 are the sum of three primes'.
                                         Furthermore, it would also mean that between consecutive
                                         cube numbers, there would always be at least 1 prime
                                         number.</p><p>All of these theorems and conjectures
                                         highlight the importance of the Riemann hypothesis, and that
                                         if it was to be proven, it would lead to several major
                                         breakthroughs, not only in mathematics but quantum physics
                                         and computer science - fields that heavily use the prime
                                         numbers.</p></body></html>"))
        self.NotesButton.setText(_translate("PrimeNumbersScreen",
                                         "Notes"))

```

`program/user_interface/investigation.ui/single_calculator.py`

```

"""
single_calculator.py
=====
A GUI for the single calculator page of the investigation section
"""

```

```

from PyQt5 import QtCore, QtGui, QtWidgets

class Ui_SingleCalculatorScreen(object):

    def setupUi(self, SingleCalculatorScreen):
        SingleCalculatorScreen.setObjectName("SingleCalculatorScreen")
        SingleCalculatorScreen.resize(1340, 720)
        SingleCalculatorScreen.setSizeGripEnabled(False)
        self.widget = QtWidgets.QWidget(SingleCalculatorScreen)
        self.widget.setGeometry(QtCore.QRect(0, 0, 1340, 720))
        self.widget.setStyleSheet("background-color: rgb(69, 69, 69);")
        self.widget.setObjectName("widget")
        self.Title = QtWidgets.QLabel(self.widget)
        self.Title.setGeometry(QtCore.QRect(560, 20, 221, 51))
        self.Title.setStyleSheet("font: 36pt \\"Sans Serif\\";
                               color:rgb(239, 239, 239)")
        self.Title.setObjectName("Title")
        self.TabBar = QtWidgets.QWidget(self.widget)
        self.TabBar.setGeometry(QtCore.QRect(0, 80, 1340, 80))
        self.TabBar.setStyleSheet("background-color: rgb(239, 239,
                                         239);")
        self.TabBar.setObjectName("TabBar")
        self.SingleTab = QtWidgets.QPushButton(self.TabBar)
        self.SingleTab.setGeometry(QtCore.QRect(10, 5, 200, 70))
        self.SingleTab.setCursor(QtGui.QCursor(QtCore.Qt.PointingHandCursor))
        self.SingleTab.setStyleSheet("border: 2px solid;\n"
                                   "border-radius: 20px;\n"
                                   "border-color:rgb(69, 69, 69);\n"
                                   "background-color: rgb(239, 239,239);\n"
                                   "font: 18pt \\"Sans Serif\\"; color:rgb(69, 69, 69);\n"
                                   ""))
        self.SingleTab.setObjectName("SingleTab")
        self.TableTab = QtWidgets.QPushButton(self.TabBar)
        self.TableTab.setGeometry(QtCore.QRect(220, 5, 200, 70))
        self.TableTab.setCursor(QtGui.QCursor(QtCore.Qt.PointingHandCursor))
        self.TableTab.setStyleSheet("border: 2px solid;\n"
                                   "border-radius: 20px;\n"
                                   "border-color:rgb(69, 69, 69);\n"
                                   "background-color: rgb(69, 69, 69);\n"
                                   "font: 18pt \\"Sans Serif\\"; color:rgb(239, 239, 239);\n"
                                   "")
        self.TableTab.setObjectName("TableTab")
        self.LeaderboardTab = QtWidgets.QPushButton(self.TabBar)
        self.LeaderboardTab.setGeometry(QtCore.QRect(430, 5, 200, 70))
        self.LeaderboardTab.setCursor(QtGui.QCursor(QtCore.Qt.PointingHandCursor))
        self.LeaderboardTab.setStyleSheet("border: 2px solid;\n"
                                         "border-radius: 20px;\n"
                                         "border-color:rgb(69, 69, 69);")

```

```

"background-color: rgb(69, 69, 69);\n"
"font: 18pt \\"Sans Serif\\"; color:rgb(239, 239, 239);\n"
""")
    self.LeaderboardTab.setObjectName("LeaderboardTab")
    self.MainWidget = QtWidgets.QWidget(self.widget)
    self.MainWidget.setGeometry(QtCore.QRect(10, 170, 1320, 540))
    self.MainWidget.setStyleSheet("background-color: rgb(239, 239,
        239);\n"
"border-radius: 20px;")
    self.MainWidget.setObjectName("MainWidget")
    self.PrevButton = QtWidgets.QPushButton(self.MainWidget)
    self.PrevButton.setGeometry(QtCore.QRect(10, 460, 200, 70))
    self.PrevButton.setCursor(QtGui.QCursor(QtCore.Qt.PointingHandCursor))
    self.PrevButton.setStyleSheet("border: 2px solid;\n"
"border-radius: 20px;\n"
"border-color:rgb(69, 69, 69);\n"
"background-color: rgb(69, 69, 69);\n"
"font: 18pt \\"Sans Serif\\"; color:rgb(239, 239, 239);\n"
""")
    self.PrevButton.setObjectName("PrevButton")
    self.NextButton = QtWidgets.QPushButton(self.MainWidget)
    self.NextButton.setGeometry(QtCore.QRect(1110, 460, 200, 70))
    self.NextButton.setCursor(QtGui.QCursor(QtCore.Qt.PointingHandCursor))
    self.NextButton.setStyleSheet("border: 2px solid;\n"
"border-radius: 20px;\n"
"border-color:rgb(69, 69, 69);\n"
"background-color: rgb(69, 69, 69);\n"
"font: 18pt \\"Sans Serif\\"; color:rgb(239, 239, 239);\n"
""")
    self.NextButton.setObjectName("NextButton")
    self.SubTitleText = QtWidgets.QLabel(self.MainWidget)
    self.SubTitleText.setGeometry(QtCore.QRect(40, 20, 421, 51))
    self.SubTitleText.setStyleSheet("font: 25pt \\"Sans Serif\\";
        color:rgb(69, 69, 69);\n"
"background-color: rgb(239, 239, 239); padding: 5px;")
    self.SubTitleText.setObjectName("SubTitleText")
    self.EquationImage = QtWidgets.QLabel(self.MainWidget)
    self.EquationImage.setGeometry(QtCore.QRect(155, 70, 1031, 131))
    self.EquationImage.setText("")
    self.EquationImage.setPixmap(QtGui.QPixmap("ui/investigation_screens/../../media/riemanns_func"))
    self.EquationImage.setObjectName("EquationImage")
    self.ZetaInput = QtWidgets.QLineEdit(self.MainWidget)
    self.ZetaInput.setGeometry(QtCore.QRect(170, 340, 371, 81))
    self.ZetaInput.setStyleSheet("background-color: rgb(239, 239,
        239);\n"
"color: rgb(69, 69, 69);\n"
"font: 36pt \\"Sans Serif\\";\n"
"border: 2px solid;\n"
"border-radius: 20px;\n"
"border-color:rgb(69, 69, 69);")

```

```

        self.ZetaInput.setText("")
        self.ZetaInput.setObjectName("ZetaInput")
        self.ZetaOutput = QtWidgets.QLabel(self.MainWidget)
        self.ZetaOutput.setGeometry(QtCore.QRect(800, 340, 431, 81))
        self.ZetaOutput.setStyleSheet("background-color: rgb(239, 239,
            239);\n"
"color: rgb(69, 69, 69);\n"
"font: 36pt \\"Sans Serif\"\; \n"
"border: 2px solid;\n"
"border-radius: 20px;\n"
"border-color:rgb(69, 69, 69);")
        self.ZetaOutput.setText("")
        self.ZetaOutput.setTextInteractionFlags(QtCore.Qt.LinksAccessibleByMouse|QtCore.Qt.TextSelectable)
        self.ZetaOutput.setObjectName("ZetaOutput")
        self.InputText = QtWidgets.QLabel(self.MainWidget)
        self.InputText.setGeometry(QtCore.QRect(230, 270, 281, 51))
        self.InputText.setStyleSheet("font: 25pt \\"Sans Serif\";
            color:rgb(69, 69, 69);\n"
"background-color: rgb(239, 239, 239); padding: 5px;\n"
"text-decoration: underline;")
        self.InputText.setObjectName("InputText")
        self.OutputText = QtWidgets.QLabel(self.MainWidget)
        self.OutputText.setGeometry(QtCore.QRect(860, 250, 321, 61))
        self.OutputText.setStyleSheet("font: 25pt \\"Sans Serif\";
            color:rgb(69, 69, 69);\n"
"background-color: rgb(239, 239, 239); padding: 5px;\n"
"text-decoration: underline;")
        self.OutputText.setObjectName("OutputText")
        self.DatabaseButton = QtWidgets.QPushButton(self.MainWidget)
        self.DatabaseButton.setGeometry(QtCore.QRect(429, 460, 211, 70))
        self.DatabaseButton.setCursor(QtGui.QCursor(QtCore.Qt.PointingHandCursor))
        self.DatabaseButton.setStyleSheet("border: 2px solid;\n"
"border-radius: 20px;\n"
"border-color:rgb(69, 69, 69); \n"
"background-color: rgb(69, 69, 69);\n"
"font: 18pt \\"Sans Serif\"; color:rgb(239, 239, 239);\n"
"")
        self.DatabaseButton.setObjectName("DatabaseButton")
        self.FileButton = QtWidgets.QPushButton(self.MainWidget)
        self.FileButton.setGeometry(QtCore.QRect(700, 460, 200, 70))
        self.FileButton.setCursor(QtGui.QCursor(QtCore.Qt.PointingHandCursor))
        self.FileButton.setStyleSheet("border: 2px solid;\n"
"border-radius: 20px;\n"
"border-color:rgb(69, 69, 69); \n"
"background-color: rgb(69, 69, 69);\n"
"font: 18pt \\"Sans Serif\"; color:rgb(239, 239, 239);\n"
"")
        self.FileButton.setObjectName("FileButton")
        self.ErrorLabel = QtWidgets.QLabel(self.MainWidget)
        self.ErrorLabel.setGeometry(QtCore.QRect(370, 210, 631, 41))

```

```

        self.ErrorLabel.setStyleSheet("color: rgb(255, 0, 0);\n"
"font: 18pt \"Sans Serif\";\n"
        self.ErrorLabel.setObjectName("ErrorLabel")
        self.CalculateButton = QtWidgets.QPushButton(self.MainWidget)
        self.CalculateButton.setGeometry(QtCore.QRect(570, 350, 200, 70))
        self.CalculateButton.setCursor(QtGui.QCursor(QtCore.Qt.PointingHandCursor))
        self.CalculateButton.setStyleSheet("border: 2px solid;\n"
"border-radius: 20px;\n"
"border-color:rgb(69, 69, 69);\n"
"background-color: rgb(69, 69, 69);\n"
"font: 18pt \"Sans Serif\"; color:rgb(239, 239, 239);\n"
""")
        self.CalculateButton.setObjectName("CalculateButton")
        self.PrevButton.raise_()
        self.NextButton.raise_()
        self.EquationImage.raise_()
        self.ZetaInput.raise_()
        self.SubTitleText.raise_()
        self.ZetaOutput.raise_()
        self.InputText.raise_()
        self.OutputText.raise_()
        self.DatabaseButton.raise_()
        self.FileButton.raise_()
        self.CalculateButton.raise_()
        self.ErrorLabel.raise_()

        self.retranslateUi(SingleCalculatorScreen)
        QtCore.QMetaObject.connectSlotsByName(SingleCalculatorScreen)

    def retranslateUi(self, SingleCalculatorScreen):
        _translate = QtCore.QCoreApplication.translate
        SingleCalculatorScreen.setWindowTitle(_translate("SingleCalculatorScreen",
            "Visualising the Riemann Hypothesis - Calculator"))
        self.Title.setText(_translate("SingleCalculatorScreen",
            "Calculator"))
        self.SingleTab.setText(_translate("SingleCalculatorScreen",
            "Single"))
        self.TableTab.setText(_translate("SingleCalculatorScreen",
            "Table"))
        self.LeaderboardTab.setText(_translate("SingleCalculatorScreen",
            "Leaderboard"))
        self.PrevButton.setText(_translate("SingleCalculatorScreen",
            "Prev"))
        self.NextButton.setText(_translate("SingleCalculatorScreen",
            "Next"))
        self.SubTitleText.setText(_translate("SingleCalculatorScreen",
            "<html><head/><body><p><span style=\"\n            font-weight:600;\">\">Single Zeta\n            Calculator</span></p></body></html>"))
        self.InputText.setText(_translate("SingleCalculatorScreen",

```

```

        "<html><head/><body><p><span style=\""
        font-weight:600;">Input Value
        (s):</span></p></body></html>"))
    self.OutputText.setText(_translate("SingleCalculatorScreen",
        "<html><head/><body><p><span style=\""
        font-weight:600;">Output Value
        (s):</span></p></body></html>"))
    self.DatabaseButton.setText(_translate("SingleCalculatorScreen",
        "Save to database"))
    self.FileButton.setText(_translate("SingleCalculatorScreen",
        "Save to file"))
    self.ErrorLabel.setText(_translate("SingleCalculatorScreen",
        "<html><head/><body><p"
        align=\"center\"><br/></p></body></html>"))
    self.CalculateButton.setText(_translate("SingleCalculatorScreen",
        "Calculate "))

```

program/user_interface/investigation_ui/table_calculator.py

```

"""
table_calculator.py
=====
A GUI for the table calculator page of the investigation section
"""

from PyQt5 import QtCore, QtGui, QtWidgets

class Ui_TableCalculatorScreen(object):

    def setupUi(self, TableCalculatorScreen):
        TableCalculatorScreen.setObjectName("TableCalculatorScreen")
        TableCalculatorScreen.resize(1340, 720)
        TableCalculatorScreen.setSizeGripEnabled(False)
        self.widget = QtWidgets.QWidget(TableCalculatorScreen)
        self.widget.setGeometry(QtCore.QRect(0, 0, 1340, 720))
        self.widget.setStyleSheet("background-color: rgb(69, 69, 69);")
        self.widget.setObjectName("widget")
        self.Title = QtWidgets.QLabel(self.widget)
        self.Title.setGeometry(QtCore.QRect(560, 20, 221, 51))
        self.Title.setStyleSheet("font: 36pt \"Sans Serif\";"
                               "color:rgb(239, 239, 239);")
        self.Title.setObjectName("Title")
        self.TabBar = QtWidgets.QWidget(self.widget)
        self.TabBar.setGeometry(QtCore.QRect(0, 80, 1340, 80))
        self.TabBar.setStyleSheet("background-color: rgb(239, 239,
                               239);")
        self.TabBar.setObjectName("TabBar")

```

```

        self.SingleTab = QtWidgets.QPushButton(self.TabBar)
        self.SingleTab.setGeometry(QtCore.QRect(10, 5, 200, 70))
        self.SingleTab.setCursor(QtGui.QCursor(QtCore.Qt.PointingHandCursor))
        self.SingleTab.setStyleSheet("border: 2px solid;\n"
"border-radius: 20px;\n"
"border-color:rgb(69, 69, 69);\n"
"background-color: rgb(69, 69,69);\n"
"font: 18pt \\"Sans Serif\\"; color:rgb(239, 239, 239);\n"
""")
        self.SingleTab.setObjectName("SingleTab")
        self.TableTab = QtWidgets.QPushButton(self.TabBar)
        self.TableTab.setGeometry(QtCore.QRect(220, 5, 200, 70))
        self.TableTab.setCursor(QtGui.QCursor(QtCore.Qt.PointingHandCursor))
        self.TableTab.setStyleSheet("border: 2px solid;\n"
"border-radius: 20px;\n"
"border-color:rgb(69, 69, 69);\n"
"background-color: rgb(239, 239, 239);\n"
"font: 18pt \\"Sans Serif\\"; color:rgb(69, 69, 69);\n"
""")
        self.TableTab.setObjectName("TableTab")
        self.LeaderboardTab = QtWidgets.QPushButton(self.TabBar)
        self.LeaderboardTab.setGeometry(QtCore.QRect(430, 5, 200, 70))
        self.LeaderboardTab.setCursor(QtGui.QCursor(QtCore.Qt.PointingHandCursor))
        self.LeaderboardTab.setStyleSheet("border: 2px solid;\n"
"border-radius: 20px;\n"
"border-color:rgb(69, 69, 69);\n"
"background-color: rgb(69, 69,69);\n"
"font: 18pt \\"Sans Serif\\"; color:rgb(239, 239, 239);\n"
""")
        self.LeaderboardTab.setObjectName("LeaderboardTab")
        self.MainWidget = QtWidgets.QWidget(self.widget)
        self.MainWidget.setGeometry(QtCore.QRect(10, 170, 1320, 540))
        self.MainWidget.setStyleSheet("background-color: rgb(239, 239,
239);\n"
"border-radius: 20px;")
        self.MainWidget.setObjectName("MainWidget")
        self.PrevButton = QtWidgets.QPushButton(self.MainWidget)
        self.PrevButton.setGeometry(QtCore.QRect(10, 460, 200, 70))
        self.PrevButton.setCursor(QtGui.QCursor(QtCore.Qt.PointingHandCursor))
        self.PrevButton.setStyleSheet("border: 2px solid;\n"
"border-radius: 20px;\n"
"border-color:rgb(69, 69, 69);\n"
"background-color: rgb(69, 69,69);\n"
"font: 18pt \\"Sans Serif\\"; color:rgb(239, 239, 239);\n"
""")
        self.PrevButton.setObjectName("PrevButton")
        self.NextButton = QtWidgets.QPushButton(self.MainWidget)
        self.NextButton.setGeometry(QtCore.QRect(1110, 460, 200, 70))
        self.NextButton.setCursor(QtGui.QCursor(QtCore.Qt.PointingHandCursor))
        self.NextButton.setStyleSheet("border: 2px solid;\n"

```

```

"border-radius: 20px;\n"
"border-color:rgb(69, 69, 69);\n"
"background-color: rgb(69, 69, 69);\n"
"font: 18pt \"Sans Serif\"; color:rgb(239, 239, 239);\n"
""")
    self.NextButton.setObjectName("NextButton")
    self.SubTitleText = QtWidgets.QLabel(self.MainWidget)
    self.SubTitleText.setGeometry(QtCore.QRect(40, 20, 381, 41))
    self.SubTitleText.setStyleSheet("font: 25pt \"Sans Serif\";
        color:rgb(69, 69, 69);\n"
"background-color: rgb(239, 239, 239); padding: 5px;")
    self.SubTitleText.setObjectName("SubTitleText")
    self.StartInput = QtWidgets.QLineEdit(self.MainWidget)
    self.StartInput.setGeometry(QtCore.QRect(485, 110, 421, 81))
    self.StartInput.setStyleSheet("background-color: rgb(239, 239,
        239);\n"
"color: rgb(69, 69, 69);\n"
"font: 18pt \"Sans Serif\";\n"
"border: 2px solid;\n"
"border-radius: 20px;\n"
"border-color:rgb(69, 69, 69);")
        self.StartInput.setText("")
        self.StartInput.setObjectName("StartInput")
        self.StartValueText = QtWidgets.QLabel(self.MainWidget)
        self.StartValueText.setGeometry(QtCore.QRect(100, 120, 291, 61))
        self.StartValueText.setStyleSheet("font: 36pt \"Sans Serif\";
            color:rgb(69, 69, 69);\n"
"background-color: rgb(239, 239, 239); padding: 5px;\n"
"text-decoration: underline;")
            self.StartValueText.setObjectName("StartValueText")
            self.CalculateButton = QtWidgets.QPushButton(self.MainWidget)
            self.CalculateButton.setGeometry(QtCore.QRect(980, 215, 200, 70))
            self.CalculateButton.setCursor(QtGui.QCursor(QtCore.Qt.PointingHandCursor))
            self.CalculateButton.setStyleSheet("border: 2px solid;\n"
"border-radius: 20px;\n"
"border-color:rgb(69, 69, 69);\n"
"background-color: rgb(69, 69, 69);\n"
"font: 18pt \"Sans Serif\"; color:rgb(239, 239, 239);\n"
""")
                self.CalculateButton.setObjectName("CalculateButton")
                self.StepText = QtWidgets.QLabel(self.MainWidget)
                self.StepText.setGeometry(QtCore.QRect(100, 220, 291, 61))
                self.StepText.setStyleSheet("font: 36pt \"Sans Serif\";
                    color:rgb(69, 69, 69);\n"
"background-color: rgb(239, 239, 239); padding: 5px;\n"
"text-decoration: underline;")
                    self.StepText.setObjectName("StepText")
                    self.StepInput = QtWidgets.QLineEdit(self.MainWidget)
                    self.StepInput.setGeometry(QtCore.QRect(485, 210, 421, 81))
                    self.StepInput.setStyleSheet("background-color: rgb(239, 239,
                        239);")

```

```

        239);\n"
"color: rgb(69, 69, 69);\n"
"font: 18pt \\"Sans Serif\\\";\n"
"border: 2px solid;\n"
"border-radius: 20px;\n"
"border-color:rgb(69, 69, 69);")
    self.StepInput.setText("")
    self.StepInput.setObjectName("StepInput")
    self.ErrorLabel = QtWidgets.QLabel(self.MainWidget)
    self.ErrorLabel.setGeometry(QtCore.QRect(400, 410, 701, 61))
    self.ErrorLabel.setStyleSheet("color: rgb(255, 0, 0);\n"
"font: 18pt \\"Sans Serif\\\";")
    self.ErrorLabel.setObjectName("ErrorLabel")
    self.NoOfValuesText = QtWidgets.QLabel(self.MainWidget)
    self.NoOfValuesText.setGeometry(QtCore.QRect(10, 320, 381, 61))
    self.NoOfValuesText.setStyleSheet("font: 36pt \\"Sans Serif\\\"";
        color:rgb(69, 69, 69);\n"
"background-color: rgb(239, 239, 239); padding: 5px;\n"
"text-decoration: underline;")
    self.NoOfValuesText.setObjectName("NoOfValuesText")
    self.NoOfValuesInput = QtWidgets.QLineEdit(self.MainWidget)
    self.NoOfValuesInput.setGeometry(QtCore.QRect(485, 310, 421, 81))
    self.NoOfValuesInput.setStyleSheet("background-color: rgb(239,
        239, 239);\n"
"color: rgb(69, 69, 69);\n"
"font: 18pt \\"Sans Serif\\\";\n"
"border: 2px solid;\n"
"border-radius: 20px;\n"
"border-color:rgb(69, 69, 69);")
    self.NoOfValuesInput.setText("")
    self.NoOfValuesInput.setObjectName("NoOfValuesInput")
    self.PrevButton.raise_()
    self.NextButton.raise_()
    self.StartInput.raise_()
    self.SubTitleText.raise_()
    self.StartValueText.raise_()
    self.CalculateButton.raise_()
    self.StepText.raise_()
    self.StepInput.raise_()
    self.ErrorLabel.raise_()
    self.NoOfValuesText.raise_()
    self.NoOfValuesInput.raise_()

    self.retranslateUi(TableCalculatorScreen)
    QtCore.QMetaObject.connectSlotsByName(TableCalculatorScreen)

def retranslateUi(self, TableCalculatorScreen):
    _translate = QtCore.QCoreApplication.translate
    TableCalculatorScreen.setWindowTitle(_translate("TableCalculatorScreen",
        "Visualising the Riemann Hypothesis - Calculator")))

```

```

        self.Title.setText(_translate("TableCalculatorScreen",
            "Calculator"))
        self.SingleTab.setText(_translate("TableCalculatorScreen",
            "Single"))
        self.TableTab.setText(_translate("TableCalculatorScreen",
            "Table"))
        self.LeaderboardTab.setText(_translate("TableCalculatorScreen",
            "Leaderboard"))
        self.PrevButton.setText(_translate("TableCalculatorScreen",
            "Prev"))
        self.NextButton.setText(_translate("TableCalculatorScreen",
            "Next"))
        self.SubTitleText.setText(_translate("TableCalculatorScreen",
            "<html><head/><body><p><span style=\""
            "font-weight:600;\">Table Zeta"
            "Calculation</span></p></body></html>"))
        self.StartInput.setPlaceholderText(_translate("TableCalculatorScreen",
            " Enter Start Value"))
        self.StartValueText.setText(_translate("TableCalculatorScreen",
            "<html><head/><body><p align=\"right\"><span style=\""
            "font-weight:600;\">Start Value:</span></p></body></html>"))
        self.CalculateButton.setText(_translate("TableCalculatorScreen",
            "Calculate "))
        self.StepText.setText(_translate("TableCalculatorScreen",
            "<html><head/><body><p align=\"right\"><span style=\""
            "font-weight:600;\">Step:</span></p></body></html>"))
        self.StepInput.setPlaceholderText(_translate("TableCalculatorScreen",
            " Enter Step Value"))
        self.ErrorLabel.setText(_translate("TableCalculatorScreen",
            "<html><head/><body><p"
            "align=\"center\"><br/></p></body></html>"))
        self.NoOfValuesText.setText(_translate("TableCalculatorScreen",
            "<html><head/><body><p align=\"right\"><span style=\""
            "font-weight:600;\">No. of Values:</span></p></body></html>"))
        self.NoOfValuesInput.setPlaceholderText(_translate("TableCalculatorScreen",
            " Enter No. of Values"))

```

program/user_interface/investigation_ui/table_calculator_2.py

```

"""


```

```
from PyQt5 import QtCore, QtGui, QtWidgets
```

```

class Ui_TableCalculator2Screen(object):

    def setupUi(self, TableCalculator2Screen):
        TableCalculator2Screen.setObjectName("TableCalculator2Screen")
        TableCalculator2Screen.resize(1340, 720)
        TableCalculator2Screen.setSizeGripEnabled(False)
        self.widget = QtWidgets.QWidget(TableCalculator2Screen)
        self.widget.setGeometry(QtCore.QRect(0, 0, 1340, 720))
        self.widget.setStyleSheet("background-color: rgb(69, 69, 69);")
        self.widget.setObjectName("widget")
        self.Title = QtWidgets.QLabel(self.widget)
        self.Title.setGeometry(QtCore.QRect(560, 20, 221, 51))
        self.Title.setStyleSheet("font: 36pt \\"Sans Serif\\";\n"
                               "color:rgb(239, 239, 239)")
        self.Title.setObjectName("Title")
        self.TabBar = QtWidgets.QWidget(self.widget)
        self.TabBar.setGeometry(QtCore.QRect(0, 80, 1340, 80))
        self.TabBar.setStyleSheet("background-color: rgb(239, 239,\n"
                               "239);")
        self.TabBar.setObjectName("TabBar")
        self.SingleTab = QtWidgets.QPushButton(self.TabBar)
        self.SingleTab.setGeometry(QtCore.QRect(10, 5, 200, 70))
        self.SingleTab.setCursor(QtGui.QCursor(QtCore.Qt.PointingHandCursor))
        self.SingleTab.setStyleSheet("border: 2px solid;\n"
                                   "border-radius: 20px;\n"
                                   "border-color:rgb(69, 69, 69);\n"
                                   "background-color: rgb(69, 69,69);\n"
                                   "font: 18pt \\"Sans Serif\\"; color:rgb(239, 239, 239);\n"
                                   ""))
        self.SingleTab.setObjectName("SingleTab")
        self.TableTab = QtWidgets.QPushButton(self.TabBar)
        self.TableTab.setGeometry(QtCore.QRect(220, 5, 200, 70))
        self.TableTab.setCursor(QtGui.QCursor(QtCore.Qt.PointingHandCursor))
        self.TableTab.setStyleSheet("border: 2px solid;\n"
                                   "border-radius: 20px;\n"
                                   "border-color:rgb(69, 69, 69);\n"
                                   "background-color: rgb(239, 239, 239);\n"
                                   "font: 18pt \\"Sans Serif\\"; color:rgb(69, 69, 69);\n"
                                   ""))
        self.TableTab.setObjectName("TableTab")
        self.LeaderboardTab = QtWidgets.QPushButton(self.TabBar)
        self.LeaderboardTab.setGeometry(QtCore.QRect(430, 5, 200, 70))
        self.LeaderboardTab.setCursor(QtGui.QCursor(QtCore.Qt.PointingHandCursor))
        self.LeaderboardTab.setStyleSheet("border: 2px solid;\n"
                                   "border-radius: 20px;\n"
                                   "border-color:rgb(69, 69, 69);\n"
                                   "background-color: rgb(69, 69, 69);\n"
                                   "font: 18pt \\"Sans Serif\\"; color:rgb(239, 239, 239);\n"
                                   ""))
        self.LeaderboardTab.setObjectName("LeaderboardTab")

```

```

        self.MainWidget = QtWidgets.QWidget(self.widget)
        self.MainWidget.setGeometry(QtCore.QRect(10, 170, 1320, 540))
        self.MainWidget.setStyleSheet("background-color: rgb(239, 239,
            239);\n"
    "border-radius: 20px;")
        self.MainWidget.setObjectName("MainWidget")
        self.PrevButton = QtWidgets.QPushButton(self.MainWidget)
        self.PrevButton.setGeometry(QtCore.QRect(10, 460, 200, 70))
        self.PrevButton.setCursor(QtGui.QCursor(QtCore.Qt.PointingHandCursor))
        self.PrevButton.setStyleSheet("border: 2px solid;\n"
    "border-radius: 20px;\n"
    "border-color:rgb(69, 69, 69);\n"
    "background-color: rgb(69, 69, 69);\n"
    "font: 18pt \"Sans Serif\"; color:rgb(239, 239, 239);\n"
    "")
        self.PrevButton.setObjectName("PrevButton")
        self.NextButton = QtWidgets.QPushButton(self.MainWidget)
        self.NextButton.setGeometry(QtCore.QRect(1110, 460, 200, 70))
        self.NextButton.setCursor(QtGui.QCursor(QtCore.Qt.PointingHandCursor))
        self.NextButton.setStyleSheet("border: 2px solid;\n"
    "border-radius: 20px;\n"
    "border-color:rgb(69, 69, 69);\n"
    "background-color: rgb(69, 69, 69);\n"
    "font: 18pt \"Sans Serif\"; color:rgb(239, 239, 239);\n"
    "")
        self.NextButton.setObjectName("NextButton")
        self.SubTitleText = QtWidgets.QLabel(self.MainWidget)
        self.SubTitleText.setGeometry(QtCore.QRect(40, 20, 381, 41))
        self.SubTitleText.setStyleSheet("font: 25pt \"Sans Serif\";
            color:rgb(69, 69, 69);\n"
    "background-color: rgb(239, 239, 239); padding: 5px;")
        self.SubTitleText.setObjectName("SubTitleText")
        self.ErrorLabel = QtWidgets.QLabel(self.MainWidget)
        self.ErrorLabel.setGeometry(QtCore.QRect(110, 395, 1120, 61))
        self.ErrorLabel.setStyleSheet("color: rgb(255, 0, 0);\n"
    "font: 18pt \"Sans Serif\";")
        self.ErrorLabel.setObjectName("ErrorLabel")
        self.ZetaTable = QtWidgets.QTableWidget(self.MainWidget)
        self.ZetaTable.setGeometry(QtCore.QRect(510, 30, 300, 351))
        self.ZetaTable.setObjectName("ZetaTable")
        self.ZetaTable.setColumnCount(2)
        self.ZetaTable.setRowCount(0)
        item = QtWidgets.QTableWidgetItem()
        item.setTextAlignment(QtCore.Qt.AlignCenter)
        font = QtGui.QFont()
        font.setPointSize(16)
        font.setBold(True)
        font.setWeight(75)
        item.setFont(font)
        self.ZetaTable.setHorizontalHeaderItem(0, item)

```

```

        item = QtWidgets.QTableWidgetItem()
        item.setTextAlignment(QtCore.Qt.AlignCenter)
        font = QtGui.QFont()
        font.setPointSize(16)
        font.setBold(True)
        font.setWeight(75)
        item.setFont(font)
        self.ZetaTable.setHorizontalHeaderItem(1, item)
        self.DatabaseButton = QtWidgets.QPushButton(self.MainWidget)
        self.DatabaseButton.setGeometry(QtCore.QRect(420, 460, 200, 70))
        self.DatabaseButton.setCursor(QtGui.QCursor(QtCore.Qt.PointingHandCursor))
        self.DatabaseButton.setStyleSheet("border: 2px solid;\n"
"border-radius: 20px;\n"
"border-color:rgb(69, 69, 69);\n"
"background-color: rgb(69, 69, 69);\n"
"font: 18pt \\"Sans Serif\\"; color:rgb(239, 239, 239);\n"
"")
        self.DatabaseButton.setObjectName("DatabaseButton")
        self.FileButton = QtWidgets.QPushButton(self.MainWidget)
        self.FileButton.setGeometry(QtCore.QRect(720, 460, 200, 70))
        self.FileButton.setCursor(QtGui.QCursor(QtCore.Qt.PointingHandCursor))
        self.FileButton.setStyleSheet("border: 2px solid;\n"
"border-radius: 20px;\n"
"border-color:rgb(69, 69, 69);\n"
"background-color: rgb(69, 69, 69);\n"
"font: 18pt \\"Sans Serif\\"; color:rgb(239, 239, 239);\n"
"")
        self.FileButton.setObjectName("FileButton")

        self.retranslateUi(TableCalculator2Screen)
        QtCore.QMetaObject.connectSlotsByName(TableCalculator2Screen)

    def retranslateUi(self, TableCalculator2Screen):
        _translate = QtCore.QCoreApplication.translate
        TableCalculator2Screen.setWindowTitle(_translate("TableCalculator2Screen",
            "Visualising the Riemann Hypothesis - Calculator"))
        self.Title.setText(_translate("TableCalculator2Screen",
            "Calculator"))
        self.SingleTab.setText(_translate("TableCalculator2Screen",
            "Single"))
        self.TableTab.setText(_translate("TableCalculator2Screen",
            "Table"))
        self.LeaderboardTab.setText(_translate("TableCalculator2Screen",
            "Leaderboard"))
        self.PrevButton.setText(_translate("TableCalculator2Screen",
            "Prev"))
        self.NextButton.setText(_translate("TableCalculator2Screen",
            "Next"))
        self.SubTitleText.setText(_translate("TableCalculator2Screen",
            "<html><head/><body><p><span style=\""))

```

```

        font-weight:600;">Table Zeta
    Calculation</span></p></body></html">))
self.ErrorLabel.setText(_translate("TableCalculator2Screen",
        "<html><head/><body><p"
        align=\"center\"><br/></p></body></html>"))
item = self.ZetaTable.horizontalHeaderItem(0)
item.setText(_translate("TableCalculator2Screen", "Input (s)"))
item = self.ZetaTable.horizontalHeaderItem(1)
item.setText(_translate("TableCalculator2Screen", "Output (s)"))
self.DatabaseButton.setText(_translate("TableCalculator2Screen",
        "Save to database"))
self.FileButton.setText(_translate("TableCalculator2Screen",
        "Save to file"))

```

program/user_interface/investigation_ui/zeroes.py

```

"""
zeroes.py
=====
A GUI for the zeroes page of the investigation section
"""

from PyQt5 import QtCore, QtGui, QtWidgets

class Ui_ZeroesScreen(object):

    def setupUi(self, ZeroesScreen):
        ZeroesScreen.setObjectName("ZeroesScreen")
        ZeroesScreen.resize(1340, 720)
        ZeroesScreen.setSizeGripEnabled(False)
        self.widget = QtWidgets.QWidget(ZeroesScreen)
        self.widget.setGeometry(QtCore.QRect(0, 0, 1340, 720))
        self.widget.setStyleSheet("background-color: rgb(69, 69, 69);")
        self.widget.setObjectName("widget")
        self.Title = QtWidgets.QLabel(self.widget)
        self.Title.setGeometry(QtCore.QRect(530, 20, 291, 51))
        self.Title.setStyleSheet("font: 36pt \"Sans Serif\";"
                               "color:rgb(239, 239, 239);")
        self.Title.setObjectName("Title")
        self.TabBar = QtWidgets.QWidget(self.widget)
        self.TabBar.setGeometry(QtCore.QRect(0, 80, 1340, 80))
        self.TabBar.setStyleSheet("background-color: rgb(239, 239,
                           239);")
        self.TabBar.setObjectName("TabBar")
        self.GraphsTab = QtWidgets.QPushButton(self.TabBar)
        self.GraphsTab.setGeometry(QtCore.QRect(10, 5, 200, 70))
        self.GraphsTab.setCursor(QtGui.QCursor(QtCore.Qt.PointingHandCursor))

```

```

        self.GraphsTab.setStyleSheet("border: 2px solid;\n"
"border-radius: 20px;\n"
"border-color:rgb(69, 69, 69);\n"
"background-color: rgb(69, 69,69);\n"
"font: 18pt \\"Sans Serif\\"; color:rgb(239, 239, 239);\n"
"")

        self.GraphsTab.setObjectName("GraphsTab")
        self.PrimesTab = QtWidgets.QPushButton(self.TabBar)
        self.PrimesTab.setGeometry(QtCore.QRect(220, 5, 200, 70))
        self.PrimesTab.setCursor(QtGui.QCursor(QtCore.Qt.PointingHandCursor))
        self.PrimesTab.setStyleSheet("border: 2px solid;\n"
"border-radius: 20px;\n"
"border-color:rgb(69, 69, 69);\n"
"background-color: rgb(69, 69, 69);\n"
"font: 18pt \\"Sans Serif\\"; color:rgb(239, 239, 239);\n"
"")

        self.PrimesTab.setObjectName("PrimesTab")
        self.CalculatorTab = QtWidgets.QPushButton(self.TabBar)
        self.CalculatorTab.setGeometry(QtCore.QRect(430, 5, 200, 70))
        self.CalculatorTab.setCursor(QtGui.QCursor(QtCore.Qt.PointingHandCursor))
        self.CalculatorTab.setStyleSheet("border: 2px solid;\n"
"border-radius: 20px;\n"
"border-color:rgb(69, 69, 69);\n"
"background-color: rgb(69, 69, 69);\n"
"font: 18pt \\"Sans Serif\\"; color:rgb(239, 239, 239);\n"
"")

        self.CalculatorTab.setObjectName("CalculatorTab")
        self.ZeroesTab = QtWidgets.QPushButton(self.TabBar)
        self.ZeroesTab.setGeometry(QtCore.QRect(640, 5, 200, 70))
        self.ZeroesTab.setCursor(QtGui.QCursor(QtCore.Qt.PointingHandCursor))
        self.ZeroesTab.setStyleSheet("border: 2px solid;\n"
"border-radius: 20px;\n"
"border-color:rgb(69, 69, 69);\n"
"background-color: rgb(239, 239, 239);\n"
"font: 18pt \\"Sans Serif\\"; color:rgb(69, 69, 69);\n"
"")

        self.ZeroesTab.setObjectName("ZeroesTab")
        self.MainWidget = QtWidgets.QWidget(self.widget)
        self.MainWidget.setGeometry(QtCore.QRect(10, 170, 1320, 540))
        self.MainWidget.setStyleSheet("background-color: rgb(239, 239,
239);\n"
"border-radius: 20px;")

        self.MainWidget.setObjectName("MainWidget")
        self.PreviousButton = QtWidgets.QPushButton(self.MainWidget)
        self.PreviousButton.setGeometry(QtCore.QRect(10, 460, 200, 70))
        self.PreviousButton.setCursor(QtGui.QCursor(QtCore.Qt.PointingHandCursor))
        self.PreviousButton.setStyleSheet("border: 2px solid;\n"
"border-radius: 20px;\n"
"border-color:rgb(69, 69, 69);\n"
"background-color: rgb(69, 69, 69);\n"
"")


```

```

"font: 18pt \\"Sans Serif\\"; color:rgb(239, 239, 239);\n"
""")
    self.PrevButton.setObjectName("PrevButton")
    self.NextButton = QtWidgets.QPushButton(self.MainWidget)
    self.NextButton.setGeometry(QtCore.QRect(1110, 460, 200, 70))
    self.NextButton.setCursor(QtGui.QCursor(QtCore.Qt.PointingHandCursor))
    self.NextButton.setStyleSheet("border: 2px solid;\n"
"border-radius: 20px;\n"
"border-color:rgb(69, 69, 69);\n"
"background-color: rgb(69, 69, 69);\n"
"font: 18pt \\"Sans Serif\\"; color:rgb(239, 239, 239);\n"
""")
    self.NextButton.setObjectName("NextButton")
    self.SubTitleText = QtWidgets.QLabel(self.MainWidget)
    self.SubTitleText.setGeometry(QtCore.QRect(40, 20, 901, 51))
    self.SubTitleText.setStyleSheet("font: 25pt \\"Sans Serif\\";
color:rgb(69, 69, 69);\n"
"background-color: rgb(239, 239, 239); padding: 5px;")
    self.SubTitleText.setObjectName("SubTitleText")
    self.MainText = QtWidgets.QLabel(self.MainWidget)
    self.MainText.setGeometry(QtCore.QRect(30, 70, 1251, 211))
    self.MainText.setStyleSheet("font: 13pt \\"Sans Serif\\";
color:rgb(69, 69, 69);\n"
"background-color: rgb(239, 239, 239); padding: 5px;")
    self.MainText.setWordWrap(True)
    self.MainText.setObjectName("MainText")
    self.CalculateButton = QtWidgets.QPushButton(self.MainWidget)
    self.CalculateButton.setGeometry(QtCore.QRect(440, 460, 200, 70))
    self.CalculateButton.setCursor(QtGui.QCursor(QtCore.Qt.PointingHandCursor))
    self.CalculateButton.setStyleSheet("border: 2px solid;\n"
"border-radius: 20px;\n"
"border-color:rgb(69, 69, 69);\n"
"background-color: rgb(69, 69, 69);\n"
"font: 18pt \\"Sans Serif\\"; color:rgb(239, 239, 239);\n"
""")
    self.CalculateButton.setObjectName("CalculateButton")
    self.NotesButton = QtWidgets.QPushButton(self.MainWidget)
    self.NotesButton.setGeometry(QtCore.QRect(700, 460, 200, 70))
    self.NotesButton.setCursor(QtGui.QCursor(QtCore.Qt.PointingHandCursor))
    self.NotesButton.setStyleSheet("border: 2px solid;\n"
"border-radius: 20px;\n"
"border-color:rgb(69, 69, 69);\n"
"background-color: rgb(69, 69, 69);\n"
"font: 18pt \\"Sans Serif\\"; color:rgb(239, 239, 239);\n"
""")
    self.NotesButton.setObjectName("NotesButton")
    self.QuestionText = QtWidgets.QLabel(self.MainWidget)
    self.QuestionText.setGeometry(QtCore.QRect(420, 270, 501, 71))
    self.QuestionText.setStyleSheet("font: 25pt \\"Sans Serif\\";
color:rgb(69, 69, 69);\n"

```

```

"background-color: rgb(239, 239, 239); padding: 5px;")
    self.QuestionText.setAlignment(QtCore.Qt.AlignBottom|QtCore.Qt.AlignHCenter)
    self.QuestionText.setWordWrap(True)
    self.QuestionText.setObjectName("QuestionText")
    self.QuestionInput = QtWidgets.QLineEdit(self.MainWidget)
    self.QuestionInput.setGeometry(QtCore.QRect(390, 350, 230, 60))
    self.QuestionInput.setStyleSheet("background-color: rgb(239,
        239, 239);\n"
"color: rgb(69, 69, 69);\n"
"font: 18pt \\"Sans Serif\\";\n"
"border: 2px solid;\n"
"border-radius: 20px;\n"
"border-color:rgb(69, 69, 69);")
        self.QuestionInput.setText("")
        self.QuestionInput.setCursorPosition(0)
        self.QuestionInput.setAlignment(QtCore.Qt.AlignCenter)
        self.QuestionInput.setObjectName("QuestionInput")
        self.SubmitButton = QtWidgets.QPushButton(self.MainWidget)
        self.SubmitButton.setGeometry(QtCore.QRect(720, 350, 121, 61))
        self.SubmitButton.setCursor(QtGui.QCursor(QtCore.Qt.PointingHandCursor))
        self.SubmitButton.setStyleSheet("border: 2px solid;\n"
"border-radius: 20px;\n"
"border-color:rgb(69, 69, 69);\n"
"background-color: rgb(69, 69, 69);\n"
"font: 18pt \\"Sans Serif\\"; color:rgb(239, 239, 239);\n"
"")
        self.SubmitButton.setObjectName("SubmitButton")
        self.MessageLabel = QtWidgets.QLabel(self.MainWidget)
        self.MessageLabel.setGeometry(QtCore.QRect(410, 410, 530, 41))
        self.MessageLabel.setStyleSheet("color: rgb(0, 140, 0);\n"
"font: 18pt \\"Sans Serif\\\";")
        self.MessageLabel.setAlignment(QtCore.Qt.AlignBottom|QtCore.Qt.AlignHCenter)
        self.MessageLabel.setObjectName("MessageLabel")
        self.PrevButton.raise_()
        self.NextButton.raise_()
        self.MainText.raise_()
        self.CalculateButton.raise_()
        self.NotesButton.raise_()
        self.QuestionText.raise_()
        self.QuestionInput.raise_()
        self.MessageLabel.raise_()
        self.SubTitleText.raise_()
        self.SubmitButton.raise_()

        self.retranslateUi(ZeroesScreen)
        QtCore.QMetaObject.connectSlotsByName(ZeroesScreen)

def retranslateUi(self, ZeroesScreen):
    _translate = QtCore.QCoreApplication.translate
    ZeroesScreen.setWindowTitle(_translate("ZeroesScreen",

```

```

    "Visualising the Riemann Hypothesis - Investigation"))
self.Title.setText(_translate("ZeroesScreen", "Investigation"))
self.GraphsTab.setText(_translate("ZeroesScreen", "Graphs"))
self.PrimesTab.setText(_translate("ZeroesScreen", "Primes"))
self.CalculatorTab.setText(_translate("ZeroesScreen",
    "Calculator"))
self.ZeroesTab.setText(_translate("ZeroesScreen", "Zeroes"))
self.PrevButton.setText(_translate("ZeroesScreen", "Prev"))
self.NextButton.setText(_translate("ZeroesScreen", "Next"))
self.SubTitleText.setText(_translate("ZeroesScreen",
    "<html><head/><body><p><span style=\""
    "font-weight:600;\">Calculating the Zeroes of the Riemann
    Zeta Function</span></p></body></html>"))
self.MainText.setText(_translate("ZeroesScreen",
    "<html><head/><body><p>The zeroes of the Riemann Zeta
    Function is where the mystery of the Riemann Hypothesis
    lies.</p><p>A zero, also called a root, of the function  $f(x)$ 
    is the  $x$  value such that  $f(x) = 0$ . For the zeta function,
    these roots are in two categories, trivial, and non-trivial
    zeroes. The trivial zeroes, are much simply to understand.
    These occur when the input to the zeta function, is a
    negative even integer. There is solid proof for this.
    However, the non-trivial zeroes are much more complex. The
    Riemann Hypothesis states that these non-trivial zeroes
    occur when the real part of the input to the zeta function
    is equal to  $1/2$ . Although it has been proven that the zeroes
    must occur when the real part of the input is between 0 and
    1, it is no more specific than that. Although all
    non-trivial zeroes every calculated have had real part
     $1/2$ .</p><p>There is no proof for why the non-trivial zeroes
    occur at  $1/2$ , but we can try to calculate the non-trivial
    zeroes by setting the real part of our input to the zeta
    function to be  $1/2$ , and varying the imaginary part. Click
    Calculate Zeroes to try and find the values of some of the
    non-trivial zeroes of the zeta function.</p></body></html>"))
self.CalculateButton.setText(_translate("ZeroesScreen",
    "Calculate Zeroes"))
self.NotesButton.setText(_translate("ZeroesScreen", "Notes"))
self.QuestionText.setText(_translate("ZeroesScreen",
    "<html><head/><body><p align=\"center\"><span style=\""
    "font-size:16pt;
    font-weight:600;\">Question</span></p></body></html>"))
self.QuestionInput.setPlaceholderText(_translate("ZeroesScreen",
    "Answer"))
self.SubmitButton.setText(_translate("ZeroesScreen", "Submit"))
self.MessageLabel.setText(_translate("ZeroesScreen",
    "<html><head/><body><p
    align=\"center\"><br/></p></body></html>"))

```

program/user_interface/investigation_ui/zeta_approximation.py

```
"""
zeta_approximation.py
=====
A GUI for the zeta approximation page of the investigation section
"""

from PyQt5 import QtCore, QtGui, QtWidgets

class Ui_ZetaApproximationScreen(object):

    def setupUi(self, ZetaApproximationScreen):
        ZetaApproximationScreen.setObjectName("ZetaApproximationScreen")
        ZetaApproximationScreen.resize(1340, 720)
        ZetaApproximationScreen.setSizeGripEnabled(False)
        self.widget = QtWidgets.QWidget(ZetaApproximationScreen)
        self.widget.setGeometry(QtCore.QRect(0, 0, 1340, 720))
        self.widget.setStyleSheet("background-color: rgb(69, 69, 69);")
        self.widget.setObjectName("widget")
        self.Title = QtWidgets.QLabel(self.widget)
        self.Title.setGeometry(QtCore.QRect(550, 20, 281, 51))
        self.Title.setStyleSheet("font: 36pt \"Sans Serif\";\n"
                               "color:rgb(239, 239, 239);")
        self.Title.setObjectName("Title")
        self.TabBar = QtWidgets.QWidget(self.widget)
        self.TabBar.setGeometry(QtCore.QRect(0, 80, 1340, 80))
        self.TabBar.setStyleSheet("background-color: rgb(239, 239,\n"
                               "239);")
        self.TabBar.setObjectName("TabBar")
        self.PolarTab = QtWidgets.QPushButton(self.TabBar)
        self.PolarTab.setGeometry(QtCore.QRect(10, 5, 200, 70))
        self.PolarTab.setCursor(QtGui.QCursor(QtCore.Qt.PointingHandCursor))
        self.PolarTab.setStyleSheet("border: 2px solid;\n"
                               "border-radius: 20px;\n"
                               "border-color:rgb(69, 69, 69);\n"
                               "background-color: rgb(69, 69, 69);\n"
                               "font: 18pt \"Sans Serif\"; color:rgb(239, 239, 239);\n"
                               "")
        self.PolarTab.setObjectName("PolarTab")
        self.ZetaZeroesPlotTab = QtWidgets.QPushButton(self.TabBar)
        self.ZetaZeroesPlotTab.setGeometry(QtCore.QRect(220, 5, 200, 70))
        self.ZetaZeroesPlotTab.setCursor(QtGui.QCursor(QtCore.Qt.PointingHandCursor))
        self.ZetaZeroesPlotTab.setStyleSheet("border: 2px solid;\n"
                               "border-radius: 20px;\n"
                               "border-color:rgb(69, 69, 69);\n"
                               "background-color: rgb(69, 69, 69);\n"
                               "font: 18pt \"Sans Serif\"; color:rgb(239, 239, 239);\n"
                               "")
```

```

        """
        self.ZetaZeroesPlotTab.setObjectName("ZetaZeroesPlotTab")
        self.PrimeTab = QtWidgets.QPushButton(self.TabBar)
        self.PrimeTab.setGeometry(QtCore.QRect(430, 5, 200, 70))
        self.PrimeTab.setCursor(QtGui.QCursor(QtCore.Qt.PointingHandCursor))
        self.PrimeTab.setStyleSheet("border: 2px solid;\n"
"border-radius: 20px;\n"
"border-color:rgb(69, 69, 69);\n"
"background-color: rgb(69, 69, 69);\n"
"font: 18pt \"Sans Serif\"; color:rgb(239, 239, 239);\n"
"""
        self.PrimeTab.setObjectName("PrimeTab")
        self.ZetaApproximationLabel = QtWidgets.QLabel(self.TabBar)
        self.ZetaApproximationLabel.setGeometry(QtCore.QRect(640, 5,
200, 70))
        self.ZetaApproximationLabel.setStyleSheet("border: 2px solid;\n"
"border-radius: 20px;\n"
"border-color:rgb(69, 69, 69);\n"
"background-color: rgb(239, 239, 239);\n"
"font: 18pt \"Sans Serif\"; color:rgb(69, 69, 69);\n"
"""
        self.ZetaApproximationLabel.setObjectName("ZetaApproximationLabel")
        self.ZetaApproximationTab = QtWidgets.QPushButton(self.TabBar)
        self.ZetaApproximationTab.setGeometry(QtCore.QRect(640, 5, 200,
70))
        self.ZetaApproximationTab.setCursor(QtGui.QCursor(QtCore.Qt.PointingHandCursor))
        self.ZetaApproximationTab.setStyleSheet("border-radius: 20px;\n"
"background-color: rgba(0, 0, 0, 0);\n"
"font: 18pt \"Sans Serif\";\n"
"""
        self.ZetaApproximationTab.setText("")
        self.ZetaApproximationTab.setObjectName("ZetaApproximationTab")
        self.MainWidget = QtWidgets.QWidget(self.widget)
        self.MainWidget.setGeometry(QtCore.QRect(10, 170, 1320, 540))
        self.MainWidget.setStyleSheet("background-color: rgb(239, 239,
239);\n"
"border-radius: 20px;")
        self.MainWidget.setObjectName("MainWidget")
        self.PrevButton = QtWidgets.QPushButton(self.MainWidget)
        self.PrevButton.setGeometry(QtCore.QRect(10, 460, 200, 70))
        self.PrevButton.setCursor(QtGui.QCursor(QtCore.Qt.PointingHandCursor))
        self.PrevButton.setStyleSheet("border: 2px solid;\n"
"border-radius: 20px;\n"
"border-color:rgb(69, 69, 69);\n"
"background-color: rgb(69, 69, 69);\n"
"font: 18pt \"Sans Serif\"; color:rgb(239, 239, 239);\n"
"""
        self.PrevButton.setObjectName("PrevButton")
        self.NextButton = QtWidgets.QPushButton(self.MainWidget)
        self.NextButton.setGeometry(QtCore.QRect(1110, 460, 200, 70))

```

```

        self.NextButton.setCursor(QtGui.QCursor(QtCore.Qt.PointingHandCursor))
        self.NextButton.setStyleSheet("border: 2px solid;\n"
"border-radius: 20px;\n"
"border-color:rgb(69, 69, 69);\n"
"background-color: rgb(69, 69, 69);\n"
"font: 18pt \\"Sans Serif\\"; color:rgb(239, 239, 239);\n"
""")
        self.NextButton.setObjectName("NextButton")
        self.GraphButton = QtWidgets.QPushButton(self.MainWidget)
        self.GraphButton.setGeometry(QtCore.QRect(680, 460, 200, 70))
        self.GraphButton.setCursor(QtGui.QCursor(QtCore.Qt.PointingHandCursor))
        self.GraphButton.setStyleSheet("border: 2px solid;\n"
"border-radius: 20px;\n"
"border-color:rgb(69, 69, 69);\n"
"background-color: rgb(69, 69, 69);\n"
"font: 18pt \\"Sans Serif\\"; color:rgb(239, 239, 239);\n"
""")
        self.GraphButton.setObjectName("GraphButton")
        self.GraphInput = QtWidgets.QLineEdit(self.MainWidget)
        self.GraphInput.setGeometry(QtCore.QRect(460, 460, 200, 70))
        self.GraphInput.setStyleSheet("background-color: rgb(239, 239,
239);\n"
"color: rgb(69, 69, 69);\n"
"font: 18pt \\"Sans Serif\\";\n"
"border: 2px solid;\n"
"border-radius: 20px;\n"
"border-color:rgb(69, 69, 69);\n"
"text-align: center;")
        self.GraphInput.setText("")
        self.GraphInput.setCursorPosition(0)
        self.GraphInput.setAlignment(QtCore.Qt.AlignCenter)
        self.GraphInput.setObjectName("GraphInput")
        self.SubTitleText = QtWidgets.QLabel(self.MainWidget)
        self.SubTitleText.setGeometry(QtCore.QRect(40, 20, 821, 41))
        self.SubTitleText.setStyleSheet("font: 25pt \\"Sans Serif\\";
color:rgb(69, 69, 69);\n"
"background-color: rgb(239, 239, 239); padding: 5px;")
        self.SubTitleText.setObjectName("SubTitleText")
        self.MainText = QtWidgets.QLabel(self.MainWidget)
        self.MainText.setGeometry(QtCore.QRect(50, 80, 1251, 201))
        self.MainText.setStyleSheet("font: 13pt \\"Sans Serif\\";
color:rgb(69, 69, 69);\n"
"background-color: rgb(239, 239, 239); padding: 5px;")
        self.MainText.setAlignment(QtCore.Qt.AlignLeading|QtCore.Qt.AlignLeft|QtCore.Qt.AlignTop)
        self.MainText.setWordWrap(True)
        self.MainText.setObjectName("MainText")
        self.ErrorLabel = QtWidgets.QLabel(self.MainWidget)
        self.ErrorLabel.setGeometry(QtCore.QRect(310, 400, 721, 41))
        self.ErrorLabel.setStyleSheet("color: rgb(255, 0, 0);\n"
"font: 12pt \\"Sans Serif\\";")

```

```

    self.ErrorLabel.setObjectName("ErrorLabel")

    self.retranslateUi(ZetaApproximationScreen)
    QtCore.QMetaObject.connectSlotsByName(ZetaApproximationScreen)

def retranslateUi(self, ZetaApproximationScreen):
    _translate = QtCore.QCoreApplication.translate
    ZetaApproximationScreen.setWindowTitle(_translate("ZetaApproximationScreen",
        "Visualising the Riemann Hypothesis - Investigation"))
    self.Title.setText(_translate("ZetaApproximationScreen", "Graph
        Plots"))
    self.PolarTab.setText(_translate("ZetaApproximationScreen",
        "Polar"))
    self.ZetaZeroesPlotTab.setText(_translate("ZetaApproximationScreen",
        "Zeroes"))
    self.PrimeTab.setText(_translate("ZetaApproximationScreen",
        "Prime"))
    self.ZetaApproximationLabel.setText(_translate("ZetaApproximationScreen",
        "<html><head/><body><p
        align=\"center\">Zeta<br/>Approximation</p></body></html>"))
    self.PrevButton.setText(_translate("ZetaApproximationScreen",
        "Prev"))
    self.NextButton.setText(_translate("ZetaApproximationScreen",
        "Next"))
    self.GraphButton.setText(_translate("ZetaApproximationScreen",
        "Graph"))
    self.GraphInput.setToolTip(_translate("ZetaApproximationScreen",
        "<html><head/><body><p align=\"center\">
        Re(s)</body></html>"))
    self.GraphInput.setPlaceholderText(_translate("ZetaApproximationScreen",
        "Input"))
    self.SubTitleText.setText(_translate("ZetaApproximationScreen",
        "<html><head/><body><p><span style=\"
        font-weight:600;\">Approximation of the Riemann Zeta
        Function</span></p></body></html>"))
    self.MainText.setText(_translate("ZetaApproximationScreen",
        "<html><head/><body><p>Due to the infinite and recursive
        nature of the zeta function, it would be impossible to
        calculate any exact values for the zeta function using a
        computer program.</p><p><br/></p><p>The aim of this graph,
        is to demonstrate how the program uses sums with increasing
        amounts of accuracy to find values of the zeta
        function.</p><p><br/></p><p>Type any complex number into the
        box, and click graph!</p></body></html>"))
    self.ErrorLabel.setText(_translate("ZetaApproximationScreen",
        "<html><head/><body><p
        align=\"center\"><br/></p></body></html>"))

```

program/user_interface/investigation.ui/zeta_zeroes_plot.py

```
"""
zeta_zeroes_plot.py
=====
A GUI for the zeta zeroes plot page of the investigation section
"""

from PyQt5 import QtCore, QtGui, QtWidgets

class Ui_ZetaZeroesPlotScreen(object):

    def setupUi(self, ZetaZeroesPlotScreen):
        ZetaZeroesPlotScreen.setObjectName("ZetaZeroesPlotScreen")
        ZetaZeroesPlotScreen.resize(1340, 722)
        ZetaZeroesPlotScreen.setSizeGripEnabled(False)
        self.widget = QtWidgets.QWidget(ZetaZeroesPlotScreen)
        self.widget.setGeometry(QtCore.QRect(0, 0, 1340, 720))
        self.widget.setStyleSheet("background-color: rgb(69, 69, 69);")
        self.widget.setObjectName("widget")
        self.Title = QtWidgets.QLabel(self.widget)
        self.Title.setGeometry(QtCore.QRect(550, 20, 271, 51))
        self.Title.setStyleSheet("font: 36pt \"Sans Serif\";\n"
                               "color:rgb(239, 239, 239);")
        self.Title.setObjectName("Title")
        self.TabBar = QtWidgets.QWidget(self.widget)
        self.TabBar.setGeometry(QtCore.QRect(0, 80, 1340, 80))
        self.TabBar.setStyleSheet("background-color: rgb(239, 239,\n"
                               "239);")
        self.TabBar.setObjectName("TabBar")
        self.PolarTab = QtWidgets.QPushButton(self.TabBar)
        self.PolarTab.setGeometry(QtCore.QRect(10, 5, 200, 70))
        self.PolarTab.setCursor(QtGui.QCursor(QtCore.Qt.PointingHandCursor))
        self.PolarTab.setStyleSheet("border: 2px solid;\n"
                               "border-radius: 20px;\n"
                               "border-color:rgb(69, 69, 69);\n"
                               "background-color: rgb(69, 69, 69);\n"
                               "font: 18pt \"Sans Serif\"; color:rgb(239, 239, 239);\n"
                               "")
        self.PolarTab.setObjectName("PolarTab")
        self.ZetaZeroesPlotTab = QtWidgets.QPushButton(self.TabBar)
        self.ZetaZeroesPlotTab.setGeometry(QtCore.QRect(220, 5, 200, 70))
        self.ZetaZeroesPlotTab.setCursor(QtGui.QCursor(QtCore.Qt.PointingHandCursor))
        self.ZetaZeroesPlotTab.setStyleSheet("border: 2px solid;\n"
                               "border-radius: 20px;\n"
                               "border-color:rgb(69, 69, 69);\n"
                               "background-color: rgb(239, 239, 239);\n"
                               "font: 18pt \"Sans Serif\"; color:rgb(69, 69, 69);\n"
                               "")
```

```

        self.ZetaZeroesPlotTab.setObjectName("ZetaZeroesPlotTab")
        self.PrimeTab = QtWidgets.QPushButton(self.TabBar)
        self.PrimeTab.setGeometry(QtCore.QRect(430, 5, 200, 70))
        self.PrimeTab.setCursor(QtGui.QCursor(QtCore.Qt.PointingHandCursor))
        self.PrimeTab.setStyleSheet("border: 2px solid;\n"
"border-radius: 20px;\n"
"border-color:rgb(69, 69, 69);\n"
"background-color: rgb(69, 69, 69);\n"
"font: 18pt \"Sans Serif\"; color:rgb(239, 239, 239);\n"
""")
        self.PrimeTab.setObjectName("PrimeTab")
        self.ZetaApproximationTab = QtWidgets.QPushButton(self.TabBar)
        self.ZetaApproximationTab.setGeometry(QtCore.QRect(640, 5, 200,
70))
        self.ZetaApproximationTab.setCursor(QtGui.QCursor(QtCore.Qt.PointingHandCursor))
        self.ZetaApproximationTab.setStyleSheet("border-radius: 20px;\n"
"background-color: rgba(0, 0, 0, 0);\n"
"font: 18pt \"Sans Serif\";\n"
""")
        self.ZetaApproximationTab.setText("")
        self.ZetaApproximationTab.setObjectName("ZetaApproximationTab")
        self.ZetaApproximationLabel = QtWidgets.QLabel(self.TabBar)
        self.ZetaApproximationLabel.setGeometry(QtCore.QRect(640, 5,
200, 70))
        self.ZetaApproximationLabel.setStyleSheet("border: 2px solid;\n"
"border-radius: 20px;\n"
"border-color:rgb(69, 69, 69);\n"
"background-color: rgb(69, 69, 69);\n"
"font: 18pt \"Sans Serif\"; color:rgb(239, 239, 239);\n"
""")
        self.ZetaApproximationLabel.setObjectName("ZetaApproximationLabel")
        self.PolarTab.raise_()
        self.ZetaZeroesPlotTab.raise_()
        self.PrimeTab.raise_()
        self.ZetaApproximationLabel.raise_()
        self.ZetaApproximationTab.raise_()
        self.MainWidget = QtWidgets.QWidget(self.widget)
        self.MainWidget.setGeometry(QtCore.QRect(10, 170, 1320, 540))
        self.MainWidget.setStyleSheet("background-color: rgb(239, 239,
239);\n"
"border-radius: 20px;")
        self.MainWidget.setObjectName("MainWidget")
        self.PreviousButton = QtWidgets.QPushButton(self.MainWidget)
        self.PreviousButton.setGeometry(QtCore.QRect(10, 460, 200, 70))
        self.PreviousButton.setCursor(QtGui.QCursor(QtCore.Qt.PointingHandCursor))
        self.PreviousButton.setStyleSheet("border: 2px solid;\n"
"border-radius: 20px;\n"
"border-color:rgb(69, 69, 69);\n"
"background-color: rgb(69, 69, 69);\n"
"font: 18pt \"Sans Serif\"; color:rgb(239, 239, 239);\n"
")

```

```

    """
        self.PrevButton.setObjectName("PrevButton")
        self.NextButton = QtWidgets.QPushButton(self.MainWidget)
        self.NextButton.setGeometry(QtCore.QRect(1110, 460, 200, 70))
        self.NextButton.setCursor(QtGui.QCursor(QtCore.Qt.PointingHandCursor))
        self.NextButton.setStyleSheet("border: 2px solid;\n"
"border-radius: 20px;\n"
"border-color:rgb(69, 69, 69);\n"
"background-color: rgb(69, 69, 69);\n"
"font: 18pt \\"Sans Serif\\"; color:rgb(239, 239, 239);\n"
        ")
        self.NextButton.setObjectName("NextButton")
        self.GraphButton = QtWidgets.QPushButton(self.MainWidget)
        self.GraphButton.setGeometry(QtCore.QRect(570, 460, 200, 70))
        self.GraphButton.setCursor(QtGui.QCursor(QtCore.Qt.PointingHandCursor))
        self.GraphButton.setStyleSheet("border: 2px solid;\n"
"border-radius: 20px;\n"
"border-color:rgb(69, 69, 69);\n"
"background-color: rgb(69, 69, 69);\n"
"font: 18pt \\"Sans Serif\\"; color:rgb(239, 239, 239);\n"
        ")
        self.GraphButton.setObjectName("GraphButton")
        self.SubTitleText = QtWidgets.QLabel(self.MainWidget)
        self.SubTitleText.setGeometry(QtCore.QRect(40, 20, 681, 41))
        self.SubTitleText.setStyleSheet("font: 25pt \\"Sans Serif\\";
                                         color:rgb(69, 69, 69);\n"
"background-color: rgb(239, 239, 239); padding: 5px;")
        self.SubTitleText.setObjectName("SubTitleText")
        self.MainText = QtWidgets.QLabel(self.MainWidget)
        self.MainText.setGeometry(QtCore.QRect(40, 80, 1251, 141))
        self.MainText.setStyleSheet("font: 13pt \\"Sans Serif\\";
                                         color:rgb(69, 69, 69);\n"
"background-color: rgb(239, 239, 239); padding: 5px;")
        self.MainText.setAlignment(QtCore.Qt.AlignLeading|QtCore.Qt.AlignLeft|QtCore.Qt.AlignTop)
        self.MainText.setWordWrap(True)
        self.MainText.setObjectName("MainText")
        self.ZeroesTab = QtWidgets.QPushButton(self.MainWidget)
        self.ZeroesTab.setGeometry(QtCore.QRect(640, 70, 171, 51))
        self.ZeroesTab.setCursor(QtGui.QCursor(QtCore.Qt.PointingHandCursor))
        self.ZeroesTab.setStyleSheet("border: 2px solid;\n"
"border-radius: 20px;\n"
"border-color:rgb(69, 69, 69);\n"
"background-color: rgb(69, 69, 69);\n"
"font: 12pt \\"Sans Serif\\"; color:rgb(239, 239, 239);\n"
        ")
        self.ZeroesTab.setObjectName("ZeroesTab")
        self.QuestionText = QtWidgets.QLabel(self.MainWidget)
        self.QuestionText.setGeometry(QtCore.QRect(420, 230, 501, 101))
        self.QuestionText.setStyleSheet("font: 25pt \\"Sans Serif\\";
                                         color:rgb(69, 69, 69);\n"

```

```

"background-color: rgb(239, 239, 239); padding: 5px;")
    self.QuestionText.setAlignment(QtCore.Qt.AlignBottom|QtCore.Qt.AlignHCenter)
    self.QuestionText.setWordWrap(True)
    self.QuestionText.setObjectName("QuestionText")
    self.QuestionInput = QtWidgets.QLineEdit(self.MainWidget)
    self.QuestionInput.setGeometry(QtCore.QRect(390, 350, 230, 60))
    self.QuestionInput.setStyleSheet("background-color: rgb(239,
        239, 239);\n"
"color: rgb(69, 69, 69);\n"
"font: 18pt \\"Sans Serif\\";\n"
"border: 2px solid;\n"
"border-radius: 20px;\n"
"border-color:rgb(69, 69, 69);")
        self.QuestionInput.setText("")
        self.QuestionInput.setCursorPosition(0)
        self.QuestionInput.setAlignment(QtCore.Qt.AlignCenter)
        self.QuestionInput.setObjectName("QuestionInput")
        self.SubmitButton = QtWidgets.QPushButton(self.MainWidget)
        self.SubmitButton.setGeometry(QtCore.QRect(720, 350, 121, 61))
        self.SubmitButton.setCursor(QtGui.QCursor(QtCore.Qt.PointingHandCursor))
        self.SubmitButton.setStyleSheet("border: 2px solid;\n"
"border-radius: 20px;\n"
"border-color:rgb(69, 69, 69);\n"
"background-color: rgb(69, 69, 69);\n"
"font: 18pt \\"Sans Serif\\"; color:rgb(239, 239, 239);\n"
"")
        self.SubmitButton.setObjectName("SubmitButton")
        self.MessageLabel = QtWidgets.QLabel(self.MainWidget)
        self.MessageLabel.setGeometry(QtCore.QRect(410, 410, 530, 41))
        self.MessageLabel.setStyleSheet("color: rgb(0, 140, 0);\n"
"font: 18pt \\"Sans Serif\\\";")
        self.MessageLabel.setAlignment(QtCore.Qt.AlignBottom|QtCore.Qt.AlignHCenter)
        self.MessageLabel.setObjectName("MessageLabel")
        self.PrevButton.raise_()
        self.NextButton.raise_()
        self.GraphButton.raise_()
        self.SubTitleText.raise_()
        self.MainText.raise_()
        self.ZeroesTab.raise_()
        self.QuestionText.raise_()
        self.QuestionInput.raise_()
        self.MessageLabel.raise_()
        self.SubmitButton.raise_()

        self.retranslateUi(ZetaZeroesPlotScreen)
        QtCore.QMetaObject.connectSlotsByName(ZetaZeroesPlotScreen)

def retranslateUi(self, ZetaZeroesPlotScreen):
    _translate = QtCore.QCoreApplication.translate
    ZetaZeroesPlotScreen.setWindowTitle(_translate("ZetaZeroesPlotScreen",

```

```

    "Visualising the Riemann Hypothesis - Investigation"))
self.Title.setText(_translate("ZetaZeroesPlotScreen", "Graph
    Plots"))
self.PolarTab.setText(_translate("ZetaZeroesPlotScreen",
    "Polar"))
self.ZetaZeroesPlotTab.setText(_translate("ZetaZeroesPlotScreen",
    "Zeroes"))
self.PrimeTab.setText(_translate("ZetaZeroesPlotScreen",
    "Prime"))
self.ZetaApproximationLabel.setText(_translate("ZetaZeroesPlotScreen",
    "<html><head/><body><p>
        align=\\"center\\">Zeta<br>Approximation</p></body></html>"))
self.PrevButton.setText(_translate("ZetaZeroesPlotScreen",
    "Prev"))
self.NextButton.setText(_translate("ZetaZeroesPlotScreen",
    "Next"))
self.GraphButton.setText(_translate("ZetaZeroesPlotScreen",
    "Graph"))
self.SubTitleText.setText(_translate("ZetaZeroesPlotScreen",
    "<html><head/><body><p><span style=\"
        font-weight:600;\\">Zeroes of the Riemann Zeta
        Function</span></p></body></html>"))
self.MainText.setText(_translate("ZetaZeroesPlotScreen",
    "<html><head/><body><p>As also mentioned in the zeroes
        calculator section of the investigation
        --&gt;<br/></p><p>The non-trivial zeroes of the riemann zeta
        function are input values between 0 and 1, for which the
        output of the function is zero.</p><p>This graph will aim to
        calculate each zeta zero, and then plot them on a graph;
        allowing you to see the distribution of the non-trivial zeta
        zeroes along the critical line.</p></body></html>"))
self.ZeroesTab.setText(_translate("ZetaZeroesPlotScreen",
    "Zeroes Calculator"))
self.QuestionText.setText(_translate("ZetaZeroesPlotScreen",
    "<html><head/><body><p align=\\"center\\"><span style=\"
        font-size:16pt;
        font-weight:600;\\">Question</span></p></body></html>"))
self.QuestionInput.setPlaceholderText(_translate("ZetaZeroesPlotScreen",
    "Answer"))
self.SubmitButton.setText(_translate("ZetaZeroesPlotScreen",
    "Submit"))
self.MessageLabel.setText(_translate("ZetaZeroesPlotScreen",
    "<html><head/><body><p
        align=\\"center\\"><br/></p></body></html>"))

```

program/user_interface/login_ui/_init__.py

```

"""
__init__.py

```

```
=====
Imports for the login_ui
"""

from .forgotten_password import Ui_ForgottenPasswordScreen
from .forgotten_password2 import Ui_ForgottenPassword2Screen
from .login import Ui_LoginScreen
from .reset_password import Ui_ResetPasswordScreen
from .reset_password2 import Ui_ResetPassword2Screen
from .sign_up import Ui_SignUpScreen
```

program/user_interface/login_ui/forgotten_password.py

```
"""
forgotten_password.py
=====
A GUI for the forgotten password page of the login section
"""

from PyQt5 import QtCore, QtGui, QtWidgets

class Ui_ForgottenPasswordScreen(object):

    def setupUi(self, ForgottenPasswordScreen):
        ForgottenPasswordScreen.setObjectName("ForgottenPasswordScreen")
        ForgottenPasswordScreen.resize(1340, 720)
        ForgottenPasswordScreen.setSizeGripEnabled(False)
        self.widget = QtWidgets.QWidget(ForgottenPasswordScreen)
        self.widget.setGeometry(QtCore.QRect(0, 0, 1340, 720))
        self.widget.setStyleSheet("background-color: rgb(69, 69, 69);")
        self.widget.setObjectName("widget")
        self.Title = QtWidgets.QLabel(self.widget)
        self.Title.setGeometry(QtCore.QRect(612, 20, 116, 51))
        self.Title.setStyleSheet("font: 36pt \\"Sans Serif\\";
                               color:rgb(239, 239, 239)")
        self.Title.setObjectName("Title")
        self.TabBar = QtWidgets.QWidget(self.widget)
        self.TabBar.setGeometry(QtCore.QRect(0, 80, 1340, 80))
        self.TabBar.setStyleSheet("background-color: rgb(239, 239,
                               239);")
        self.TabBar.setObjectName("TabBar")
        self.LoginTab = QtWidgets.QPushButton(self.TabBar)
        self.LoginTab.setGeometry(QtCore.QRect(10, 5, 200, 70))
        self.LoginTab.setCursor(QtGui.QCursor(QtCore.Qt.PointingHandCursor))
        self.LoginTab.setStyleSheet("border: 2px solid;\n"
                               "border-radius: 20px;\n")
```

```

"border-color:rgb(69, 69, 69);\n"
"background-color: rgb(69, 69, 69);\n"
"font: 18pt \\"Sans Serif\\"; color:rgb(239, 239, 239);\n"
""")
    self.LoginTab.setObjectName("LoginTab")
    self.SignUpTab = QtWidgets.QPushButton(self.TabBar)
    self.SignUpTab.setGeometry(QtCore.QRect(220, 5, 200, 70))
    self.SignUpTab.setCursor(QtGui.QCursor(QtCore.Qt.PointingHandCursor))
    self.SignUpTab.setStyleSheet("border: 2px solid;\n"
"border-radius: 20px;\n"
"border-color:rgb(69, 69, 69);\n"
"background-color: rgb(69, 69, 69);\n"
"font: 18pt \\"Sans Serif\\"; color:rgb(239, 239, 239);\n"
""")
    self.SignUpTab.setObjectName("SignUpTab")
    self.ResetPasswordTab = QtWidgets.QPushButton(self.TabBar)
    self.ResetPasswordTab.setGeometry(QtCore.QRect(640, 5, 200, 70))
    self.ResetPasswordTab.setCursor(QtGui.QCursor(QtCore.Qt.PointingHandCursor))
    self.ResetPasswordTab.setStyleSheet("border: 2px solid;\n"
"border-radius: 20px;\n"
"border-color:rgb(69, 69, 69);\n"
"background-color: rgb(69, 69, 69);\n"
"font: 18pt \\"Sans Serif\\"; color:rgb(239, 239, 239);\n"
""")
    self.ResetPasswordTab.setObjectName("ResetPasswordTab")
    self.ForgottenPasswordLabel = QtWidgets.QLabel(self.TabBar)
    self.ForgottenPasswordLabel.setGeometry(QtCore.QRect(430, 5,
200, 70))
    self.ForgottenPasswordLabel.setStyleSheet("border: 2px solid;\n"
"border-radius: 20px;\n"
"border-color:rgb(69, 69, 69);\n"
"background-color: rgb(239, 239, 239);\n"
"font: 18pt \\"Sans Serif\\"; color:rgb(69, 69, 69);\n"
"padding: 7px;\n"
""")
    self.ForgottenPasswordLabel.setObjectName("ForgottenPasswordLabel")
    self.ForgottenPasswordTab = QtWidgets.QPushButton(self.TabBar)
    self.ForgottenPasswordTab.setGeometry(QtCore.QRect(430, 5, 200,
70))
    self.ForgottenPasswordTab.setCursor(QtGui.QCursor(QtCore.Qt.PointingHandCursor))
    self.ForgottenPasswordTab.setStyleSheet("border: 2px solid;\n"
"border-radius: 20px;\n"
"background-color: rgba(0, 0, 0, 0);\n"
"border-color: rgba(0, 0, 0, 0);")
    self.ForgottenPasswordTab.setText("")
    self.ForgottenPasswordTab.setObjectName("ForgottenPasswordTab")
    self.MainWidget = QtWidgets.QWidget(self.widget)
    self.MainWidget.setGeometry(QtCore.QRect(10, 170, 1320, 540))
    self.MainWidget.setStyleSheet("background-color: rgb(239, 239,
239);\n"

```

```

"border-radius: 20px;")  

    self.MainWidget.setObjectName("MainWidget")  

    self.EmailText = QtWidgets.QLabel(self.MainWidget)  

    self.EmailText.setGeometry(QtCore.QRect(300, 130, 301, 61))  

    self.EmailText.setStyleSheet("font: 25pt \"Sans Serif\";  

        color:rgb(69, 69, 69);\n"  

"background-color: rgb(239, 239, 239); padding: 5px;")  

    self.EmailText.setObjectName("EmailText")  

    self.EmailInput = QtWidgets.QLineEdit(self.MainWidget)  

    self.EmailInput.setGeometry(QtCore.QRect(720, 130, 361, 60))  

    self.EmailInput.setStyleSheet("background-color: rgb(239, 239,  

        239);\n"  

"color: rgb(69, 69, 69);\n"  

"font: 18pt \"Sans Serif\";\n"  

"border: 2px solid;\n"  

"border-radius: 20px;\n"  

"border-color:rgb(69, 69, 69);")  

        self.EmailInput.setText("")  

        self.EmailInput.setCursorPosition(0)  

        self.EmailInput.setObjectName("EmailInput")  

        self.SubmitButton = QtWidgets.QPushButton(self.MainWidget)  

        self.SubmitButton.setGeometry(QtCore.QRect(570, 440, 200, 70))  

        self.SubmitButton.setCursor(QtGui.QCursor(QtCore.Qt.PointingHandCursor))  

        self.SubmitButton.setStyleSheet("border: 2px solid;\n"  

"border-radius: 20px;\n"  

"border-color:rgb(69, 69, 69);\n"  

"background-color: rgb(69, 69, 69);\n"  

"font: 18pt \"Sans Serif\"; color:rgb(239, 239, 239);\n"  

"")  

        self.SubmitButton.setObjectName("SubmitButton")  

        self.ErrorLabel = QtWidgets.QLabel(self.MainWidget)  

        self.ErrorLabel.setGeometry(QtCore.QRect(440, 320, 461, 71))  

        self.ErrorLabel.setStyleSheet("color: rgb(255, 0, 0);\n"  

"font: 18pt \"Sans Serif\";")  

        self.ErrorLabel.setObjectName("ErrorLabel")  

        self.retranslateUi(ForgottenPasswordScreen)  

        QtCore.QMetaObject.connectSlotsByName(ForgottenPasswordScreen)  

def retranslateUi(self, ForgottenPasswordScreen):  

    _translate = QtCore.QCoreApplication.translate  

    ForgottenPasswordScreen.setWindowTitle(_translate("ForgottenPasswordScreen",  

        "Visualising the Riemann Hypothesis - Forgotten Password"))  

    self.Title.setText(_translate("ForgottenPasswordScreen",  

        "Login"))  

    self.LoginTab.setText(_translate("ForgottenPasswordScreen",  

        "Login"))  

    self.SignUpTab.setText(_translate("ForgottenPasswordScreen",  

        "Sign Up"))  

    self.ResetPasswordTab.setText(_translate("ForgottenPasswordScreen",

```

```

    "Reset Password"))
self.ForgottenPasswordLabel.setText(_translate("ForgottenPasswordScreen",
    "<html><head/><body><p align=\"center\"><span style=\""
    "font-size:18pt;\">Forgotten<br/>Password</span></p></body></html>"))
self.EmailText.setText(_translate("ForgottenPasswordScreen",
    "<html><head/><body><p"
    "align=\"right\">Email:</p></body></html>"))
self.EmailInput.setPlaceholderText(_translate("ForgottenPasswordScreen",
    "Enter Email"))
self.SubmitButton.setText(_translate("ForgottenPasswordScreen",
    "Submit"))
self.ErrorLabel.setText(_translate("ForgottenPasswordScreen",
    "<html><head/><body><p"
    "align=\"center\"><br/></p></body></html>"))

```

program/user_interface/login_ui/forgotten_password2.py

```

"""
forgotten_password2.py
=====
A GUI for the forgotten password 2 page of the login section
"""

from PyQt5 import QtCore, QtGui, QtWidgets

class Ui_ForgottenPassword2Screen(object):

    def setupUi(self, ForgottenPassword2Screen):
        ForgottenPassword2Screen.setObjectName("ForgottenPassword2Screen")
        ForgottenPassword2Screen.resize(1340, 720)
        ForgottenPassword2Screen.setSizeGripEnabled(False)
        self.widget = QtWidgets.QWidget(ForgottenPassword2Screen)
        self.widget.setGeometry(QtCore.QRect(0, 0, 1340, 720))
        self.widget.setStyleSheet("background-color: rgb(69, 69, 69);")
        self.widget.setObjectName("widget")
        self.Title = QtWidgets.QLabel(self.widget)
        self.Title.setGeometry(QtCore.QRect(612, 20, 116, 51))
        self.Title.setStyleSheet("font: 36pt \"Sans Serif\";"
                               "color:rgb(239, 239, 239);")
        self.Title.setObjectName("Title")
        self.TabBar = QtWidgets.QWidget(self.widget)
        self.TabBar.setGeometry(QtCore.QRect(0, 80, 1340, 80))
        self.TabBar.setStyleSheet("background-color: rgb(239, 239,
                               239);")
        self.TabBar.setObjectName("TabBar")
        self.LoginTab = QtWidgets.QPushButton(self.TabBar)
        self.LoginTab.setGeometry(QtCore.QRect(10, 5, 200, 70))

```

```

        self.LoginTab.setCursor(QtGui.QCursor(Qt.PointingHandCursor))
        self.LoginTab.setStyleSheet("border: 2px solid;\n"
"border-radius: 20px;\n"
"border-color:rgb(69, 69, 69);\n"
"background-color: rgb(69, 69, 69);\n"
"font: 18pt \"Sans Serif\"; color:rgb(239, 239, 239);\n"
""")
        self.LoginTab.setObjectName("LoginTab")
        self.SignUpTab = QtWidgets.QPushButton(self.TabBar)
        self.SignUpTab.setGeometry(QtCore.QRect(220, 5, 200, 70))
        self.SignUpTab.setCursor(QtGui.QCursor(Qt.PointingHandCursor))
        self.SignUpTab.setStyleSheet("border: 2px solid;\n"
"border-radius: 20px;\n"
"border-color:rgb(69, 69, 69);\n"
"background-color: rgb(69, 69, 69);\n"
"font: 18pt \"Sans Serif\"; color:rgb(239, 239, 239);\n"
""")
        self.SignUpTab.setObjectName("SignUpTab")
        self.ResetPasswordTab = QtWidgets.QPushButton(self.TabBar)
        self.ResetPasswordTab.setGeometry(QtCore.QRect(640, 5, 200, 70))
        self.ResetPasswordTab.setCursor(QtGui.QCursor(Qt.PointingHandCursor))
        self.ResetPasswordTab.setStyleSheet("border: 2px solid;\n"
"border-radius: 20px;\n"
"border-color:rgb(69, 69, 69);\n"
"background-color: rgb(69, 69, 69);\n"
"font: 18pt \"Sans Serif\"; color:rgb(239, 239, 239);\n"
""")
        self.ResetPasswordTab.setObjectName("ResetPasswordTab")
        self.ForgottenPasswordLabel = QtWidgets.QLabel(self.TabBar)
        self.ForgottenPasswordLabel.setGeometry(QtCore.QRect(430, 5,
200, 70))
        self.ForgottenPasswordLabel.setStyleSheet("border: 2px solid;\n"
"border-radius: 20px;\n"
"border-color:rgb(69, 69, 69);\n"
"background-color: rgb(239, 239, 239);\n"
"font: 18pt \"Sans Serif\"; color:rgb(69, 69, 69);\n"
"padding: 7px;\n"
""")
        self.ForgottenPasswordLabel.setObjectName("ForgottenPasswordLabel")
        self.ForgottenPasswordTab = QtWidgets.QPushButton(self.TabBar)
        self.ForgottenPasswordTab.setGeometry(QtCore.QRect(430, 5, 200,
70))
        self.ForgottenPasswordTab.setCursor(QtGui.QCursor(Qt.PointingHandCursor))
        self.ForgottenPasswordTab.setStyleSheet("border: 2px solid;\n"
"border-radius: 20px;\n"
"background-color: rgba(0, 0, 0, 0);\n"
"border-color: rgba(0, 0, 0, 0);")
        self.ForgottenPasswordTab.setText("")
        self.ForgottenPasswordTab.setObjectName("ForgottenPasswordTab")
        self.MainWidget = QtWidgets.QWidget(self.widget)

```

```

        self.MainWidget.setGeometry(QtCore.QRect(10, 170, 1320, 540))
        self.MainWidget.setStyleSheet("background-color: rgb(239, 239,
            239);\n"
    "border-radius: 20px;")
        self.MainWidget.setObjectName("MainWidget")
        self.VerificationCodeText = QtWidgets.QLabel(self.MainWidget)
        self.VerificationCodeText.setGeometry(QtCore.QRect(300, 200,
            301, 61))
        self.VerificationCodeText.setStyleSheet("font: 25pt \\"Sans
            Serif\"; color:rgb(69, 69, 69);\n"
"background-color: rgb(239, 239, 239); padding: 5px;")
        self.VerificationCodeText.setObjectName("VerificationCodeText")
        self.VerificationCodeInput = QtWidgets.QLineEdit(self.MainWidget)
        self.VerificationCodeInput.setGeometry(QtCore.QRect(720, 200,
            261, 60))
        self.VerificationCodeInput.setStyleSheet("background-color:
            rgb(239, 239, 239);\n"
"color: rgb(69, 69, 69);\n"
"font: 18pt \\"Sans Serif\";\n"
"border: 2px solid;\n"
"border-radius: 20px;\n"
"border-color:rgb(69, 69, 69);")
            self.VerificationCodeInput.setText("")
            self.VerificationCodeInput.setCursorPosition(0)
            self.VerificationCodeInput.setObjectName("VerificationCodeInput")
            self.SubmitButton = QtWidgets.QPushButton(self.MainWidget)
            self.SubmitButton.setGeometry(QtCore.QRect(570, 440, 200, 70))
            self.SubmitButton.setCursor(QtGui.QCursor(Qt.PointingHandCursor))
            self.SubmitButton.setStyleSheet("border: 2px solid;\n"
"border-radius: 20px;\n"
"border-color:rgb(69, 69, 69);\n"
"background-color: rgb(69, 69, 69);\n"
"font: 18pt \\"Sans Serif\"; color:rgb(239, 239, 239);\n"
""")
            self.SubmitButton.setObjectName("SubmitButton")
            self.VerificationText = QtWidgets.QLabel(self.MainWidget)
            self.VerificationText.setGeometry(QtCore.QRect(305, 60, 730, 61))
            self.VerificationText.setStyleSheet("font: 25pt \\"Sans Serif\";
                color:rgb(69, 69, 69);\n"
"background-color: rgb(239, 239, 239); padding: 5px;")
            self.VerificationText.setObjectName("VerificationText")
            self.ErrorLabel = QtWidgets.QLabel(self.MainWidget)
            self.ErrorLabel.setGeometry(QtCore.QRect(440, 350, 461, 71))
            self.ErrorLabel.setStyleSheet("color: rgb(255, 0, 0);\n"
"font: 18pt \\"Sans Serif\";")
            self.ErrorLabel.setObjectName("ErrorLabel")

        self.retranslateUi(ForgottenPassword2Screen)
        QtCore.QMetaObject.connectSlotsByName(ForgottenPassword2Screen)

```

```

def retranslateUi(self, ForgottenPassword2Screen):
    _translate = QtCore.QCoreApplication.translate
    ForgottenPassword2Screen.setWindowTitle(_translate("ForgottenPassword2Screen",
        "Visualising the Riemann Hypothesis - Forgotten Password"))
    self.Title.setText(_translate("ForgottenPassword2Screen",
        "Login"))
    self.LoginTab.setText(_translate("ForgottenPassword2Screen",
        "Login"))
    self.SignUpTab.setText(_translate("ForgottenPassword2Screen",
        "Sign Up"))
    self.ResetPasswordTab.setText(_translate("ForgottenPassword2Screen",
        "Reset Password"))
    self.ForgottenPasswordLabel.setText(_translate("ForgottenPassword2Screen",
        "<html><head/><body><p align=\"center\"><span style=\""
        "font-size:18pt;\">Forgotten<br/>Password</span></p></body></html>"))
    self.VerificationCodeText.setText(_translate("ForgottenPassword2Screen",
        "<html><head/><body><p align=\"right\">Verification"
        "Code:</p></body></html>"))
    self.VerificationCodeInput.setPlaceholderText(_translate("ForgottenPassword2Screen",
        "Enter Verification Code"))
    self.SubmitButton.setText(_translate("ForgottenPassword2Screen",
        "Submit"))
    self.VerificationText.setText(_translate("ForgottenPassword2Screen",
        "<html><head/><body><p align=\"center\">A Verification Code"
        "has been sent to your email</p></body></html>"))
    self.ErrorLabel.setText(_translate("ForgottenPassword2Screen",
        "<html><head/><body><p align=\"center\"><br/></p></body></html>"))

```

program/user_interface/login_ui/login.py

```

"""
login.py
=====
A GUI for the login page of the login section
"""

from PyQt5 import QtCore, QtGui, QtWidgets

class Ui_LoginScreen(object):

    def setupUi(self, LoginScreen):
        LoginScreen.setObjectName("LoginScreen")
        LoginScreen.resize(1340, 720)
        LoginScreen.setSizeGripEnabled(False)
        self.widget = QtWidgets.QWidget(LoginScreen)
        self.widget.setGeometry(QtCore.QRect(0, 0, 1340, 720))

```

```

        self.widget.setStyleSheet("background-color: rgb(69, 69, 69);")
        self.widget.setObjectName("widget")
        self.Title = QtWidgets.QLabel(self.widget)
        self.Title.setGeometry(QtCore.QRect(612, 20, 116, 51))
        self.Title.setStyleSheet("font: 36pt \\"Sans Serif\\";
                               color:rgb(239, 239, 239)")
        self.Title.setObjectName("Title")
        self.TabBar = QtWidgets.QWidget(self.widget)
        self.TabBar.setGeometry(QtCore.QRect(0, 80, 1340, 80))
        self.TabBar.setStyleSheet("background-color: rgb(239, 239,
                                         239);")
        self.TabBar.setObjectName("TabBar")
        self.LoginTab = QtWidgets.QPushButton(self.TabBar)
        self.LoginTab.setGeometry(QtCore.QRect(10, 5, 200, 70))
        self.LoginTab.setCursor(QtGui.QCursor(QtCore.Qt.PointingHandCursor))
        self.LoginTab.setStyleSheet("border: 2px solid;\n"
"border-radius: 20px;\n"
"border-color:rgb(69, 69, 69);\n"
"background-color: rgb(239, 239, 239);\n"
"font: 18pt \\"Sans Serif\\"; color:rgb(69, 69, 69);\n"
"")
        self.LoginTab.setObjectName("LoginTab")
        self.SignUpTab = QtWidgets.QPushButton(self.TabBar)
        self.SignUpTab.setGeometry(QtCore.QRect(220, 5, 200, 70))
        self.SignUpTab.setCursor(QtGui.QCursor(QtCore.Qt.PointingHandCursor))
        self.SignUpTab.setStyleSheet("border: 2px solid;\n"
"border-radius: 20px;\n"
"border-color:rgb(69, 69, 69);\n"
"background-color: rgb(69, 69, 69);\n"
"font: 18pt \\"Sans Serif\\"; color:rgb(239, 239, 239);\n"
"padding: 7px;\n"
"")
        self.SignUpTab.setObjectName("SignUpTab")
        self.ResetPasswordTab = QtWidgets.QPushButton(self.TabBar)
        self.ResetPasswordTab.setGeometry(QtCore.QRect(640, 5, 200, 70))
        self.ResetPasswordTab.setCursor(QtGui.QCursor(QtCore.Qt.PointingHandCursor))
        self.ResetPasswordTab.setStyleSheet("border: 2px solid;\n"
"border-radius: 20px;\n"
"border-color:rgb(69, 69, 69);\n"
"background-color: rgb(69, 69, 69);\n"
"font: 18pt \\"Sans Serif\\"; color:rgb(239, 239, 239);\n"
"")
        self.ResetPasswordTab.setObjectName("ResetPasswordTab")
        self.ForgottenPasswordTab = QtWidgets.QPushButton(self.TabBar)
        self.ForgottenPasswordTab.setGeometry(QtCore.QRect(430, 5, 200,
                                         70))
        self.ForgottenPasswordTab.setCursor(QtGui.QCursor(QtCore.Qt.PointingHandCursor))
        self.ForgottenPasswordTab.setStyleSheet("border: 2px solid;\n"
"border-radius: 20px;\n"
"background-color: rgba(0, 0, 0, 0);\n"

```

```

"border-color: rgba(0, 0, 0, 0);")
    self.ForgottenPasswordTab.setText("")
    self.ForgottenPasswordTab.setObjectName("ForgottenPasswordTab")
    self.ForgottenPasswordLabel = QtWidgets.QLabel(self.TabBar)
    self.ForgottenPasswordLabel.setGeometry(QtCore.QRect(430, 5,
        200, 70))
    self.ForgottenPasswordLabel.setStyleSheet("border: 2px solid;\n"
"border-radius: 20px;\n"
"border-color:rgb(69, 69, 69);\n"
"background-color: rgb(69, 69, 69);\n"
"font: 18pt \"Sans Serif\"; color:rgb(239, 239, 239);\n"
"padding: 7px;\n"
""")
    self.ForgottenPasswordLabel.setObjectName("ForgottenPasswordLabel")
    self.LoginTab.raise_()
    self.SignUpTab.raise_()
    self.ResetPasswordTab.raise_()
    self.ForgottenPasswordLabel.raise_()
    self.ForgottenPasswordTab.raise_()
    self.MainWidget = QtWidgets.QWidget(self.widget)
    self.MainWidget.setGeometry(QtCore.QRect(10, 170, 1320, 540))
    self.MainWidget.setStyleSheet("background-color: rgb(239, 239,
        239);\n"
"border-radius: 20px;")
    self.MainWidget.setObjectName("MainWidget")
    self.UsernameOrEmailText = QtWidgets.QLabel(self.MainWidget)
    self.UsernameOrEmailText.setGeometry(QtCore.QRect(300, 130, 301,
        61))
    self.UsernameOrEmailText.setStyleSheet("font: 25pt \"Sans
        Serif\"; color:rgb(69, 69, 69);\n"
"background-color: rgb(239, 239, 239); padding: 5px;")
    self.UsernameOrEmailText.setObjectName("UsernameOrEmailText")
    self.PasswordText = QtWidgets.QLabel(self.MainWidget)
    self.PasswordText.setGeometry(QtCore.QRect(320, 280, 281, 61))
    self.PasswordText.setStyleSheet("font: 25pt \"Sans Serif\";
        color:rgb(69, 69, 69);\n"
"background-color: rgb(239, 239, 239); padding: 5px;")
    self.PasswordText.setObjectName("PasswordText")
    self.UsernameInput = QtWidgets.QLineEdit(self.MainWidget)
    self.UsernameInput.setGeometry(QtCore.QRect(720, 130, 231, 60))
    self.UsernameInput.setStyleSheet("background-color: rgb(239,
        239, 239);\n"
"color: rgb(69, 69, 69);\n"
"font: 18pt \"Sans Serif\";\n"
"border: 2px solid;\n"
"border-radius: 20px;\n"
"border-color:rgb(69, 69, 69);")
    self.UsernameInput.setText("")
    self.UsernameInput.setCursorPosition(0)
    self.UsernameInput.setObjectName("UsernameInput")

```

```

        self.PasswordInput = QtWidgets.QLineEdit(self.MainWidget)
        self.PasswordInput.setGeometry(QtCore.QRect(720, 280, 231, 60))
        self.PasswordInput.setStyleSheet("background-color: rgb(239,
            239, 239);\n"
"color: rgb(69, 69, 69);\n"
"font: 18pt \\"Sans Serif\\";\n"
"border: 2px solid;\n"
"border-radius: 20px;\n"
"border-color:rgb(69, 69, 69);")
        self.PasswordInput.setText("")
        self.PasswordInput.setEchoMode(QtWidgets.QLineEdit.Password)
        self.PasswordInput.setCursorPosition(0)
        self.PasswordInput.setObjectName("PasswordInput")
        self.SubmitButton = QtWidgets.QPushButton(self.MainWidget)
        self.SubmitButton.setGeometry(QtCore.QRect(570, 440, 200, 70))
        self.SubmitButton.setCursor(QtGui.QCursor(QtCore.Qt.PointingHandCursor))
        self.SubmitButton.setStyleSheet("border: 2px solid;\n"
"border-radius: 20px;\n"
"border-color:rgb(69, 69, 69);\n"
"background-color: rgb(69, 69, 69);\n"
"font: 18pt \\"Sans Serif\\"; color:rgb(239, 239, 239);\n"
"")
        self.SubmitButton.setObjectName("SubmitButton")
        self.ErrorLabel = QtWidgets.QLabel(self.MainWidget)
        self.ErrorLabel.setGeometry(QtCore.QRect(440, 350, 461, 71))
        self.ErrorLabel.setStyleSheet("color: rgb(255, 0, 0);\n"
"font: 18pt \\"Sans Serif\\";")
        self.ErrorLabel.setObjectName("ErrorLabel")
        self.ShowHideButton = QtWidgets.QPushButton(self.MainWidget)
        self.ShowHideButton.setGeometry(QtCore.QRect(980, 290, 111, 41))
        self.ShowHideButton.setCursor(QtGui.QCursor(QtCore.Qt.PointingHandCursor))
        self.ShowHideButton.setStyleSheet("border: 2px solid;\n"
"border-radius: 20px;\n"
"border-color:rgb(69, 69, 69);\n"
"background-color: rgb(69, 69, 69);\n"
"font: 18pt \\"Sans Serif\\"; color:rgb(239, 239, 239);\n"
"")
        self.ShowHideButton.setObjectName("ShowHideButton")
        self.BackButton = QtWidgets.QPushButton(self.MainWidget)
        self.BackButton.setGeometry(QtCore.QRect(10, 460, 200, 70))
        self.BackButton.setCursor(QtGui.QCursor(QtCore.Qt.PointingHandCursor))
        self.BackButton.setStyleSheet("border: 2px solid;\n"
"border-radius: 20px;\n"
"border-color:rgb(69, 69, 69);\n"
"background-color: rgb(69, 69, 69);\n"
"font: 18pt \\"Sans Serif\\"; color:rgb(239, 239, 239);\n"
"")
        self.BackButton.setObjectName("BackButton")

        self.retranslateUi(LoginScreen)

```

```

QtCore.QMetaObject.connectSlotsByName(LoginScreen)

def retranslateUi(self, LoginScreen):
    _translate = QtCore.QCoreApplication.translate
    LoginScreen.setWindowTitle(_translate("LoginScreen",
        "Visualising the Riemann Hypothesis - Log In"))
    self.Title.setText(_translate("LoginScreen", "Login"))
    self.LoginTab.setText(_translate("LoginScreen", "Login"))
    self.SignUpTab.setText(_translate("LoginScreen", "Sign Up"))
    self.ResetPasswordTab.setText(_translate("LoginScreen", "Reset
        Password"))
    self.ForgottenPasswordLabel.setText(_translate("LoginScreen",
        "<html><head/><body><p align=\"center\"><span style=\"
        font-size:18pt;\">Forgotten<br/>Password</span></p></body></html>"))
    self.UsernameOrEmailText.setText(_translate("LoginScreen",
        "<html><head/><body><p
        align=\"right\">Username:</p></body></html>"))
    self.PasswordText.setText(_translate("LoginScreen",
        "<html><head/><body><p
        align=\"right\">Password:</p></body></html>"))
    self.UsernameInput.setPlaceholderText(_translate("LoginScreen",
        "Enter Username"))
    self.PasswordInput.setPlaceholderText(_translate("LoginScreen",
        "Enter Password"))
    self.SubmitButton.setText(_translate("LoginScreen", "Submit"))
    self.ErrorLabel.setText(_translate("LoginScreen",
        "<html><head/><body><p
        align=\"center\"><br/></p></body></html>"))
    self.ShowHideButton.setText(_translate("LoginScreen", "Show"))
    self.BackButton.setText(_translate("LoginScreen", "Back"))

```

program/user_interface/login_ui/resset_password.py

```

"""
reset_password.py
=====
A GUI for the reset password page of the login section
"""

```

```

from PyQt5 import QtCore, QtGui, QtWidgets

class Ui_ResetPasswordScreen(object):

    def setupUi(self, ResetPasswordScreen):
        ResetPasswordScreen.setObjectName("ResetPasswordScreen")
        ResetPasswordScreen.resize(1340, 720)
        ResetPasswordScreen.setSizeGripEnabled(False)

```

```

    self.widget = QtWidgets.QWidget(self)
    self.widget.setGeometry(QtCore.QRect(0, 0, 1340, 720))
    self.widget.setStyleSheet("background-color: #4d4d4d; color: white")
    self.widget.setObjectName("widget")
    self.Title = QtWidgets.QLabel(self.widget)
    self.Title.setGeometry(QtCore.QRect(612, 20, 116, 51))
    self.Title.setStyleSheet("font: 36pt \"Sans Serif\"; color: #4d4d4d")
    self.Title.setObjectName("Title")
    self.TabBar = QtWidgets.QWidget(self.widget)
    self.TabBar.setGeometry(QtCore.QRect(0, 80, 1340, 80))
    self.TabBar.setStyleSheet("background-color: #4d4d4d; border-radius: 20px; border: 2px solid #4d4d4d; color: white")
    self.TabBar.setObjectName("TabBar")
    self.LoginTab = QtWidgets.QPushButton(self.TabBar)
    self.LoginTab.setGeometry(QtCore.QRect(10, 5, 200, 70))
    self.LoginTab.setCursor(QtGui.QCursor(QtCore.Qt.PointingHandCursor))
    self.LoginTab.setStyleSheet("border: 2px solid #4d4d4d; border-radius: 20px; background-color: #4d4d4d; color: white; font: 18pt \"Sans Serif\"; font-weight: bold; padding: 5px; text-align: center; width: 190px; height: 65px; margin-left: 10px; margin-right: 10px; margin-top: 10px; margin-bottom: 10px; outline: none")
    self.LoginTab.setObjectName("LoginTab")
    self.SignUpTab = QtWidgets.QPushButton(self.TabBar)
    self.SignUpTab.setGeometry(QtCore.QRect(220, 5, 200, 70))
    self.SignUpTab.setCursor(QtGui.QCursor(QtCore.Qt.PointingHandCursor))
    self.SignUpTab.setStyleSheet("border: 2px solid #4d4d4d; border-radius: 20px; background-color: #4d4d4d; color: white; font: 18pt \"Sans Serif\"; font-weight: bold; padding: 5px; text-align: center; width: 190px; height: 65px; margin-left: 10px; margin-right: 10px; margin-top: 10px; margin-bottom: 10px; outline: none")
    self.SignUpTab.setObjectName("SignUpTab")
    self.ResetPasswordTab = QtWidgets.QPushButton(self.TabBar)
    self.ResetPasswordTab.setGeometry(QtCore.QRect(640, 5, 200, 70))
    self.ResetPasswordTab.setCursor(QtGui.QCursor(QtCore.Qt.PointingHandCursor))
    self.ResetPasswordTab.setStyleSheet("border: 2px solid #4d4d4d; border-radius: 20px; background-color: #4d4d4d; color: white; font: 18pt \"Sans Serif\"; font-weight: bold; padding: 5px; text-align: center; width: 190px; height: 65px; margin-left: 10px; margin-right: 10px; margin-top: 10px; margin-bottom: 10px; outline: none")
    self.ResetPasswordTab.setObjectName("ResetPasswordTab")
    self.ForgottenPasswordLabel = QtWidgets.QLabel(self.TabBar)
    self.ForgottenPasswordLabel.setGeometry(QtCore.QRect(430, 5, 200, 70))
    self.ForgottenPasswordLabel.setStyleSheet("border: 2px solid #4d4d4d; border-radius: 20px; background-color: #4d4d4d; color: white; font: 18pt \"Sans Serif\"; font-weight: bold; padding: 5px; text-align: center; width: 190px; height: 65px; margin-left: 10px; margin-right: 10px; margin-top: 10px; margin-bottom: 10px; outline: none")
    self.ForgottenPasswordLabel.setObjectName("ForgottenPasswordLabel")

```

```

"background-color: rgb(69, 69, 69);\n"
"font: 18pt \"Sans Serif\"; color:rgb(239, 239, 239);\n"
"padding: 7px;\n"
"")
    self.ForgottenPasswordLabel.setObjectName("ForgottenPasswordLabel")
    self.ForgottenPasswordTab = QtWidgets.QPushButton(self.TabBar)
    self.ForgottenPasswordTab.setGeometry(QtCore.QRect(430, 5, 200,
        70))
    self.ForgottenPasswordTab.setCursor(QtGui.QCursor(QtCore.Qt.PointingHandCursor))
    self.ForgottenPasswordTab.setStyleSheet("border: 2px solid;\n"
"border-radius: 20px;\n"
"background-color: rgba(0, 0, 0, 0);\n"
"border-color: rgba(0, 0, 0, 0);")
        self.ForgottenPasswordTab.setText("")
        self.ForgottenPasswordTab.setObjectName("ForgottenPasswordTab")
        self.MainWidget = QtWidgets.QWidget(self.widget)
        self.MainWidget.setGeometry(QtCore.QRect(10, 170, 1320, 540))
        self.MainWidget.setStyleSheet("background-color: rgb(239, 239,
            239);\n"
"border-radius: 20px;")
        self.MainWidget.setObjectName("MainWidget")
        self.UsernameOrEmailText = QtWidgets.QLabel(self.MainWidget)
        self.UsernameOrEmailText.setGeometry(QtCore.QRect(300, 130, 301,
            61))
        self.UsernameOrEmailText.setStyleSheet("font: 25pt \"Sans
            Serif\"; color:rgb(69, 69, 69);\n"
"background-color: rgb(239, 239, 239); padding: 5px;")
        self.UsernameOrEmailText.setObjectName("UsernameOrEmailText")
        self.PasswordText = QtWidgets.QLabel(self.MainWidget)
        self.PasswordText.setGeometry(QtCore.QRect(320, 280, 281, 61))
        self.PasswordText.setStyleSheet("font: 25pt \"Sans Serif\";
            color:rgb(69, 69, 69);\n"
"background-color: rgb(239, 239, 239); padding: 5px;")
        self.PasswordText.setObjectName("PasswordText")
        self.UsernameInput = QtWidgets.QLineEdit(self.MainWidget)
        self.UsernameInput.setGeometry(QtCore.QRect(720, 130, 261, 60))
        self.UsernameInput.setStyleSheet("background-color: rgb(239,
            239, 239);\n"
"color: rgb(69, 69, 69);\n"
"font: 18pt \"Sans Serif\";\n"
"border: 2px solid;\n"
"border-radius: 20px;\n"
"border-color:rgb(69, 69, 69);")
        self.UsernameInput.setText("")
        self.UsernameInput.setCursorPosition(0)
        self.UsernameInput.setObjectName("UsernameInput")
        self.PasswordInput = QtWidgets.QLineEdit(self.MainWidget)
        self.PasswordInput.setGeometry(QtCore.QRect(720, 280, 261, 60))
        self.PasswordInput.setStyleSheet("background-color: rgb(239,
            239, 239);\n"

```

```

"color: rgb(69, 69, 69);\n"
"font: 18pt \\"Sans Serif\\\";\n"
"border: 2px solid;\n"
"border-radius: 20px;\n"
"border-color:rgb(69, 69, 69);")
    self.PasswordInput.setText("")
    self.PasswordInput.setEchoMode(QtWidgets.QLineEdit.Password)
    self.PasswordInput.setCursorPosition(0)
    self.PasswordInput.setObjectName("PasswordInput")
    self.SubmitButton = QtWidgets.QPushButton(self.MainWidget)
    self.SubmitButton.setGeometry(QtCore.QRect(570, 440, 200, 70))
    self.SubmitButton.setCursor(QtGui.QCursor(Qt.PointingHandCursor))
    self.SubmitButton.setStyleSheet("border: 2px solid;\n"
"border-radius: 20px;\n"
"border-color:rgb(69, 69, 69);\n"
"background-color: rgb(69, 69, 69);\n"
"font: 18pt \\"Sans Serif\\\"; color:rgb(239, 239, 239);\n"
""")
        self.SubmitButton.setObjectName("SubmitButton")
        self.ShowHideButton = QtWidgets.QPushButton(self.MainWidget)
        self.ShowHideButton.setGeometry(QtCore.QRect(1010, 290, 111, 41))
        self.ShowHideButton.setCursor(QtGui.QCursor(Qt.PointingHandCursor))
        self.ShowHideButton.setStyleSheet("border: 2px solid;\n"
"border-radius: 20px;\n"
"border-color:rgb(69, 69, 69);\n"
"background-color: rgb(69, 69, 69);\n"
"font: 18pt \\"Sans Serif\\\"; color:rgb(239, 239, 239);\n"
""")
        self.ShowHideButton.setObjectName("ShowHideButton")
        self.ErrorLabel = QtWidgets.QLabel(self.MainWidget)
        self.ErrorLabel.setGeometry(QtCore.QRect(440, 350, 461, 71))
        self.ErrorLabel.setStyleSheet("color: rgb(255, 0, 0);\n"
"font: 18pt \\"Sans Serif\\\";")
        self.ErrorLabel.setObjectName("ErrorLabel")

        self.retranslateUi(ResetPasswordScreen)
        QtCore.QMetaObject.connectSlotsByName(ResetPasswordScreen)

def retranslateUi(self, ResetPasswordScreen):
    _translate = QtCore.QCoreApplication.translate
    ResetPasswordScreen.setWindowTitle(_translate("ResetPasswordScreen",
        "Visualising the Riemann Hypothesis - Reset Password"))
    self.Title.setText(_translate("ResetPasswordScreen", "Login"))
    self.LoginTab.setText(_translate("ResetPasswordScreen", "Login"))
    self.SignUpTab.setText(_translate("ResetPasswordScreen", "Sign
        Up"))
    self.ResetPasswordTab.setText(_translate("ResetPasswordScreen",
        "Reset Password"))
    self.ForgottenPasswordLabel.setText(_translate("ResetPasswordScreen",
        "<html><head/><body><p align=\"center\"><span style=\""))

```

```

    font-size:18pt;\">Forgotten<br/>Password</span></p></body></html>"))
self.UsernameOrEmailText.setText(_translate("ResetPasswordScreen",
    "<html><head/><body><p"
    align=\\\"right\\\">Username:</p></body></html>"))
self.PasswordText.setText(_translate("ResetPasswordScreen",
    "<html><head/><body><p"
    align=\\\"right\\\">Password:</p></body></html>"))
self.UsernameInput.setPlaceholderText(_translate("ResetPasswordScreen",
    "Enter Username"))
self.PasswordInput.setPlaceholderText(_translate("ResetPasswordScreen",
    "Enter Password"))
self.SubmitButton.setText(_translate("ResetPasswordScreen",
    "Submit"))
self.ShowHideButton.setText(_translate("ResetPasswordScreen",
    "Show"))
self.ErrorLabel.setText(_translate("ResetPasswordScreen",
    "<html><head/><body><p"
    align=\\\"center\\\"><br/></p></body></html>"))

```

program/user_interface/login_ui/resset_password2.py

```

"""
reset_password2.py
=====
A GUI for the reset password 2 page of the login section
"""

from PyQt5 import QtCore, QtGui, QtWidgets

class Ui_ResetPassword2Screen(object):

    def setupUi(self, ResetPassword2Screen):
        ResetPassword2Screen.setObjectName("ResetPassword2Screen")
        ResetPassword2Screen.resize(1340, 720)
        ResetPassword2Screen.setSizeGripEnabled(False)
        self.widget = QtWidgets.QWidget(ResetPassword2Screen)
        self.widget.setGeometry(QtCore.QRect(0, 0, 1340, 720))
        self.widget.setStyleSheet("background-color: rgb(69, 69, 69);")
        self.widget.setObjectName("widget")
        self.Title = QtWidgets.QLabel(self.widget)
        self.Title.setGeometry(QtCore.QRect(612, 20, 116, 51))
        self.Title.setStyleSheet("font: 36pt \\\"Sans Serif\\\"";
                               "color:rgb(239, 239, 239)")
        self.Title.setObjectName("Title")
        self.TabBar = QtWidgets.QWidget(self.widget)
        self.TabBar.setGeometry(QtCore.QRect(0, 80, 1340, 80))
        self.TabBar.setStyleSheet("background-color: rgb(239, 239,

```

```

        239);")
    self.TabBar.setObjectName("TabBar")
    self.LoginTab = QtWidgets.QPushButton(self.TabBar)
    self.LoginTab.setGeometry(QtCore.QRect(10, 5, 200, 70))
    self.LoginTab.setCursor(QtGui.QCursor(QtCore.Qt.ArrowCursor))
    self.LoginTab.setStyleSheet("border: 2px solid;\n"
"border-radius: 20px;\n"
"border-color:rgb(69, 69, 69);\n"
"background-color: rgb(69, 69, 69);\n"
"font: 18pt \"Sans Serif\"; color:rgb(239, 239, 239);\n"
""")
    self.LoginTab.setObjectName("LoginTab")
    self.SignUpTab = QtWidgets.QPushButton(self.TabBar)
    self.SignUpTab.setGeometry(QtCore.QRect(220, 5, 200, 70))
    self.SignUpTab.setCursor(QtGui.QCursor(QtCore.Qt.ArrowCursor))
    self.SignUpTab.setStyleSheet("border: 2px solid;\n"
"border-radius: 20px;\n"
"border-color:rgb(69, 69, 69);\n"
"background-color: rgb(69, 69, 69);\n"
"font: 18pt \"Sans Serif\"; color:rgb(239, 239, 239);\n"
""")
    self.SignUpTab.setObjectName("SignUpTab")
    self.ResetPasswordTab = QtWidgets.QPushButton(self.TabBar)
    self.ResetPasswordTab.setGeometry(QtCore.QRect(640, 5, 200, 70))
    self.ResetPasswordTab.setCursor(QtGui.QCursor(QtCore.Qt.ArrowCursor))
    self.ResetPasswordTab.setStyleSheet("border: 2px solid;\n"
"border-radius: 20px;\n"
"border-color:rgb(69, 69, 69);\n"
"background-color: rgb(239, 239, 239);\n"
"font: 18pt \"Sans Serif\"; color:rgb(69, 69, 69);\n"
""")
    self.ResetPasswordTab.setObjectName("ResetPasswordTab")
    self.ForgottenPasswordLabel = QtWidgets.QLabel(self.TabBar)
    self.ForgottenPasswordLabel.setGeometry(QtCore.QRect(430, 5,
200, 70))
    self.ForgottenPasswordLabel.setStyleSheet("border: 2px solid;\n"
"border-radius: 20px;\n"
"border-color:rgb(69, 69, 69);\n"
"background-color: rgb(69, 69, 69);\n"
"font: 18pt \"Sans Serif\"; color:rgb(239, 239, 239);\n"
"padding: 7px;\n"
""")
    self.ForgottenPasswordLabel.setObjectName("ForgottenPasswordLabel")
    self.ForgottenPasswordTab = QtWidgets.QPushButton(self.TabBar)
    self.ForgottenPasswordTab.setGeometry(QtCore.QRect(430, 5, 200,
70))
    self.ForgottenPasswordTab.setCursor(QtGui.QCursor(QtCore.Qt.PointingHandCursor))
    self.ForgottenPasswordTab.setStyleSheet("border: 2px solid;\n"
"border-radius: 20px;\n"
"background-color: rgba(0, 0, 0, 0);\n"

```

```

"border-color: rgba(0, 0, 0, 0);")
    self.ForgottenPasswordTab.setText("")
    self.ForgottenPasswordTab.setObjectName("ForgottenPasswordTab")
    self.MainWidget = QtWidgets.QWidget(self.widget)
    self.MainWidget.setGeometry(QtCore.QRect(10, 170, 1320, 540))
    self.MainWidget.setStyleSheet("background-color: rgb(239, 239,
    239);\n"
"border-radius: 20px;")
        self.MainWidget.setObjectName("MainWidget")
        self.PasswordText = QtWidgets.QLabel(self.MainWidget)
        self.PasswordText.setGeometry(QtCore.QRect(260, 130, 341, 61))
        self.PasswordText.setStyleSheet("font: 25pt \"Sans Serif\";
        color:rgb(69, 69, 69);\n"
"background-color: rgb(239, 239, 239); padding: 5px;)")
        self.PasswordText.setObjectName("PasswordText")
        self.ConfirmPasswordText = QtWidgets.QLabel(self.MainWidget)
        self.ConfirmPasswordText.setGeometry(QtCore.QRect(210, 280, 391,
        61))
        self.ConfirmPasswordText.setStyleSheet("font: 25pt \"Sans
        Serif\"; color:rgb(69, 69, 69);\n"
"background-color: rgb(239, 239, 239); padding: 5px;)")
        self.ConfirmPasswordText.setObjectName("ConfirmPasswordText")
        self.PasswordInput = QtWidgets.QLineEdit(self.MainWidget)
        self.PasswordInput.setGeometry(QtCore.QRect(720, 130, 280, 60))
        self.PasswordInput.setStyleSheet("background-color: rgb(239,
        239, 239);\n"
"color: rgb(69, 69, 69);\n"
"font: 18pt \"Sans Serif\";\n"
"border: 2px solid;\n"
"border-radius: 20px;\n"
"border-color:rgb(69, 69, 69);")
            self.PasswordInput.setText("")
            self.PasswordInput.setEchoMode(QtWidgets.QLineEdit.Password)
            self.PasswordInput.setCursorPosition(0)
            self.PasswordInput.setObjectName("PasswordInput")
            self.ConfirmPasswordInput = QtWidgets.QLineEdit(self.MainWidget)
            self.ConfirmPasswordInput.setGeometry(QtCore.QRect(720, 280,
            280, 60))
            self.ConfirmPasswordInput.setStyleSheet("background-color:
            rgb(239, 239, 239);\n"
"color: rgb(69, 69, 69);\n"
"font: 18pt \"Sans Serif\";\n"
"border: 2px solid;\n"
"border-radius: 20px;\n"
"border-color:rgb(69, 69, 69);")
                self.ConfirmPasswordInput.setText("")
                self.ConfirmPasswordInput.setEchoMode(QtWidgets.QLineEdit.Password)
                self.ConfirmPasswordInput.setCursorPosition(0)
                self.ConfirmPasswordInput.setObjectName("ConfirmPasswordInput")
                self.SubmitButton = QtWidgets.QPushButton(self.MainWidget)

```

```

        self.SubmitButton.setGeometry(QtCore.QRect(570, 440, 200, 70))
        self.SubmitButton.setCursor(QtGui.QCursor(Qt.Core.Qt.PointingHandCursor))
        self.SubmitButton.setStyleSheet("border: 2px solid;\n"
"border-radius: 20px;\n"
"border-color:rgb(69, 69, 69);\n"
"background-color: rgb(69, 69, 69);\n"
"font: 18pt \"Sans Serif\"; color:rgb(239, 239, 239);\n"
""")
        self.SubmitButton.setObjectName("SubmitButton")
        self.ShowHideButton = QtWidgets.QPushButton(self.MainWidget)
        self.ShowHideButton.setGeometry(QtCore.QRect(1030, 290, 111, 41))
        self.ShowHideButton.setCursor(QtGui.QCursor(Qt.Core.Qt.PointingHandCursor))
        self.ShowHideButton.setStyleSheet("border: 2px solid;\n"
"border-radius: 20px;\n"
"border-color:rgb(69, 69, 69);\n"
"background-color: rgb(69, 69, 69);\n"
"font: 18pt \"Sans Serif\"; color:rgb(239, 239, 239);\n"
""")
        self.ShowHideButton.setObjectName("ShowHideButton")

        self.retranslateUi(ResetPassword2Screen)
        QtCore.QMetaObject.connectSlotsByName(ResetPassword2Screen)

    def retranslateUi(self, ResetPassword2Screen):
        _translate = QtCore.QCoreApplication.translate
        ResetPassword2Screen.setWindowTitle(_translate("ResetPassword2Screen",
            "Visualising the Riemann Hypothesis - Reset Password"))
        self.Title.setText(_translate("ResetPassword2Screen", "Login"))
        self.LoginTab.setText(_translate("ResetPassword2Screen",
            "Login"))
        self.SignUpTab.setText(_translate("ResetPassword2Screen", "Sign
            Up"))
        self.ResetPasswordTab.setText(_translate("ResetPassword2Screen",
            "Reset Password"))
        self.ForgottenPasswordLabel.setText(_translate("ResetPassword2Screen",
            "<html><head/><body><p align=\"center\"><span style=\"
            font-size:18pt;\">Forgotten<br/>Password</span></p></body></html>"))
        self.PasswordText.setText(_translate("ResetPassword2Screen",
            "<html><head/><body><p align=\"right\">Enter New
            Password:</p></body></html>"))
        self.ConfirmPasswordText.setText(_translate("ResetPassword2Screen",
            "<html><head/><body><p align=\"right\">Confirm New
            Password:</p></body></html>"))
        self.PasswordInput.setPlaceholderText(_translate("ResetPassword2Screen",
            "Enter New Password"))
        self.ConfirmPasswordInput.setPlaceholderText(_translate("ResetPassword2Screen",
            "Re-enter New Password"))
        self.SubmitButton.setText(_translate("ResetPassword2Screen",
            "Submit"))
        self.ShowHideButton.setText(_translate("ResetPassword2Screen",

```

```
"Show"))
```

program/user_interface/login_ui/sign_up.py

```
"""
sign_up.py
=====
A GUI for the sign up page of the login section
"""

from PyQt5 import QtCore, QtGui, QtWidgets

class Ui_SignUpScreen(object):

    def setupUi(self, SignUpScreen):
        SignUpScreen.setObjectName("SignUpScreen")
        SignUpScreen.resize(1340, 720)
        SignUpScreen.setSizeGripEnabled(False)
        self.widget = QtWidgets.QWidget(SignUpScreen)
        self.widget.setGeometry(QtCore.QRect(0, 0, 1340, 720))
        self.widget.setStyleSheet("background-color: rgb(69, 69, 69);")
        self.widget.setObjectName("widget")
        self.Title = QtWidgets.QLabel(self.widget)
        self.Title.setGeometry(QtCore.QRect(612, 20, 121, 51))
        self.Title.setStyleSheet("font: 36pt \\"Sans Serif\\";
                               color:rgb(239, 239, 239);")
        self.Title.setObjectName("Title")
        self.TabBar = QtWidgets.QWidget(self.widget)
        self.TabBar.setGeometry(QtCore.QRect(0, 80, 1340, 80))
        self.TabBar.setStyleSheet("background-color: rgb(239, 239,
                                         239);")
        self.TabBar.setObjectName("TabBar")
        self.LoginTab = QtWidgets.QPushButton(self.TabBar)
        self.LoginTab.setGeometry(QtCore.QRect(10, 5, 200, 70))
        self.LoginTab.setCursor(QtGui.QCursor(QtCore.Qt.PointingHandCursor))
        self.LoginTab.setStyleSheet("border: 2px solid;\n"
"border-radius: 20px;\n"
"border-color:rgb(69, 69, 69);\n"
"background-color: rgb(69, 69, 69);\n"
"font: 18pt \\"Sans Serif\\"; color:rgb(239, 239, 239);\n"
"")
        self.LoginTab.setObjectName("LoginTab")
        self.SignUpTab = QtWidgets.QPushButton(self.TabBar)
        self.SignUpTab.setGeometry(QtCore.QRect(220, 5, 200, 70))
        self.SignUpTab.setCursor(QtGui.QCursor(QtCore.Qt.PointingHandCursor))
        self.SignUpTab.setStyleSheet("border: 2px solid;\n"
"border-radius: 20px;\n"
"border-color:rgb(69, 69, 69);\n"
"background-color: rgb(69, 69, 69);\n"
"font: 18pt \\"Sans Serif\\"; color:rgb(239, 239, 239);\n"
"")
```

```

"border-color:rgb(69, 69, 69);\n"
"background-color: rgb(239, 239, 239);\n"
"font: 18pt \\"Sans Serif\\"; color:rgb(69, 69, 69);\n"
""")
    self.SignUpTab.setObjectName("SignUpTab")
    self.ResetPasswordTab = QtWidgets.QPushButton(self.TabBar)
    self.ResetPasswordTab.setGeometry(QtCore.QRect(640, 5, 200, 70))
    self.ResetPasswordTab.setCursor(QtGui.QCursor(QtCore.Qt.PointingHandCursor))
    self.ResetPasswordTab.setStyleSheet("border: 2px solid;\n"
"border-radius: 20px;\n"
"border-color:rgb(69, 69, 69);\n"
"background-color: rgb(69, 69, 69);\n"
"font: 18pt \\"Sans Serif\\"; color:rgb(239, 239, 239);\n"
""")
    self.ResetPasswordTab.setObjectName("ResetPasswordTab")
    self.ForgottenPasswordLabel = QtWidgets.QLabel(self.TabBar)
    self.ForgottenPasswordLabel.setGeometry(QtCore.QRect(430, 5,
200, 70))
    self.ForgottenPasswordLabel.setStyleSheet("border: 2px solid;\n"
"border-radius: 20px;\n"
"border-color:rgb(69, 69, 69);\n"
"background-color: rgb(69, 69, 69);\n"
"font: 18pt \\"Sans Serif\\"; color:rgb(239, 239, 239);\n"
"padding: 7px;\n"
""")
    self.ForgottenPasswordLabel.setObjectName("ForgottenPasswordLabel")
    self.ForgottenPasswordTab = QtWidgets.QPushButton(self.TabBar)
    self.ForgottenPasswordTab.setGeometry(QtCore.QRect(430, 5, 200,
70))
    self.ForgottenPasswordTab.setCursor(QtGui.QCursor(QtCore.Qt.PointingHandCursor))
    self.ForgottenPasswordTab.setStyleSheet("border: 2px solid;\n"
"border-radius: 20px;\n"
"background-color: rgba(0, 0, 0, 0);\n"
"border-color: rgba(0, 0, 0, 0);")
    self.ForgottenPasswordTab.setText("")
    self.ForgottenPasswordTab.setObjectName("ForgottenPasswordTab")
    self.MainWidget = QtWidgets.QWidget(self.widget)
    self.MainWidget.setGeometry(QtCore.QRect(10, 170, 1320, 540))
    self.MainWidget.setStyleSheet("background-color: rgb(239, 239,
239);\n"
"border-radius: 20px;")

    self.MainWidget.setObjectName("MainWidget")
    self.UsernameOrEmailText = QtWidgets.QLabel(self.MainWidget)
    self.UsernameOrEmailText.setGeometry(QtCore.QRect(270, 40, 301,
61))
    self.UsernameOrEmailText.setStyleSheet("font: 25pt \\"Sans
Serif\\"; color:rgb(69, 69, 69);\n"
"background-color: rgb(239, 239, 239); padding: 5px;")
    self.UsernameOrEmailText.setObjectName("UsernameOrEmailText")
    self.EmailText = QtWidgets.QLabel(self.MainWidget)

```

```

        self.EmailText.setGeometry(QtCore.QRect(290, 120, 281, 61))
        self.EmailText.setStyleSheet("font: 25pt \"Sans Serif\";
            color:rgb(69, 69, 69);\n"
    "background-color: rgb(239, 239, 239); padding: 5px;")
        self.EmailText.setObjectName("EmailText")
        self.UsernameInput = QtWidgets.QLineEdit(self.MainWidget)
        self.UsernameInput.setGeometry(QtCore.QRect(680, 40, 231, 60))
        self.UsernameInput.setStyleSheet("background-color: rgb(239,
            239, 239);\n"
    "color: rgb(69, 69, 69);\n"
    "font: 18pt \"Sans Serif\";\n"
    "border: 2px solid;\n"
    "border-radius: 20px;\n"
    "border-color:rgb(69, 69, 69);")
        self.UsernameInput.setText("")
        self.UsernameInput.setCursorPosition(0)
        self.UsernameInput.setObjectName("UsernameInput")
        self.EmailInput = QtWidgets.QLineEdit(self.MainWidget)
        self.EmailInput.setGeometry(QtCore.QRect(680, 120, 231, 60))
        self.EmailInput.setStyleSheet("background-color: rgb(239, 239,
            239);\n"
    "color: rgb(69, 69, 69);\n"
    "font: 18pt \"Sans Serif\";\n"
    "border: 2px solid;\n"
    "border-radius: 20px;\n"
    "border-color:rgb(69, 69, 69);")
        self.EmailInput.setText("")
        self.EmailInput.setEchoMode(QtWidgets.QLineEdit.Normal)
        self.EmailInput.setCursorPosition(0)
        self.EmailInput.setObjectName("EmailInput")
        self.SubmitButton = QtWidgets.QPushButton(self.MainWidget)
        self.SubmitButton.setGeometry(QtCore.QRect(570, 440, 200, 70))
        self.SubmitButton.setCursor(QtGui.QCursor(Qt.PointingHandCursor))
        self.SubmitButton.setStyleSheet("border: 2px solid;\n"
    "border-radius: 20px;\n"
    "border-color:rgb(69, 69, 69);\n"
    "background-color: rgb(69, 69, 69);\n"
    "font: 18pt \"Sans Serif\"; color:rgb(239, 239, 239);\n"
    "")
        self.SubmitButton.setObjectName("SubmitButton")
        self.PasswordText = QtWidgets.QLabel(self.MainWidget)
        self.PasswordText.setGeometry(QtCore.QRect(290, 200, 281, 61))
        self.PasswordText.setStyleSheet("font: 25pt \"Sans Serif\";
            color:rgb(69, 69, 69);\n"
    "background-color: rgb(239, 239, 239); padding: 5px;")
        self.PasswordText.setObjectName("PasswordText")
        self.PasswordInput = QtWidgets.QLineEdit(self.MainWidget)
        self.PasswordInput.setGeometry(QtCore.QRect(680, 200, 231, 60))
        self.PasswordInput.setStyleSheet("background-color: rgb(239,
            239, 239);\n"
    )

```

```

"color: rgb(69, 69, 69);\n"
"font: 18pt \\"Sans Serif\"\;\n"
"border: 2px solid;\n"
"border-radius: 20px;\n"
"border-color:rgb(69, 69, 69);")
    self.PasswordInput.setText("")
    self.PasswordInput.setEchoMode(QtWidgets.QLineEdit.Password)
    self.PasswordInput.setCursorPosition(0)
    self.PasswordInput.setObjectName("PasswordInput")
    self.PasswordText_2 = QtWidgets.QLabel(self.MainWidget)
    self.PasswordText_2.setGeometry(QtCore.QRect(260, 280, 311, 61))
    self.PasswordText_2.setStyleSheet("font: 25pt \\"Sans Serif\";\n"
                                    "color:rgb(69, 69, 69);\n"
"background-color: rgb(239, 239, 239); padding: 5px;")
        self.PasswordText_2.setObjectName("PasswordText_2")
        self.PasswordInput_2 = QtWidgets.QLineEdit(self.MainWidget)
        self.PasswordInput_2.setGeometry(QtCore.QRect(680, 280, 231, 60))
        self.PasswordInput_2.setStyleSheet("background-color: rgb(239,
239, 239);\n"
"color: rgb(69, 69, 69);\n"
"font: 18pt \\"Sans Serif\"\;\n"
"border: 2px solid;\n"
"border-radius: 20px;\n"
"border-color:rgb(69, 69, 69);")
            self.PasswordInput_2.setText("")
            self.PasswordInput_2.setEchoMode(QtWidgets.QLineEdit.Password)
            self.PasswordInput_2.setCursorPosition(0)
            self.PasswordInput_2.setObjectName("PasswordInput_2")
            self.ErrorLabel = QtWidgets.QLabel(self.MainWidget)
            self.ErrorLabel.setGeometry(QtCore.QRect(365, 350, 611, 71))
            self.ErrorLabel.setStyleSheet("color: rgb(255, 0, 0);\n"
"font: 18pt \\"Sans Serif\";")
            self.ErrorLabel.setObjectName("ErrorLabel")
            self.ShowHideButton_2 = QtWidgets.QPushButton(self.MainWidget)
            self.ShowHideButton_2.setGeometry(QtCore.QRect(940, 290, 111,
41))
            self.ShowHideButton_2.setCursor(QtGui.QCursor(QtCore.Qt.PointingHandCursor))
            self.ShowHideButton_2.setStyleSheet("border: 2px solid;\n"
"border-radius: 20px;\n"
"border-color:rgb(69, 69, 69);\n"
"background-color: rgb(69, 69, 69);\n"
"font: 18pt \\"Sans Serif\"; color:rgb(239, 239, 239);\n"
"")
                self.ShowHideButton_2.setObjectName("ShowHideButton_2")
                self.ShowHideButton = QtWidgets.QPushButton(self.MainWidget)
                self.ShowHideButton.setGeometry(QtCore.QRect(940, 210, 111, 41))
                self.ShowHideButton.setCursor(QtGui.QCursor(QtCore.Qt.PointingHandCursor))
                self.ShowHideButton.setStyleSheet("border: 2px solid;\n"
"border-radius: 20px;\n"
"border-color:rgb(69, 69, 69);\n"

```

```

"background-color: rgb(69, 69, 69);\n"
"font: 18pt \"Sans Serif\"; color:rgb(239, 239, 239);\n"
"""
    self.ShowHideButton.setObjectName("ShowHideButton")

    self.retranslateUi(SignUpScreen)
    QtCore.QMetaObject.connectSlotsByName(SignUpScreen)

def retranslateUi(self, SignUpScreen):
    _translate = QtCore.QCoreApplication.translate
    SignUpScreen.setWindowTitle(_translate("SignUpScreen",
                                           "Visualising the Riemann Hypothesis - Sign Up"))
    self.Title.setText(_translate("SignUpScreen", "Login"))
    self.LoginTab.setText(_translate("SignUpScreen", "Login"))
    self.SignUpTab.setText(_translate("SignUpScreen", "Sign Up"))
    self.ResetPasswordTab.setText(_translate("SignUpScreen", "Reset
                                               Password"))
    self.ForgottenPasswordLabel.setText(_translate("SignUpScreen",
                                                   "<html><head/><body><p align=\"center\"><span style=\"
                                                   font-size:18pt;\">Forgotten<br/>Password</span></p></body></html>"))
    self.UsernameOrEmailText.setText(_translate("SignUpScreen",
                                              "<html><head/><body><p
                                              align=\"right\">Username:</p></body></html>"))
    self.EmailText.setText(_translate("SignUpScreen",
                                    "<html><head/><body><p
                                    align=\"right\">Email:</p></body></html>"))
    self.UsernameInput.setPlaceholderText(_translate("SignUpScreen",
                                                    "Enter Username"))
    self.EmailInput.setPlaceholderText(_translate("SignUpScreen",
                                                "Enter Email"))
    self.SubmitButton.setText(_translate("SignUpScreen", "Submit"))
    self.PasswordText.setText(_translate("SignUpScreen",
                                         "<html><head/><body><p
                                         align=\"right\">Password:</p></body></html>"))
    self.PasswordInput.setPlaceholderText(_translate("SignUpScreen",
                                                    "Enter Password"))
    self.PasswordText_2.setText(_translate("SignUpScreen",
                                         "<html><head/><body><p align=\"right\">Confirm
                                         Password:</p></body></html>"))
    self.PasswordInput_2.setPlaceholderText(_translate("SignUpScreen",
                                                    "Re-enter Password"))
    self.ErrorLabel.setText(_translate("SignUpScreen",
                                     "<html><head/><body><p
                                     align=\"center\"><br/></p></body></html>"))
    self.ShowHideButton_2.setText(_translate("SignUpScreen", "Show"))
    self.ShowHideButton.setText(_translate("SignUpScreen", "Show"))

```

program/user_interface/notes.ui/__init__.py

```

"""
__init__.py
=====
Imports for the notes_ui
"""

from .tutorial_notes import Ui_TutorialNotesScreen
from .introduction_notes import Ui_IntroductionNotesScreen
from .investigation_notes import Ui_InvestigationNotesScreen
from .summary_notes import Ui_SummaryNotesScreen


---


program/user_interface/notes_ui/introduction_notes.py
-----
"""

introduction_notes.py
=====
A GUI for the introduction notes page of the notes section
"""

from PyQt5 import QtCore, QtGui, QtWidgets

class Ui_IntroductionNotesScreen(object):

    def setupUi(self, IntroductionNotesScreen):
        IntroductionNotesScreen.setObjectName("IntroductionNotesScreen")
        IntroductionNotesScreen.resize(1340, 723)
        IntroductionNotesScreen.setSizeGripEnabled(False)
        self.widget = QtWidgets.QWidget(IntroductionNotesScreen)
        self.widget.setGeometry(QtCore.QRect(0, 0, 1340, 720))
        self.widget.setStyleSheet("background-color: rgb(69, 69, 69);")
        self.widget.setObjectName("widget")
        self.Title = QtWidgets.QLabel(self.widget)
        self.Title.setGeometry(QtCore.QRect(605, 20, 131, 51))
        self.Title.setStyleSheet("font: 36pt \\"Sans Serif\\";
                               color:rgb(239, 239, 239);")
        self.Title.setObjectName("Title")
        self.TabBar = QtWidgets.QWidget(self.widget)
        self.TabBar.setGeometry(QtCore.QRect(0, 80, 1340, 80))
        self.TabBar.setStyleSheet("background-color: rgb(239, 239,
                                         239);")
        self.TabBar.setObjectName("TabBar")
        self.TutorialTab = QtWidgets.QPushButton(self.TabBar)
        self.TutorialTab.setGeometry(QtCore.QRect(10, 5, 200, 70))
        self.TutorialTab.setCursor(QtGui.QCursor(QtCore.Qt.PointingHandCursor))
        self.TutorialTab.setStyleSheet("border: 2px solid;\n"
                                     "border-radius: 20px;\n"

```

```

"border-color:rgb(69, 69, 69);\n"
"background-color: rgb(69, 69, 69);\n"
"font: 18pt \\"Sans Serif\\"; color:rgb(239, 239, 239);\n"
""")
    self.TutorialTab.setObjectName("TutorialTab")
    self.SummaryTab = QtWidgets.QPushButton(self.TabBar)
    self.SummaryTab.setGeometry(QtCore.QRect(640, 5, 200, 70))
    self.SummaryTab.setCursor(QtGui.QCursor(QtCore.Qt.PointingHandCursor))
    self.SummaryTab.setStyleSheet("border: 2px solid;\n"
"border-radius: 20px;\n"
"border-color:rgb(69, 69, 69);\n"
"background-color: rgb(69, 69, 69);\n"
"font: 18pt \\"Sans Serif\\"; color:rgb(239, 239, 239);\n"
""")
    self.SummaryTab.setObjectName("SummaryTab")
    self.IntroductionTab = QtWidgets.QPushButton(self.TabBar)
    self.IntroductionTab.setGeometry(QtCore.QRect(220, 5, 200, 70))
    self.IntroductionTab.setCursor(QtGui.QCursor(QtCore.Qt.PointingHandCursor))
    self.IntroductionTab.setStyleSheet("border: 2px solid;\n"
"border-radius: 20px;\n"
"border-color:rgb(69, 69, 69);\n"
"background-color: rgb(239, 239, 239);\n"
"font: 18pt \\"Sans Serif\\"; color:rgb(69, 69, 69);\n"
""")
    self.IntroductionTab.setObjectName("IntroductionTab")
    self.InvestigationTab = QtWidgets.QPushButton(self.TabBar)
    self.InvestigationTab.setGeometry(QtCore.QRect(430, 5, 200, 70))
    self.InvestigationTab.setCursor(QtGui.QCursor(QtCore.Qt.PointingHandCursor))
    self.InvestigationTab.setStyleSheet("border: 2px solid;\n"
"border-radius: 20px;\n"
"border-color:rgb(69, 69, 69);\n"
"background-color: rgb(69, 69, 69);\n"
"font: 18pt \\"Sans Serif\\"; color:rgb(239, 239, 239);\n"
""")
    self.InvestigationTab.setObjectName("InvestigationTab")
    self.MainWidget = QtWidgets.QWidget(self.widget)
    self.MainWidget.setGeometry(QtCore.QRect(10, 170, 1320, 540))
    self.MainWidget.setStyleSheet("background-color: rgb(239, 239,
239);\n"
"border-radius: 20px;")
    self.MainWidget.setObjectName("MainWidget")
    self.BackButton = QtWidgets.QPushButton(self.MainWidget)
    self.BackButton.setGeometry(QtCore.QRect(10, 460, 200, 70))
    self.BackButton.setCursor(QtGui.QCursor(QtCore.Qt.PointingHandCursor))
    self.BackButton.setStyleSheet("border: 2px solid;\n"
"border-radius: 20px;\n"
"border-color:rgb(69, 69, 69);\n"
"background-color: rgb(69, 69, 69);\n"
"font: 18pt \\"Sans Serif\\"; color:rgb(239, 239, 239);\n"
""")

```

```

        self.BackButton.setObjectName("BackButton")
        self.NextButton = QtWidgets.QPushButton(self.MainWidget)
        self.NextButton.setGeometry(QtCore.QRect(1110, 460, 200, 70))
        self.NextButton.setCursor(QtGui.QCursor(QtCore.Qt.PointingHandCursor))
        self.NextButton.setStyleSheet("border: 2px solid;\n"
"border-radius: 20px;\n"
"border-color:rgb(69, 69, 69);\n"
"background-color: rgb(69, 69, 69);\n"
"font: 18pt \"Sans Serif\"; color:rgb(239, 239, 239);\n"
""")
        self.NextButton.setObjectName("NextButton")
        self.SubTitleText = QtWidgets.QLabel(self.MainWidget)
        self.SubTitleText.setGeometry(QtCore.QRect(40, 20, 231, 41))
        self.SubTitleText.setStyleSheet("font: 25pt \"Sans Serif\";\n"
"color:rgb(69, 69, 69);\n"
"background-color: rgb(239, 239, 239); padding: 5px;")
        self.SubTitleText.setObjectName("SubTitleText")
        self.NotesText = QtWidgets.QTextEdit(self.MainWidget)
        self.NotesText.setGeometry(QtCore.QRect(50, 80, 1211, 371))
        self.NotesText.viewport().setProperty("cursor",
            QtGui.QCursor(QtCore.Qt.IBeamCursor))
        self.NotesText.setStyleSheet("background-color: rgb(239, 239,
239);\n"
"color: rgb(69, 69, 69);\n"
"font: 18pt \"Sans Serif\";\n"
"border: 2px solid;\n"
"border-color:rgb(69, 69, 69);\n"
"border-radius: 0px;")
        self.NotesText.setReadOnly(False)
        self.NotesText.setObjectName("NotesText")
        self.SaveButton = QtWidgets.QPushButton(self.MainWidget)
        self.SaveButton.setGeometry(QtCore.QRect(470, 460, 200, 70))
        self.SaveButton.setCursor(QtGui.QCursor(QtCore.Qt.PointingHandCursor))
        self.SaveButton.setStyleSheet("border: 2px solid;\n"
"border-radius: 20px;\n"
"border-color:rgb(69, 69, 69);\n"
"background-color: rgb(69, 69, 69);\n"
"font: 18pt \"Sans Serif\"; color:rgb(239, 239, 239);\n"
""")
        self.SaveButton.setObjectName("SaveButton")
        self.SavedText = QtWidgets.QLabel(self.MainWidget)
        self.SavedText.setGeometry(QtCore.QRect(690, 465, 191, 61))
        self.SavedText.setStyleSheet("font: 25pt \"Sans Serif\";\n"
"color:rgb(69, 69, 69);\n"
"background-color: rgb(239, 239, 239); padding: 5px;\n"
"border-radius: 0px")
        self.SavedText.setObjectName("SavedText")

        self.retranslateUi(IntroductionNotesScreen)
        QtCore.QMetaObject.connectSlotsByName(IntroductionNotesScreen)

```

```

def retranslateUi(self, IntroductionNotesScreen):
    _translate = QtCore.QCoreApplication.translate
    IntroductionNotesScreen.setWindowTitle(_translate("IntroductionNotesScreen",
        "Visualising the Riemann Hypothesis - Notes"))
    self.Title.setText(_translate("IntroductionNotesScreen",
        "Notes"))
    self.TutorialTab.setText(_translate("IntroductionNotesScreen",
        "Tutorial"))
    self.SummaryTab.setText(_translate("IntroductionNotesScreen",
        "Summary"))
    self.IntroductionTab.setText(_translate("IntroductionNotesScreen",
        "Introduction"))
    self.InvestigationTab.setText(_translate("IntroductionNotesScreen",
        "Investigation"))
    self.BackButton.setText(_translate("IntroductionNotesScreen",
        "Back"))
    self.NextButton.setText(_translate("IntroductionNotesScreen",
        "Next"))
    self.SubTitleText.setText(_translate("IntroductionNotesScreen",
        "<html><head><body><p><span style=\"\n            font-weight:600;\\">Introduction</span></p></body></html>"))
    self.NotesText.setHtml(_translate("IntroductionNotesScreen",
        "<!DOCTYPE HTML PUBLIC \"-//W3C//DTD HTML 4.0//EN\"\n        \"http://www.w3.org/TR/REC-html40/strict.dtd\">\n<html><head><meta name=\"qrichtext\" content=\"1\" /><style\n            type=\"text/css\"\n            \">\n            p, li { white-space: pre-wrap; }\n            </style></head><body style=\" font-family:'Sans Serif';\n            font-size:18pt; font-weight:400; font-style:normal;\">\n            <p style=\"-qt-paragraph-type:empty; margin-top:0px; margin-bottom:0px;\n            margin-left:0px; margin-right:0px; -qt-block-indent:0;\n            text-indent:0px;\"><br /></p></body></html>"))
    self.SaveButton.setText(_translate("IntroductionNotesScreen",
        "Save"))
    self.SavedText.setText(_translate("IntroductionNotesScreen",
        "<html><head><body><p><br/></p></body></html>"))

```

program/user_interface/notes_ui/investigation_notes.py

```

"""
investigation_notes.py
=====
A GUI for the investigation notes page of the notes section
"""

```

```

from PyQt5 import QtCore, QtGui, QtWidgets

```

```

class Ui_InvestigationNotesScreen(object):

    def setupUi(self, InvestigationNotesScreen):
        InvestigationNotesScreen.setObjectName("InvestigationNotesScreen")
        InvestigationNotesScreen.resize(1340, 723)
        InvestigationNotesScreen.setSizeGripEnabled(False)
        self.widget = QtWidgets.QWidget(InvestigationNotesScreen)
        self.widget.setGeometry(QtCore.QRect(0, 0, 1340, 720))
        self.widget.setStyleSheet("background-color: rgb(69, 69, 69);")
        self.widget.setObjectName("widget")
        self.Title = QtWidgets.QLabel(self.widget)
        self.Title.setGeometry(QtCore.QRect(605, 20, 131, 51))
        self.Title.setStyleSheet("font: 36pt \\"Sans Serif\\";
                               color:rgb(239, 239, 239)")
        self.Title.setObjectName("Title")
        self.TabBar = QtWidgets.QWidget(self.widget)
        self.TabBar.setGeometry(QtCore.QRect(0, 80, 1340, 80))
        self.TabBar.setStyleSheet("background-color: rgb(239, 239,
                                         239);")
        self.TabBar.setObjectName("TabBar")
        self.TutorialTab = QtWidgets.QPushButton(self.TabBar)
        self.TutorialTab.setGeometry(QtCore.QRect(10, 5, 200, 70))
        self.TutorialTab.setCursor(QtGui.QCursor(QtCore.Qt.PointingHandCursor))
        self.TutorialTab.setStyleSheet("border: 2px solid;\n"
                                      "border-radius: 20px;\n"
                                      "border-color:rgb(69, 69, 69);\n"
                                      "background-color: rgb(69, 69, 69);\n"
                                      "font: 18pt \\"Sans Serif\\"; color:rgb(239, 239, 239);\n"
                                      ""))
        self.TutorialTab.setObjectName("TutorialTab")
        self.SummaryTab = QtWidgets.QPushButton(self.TabBar)
        self.SummaryTab.setGeometry(QtCore.QRect(640, 5, 200, 70))
        self.SummaryTab.setCursor(QtGui.QCursor(QtCore.Qt.PointingHandCursor))
        self.SummaryTab.setStyleSheet("border: 2px solid;\n"
                                      "border-radius: 20px;\n"
                                      "border-color:rgb(69, 69, 69);\n"
                                      "background-color: rgb(69, 69, 69);\n"
                                      "font: 18pt \\"Sans Serif\\"; color:rgb(239, 239, 239);\n"
                                      ""))
        self.SummaryTab.setObjectName("SummaryTab")
        self.IntroductionTab = QtWidgets.QPushButton(self.TabBar)
        self.IntroductionTab.setGeometry(QtCore.QRect(220, 5, 200, 70))
        self.IntroductionTab.setCursor(QtGui.QCursor(QtCore.Qt.PointingHandCursor))
        self.IntroductionTab.setStyleSheet("border: 2px solid;\n"
                                          "border-radius: 20px;\n"
                                          "border-color:rgb(69, 69, 69);\n"
                                          "background-color: rgb(69, 69, 69);\n"
                                          "font: 18pt \\"Sans Serif\\"; color:rgb(239, 239, 239);\n"
                                          ""))

```

```

        self.IntroductionTab.setObjectName("IntroductionTab")
        self.InvestigationTab = QtWidgets.QPushButton(self.TabBar)
        self.InvestigationTab.setGeometry(QtCore.QRect(430, 5, 200, 70))
        self.InvestigationTab.setCursor(QtGui.QCursor(QtCore.Qt.PointingHandCursor))
        self.InvestigationTab.setStyleSheet("border: 2px solid;\n"
"border-radius: 20px;\n"
"border-color:rgb(69, 69, 69);\n"
"background-color: rgb(239, 239, 239);\n"
"font: 18pt \"Sans Serif\"; color:rgb(69, 69, 69);\n"
"")

        self.InvestigationTab.setObjectName("InvestigationTab")
        self.MainWidget = QtWidgets.QWidget(self.widget)
        self.MainWidget.setGeometry(QtCore.QRect(10, 170, 1320, 540))
        self.MainWidget.setStyleSheet("background-color: rgb(239, 239,
239);\n"
"border-radius: 20px;")

        self.MainWidget.setObjectName("MainWidget")
        self.BackButton = QtWidgets.QPushButton(self.MainWidget)
        self.BackButton.setGeometry(QtCore.QRect(10, 460, 200, 70))
        self.BackButton.setCursor(QtGui.QCursor(QtCore.Qt.PointingHandCursor))
        self.BackButton.setStyleSheet("border: 2px solid;\n"
"border-radius: 20px;\n"
"border-color:rgb(69, 69, 69);\n"
"background-color: rgb(69, 69, 69);\n"
"font: 18pt \"Sans Serif\"; color:rgb(239, 239, 239);\n"
"")

        self.BackButton.setObjectName("BackButton")
        self.NextButton = QtWidgets.QPushButton(self.MainWidget)
        self.NextButton.setGeometry(QtCore.QRect(1110, 460, 200, 70))
        self.NextButton.setCursor(QtGui.QCursor(QtCore.Qt.PointingHandCursor))
        self.NextButton.setStyleSheet("border: 2px solid;\n"
"border-radius: 20px;\n"
"border-color:rgb(69, 69, 69);\n"
"background-color: rgb(69, 69, 69);\n"
"font: 18pt \"Sans Serif\"; color:rgb(239, 239, 239);\n"
"")

        self.NextButton.setObjectName("NextButton")
        self.SubTitleText = QtWidgets.QLabel(self.MainWidget)
        self.SubTitleText.setGeometry(QtCore.QRect(40, 20, 241, 41))
        self.SubTitleText.setStyleSheet("font: 25pt \"Sans Serif\";
color:rgb(69, 69, 69);\n"
"background-color: rgb(239, 239, 239); padding: 5px;")

        self.SubTitleText.setObjectName("SubTitleText")
        self.NotesText = QtWidgets.QTextEdit(self.MainWidget)
        self.NotesText.setGeometry(QtCore.QRect(50, 80, 1211, 371))
        self.NotesText.viewport().setProperty("cursor",
QtGui.QCursor(QtCore.Qt.IBeamCursor))
        self.NotesText.setStyleSheet("background-color: rgb(239, 239,
239);\n"
"color: rgb(69, 69, 69);\n"

```

```

"font: 18pt \"Sans Serif\";\n"
"border: 2px solid;\n"
"border-color:rgb(69, 69, 69);\n"
"border-radius: 0px;")
    self.NotesText.setReadOnly(False)
    self.NotesText.setObjectName("NotesText")
    self.SaveButton = QtWidgets.QPushButton(self.MainWidget)
    self.SaveButton.setGeometry(QtCore.QRect(470, 460, 200, 70))
    self.SaveButton.setCursor(QtGui.QCursor(Qt.PointingHandCursor))
    self.SaveButton.setStyleSheet("border: 2px solid;\n"
"border-radius: 20px;\n"
"border-color:rgb(69, 69, 69);\n"
"background-color: rgb(69, 69, 69);\n"
"font: 18pt \"Sans Serif\"; color:rgb(239, 239, 239);\n"
""")
    self.SaveButton.setObjectName("SaveButton")
    self.SavedText = QtWidgets.QLabel(self.MainWidget)
    self.SavedText.setGeometry(QtCore.QRect(690, 465, 191, 61))
    self.SavedText.setStyleSheet("font: 25pt \"Sans Serif\";
color:rgb(69, 69, 69);\n"
"background-color: rgb(239, 239, 239); padding: 5px;\n"
"border-radius: 0px")
    self.SavedText.setObjectName("SavedText")

    self.retranslateUi(InvestigationNotesScreen)
    QtCore.QMetaObject.connectSlotsByName(InvestigationNotesScreen)

def retranslateUi(self, InvestigationNotesScreen):
    _translate = QtCore.QCoreApplication.translate
    InvestigationNotesScreen.setWindowTitle(_translate("InvestigationNotesScreen",
        "Visualising the Riemann Hypothesis - Notes"))
    self.Title.setText(_translate("InvestigationNotesScreen",
        "Notes"))
    self.TutorialTab.setText(_translate("InvestigationNotesScreen",
        "Tutorial"))
    self.SummaryTab.setText(_translate("InvestigationNotesScreen",
        "Summary"))
    self.IntroductionTab.setText(_translate("InvestigationNotesScreen",
        "Introduction"))
    self.InvestigationTab.setText(_translate("InvestigationNotesScreen",
        "Investigation"))
    self.BackButton.setText(_translate("InvestigationNotesScreen",
        "Back"))
    self.NextButton.setText(_translate("InvestigationNotesScreen",
        "Next"))
    self.SubTitleText.setText(_translate("InvestigationNotesScreen",
        "<html><head/><body><p><span style=\"\n        font-weight:600;\">\n        Investigation</span></p></body></html>"))
    self.NotesText.setHtml(_translate("InvestigationNotesScreen",
        "<!DOCTYPE HTML PUBLIC \"-//W3C//DTD HTML 4.0//EN\""))

```

```

        \ "http://www.w3.org/TR/REC-html40/strict.dtd\">\n"
"<html><head><meta name=\"qrichtext\" content=\"1\" /><style
    type=\"text/css\">\n"
"p, li { white-space: pre-wrap; }\n"
"</style></head><body style=\" font-family:\'Sans Serif\';
    font-size:18pt; font-weight:400; font-style:normal;\">\n"
"<p style=\"-qt-paragraph-type:empty; margin-top:0px; margin-bottom:0px;
    margin-left:0px; margin-right:0px; -qt-block-indent:0;
    text-indent:0px;\"><br /></p></body></html>"))
    self.SaveButton.setText(_translate("InvestigationNotesScreen",
        "Save"))
    self.SavedText.setText(_translate("InvestigationNotesScreen",
        "<html><head/><body><p><br/></p></body></html>"))

```

program/user_interface/notes_ui/summary_notes.py

```

"""
summary_notes.py
=====
A GUI for the summary notes page of the notes section
"""

from PyQt5 import QtCore, QtGui, QtWidgets

class Ui_SummaryNotesScreen(object):

    def setupUi(self, SummaryNotesScreen):
        SummaryNotesScreen.setObjectName("SummaryNotesScreen")
        SummaryNotesScreen.resize(1340, 723)
        SummaryNotesScreen.setSizeGripEnabled(False)
        self.widget = QtWidgets.QWidget(SummaryNotesScreen)
        self.widget.setGeometry(QtCore.QRect(0, 0, 1340, 720))
        self.widget.setStyleSheet("background-color: rgb(69, 69, 69);")
        self.widget.setObjectName("widget")
        self.Title = QtWidgets.QLabel(self.widget)
        self.Title.setGeometry(QtCore.QRect(605, 20, 131, 51))
        self.Title.setStyleSheet("font: 36pt \"Sans Serif\";
            color:rgb(239, 239, 239);")
        self.Title.setObjectName("Title")
        self.TabBar = QtWidgets.QWidget(self.widget)
        self.TabBar.setGeometry(QtCore.QRect(0, 80, 1340, 80))
        self.TabBar.setStyleSheet("background-color: rgb(239, 239,
            239);")
        self.TabBar.setObjectName("TabBar")
        self.TutorialTab = QtWidgets.QPushButton(self.TabBar)
        self.TutorialTab.setGeometry(QtCore.QRect(10, 5, 200, 70))
        self.TutorialTab.setCursor(QtGui.QCursor(QtCore.Qt.PointingHandCursor))

```

```

        self.TutorialTab.setStyleSheet("border: 2px solid;\n"
"border-radius: 20px;\n"
"border-color:rgb(69, 69, 69);\n"
"background-color: rgb(69, 69, 69);\n"
"font: 18pt \\"Sans Serif\\"; color:rgb(239, 239, 239);\n"
"\n"
""")
        self.TutorialTab.setObjectName("TutorialTab")
        self.SummaryTab = QtWidgets.QPushButton(self.TabBar)
        self.SummaryTab.setGeometry(QtCore.QRect(640, 5, 200, 70))
        self.SummaryTab.setCursor(QtGui.QCursor(QtCore.Qt.PointingHandCursor))
        self.SummaryTab.setStyleSheet("border: 2px solid;\n"
"border-radius: 20px;\n"
"border-color:rgb(69, 69, 69);\n"
"background-color: rgb(239, 239, 239);\n"
"font: 18pt \\"Sans Serif\\"; color:rgb(69, 69, 69);\n"
""")
        self.SummaryTab.setObjectName("SummaryTab")
        self.IntroductionTab = QtWidgets.QPushButton(self.TabBar)
        self.IntroductionTab.setGeometry(QtCore.QRect(220, 5, 200, 70))
        self.IntroductionTab.setCursor(QtGui.QCursor(QtCore.Qt.PointingHandCursor))
        self.IntroductionTab.setStyleSheet("border: 2px solid;\n"
"border-radius: 20px;\n"
"border-color:rgb(69, 69, 69);\n"
"background-color: rgb(69, 69, 69);\n"
"font: 18pt \\"Sans Serif\\"; color:rgb(239, 239, 239);\n"
""")
        self.IntroductionTab.setObjectName("IntroductionTab")
        self.InvestigationTab = QtWidgets.QPushButton(self.TabBar)
        self.InvestigationTab.setGeometry(QtCore.QRect(430, 5, 200, 70))
        self.InvestigationTab.setCursor(QtGui.QCursor(QtCore.Qt.PointingHandCursor))
        self.InvestigationTab.setStyleSheet("border: 2px solid;\n"
"border-radius: 20px;\n"
"border-color:rgb(69, 69, 69);\n"
"background-color: rgb(69, 69, 69);\n"
"font: 18pt \\"Sans Serif\\"; color:rgb(239, 239, 239);\n"
""")
        self.InvestigationTab.setObjectName("InvestigationTab")
        self.MainWidget = QtWidgets.QWidget(self.widget)
        self.MainWidget.setGeometry(QtCore.QRect(10, 170, 1320, 540))
        self.MainWidget.setStyleSheet("background-color: rgb(239, 239,
239);\n"
"border-radius: 20px;")
        self.MainWidget.setObjectName("MainWidget")
        self.BackButton = QtWidgets.QPushButton(self.MainWidget)
        self.BackButton.setGeometry(QtCore.QRect(10, 460, 200, 70))
        self.BackButton.setCursor(QtGui.QCursor(QtCore.Qt.PointingHandCursor))
        self.BackButton.setStyleSheet("border: 2px solid;\n"
"border-radius: 20px;\n"
"border-color:rgb(69, 69, 69);\n"

```

```

"background-color: rgb(69, 69, 69);\n"
"font: 18pt \"Sans Serif\"; color:rgb(239, 239, 239);\n"
""")
    self.BackButton.setObjectName("BackButton")
    self.SubTitleText = QtWidgets.QLabel(self.MainWidget)
    self.SubTitleText.setGeometry(QtCore.QRect(40, 20, 181, 51))
    self.SubTitleText.setStyleSheet("font: 25pt \"Sans Serif\";\n"
        "color:rgb(69, 69, 69);\n")
"background-color: rgb(239, 239, 239); padding: 5px;")
    self.SubTitleText.setObjectName("SubTitleText")
    self.NotesText = QtWidgets.QTextEdit(self.MainWidget)
    self.NotesText.setGeometry(QtCore.QRect(50, 80, 1211, 371))
    self.NotesText.viewport().setProperty("cursor",
        QtGui.QCursor(QtCore.Qt.IBeamCursor))
    self.NotesText.setStyleSheet("background-color: rgb(239, 239,
        239);\n"
"color: rgb(69, 69, 69);\n"
"font: 18pt \"Sans Serif\";\n"
"border: 2px solid;\n"
"border-color:rgb(69, 69, 69);\n"
"border-radius: 0px;")
        self.NotesText.setReadOnly(False)
        self.NotesText.setObjectName("NotesText")
        self.SaveButton = QtWidgets.QPushButton(self.MainWidget)
        self.SaveButton.setGeometry(QtCore.QRect(470, 460, 200, 70))
        self.SaveButton.setCursor(QtGui.QCursor(QtCore.Qt.PointingHandCursor))
        self.SaveButton.setStyleSheet("border: 2px solid;\n"
"border-radius: 20px;\n"
"border-color:rgb(69, 69, 69);\n"
"background-color: rgb(69, 69, 69);\n"
"font: 18pt \"Sans Serif\"; color:rgb(239, 239, 239);\n"
""")
        self.SaveButton.setObjectName("SaveButton")
        self.SavedText = QtWidgets.QLabel(self.MainWidget)
        self.SavedText.setGeometry(QtCore.QRect(690, 465, 191, 61))
        self.SavedText.setStyleSheet("font: 25pt \"Sans Serif\";\n"
            "color:rgb(69, 69, 69);\n")
"background-color: rgb(239, 239, 239); padding: 5px;\n"
"border-radius: 0px")
        self.SavedText.setObjectName("SavedText")

        self.retranslateUi(SummaryNotesScreen)
        QtCore.QMetaObject.connectSlotsByName(SummaryNotesScreen)

def retranslateUi(self, SummaryNotesScreen):
    _translate = QtCore.QCoreApplication.translate
    SummaryNotesScreen.setWindowTitle(_translate("SummaryNotesScreen",
        "Visualising the Riemann Hypothesis - Notes"))
    self.Title.setText(_translate("SummaryNotesScreen", "Notes"))
    self.TutorialTab.setText(_translate("SummaryNotesScreen",

```

```

        "Tutorial"))
    self.SummaryTab.setText(_translate("SummaryNotesScreen",
        "Summary"))
    self.IntroductionTab.setText(_translate("SummaryNotesScreen",
        "Introduction"))
    self.InvestigationTab.setText(_translate("SummaryNotesScreen",
        "Investigation"))
    self.BackButton.setText(_translate("SummaryNotesScreen", "Back"))
    self.SubTitleText.setText(_translate("SummaryNotesScreen",
        "<html><head/><body><p><span style=\""
        "font-weight:600;\">Summary</span></p><p><br/></p></body></html>"))
    self.NotesText.setHtml(_translate("SummaryNotesScreen",
        "<!DOCTYPE HTML PUBLIC \"-//W3C//DTD HTML 4.0//EN\""
        "\\"http://www.w3.org/TR/REC-html40/strict.dtd\\\">\n"
"<html><head><meta name=\"qrichtext\" content=\"1\" /><style"
        "type=\"text/css\">\n"
"p, li { white-space: pre-wrap; }\n"
"</style></head><body style=\" font-family:'Sans Serif'";
        "font-size:18pt; font-weight:400; font-style:normal;\">\n"
"<p style=\"-qt-paragraph-type:empty; margin-top:0px; margin-bottom:0px;
    margin-left:0px; margin-right:0px; -qt-block-indent:0;
    text-indent:0px;\"><br /></p></body></html>"))
    self.SaveButton.setText(_translate("SummaryNotesScreen", "Save"))
    self.SavedText.setText(_translate("SummaryNotesScreen",
        "<html><head/><body><p><br/></p></body></html>"))

```

program/user_interface/notes_ui/tutorial_notes.py

```

"""
tutorial_notes.py
=====
A GUI for the tutorial notes page of the notes section
"""

from PyQt5 import QtCore, QtGui, QtWidgets

class Ui_TutorialNotesScreen(object):

    def setupUi(self, TutorialNotesScreen):
        TutorialNotesScreen.setObjectName("TutorialNotesScreen")
        TutorialNotesScreen.resize(1340, 723)
        TutorialNotesScreen.setSizeGripEnabled(False)
        self.widget = QtWidgets.QWidget(TutorialNotesScreen)
        self.widget.setGeometry(QtCore.QRect(0, 0, 1340, 720))
        self.widget.setStyleSheet("background-color: rgb(69, 69, 69);")
        self.widget.setObjectName("widget")
        self.Title = QtWidgets.QLabel(self.widget)

```

```

        self.Title.setGeometry(QtCore.QRect(605, 20, 131, 51))
        self.Title.setStyleSheet("font: 36pt \"Sans Serif\";
            color:rgb(239, 239, 239)")
        self.Title.setObjectName("Title")
        self.TabBar = QtWidgets.QWidget(self.widget)
        self.TabBar.setGeometry(QtCore.QRect(0, 80, 1340, 80))
        self.TabBar.setStyleSheet("background-color: rgb(239, 239,
            239);")
        self.TabBar.setObjectName("TabBar")
        self.TutorialTab = QtWidgets.QPushButton(self.TabBar)
        self.TutorialTab.setGeometry(QtCore.QRect(10, 5, 200, 70))
        self.TutorialTab.setCursor(QtGui.QCursor(Qt.PointingHandCursor))
        self.TutorialTab.setStyleSheet("border: 2px solid;\n"
"border-radius: 20px;\n"
"border-color:rgb(69, 69, 69);\n"
"background-color: rgb(239, 239, 239);\n"
"font: 18pt \"Sans Serif\"; color:rgb(69, 69, 69);\n"
"")
        self.TutorialTab.setObjectName("TutorialTab")
        self.SummaryTab = QtWidgets.QPushButton(self.TabBar)
        self.SummaryTab.setGeometry(QtCore.QRect(640, 5, 200, 70))
        self.SummaryTab.setCursor(QtGui.QCursor(Qt.PointingHandCursor))
        self.SummaryTab.setStyleSheet("border: 2px solid;\n"
"border-radius: 20px;\n"
"border-color:rgb(69, 69, 69);\n"
"background-color: rgb(69, 69, 69);\n"
"font: 18pt \"Sans Serif\"; color:rgb(239, 239, 239);\n"
"")
        self.SummaryTab.setObjectName("SummaryTab")
        self.IntroductionTab = QtWidgets.QPushButton(self.TabBar)
        self.IntroductionTab.setGeometry(QtCore.QRect(220, 5, 200, 70))
        self.IntroductionTab.setCursor(QtGui.QCursor(Qt.PointingHandCursor))
        self.IntroductionTab.setStyleSheet("border: 2px solid;\n"
"border-radius: 20px;\n"
"border-color:rgb(69, 69, 69);\n"
"background-color: rgb(69, 69, 69);\n"
"font: 18pt \"Sans Serif\"; color:rgb(239, 239, 239);\n"
"")
        self.IntroductionTab.setObjectName("IntroductionTab")
        self.InvestigationTab = QtWidgets.QPushButton(self.TabBar)
        self.InvestigationTab.setGeometry(QtCore.QRect(430, 5, 200, 70))
        self.InvestigationTab.setCursor(QtGui.QCursor(Qt.PointingHandCursor))
        self.InvestigationTab.setStyleSheet("border: 2px solid;\n"
"border-radius: 20px;\n"
"border-color:rgb(69, 69, 69);\n"
"background-color: rgb(69, 69, 69);\n"
"font: 18pt \"Sans Serif\"; color:rgb(239, 239, 239);\n"
"")
        self.InvestigationTab.setObjectName("InvestigationTab")
        self.MainWidget = QtWidgets.QWidget(self.widget)

```

```

        self.MainWidget.setGeometry(QtCore.QRect(10, 170, 1320, 540))
        self.MainWidget.setStyleSheet("background-color: rgb(239, 239,
            239);\n"
    "border-radius: 20px;")
        self.MainWidget.setObjectName("MainWidget")
        self.BackButton = QtWidgets.QPushButton(self.MainWidget)
        self.BackButton.setGeometry(QtCore.QRect(10, 460, 200, 70))
        self.BackButton.setCursor(QtGui.QCursor(Qt.PointingHandCursor))
        self.BackButton.setStyleSheet("border: 2px solid;\n"
    "border-radius: 20px;\n"
    "border-color:rgb(69, 69, 69);\n"
    "background-color: rgb(69, 69, 69);\n"
    "font: 18pt \\"Sans Serif\\"; color:rgb(239, 239, 239);\n"
    "")
        self.BackButton.setObjectName("BackButton")
        self.NextButton = QtWidgets.QPushButton(self.MainWidget)
        self.NextButton.setGeometry(QtCore.QRect(1110, 460, 200, 70))
        self.NextButton.setCursor(QtGui.QCursor(Qt.PointingHandCursor))
        self.NextButton.setStyleSheet("border: 2px solid;\n"
    "border-radius: 20px;\n"
    "border-color:rgb(69, 69, 69);\n"
    "background-color: rgb(69, 69, 69);\n"
    "font: 18pt \\"Sans Serif\\"; color:rgb(239, 239, 239);\n"
    "")
        self.NextButton.setObjectName("NextButton")
        self.SubTitleText = QtWidgets.QLabel(self.MainWidget)
        self.SubTitleText.setGeometry(QtCore.QRect(40, 20, 151, 41))
        self.SubTitleText.setStyleSheet("font: 25pt \\"Sans Serif\\";
            color:rgb(69, 69, 69);\n"
    "background-color: rgb(239, 239, 239); padding: 5px;")
        self.SubTitleText.setObjectName("SubTitleText")
        self.NotesText = QtWidgets.QTextEdit(self.MainWidget)
        self.NotesText.setGeometry(QtCore.QRect(50, 80, 1211, 371))
        self.NotesText.viewport().setProperty("cursor",
            QtGui.QCursor(QtCore.Qt.IBeamCursor))
        self.NotesText.setStyleSheet("background-color: rgb(239, 239,
            239);\n"
    "color: rgb(69, 69, 69);\n"
    "font: 18pt \\"Sans Serif\\";\n"
    "border: 2px solid;\n"
    "border-color:rgb(69, 69, 69);\n"
    "border-radius: 0px;")
        self.NotesText.setReadOnly(False)
        self.NotesText.setObjectName("NotesText")
        self.SaveButton = QtWidgets.QPushButton(self.MainWidget)
        self.SaveButton.setGeometry(QtCore.QRect(470, 460, 200, 70))
        self.SaveButton.setCursor(QtGui.QCursor(Qt.PointingHandCursor))
        self.SaveButton.setStyleSheet("border: 2px solid;\n"
    "border-radius: 20px;\n"
    "border-color:rgb(69, 69, 69);\n"

```

```

"background-color: #636363;\n"
"font: 18pt \"Sans Serif\"; color:#2196F3;\n"
"")

    self.SaveButton.setObjectName("SaveButton")
    self.SavedText = QtWidgets.QLabel(self.MainWidget)
    self.SavedText.setGeometry(QtCore.QRect(690, 465, 191, 61))
    self.SavedText.setStyleSheet("font: 25pt \"Sans Serif\";\n"
                               "color:#636363;\n"
"background-color: #2196F3; padding: 5px;\n"
"border-radius: 0px")
    self.SavedText.setObjectName("SavedText")

    self.retranslateUi(TutorialNotesScreen)
    QtCore.QMetaObject.connectSlotsByName(TutorialNotesScreen)

def retranslateUi(self, TutorialNotesScreen):
    _translate = QtCore.QCoreApplication.translate
    TutorialNotesScreen.setWindowTitle(_translate("TutorialNotesScreen",
        "Visualising the Riemann Hypothesis - Notes"))
    self.Title.setText(_translate("TutorialNotesScreen", "Notes"))
    self.TutorialTab.setText(_translate("TutorialNotesScreen",
        "Tutorial"))
    self.SummaryTab.setText(_translate("TutorialNotesScreen",
        "Summary"))
    self.IntroductionTab.setText(_translate("TutorialNotesScreen",
        "Introduction"))
    self.InvestigationTab.setText(_translate("TutorialNotesScreen",
        "Investigation"))
    self.BackButton.setText(_translate("TutorialNotesScreen",
        "Back"))
    self.NextButton.setText(_translate("TutorialNotesScreen",
        "Next"))
    self.SubTitleText.setText(_translate("TutorialNotesScreen",
        "<html><head/><body><p><span style=\"\n"
        "font-weight:600;\">Tutorial</span></p></body></html>"))
    self.NotesText.setHtml(_translate("TutorialNotesScreen",
        "<!DOCTYPE HTML PUBLIC \"-//W3C//DTD HTML 4.0//EN\"\n"
        "\nhttp://www.w3.org/TR/REC-html40/strict.dtd\">\n"
"<html><head><meta name=\"qrichtext\" content=\"1\" /><style\n"
"    type=\"text/css\">\n"
"p, li { white-space: pre-wrap; }\n"
"</style></head><body style=\" font-family:'Sans Serif';\n"
"    font-size:18pt; font-weight:400; font-style:normal;\">\n"
"<p style=\" margin-top:0px; margin-bottom:0px; margin-left:0px;\n"
"    margin-right:0px; -qt-block-indent:0;\n"
"    text-indent:0px;\">Text1</p></body></html>"))
    self.SaveButton.setText(_translate("TutorialNotesScreen",
        "Save"))
    self.SavedText.setText(_translate("TutorialNotesScreen",
        "<html><head/><body><p><br/></p></body></html>"))

```

program/user_interface/summary.ui/__init__.py

```
"""
__init__.py
=====
Imports for the summary.ui
"""

from .summary import Ui_SummaryScreen
from .theory_recap import Ui_TheoryRecapScreen
from .investigation_results import Ui_InvestigationResultsScreen
from .conclusion import Ui_ConclusionScreen
from .impact import Ui_ImpactScreen
```

program/user_interface/summary.ui/conclusion.py

```
"""
conclusion.py
=====
A GUI for the conclusion page of the summary section
"""

from PyQt5 import QtCore, QtGui, QtWidgets

class Ui_ConclusionScreen(object):

    def setupUi(self, ConclusionScreen):
        ConclusionScreen.setObjectName("ConclusionScreen")
        ConclusionScreen.resize(1340, 723)
        ConclusionScreen.setSizeGripEnabled(False)
        self.widget = QtWidgets.QWidget(ConclusionScreen)
        self.widget.setGeometry(QtCore.QRect(0, 0, 1340, 720))
        self.widget.setStyleSheet("background-color: rgb(69, 69, 69);")
        self.widget.setObjectName("widget")
        self.Title = QtWidgets.QLabel(self.widget)
        self.Title.setGeometry(QtCore.QRect(565, 20, 211, 51))
        self.Title.setStyleSheet("font: 36pt \\"Sans Serif\\";\n"
                               "color:rgb(239, 239, 239);")
        self.Title.setObjectName("Title")
        self.TabBar = QtWidgets.QWidget(self.widget)
        self.TabBar.setGeometry(QtCore.QRect(0, 80, 1340, 80))
        self.TabBar.setStyleSheet("background-color: rgb(239, 239,\n"
                               "239);")
        self.TabBar.setObjectName("TabBar")
```

```

        self.SummaryTab = QtWidgets.QPushButton(self.TabBar)
        self.SummaryTab.setGeometry(QtCore.QRect(10, 5, 200, 70))
        self.SummaryTab.setCursor(QtGui.QCursor(QtCore.Qt.PointingHandCursor))
        self.SummaryTab.setStyleSheet("border: 2px solid;\n"
"border-radius: 20px;\n"
"border-color:rgb(69, 69, 69);\n"
"background-color: rgb(69, 69, 69);\n"
"font: 18pt \\"Sans Serif\\"; color:rgb(239, 239, 239);\n"
""")
        self.SummaryTab.setObjectName("SummaryTab")
        self.TheoryRecapTab = QtWidgets.QPushButton(self.TabBar)
        self.TheoryRecapTab.setGeometry(QtCore.QRect(220, 5, 200, 70))
        self.TheoryRecapTab.setCursor(QtGui.QCursor(QtCore.Qt.PointingHandCursor))
        self.TheoryRecapTab.setStyleSheet("border: 2px solid;\n"
"border-radius: 20px;\n"
"border-color:rgb(69, 69, 69);\n"
"background-color: rgb(69, 69, 69);\n"
"font: 18pt \\"Sans Serif\\"; color:rgb(239, 239, 239);\n"
""")
        self.TheoryRecapTab.setObjectName("TheoryRecapTab")
        self.InvestigationResultsLabel = QtWidgets.QLabel(self.TabBar)
        self.InvestigationResultsLabel.setGeometry(QtCore.QRect(430, 5,
200, 70))
        self.InvestigationResultsLabel.setStyleSheet("border: 2px
solid;\n"
"border-radius: 20px;\n"
"border-color:rgb(69, 69, 69);\n"
"background-color: rgb(69, 69, 69);\n"
"font: 18pt \\"Sans Serif\\"; color:rgb(239, 239, 239);\n"
""")
        self.InvestigationResultsLabel.setObjectName("InvestigationResultsLabel")
        self.InvestigationResultsTab = QtWidgets.QPushButton(self.TabBar)
        self.InvestigationResultsTab.setGeometry(QtCore.QRect(430, 5,
200, 70))
        self.InvestigationResultsTab.setCursor(QtGui.QCursor(QtCore.Qt.PointingHandCursor))
        self.InvestigationResultsTab.setStyleSheet("border-radius:
20px;\n"
"background-color: rgba(0, 0, 0, 0);\n"
"font: 18pt \\"Sans Serif\\";\n"
""")
        self.InvestigationResultsTab.setText("")
        self.InvestigationResultsTab.setObjectName("InvestigationResultsTab")
        self.ConclusionLabel = QtWidgets.QLabel(self.TabBar)
        self.ConclusionLabel.setGeometry(QtCore.QRect(640, 5, 200, 70))
        self.ConclusionLabel.setStyleSheet("border: 2px solid;\n"
"border-radius: 20px;\n"
"border-color:rgb(69, 69, 69);\n"
"background-color: rgb(239, 239, 239);\n"
"font: 18pt \\"Sans Serif\\"; color:rgb(69, 69, 69);\n"
""")

```

```

        self.ConclusionLabel.setObjectName("ConclusionLabel")
        self.ImpactLabel = QtWidgets.QLabel(self.TabBar)
        self.ImpactLabel.setGeometry(QtCore.QRect(850, 5, 241, 70))
        self.ImpactLabel.setStyleSheet("border: 2px solid;\n"
"border-radius: 20px;\n"
"border-color:rgb(69, 69, 69);\n"
"background-color: rgb(69, 69, 69);\n"
"font: 18pt \"Sans Serif\"; color:rgb(239, 239, 239);\n"
""")
        self.ImpactLabel.setObjectName("ImpactLabel")
        self.ConclusionTab = QtWidgets.QPushButton(self.TabBar)
        self.ConclusionTab.setGeometry(QtCore.QRect(650, 5, 200, 70))
        self.ConclusionTab.setCursor(QtGui.QCursor(QtCore.Qt.PointingHandCursor))
        self.ConclusionTab.setStyleSheet("border-radius: 20px;\n"
"background-color: rgba(0, 0, 0, 0);\n"
"font: 18pt \"Sans Serif\";\n"
""")
        self.ConclusionTab.setText("")
        self.ConclusionTab.setObjectName("ConclusionTab")
        self.ImpactTab = QtWidgets.QPushButton(self.TabBar)
        self.ImpactTab.setGeometry(QtCore.QRect(850, 5, 241, 70))
        self.ImpactTab.setCursor(QtGui.QCursor(QtCore.Qt.PointingHandCursor))
        self.ImpactTab.setStyleSheet("border-radius: 20px;\n"
"background-color: rgba(0, 0, 0, 0);\n"
"font: 18pt \"Sans Serif\";\n"
""")
        self.ImpactTab.setText("")
        self.ImpactTab.setObjectName("ImpactTab")
        self.MainWidget = QtWidgets.QWidget(self.widget)
        self.MainWidget.setGeometry(QtCore.QRect(10, 170, 1320, 540))
        self.MainWidget.setStyleSheet("background-color: rgb(239, 239,
239);\n"
"border-radius: 20px;")
        self.MainWidget.setObjectName("MainWidget")
        self.PrevButton = QtWidgets.QPushButton(self.MainWidget)
        self.PrevButton.setGeometry(QtCore.QRect(10, 460, 200, 70))
        self.PrevButton.setCursor(QtGui.QCursor(QtCore.Qt.PointingHandCursor))
        self.PrevButton.setStyleSheet("border: 2px solid;\n"
"border-radius: 20px;\n"
"border-color:rgb(69, 69, 69);\n"
"background-color: rgb(69, 69, 69);\n"
"font: 18pt \"Sans Serif\"; color:rgb(239, 239, 239);\n"
""")
        self.PrevButton.setObjectName("PrevButton")
        self.NextButton = QtWidgets.QPushButton(self.MainWidget)
        self.NextButton.setGeometry(QtCore.QRect(1110, 460, 200, 70))
        self.NextButton.setCursor(QtGui.QCursor(QtCore.Qt.PointingHandCursor))
        self.NextButton.setStyleSheet("border: 2px solid;\n"
"border-radius: 20px;\n"
"border-color:rgb(69, 69, 69);\n"

```

```

"background-color: rgb(69, 69, 69);\n"
"font: 18pt \\"Sans Serif\\"; color:rgb(239, 239, 239);\n"
""")
    self.NextButton.setObjectName("NextButton")
    self.SubTitleText = QtWidgets.QLabel(self.MainWidget)
    self.SubTitleText.setGeometry(QtCore.QRect(40, 20, 421, 51))
    self.SubTitleText.setStyleSheet("font: 25pt \\"Sans Serif\\";
                                    color:rgb(69, 69, 69);\n")
"background-color: rgb(239, 239, 239); padding: 5px;")
    self.SubTitleText.setObjectName("SubTitleText")
    self.MainText = QtWidgets.QLabel(self.MainWidget)
    self.MainText.setGeometry(QtCore.QRect(40, 90, 1251, 341))
    self.MainText.setStyleSheet("font: 13pt \\"Sans Serif\\";
                                color:rgb(69, 69, 69);\n")
"background-color: rgb(239, 239, 239); padding: 5px;")
    self.MainText.setAlignment(QtCore.Qt.AlignLeading|QtCore.Qt.AlignLeft|QtCore.Qt.AlignTop)
    self.MainText.setWordWrap(True)
    self.MainText.setObjectName("MainText")
    self.NotesButton = QtWidgets.QPushButton(self.MainWidget)
    self.NotesButton.setGeometry(QtCore.QRect(570, 460, 200, 70))
    self.NotesButton.setCursor(QtGui.QCursor(QtCore.Qt.PointingHandCursor))
    self.NotesButton.setStyleSheet("border: 2px solid;\n"
"border-radius: 20px;\n"
"border-color:rgb(69, 69, 69);\n"
"background-color: rgb(69, 69, 69);\n"
"font: 18pt \\"Sans Serif\\"; color:rgb(239, 239, 239);\n"
""")
    self.NotesButton.setObjectName("NotesButton")

    self.retranslateUi(ConclusionScreen)
    QtCore.QMetaObject.connectSlotsByName(ConclusionScreen)

def retranslateUi(self, ConclusionScreen):
    _translate = QtCore.QCoreApplication.translate
    ConclusionScreen.setWindowTitle(_translate("ConclusionScreen",
                                              "Visualising the Riemann Hypothesis - Summary"))
    self.Title.setText(_translate("ConclusionScreen", "Summary"))
    self.SummaryTab.setText(_translate("ConclusionScreen",
                                      "Summary"))
    self.TheoryRecapTab.setText(_translate("ConclusionScreen",
                                           "Theory Recap"))
    self.InvestigationResultsLabel.setText(_translate("ConclusionScreen",
                                                       "<html><head/><body><p align=\"center\\\">Investigation<br/>Results</p></body></html>"))
    self.ConclusionLabel.setText(_translate("ConclusionScreen",
                                           "<html><head/><body><p align=\"center\\\">Conclusion &
                                           <br/>Evaluation</p></body></html>"))
    self.ImpactLabel.setText(_translate("ConclusionScreen",
                                       "<html><head/><body><p align=\"center\\\">Impact of the
                                       <br/>Riemann Hypothesis</p></body></html>"))

```

```

        self.PrevButton.setText(_translate("ConclusionScreen", "Prev"))
        self.NextButton.setText(_translate("ConclusionScreen", "Next"))
        self.SubTitleText.setText(_translate("ConclusionScreen",
            "<html><head/><body><p><span style=\""
            "font-weight:600;\">Conclusion &amp;"
            "Evaluation</span></p></body></html>"))
        self.MainText.setText(_translate("ConclusionScreen",
            "<html><head/><body><p>Unfortunately, due to the fact that
            there are an infinite number of zeta zeroes, one could not
            prove the Riemann Hypothesis by simply trying to calculate
            every single zero. However, if a zero is calculated, where
            the real part of the input is not equal to 1/2, then this
            would instantly disprove the Riemann
            Hypothesis.</p><p><br/></p><p>However, disproving the
            Riemann Hypothesis would be quite the task, seeing as there
            are an infinite amount of numbers that you would need to try
            to possibly find a zero that does not comply with the
            hypothesis. <br/></p><p>Hopefully, by using this program,
            you have discovered zeta zeroes where the real part of the
            input is 1/2. This at least reinforces that idea that
            Riemann was correct with his conjecture, although it is by
            no means a solid proof.</p></body></html>"))
        self.NotesButton.setText(_translate("ConclusionScreen", "Notes"))

```

program/user_interface/summary.ui/impact.py

```

"""
impact.py
=====
A GUI for the impact page of the summary section
"""

from PyQt5 import QtCore, QtGui, QtWidgets

class Ui_ImpactScreen(object):

    def setupUi(self, ImpactScreen):
        ImpactScreen.setObjectName("ImpactScreen")
        ImpactScreen.resize(1340, 723)
        ImpactScreen.setSizeGripEnabled(False)
        self.widget = QtWidgets.QWidget(ImpactScreen)
        self.widget.setGeometry(QtCore.QRect(0, 0, 1340, 720))
        self.widget.setStyleSheet("background-color: rgb(69, 69, 69);")
        self.widget.setObjectName("widget")
        self.Title = QtWidgets.QLabel(self.widget)
        self.Title.setGeometry(QtCore.QRect(565, 20, 211, 51))
        self.Title.setStyleSheet("font: 36pt \\"Sans Serif\\";

```

```

        color:rgb(239, 239, 239)")
self.Title.setObjectName("Title")
self.TabBar = QtWidgets.QWidget(self.widget)
self.TabBar.setGeometry(QtCore.QRect(0, 80, 1340, 80))
self.TabBar.setStyleSheet("background-color: rgb(239, 239,
    239);")
self.TabBar.setObjectName("TabBar")
self.SummaryTab = QtWidgets.QPushButton(self.TabBar)
self.SummaryTab.setGeometry(QtCore.QRect(10, 5, 200, 70))
self.SummaryTab.setCursor(QtGui.QCursor(QtCore.Qt.PointingHandCursor))
self.SummaryTab.setStyleSheet("border: 2px solid;\n"
"border-radius: 20px;\n"
"border-color:rgb(69, 69, 69);\n"
"background-color: rgb(69, 69, 69);\n"
"font: 18pt \\"Sans Serif\\"; color:rgb(239, 239, 239);\n"
"")
self.SummaryTab.setObjectName("SummaryTab")
self.TheoryRecapTab = QtWidgets.QPushButton(self.TabBar)
self.TheoryRecapTab.setGeometry(QtCore.QRect(220, 5, 200, 70))
self.TheoryRecapTab.setCursor(QtGui.QCursor(QtCore.Qt.PointingHandCursor))
self.TheoryRecapTab.setStyleSheet("border: 2px solid;\n"
"border-radius: 20px;\n"
"border-color:rgb(69, 69, 69);\n"
"background-color: rgb(69, 69, 69);\n"
"font: 18pt \\"Sans Serif\\"; color:rgb(239, 239, 239);\n"
"")
self.TheoryRecapTab.setObjectName("TheoryRecapTab")
self.InvestigationResultsLabel = QtWidgets.QLabel(self.TabBar)
self.InvestigationResultsLabel.setGeometry(QtCore.QRect(430, 5,
    200, 70))
self.InvestigationResultsLabel.setStyleSheet("border: 2px
    solid;\n"
"border-radius: 20px;\n"
"border-color:rgb(69, 69, 69);\n"
"background-color: rgb(69, 69, 69);\n"
"font: 18pt \\"Sans Serif\\"; color:rgb(239, 239, 239);\n"
"")
self.InvestigationResultsLabel.setObjectName("InvestigationResultsLabel")
self.InvestigationResultsTab = QtWidgets.QPushButton(self.TabBar)
self.InvestigationResultsTab.setGeometry(QtCore.QRect(430, 5,
    200, 70))
self.InvestigationResultsTab.setCursor(QtGui.QCursor(QtCore.Qt.PointingHandCursor))
self.InvestigationResultsTab.setStyleSheet("border-radius:
    20px;\n"
"background-color: rgba(0, 0, 0, 0);\n"
"font: 18pt \\"Sans Serif\\";\n"
"")
self.InvestigationResultsTab.setText("")
self.InvestigationResultsTab.setObjectName("InvestigationResultsTab")
self.ConclusionLabel = QtWidgets.QLabel(self.TabBar)

```

```

        self.ConclusionLabel.setGeometry(QtCore.QRect(640, 5, 200, 70))
        self.ConclusionLabel.setStyleSheet("border: 2px solid;\n"
"border-radius: 20px;\n"
"border-color:rgb(69, 69, 69);\n"
"background-color: rgb(69, 69, 69);\n"
"font: 18pt \"Sans Serif\"; color:rgb(239, 239, 239);\n"
""")
        self.ConclusionLabel.setObjectName("ConclusionLabel")
        self.ImpactLabel = QtWidgets.QLabel(self.TabBar)
        self.ImpactLabel.setGeometry(QtCore.QRect(850, 5, 241, 70))
        self.ImpactLabel.setStyleSheet("border: 2px solid;\n"
"border-radius: 20px;\n"
"border-color:rgb(69, 69, 69);\n"
"background-color: rgb(239, 239, 239);\n"
"font: 18pt \"Sans Serif\"; color:rgb(69, 69, 69);\n"
""")
        self.ImpactLabel.setObjectName("ImpactLabel")
        self.ConclusionTab = QtWidgets.QPushButton(self.TabBar)
        self.ConclusionTab.setGeometry(QtCore.QRect(640, 5, 200, 70))
        self.ConclusionTab.setCursor(QtGui.QCursor(QtCore.Qt.PointingHandCursor))
        self.ConclusionTab.setStyleSheet("border-radius: 20px;\n"
"background-color: rgba(0, 0, 0, 0);\n"
"font: 18pt \"Sans Serif\";\n"
""")
        self.ConclusionTab.setText("")
        self.ConclusionTab.setObjectName("ConclusionTab")
        self.ImpactTab = QtWidgets.QPushButton(self.TabBar)
        self.ImpactTab.setGeometry(QtCore.QRect(850, 5, 241, 70))
        self.ImpactTab.setCursor(QtGui.QCursor(QtCore.Qt.PointingHandCursor))
        self.ImpactTab.setStyleSheet("border-radius: 20px;\n"
"background-color: rgba(0, 0, 0, 0);\n"
"font: 18pt \"Sans Serif\";\n"
""")
        self.ImpactTab.setText("")
        self.ImpactTab.setObjectName("ImpactTab")
        self.MainWidget = QtWidgets.QWidget(self.widget)
        self.MainWidget.setGeometry(QtCore.QRect(10, 170, 1320, 540))
        self.MainWidget.setStyleSheet("background-color: rgb(239, 239,
239);\n"
"border-radius: 20px;")
        self.MainWidget.setObjectName("MainWidget")
        self.PrevButton = QtWidgets.QPushButton(self.MainWidget)
        self.PrevButton.setGeometry(QtCore.QRect(10, 460, 200, 70))
        self.PrevButton.setCursor(QtGui.QCursor(QtCore.Qt.PointingHandCursor))
        self.PrevButton.setStyleSheet("border: 2px solid;\n"
"border-radius: 20px;\n"
"border-color:rgb(69, 69, 69);\n"
"background-color: rgb(69, 69, 69);\n"
"font: 18pt \"Sans Serif\"; color:rgb(239, 239, 239);\n"
""")

```

```

        self.PrevButton.setObjectName("PrevButton")
        self.NextButton = QtWidgets.QPushButton(self.MainWidget)
        self.NextButton.setGeometry(QtCore.QRect(1110, 460, 200, 70))
        self.NextButton.setCursor(QtGui.QCursor(QtCore.Qt.PointingHandCursor))
        self.NextButton.setStyleSheet("border: 2px solid;\n"
"border-radius: 20px;\n"
"border-color:rgb(69, 69, 69);\n"
"background-color: rgb(69, 69, 69);\n"
"font: 18pt \"Sans Serif\"; color:rgb(239, 239, 239);\n"
"")

        self.NextButton.setObjectName("NextButton")
        self.SubTitleText = QtWidgets.QLabel(self.MainWidget)
        self.SubTitleText.setGeometry(QtCore.QRect(40, 20, 611, 51))
        self.SubTitleText.setStyleSheet("font: 25pt \"Sans Serif\";\n"
"color:rgb(69, 69, 69);\n"
"background-color: rgb(239, 239, 239); padding: 5px;")
        self.SubTitleText.setObjectName("SubTitleText")
        self.MainText = QtWidgets.QLabel(self.MainWidget)
        self.MainText.setGeometry(QtCore.QRect(40, 90, 1251, 191))
        self.MainText.setStyleSheet("font: 13pt \"Sans Serif\";\n"
"color:rgb(69, 69, 69);\n"
"background-color: rgb(239, 239, 239); padding: 5px;")
        self.MainText.setAlignment(QtCore.Qt.AlignLeading|QtCore.Qt.AlignLeft|QtCore.Qt.AlignTop)
        self.MainText.setWordWrap(True)
        self.MainText.setObjectName("MainText")
        self.NotesButton = QtWidgets.QPushButton(self.MainWidget)
        self.NotesButton.setGeometry(QtCore.QRect(570, 460, 200, 70))
        self.NotesButton.setCursor(QtGui.QCursor(QtCore.Qt.PointingHandCursor))
        self.NotesButton.setStyleSheet("border: 2px solid;\n"
"border-radius: 20px;\n"
"border-color:rgb(69, 69, 69);\n"
"background-color: rgb(69, 69, 69);\n"
"font: 18pt \"Sans Serif\"; color:rgb(239, 239, 239);\n"
"")

        self.NotesButton.setObjectName("NotesButton")
        self.QuestionText = QtWidgets.QLabel(self.MainWidget)
        self.QuestionText.setGeometry(QtCore.QRect(420, 240, 501, 81))
        self.QuestionText.setStyleSheet("font: 25pt \"Sans Serif\";\n"
"color:rgb(69, 69, 69);\n"
"background-color: rgb(239, 239, 239); padding: 5px;")
        self.QuestionText.setAlignment(QtCore.Qt.AlignCenter)
        self.QuestionText.setWordWrap(True)
        self.QuestionText.setObjectName("QuestionText")
        self.QuestionInput = QtWidgets.QLineEdit(self.MainWidget)
        self.QuestionInput.setGeometry(QtCore.QRect(410, 330, 230, 60))
        self.QuestionInput.setStyleSheet("background-color: rgb(239,\n"
"239, 239);\n"
"color: rgb(69, 69, 69);\n"
"font: 18pt \"Sans Serif\";\n"
"border: 2px solid;\n"

```

```

"border-radius: 20px;\n"
"border-color:rgb(69, 69, 69);")
    self.QuestionInput.setText("")
    self.QuestionInput.setCursorPosition(0)
    self.QuestionInput.setAlignment(QtCore.Qt.AlignCenter)
    self.QuestionInput.setObjectName("QuestionInput")
    self.SubmitButton = QtWidgets.QPushButton(self.MainWidget)
    self.SubmitButton.setGeometry(QtCore.QRect(700, 330, 121, 61))
    self.SubmitButton.setCursor(QtGui.QCursor(Qt.PointingHandCursor))
    self.SubmitButton.setStyleSheet("border: 2px solid;\n"
"border-radius: 20px;\n"
"border-color:rgb(69, 69, 69);\n"
"background-color: rgb(69, 69, 69);\n"
"font: 18pt \"Sans Serif\"; color:rgb(239, 239, 239);\n"
""")
    self.SubmitButton.setObjectName("SubmitButton")
    self.MessageLabel = QtWidgets.QLabel(self.MainWidget)
    self.MessageLabel.setGeometry(QtCore.QRect(410, 400, 530, 41))
    self.MessageLabel.setStyleSheet("color: rgb(0, 140, 0);\n"
"font: 18pt \"Sans Serif\";")
    self.MessageLabel.setAlignment(QtCore.Qt.AlignBottom|QtCore.Qt.AlignHCenter)
    self.MessageLabel.setObjectName("MessageLabel")

    self.retranslateUi(ImpactScreen)
    QtCore.QMetaObject.connectSlotsByName(ImpactScreen)

def retranslateUi(self, ImpactScreen):
    _translate = QtCore.QCoreApplication.translate
    ImpactScreen.setWindowTitle(_translate("ImpactScreen",
        "Visualising the Riemann Hypothesis - Summary"))
    self.Title.setText(_translate("ImpactScreen", "Summary"))
    self.SummaryTab.setText(_translate("ImpactScreen", "Summary"))
    self.TheoryRecapTab.setText(_translate("ImpactScreen", "Theory
        Recap"))
    self.InvestigationResultsLabel.setText(_translate("ImpactScreen",
        "<html><head/><body><p
        align=\"center\">Investigation<br>Results</p></body></html>"))
    self.ConclusionLabel.setText(_translate("ImpactScreen",
        "<html><head/><body><p align=\"center\">Conclusion &
        <br/>Evaluation</p></body></html>"))
    self.ImpactLabel.setText(_translate("ImpactScreen",
        "<html><head/><body><p align=\"center\">Impact of the
        <br/>Riemann Hypothesis</p></body></html>"))
    self.PreviousButton.setText(_translate("ImpactScreen", "Prev"))
    self.NextButton.setText(_translate("ImpactScreen", "Next"))
    self.SubTitleText.setText(_translate("ImpactScreen",
        "<html><head/><body><p><span style=\"
        font-weight:600;\">Impact of the Riemann
        Hypothesis</span></p></body></html>"))
    self.MainText.setText(_translate("ImpactScreen",

```

```

"<html><head/><body><p>The Riemann Hypothesis is fundamental
to the way we think about prime numbers. Although studying a
single function may seem futile and even pointless, if this
conjecture was proven to be true, it would be one of the
most significant mathematical events to occur.<br/></p><p>It
would radically change how prime numbers can be calculated
and significantly increase our understanding of how prime
numbers are distributed.<br/></p><p>As previously mentioned,
this would affect fields such as cryptography, and even
quantum physics, completely revolutionising the way we view
prime numbers.</p></body></html>"))
self.NotesButton.setText(_translate("ImpactScreen", "Notes"))
self.QuestionText.setText(_translate("ImpactScreen",
        "<html><head/><body><p align=\"center\"><span style=\""
        "font-size:16pt; "
        "font-weight:600;\">Question</span></p></body></html>"))
self.QuestionInput.setPlaceholderText(_translate("ImpactScreen",
        "Answer"))
self.SubmitButton.setText(_translate("ImpactScreen", "Submit"))
self.MessageLabel.setText(_translate("ImpactScreen",
        "<html><head/><body><p"
        "align=\"center\"><br/></p></body></html>"))

```

program/user_interface/summary_ui/investigation_results.py

```

"""
investigation_results.py
=====
A GUI for the investigation results page of the summary section
"""

```

```

from PyQt5 import QtCore, QtGui, QtWidgets

class Ui_InvestigationResultsScreen(object):
    def setupUi(self, InvestigationResultsScreen):
        InvestigationResultsScreen.setObjectName("InvestigationResultsScreen")
        InvestigationResultsScreen.resize(1340, 723)
        InvestigationResultsScreen.setSizeGripEnabled(False)
        self.widget = QtWidgets.QWidget(InvestigationResultsScreen)
        self.widget.setGeometry(QtCore.QRect(0, 0, 1340, 720))
        self.widget.setStyleSheet("background-color: rgb(69, 69, 69);")
        self.widget.setObjectName("widget")
        self.Title = QtWidgets.QLabel(self.widget)
        self.Title.setGeometry(QtCore.QRect(565, 20, 211, 51))
        self.Title.setStyleSheet("font: 36pt \"Sans Serif\";"
                               "color:rgb(239, 239, 239);")
        self.Title.setObjectName("Title")

```

```

        self.TabBar = QtWidgets.QWidget(self.widget)
        self.TabBar.setGeometry(QtCore.QRect(0, 80, 1340, 80))
        self.TabBar.setStyleSheet("background-color: rgb(239, 239,
            239);")
        self.TabBar.setObjectName("TabBar")
        self.SummaryTab = QtWidgets.QPushButton(self.TabBar)
        self.SummaryTab.setGeometry(QtCore.QRect(10, 5, 200, 70))
        self.SummaryTab.setCursor(QtGui.QCursor(QtCore.Qt.PointingHandCursor))
        self.SummaryTab.setStyleSheet("border: 2px solid;\n"
"border-radius: 20px;\n"
"border-color:rgb(69, 69, 69);\n"
"background-color: rgb(69, 69, 69);\n"
"font: 18pt \"Sans Serif\"; color:rgb(239, 239, 239);\n"
"")
        self.SummaryTab.setObjectName("SummaryTab")
        self.TheoryRecapTab = QtWidgets.QPushButton(self.TabBar)
        self.TheoryRecapTab.setGeometry(QtCore.QRect(220, 5, 200, 70))
        self.TheoryRecapTab.setCursor(QtGui.QCursor(QtCore.Qt.PointingHandCursor))
        self.TheoryRecapTab.setStyleSheet("border: 2px solid;\n"
"border-radius: 20px;\n"
"border-color:rgb(69, 69, 69);\n"
"background-color: rgb(69, 69, 69);\n"
"font: 18pt \"Sans Serif\"; color:rgb(239, 239, 239);\n"
"")
        self.TheoryRecapTab.setObjectName("TheoryRecapTab")
        self.InvestigationResultsLabel = QtWidgets.QLabel(self.TabBar)
        self.InvestigationResultsLabel.setGeometry(QtCore.QRect(430, 5,
            200, 70))
        self.InvestigationResultsLabel.setStyleSheet("border: 2px
            solid;\n"
"border-radius: 20px;\n"
"border-color:rgb(69, 69, 69);\n"
"background-color: rgb(239, 239, 239);\n"
"font: 18pt \"Sans Serif\"; color:rgb(69, 69, 69);\n"
"")
        self.InvestigationResultsLabel.setObjectName("InvestigationResultsLabel")
        self.InvestigationResultsTab = QtWidgets.QPushButton(self.TabBar)
        self.InvestigationResultsTab.setGeometry(QtCore.QRect(430, 5,
            200, 70))
        self.InvestigationResultsTab.setCursor(QtGui.QCursor(QtCore.Qt.PointingHandCursor))
        self.InvestigationResultsTab.setStyleSheet("border-radius:
            20px;\n"
"background-color: rgba(0, 0, 0, 0);\n"
"font: 18pt \"Sans Serif\";\n"
"")
        self.InvestigationResultsTab.setText("")
        self.InvestigationResultsTab.setObjectName("InvestigationResultsTab")
        self.ConclusionLabel = QtWidgets.QLabel(self.TabBar)
        self.ConclusionLabel.setGeometry(QtCore.QRect(640, 5, 200, 70))
        self.ConclusionLabel.setStyleSheet("border: 2px solid;\n"

```

```

"border-radius: 20px;\n"
"border-color:rgb(69, 69, 69);\n"
"background-color: rgb(69, 69, 69);\n"
"font: 18pt \"Sans Serif\"; color:rgb(239, 239, 239);\n"
"""
    self.ConclusionLabel.setObjectName("ConclusionLabel")
    self.ImpactLabel = QtWidgets.QLabel(self.TabBar)
    self.ImpactLabel.setGeometry(QtCore.QRect(850, 5, 241, 70))
    self.ImpactLabel.setStyleSheet("border: 2px solid;\n"
"border-radius: 20px;\n"
"border-color:rgb(69, 69, 69);\n"
"background-color: rgb(69, 69, 69);\n"
"font: 18pt \"Sans Serif\"; color:rgb(239, 239, 239);\n"
"""
    self.ImpactLabel.setObjectName("ImpactLabel")
    self.ConclusionTab = QtWidgets.QPushButton(self.TabBar)
    self.ConclusionTab.setGeometry(QtCore.QRect(640, 5, 200, 70))
    self.ConclusionTab.setCursor(QtGui.QCursor(QtCore.Qt.PointingHandCursor))
    self.ConclusionTab.setStyleSheet("border-radius: 20px;\n"
"background-color: rgba(0, 0, 0, 0);\n"
"font: 18pt \"Sans Serif\";\n"
"""
    self.ConclusionTab.setText("")
    self.ConclusionTab.setObjectName("ConclusionTab")
    self.ImpactTab = QtWidgets.QPushButton(self.TabBar)
    self.ImpactTab.setGeometry(QtCore.QRect(850, 5, 241, 70))
    self.ImpactTab.setCursor(QtGui.QCursor(QtCore.Qt.PointingHandCursor))
    self.ImpactTab.setStyleSheet("border-radius: 20px;\n"
"background-color: rgba(0, 0, 0, 0);\n"
"font: 18pt \"Sans Serif\";\n"
"""
    self.ImpactTab.setText("")
    self.ImpactTab.setObjectName("ImpactTab")
    self.MainWidget = QtWidgets.QWidget(self.widget)
    self.MainWidget.setGeometry(QtCore.QRect(10, 170, 1320, 540))
    self.MainWidget.setStyleSheet("background-color: rgb(239, 239,
239);\n"
"border-radius: 20px;")
    self.MainWidget.setObjectName("MainWidget")
    self.PrevButton = QtWidgets.QPushButton(self.MainWidget)
    self.PrevButton.setGeometry(QtCore.QRect(10, 460, 200, 70))
    self.PrevButton.setCursor(QtGui.QCursor(QtCore.Qt.PointingHandCursor))
    self.PrevButton.setStyleSheet("border: 2px solid;\n"
"border-radius: 20px;\n"
"border-color:rgb(69, 69, 69);\n"
"background-color: rgb(69, 69, 69);\n"
"font: 18pt \"Sans Serif\"; color:rgb(239, 239, 239);\n"
"""
    self.PrevButton.setObjectName("PrevButton")
    self.NextButton = QtWidgets.QPushButton(self.MainWidget)

```

```

        self.NextButton.setGeometry(QtCore.QRect(1110, 460, 200, 70))
        self.NextButton.setCursor(QtGui.QCursor(Qt.PointingHandCursor))
        self.NextButton.setStyleSheet("border: 2px solid;\n"
"border-radius: 20px;\n"
"border-color:rgb(69, 69, 69);\n"
"background-color: rgb(69, 69, 69);\n"
"font: 18pt \"Sans Serif\"; color:rgb(239, 239, 239);\n"
""")
        self.NextButton.setObjectName("NextButton")
        self.SubTitleText = QtWidgets.QLabel(self.MainWidget)
        self.SubTitleText.setGeometry(QtCore.QRect(40, 20, 361, 51))
        self.SubTitleText.setStyleSheet("font: 25pt \"Sans Serif\";
                                         color:rgb(69, 69, 69);\n"
"background-color: rgb(239, 239, 239); padding: 5px;")
        self.SubTitleText.setObjectName("SubTitleText")
        self.MainText = QtWidgets.QLabel(self.MainWidget)
        self.MainText.setGeometry(QtCore.QRect(40, 90, 711, 341))
        self.MainText.setStyleSheet("font: 13pt \"Sans Serif\";
                                         color:rgb(69, 69, 69);\n"
"background-color: rgb(239, 239, 239); padding: 5px;")
        self.MainText.setAlignment(QtCore.Qt.AlignLeading|QtCore.Qt.AlignLeft|QtCore.Qt.AlignTop)
        self.MainText.setWordWrap(True)
        self.MainText.setObjectName("MainText")
        self.ZetaTable = QtWidgets.QTableWidget(self.MainWidget)
        self.ZetaTable.setGeometry(QtCore.QRect(900, 70, 300, 351))
        self.ZetaTable.setObjectName("ZetaTable")
        self.ZetaTable.setColumnCount(2)
        self.ZetaTable.setRowCount(0)
        item = QtWidgets.QTableWidgetItem()
        item.setTextAlignment(QtCore.Qt.AlignCenter)
        font = QtGui.QFont()
        font.setPointSize(16)
        font.setBold(True)
        font.setWeight(75)
        item.setFont(font)
        self.ZetaTable.setHorizontalHeaderItem(0, item)
        item = QtWidgets.QTableWidgetItem()
        item.setTextAlignment(QtCore.Qt.AlignCenter)
        font = QtGui.QFont()
        font.setPointSize(16)
        font.setBold(True)
        font.setWeight(75)
        item.setFont(font)
        self.ZetaTable.setHorizontalHeaderItem(1, item)
        self.NotesButton = QtWidgets.QPushButton(self.MainWidget)
        self.NotesButton.setGeometry(QtCore.QRect(570, 460, 200, 70))
        self.NotesButton.setCursor(QtGui.QCursor(Qt.PointingHandCursor))
        self.NotesButton.setStyleSheet("border: 2px solid;\n"
"border-radius: 20px;\n"
"border-color:rgb(69, 69, 69);\n"

```

```

"background-color: #636363;\n"
"font: 18pt \"Sans Serif\"; color:#fff;\n"
""")
    self.NotesButton.setObjectName("NotesButton")

    self.retranslateUi(InvestigationResultsScreen)
    QtCore.QMetaObject.connectSlotsByName(InvestigationResultsScreen)

def retranslateUi(self, InvestigationResultsScreen):
    _translate = QtCore.QCoreApplication.translate
    InvestigationResultsScreen.setWindowTitle(_translate("InvestigationResultsScreen",
        "Visualising the Riemann Hypothesis - Summary"))
    self.Title.setText(_translate("InvestigationResultsScreen",
        "Summary"))
    self.SummaryTab.setText(_translate("InvestigationResultsScreen",
        "Summary"))
    self.TheoryRecapTab.setText(_translate("InvestigationResultsScreen",
        "Theory Recap"))
    self.InvestigationResultsLabel.setText(_translate("InvestigationResultsScreen",
        "<html><head/><body><p align=\"center\">Investigation<br/>Results</p></body></html>"))
    self.ConclusionLabel.setText(_translate("InvestigationResultsScreen",
        "<html><head/><body><p align=\"center\">Conclusion &
<br/>Evaluation</p></body></html>"))
    self.ImpactLabel.setText(_translate("InvestigationResultsScreen",
        "<html><head/><body><p align=\"center\">Impact of the
<br/>Riemann Hypothesis</p></body></html>"))
    self.PrevButton.setText(_translate("InvestigationResultsScreen",
        "Prev"))
    self.NextButton.setText(_translate("InvestigationResultsScreen",
        "Next"))
    self.SubTitleText.setText(_translate("InvestigationResultsScreen",
        "<html><head/><body><p><span style=\"font-weight:600;\">Investigation
Results</span></p></body></html>"))
    self.MainText.setText(_translate("InvestigationResultsScreen",
        "<html><head/><body><p>Hopefully, throughout this program you
have been able to gather and record results from
investigating the Riemann Hypothesis.</p><p>You should
notice, that the zeroes of the Riemann Zeta function occur
only when the real part of the input is 1 half.
</p><p>Furthermore, you should have noticed the connection
between the prime power function and the prime counting
function, and how these are able to be approximated using
other functions.</p><p>See the table to the right to look at
various values of the Zeta Function that have been
calculated by users of this program.</p></body></html>"))
item = self.ZetaTable.horizontalHeaderItem(0)
item.setText(_translate("InvestigationResultsScreen", "Input
(s)"))

```

```
    item = self.ZetaTable.horizontalHeaderItem(1)
    item.setText(_translate("InvestigationResultsScreen", "Output
(s)"))
    self.NotesButton.setText(_translate("InvestigationResultsScreen",
"Notes"))
```

program/user_interface/summary_ui/summary.py

```
"""
summary.py
=====
A GUI for the summary page of the summary section
"""

from PyQt5 import QtCore, QtGui, QtWidgets

class Ui_SummaryScreen(object):

    def setupUi(self, SummaryScreen):
        SummaryScreen.setObjectName("SummaryScreen")
        SummaryScreen.resize(1340, 723)
        SummaryScreen.setSizeGripEnabled(False)
        self.widget = QtWidgets.QWidget(SummaryScreen)
        self.widget.setGeometry(QtCore.QRect(0, 0, 1340, 720))
        self.widget.setStyleSheet("background-color: rgb(69, 69, 69);")
        self.widget.setObjectName("widget")
        self.Title = QtWidgets.QLabel(self.widget)
        self.Title.setGeometry(QtCore.QRect(565, 20, 211, 51))
        self.Title.setStyleSheet("font: 36pt \\"Sans Serif\\";
                               color:rgb(239, 239, 239)")
        self.Title.setObjectName("Title")
        self.TabBar = QtWidgets.QWidget(self.widget)
        self.TabBar.setGeometry(QtCore.QRect(0, 80, 1340, 80))
        self.TabBar.setStyleSheet("background-color: rgb(239, 239,
239);")
        self.TabBar.setObjectName("TabBar")
        self.SummaryTab = QtWidgets.QPushButton(self.TabBar)
        self.SummaryTab.setGeometry(QtCore.QRect(10, 5, 200, 70))
        self.SummaryTab.setCursor(QtGui.QCursor(QtCore.Qt.PointingHandCursor))
        self.SummaryTab.setStyleSheet("border: 2px solid;\n
border-radius: 20px;\n
border-color:rgb(69, 69, 69);\n
background-color: rgb(239, 239, 239);\n
font: 18pt \\"Sans Serif\\"; color:rgb(69, 69, 69);\n")
        self.SummaryTab.setObjectName("SummaryTab")
        self.TheoryRecapTab = QtWidgets.QPushButton(self.TabBar)
```

```

        self.TheoryRecapTab.setGeometry(QtCore.QRect(220, 5, 200, 70))
        self.TheoryRecapTab.setCursor(QtGui.QCursor(QtCore.Qt.PointingHandCursor))
        self.TheoryRecapTab.setStyleSheet("border: 2px solid;\n"
"border-radius: 20px;\n"
"border-color:rgb(69, 69, 69);\n"
"background-color: rgb(69, 69, 69);\n"
"font: 18pt \"Sans Serif\"; color:rgb(239, 239, 239);\n"
""")
        self.TheoryRecapTab.setObjectName("TheoryRecapTab")
        self.InvestigationResultsLabel = QtWidgets.QLabel(self.TabBar)
        self.InvestigationResultsLabel.setGeometry(QtCore.QRect(430, 5,
200, 70))
        self.InvestigationResultsLabel.setStyleSheet("border: 2px
solid;\n"
"border-radius: 20px;\n"
"border-color:rgb(69, 69, 69);\n"
"background-color: rgb(69, 69, 69);\n"
"font: 18pt \"Sans Serif\"; color:rgb(239, 239, 239);\n"
""")
        self.InvestigationResultsLabel.setObjectName("InvestigationResultsLabel")
        self.InvestigationResultsTab = QtWidgets.QPushButton(self.TabBar)
        self.InvestigationResultsTab.setGeometry(QtCore.QRect(430, 5,
200, 70))
        self.InvestigationResultsTab.setCursor(QtGui.QCursor(QtCore.Qt.PointingHandCursor))
        self.InvestigationResultsTab.setStyleSheet("border-radius:
20px;\n"
"background-color: rgba(0, 0, 0, 0);\n"
"font: 18pt \"Sans Serif\";\n"
""")
        self.InvestigationResultsTab.setText("")
        self.InvestigationResultsTab.setObjectName("InvestigationResultsTab")
        self.ConclusionLabel = QtWidgets.QLabel(self.TabBar)
        self.ConclusionLabel.setGeometry(QtCore.QRect(640, 5, 200, 70))
        self.ConclusionLabel.setStyleSheet("border: 2px solid;\n"
"border-radius: 20px;\n"
"border-color:rgb(69, 69, 69);\n"
"background-color: rgb(69, 69, 69);\n"
"font: 18pt \"Sans Serif\"; color:rgb(239, 239, 239);\n"
""")
        self.ConclusionLabel.setObjectName("ConclusionLabel")
        self.ImpactLabel = QtWidgets.QLabel(self.TabBar)
        self.ImpactLabel.setGeometry(QtCore.QRect(850, 5, 241, 70))
        self.ImpactLabel.setStyleSheet("border: 2px solid;\n"
"border-radius: 20px;\n"
"border-color:rgb(69, 69, 69);\n"
"background-color: rgb(69, 69, 69);\n"
"font: 18pt \"Sans Serif\"; color:rgb(239, 239, 239);\n"
""")
        self.ImpactLabel.setObjectName("ImpactLabel")
        self.ConclusionTab = QtWidgets.QPushButton(self.TabBar)

```

```

        self.ConclusionTab.setGeometry(QtCore.QRect(640, 5, 200, 70))
        self.ConclusionTab.setCursor(QtGui.QCursor(Qt.Core.Qt.PointingHandCursor))
        self.ConclusionTab.setStyleSheet("border-radius: 20px;\n"
"background-color: rgba(0, 0, 0, 0);\n"
"font: 18pt \"Sans Serif\";\n"
""")
        self.ConclusionTab.setText("")
        self.ConclusionTab.setObjectName("ConclusionTab")
        self.ImpactTab = QtWidgets.QPushButton(self.TabBar)
        self.ImpactTab.setGeometry(QtCore.QRect(850, 5, 241, 70))
        self.ImpactTab.setCursor(QtGui.QCursor(Qt.Core.Qt.PointingHandCursor))
        self.ImpactTab.setStyleSheet("border-radius: 20px;\n"
"background-color: rgba(0, 0, 0, 0);\n"
"font: 18pt \"Sans Serif\";\n"
""")
        self.ImpactTab.setText("")
        self.ImpactTab.setObjectName("ImpactTab")
        self.MainWidget = QtWidgets.QWidget(self.widget)
        self.MainWidget.setGeometry(QtCore.QRect(10, 170, 1320, 540))
        self.MainWidget.setStyleSheet("background-color: rgb(239, 239,
239);\n"
"border-radius: 20px;")
        self.MainWidget.setObjectName("MainWidget")
        self.PrevButton = QtWidgets.QPushButton(self.MainWidget)
        self.PrevButton.setGeometry(QtCore.QRect(10, 460, 200, 70))
        self.PrevButton.setCursor(QtGui.QCursor(Qt.Core.Qt.PointingHandCursor))
        self.PrevButton.setStyleSheet("border: 2px solid;\n"
"border-radius: 20px;\n"
"border-color:rgb(69, 69, 69);\n"
"background-color: rgb(69, 69, 69);\n"
"font: 18pt \"Sans Serif\"; color:rgb(239, 239, 239);\n"
""")
        self.PrevButton.setObjectName("PrevButton")
        self.NextButton = QtWidgets.QPushButton(self.MainWidget)
        self.NextButton.setGeometry(QtCore.QRect(1110, 460, 200, 70))
        self.NextButton.setCursor(QtGui.QCursor(Qt.Core.Qt.PointingHandCursor))
        self.NextButton.setStyleSheet("border: 2px solid;\n"
"border-radius: 20px;\n"
"border-color:rgb(69, 69, 69);\n"
"background-color: rgb(69, 69, 69);\n"
"font: 18pt \"Sans Serif\"; color:rgb(239, 239, 239);\n"
""")
        self.NextButton.setObjectName("NextButton")
        self.SubTitleText = QtWidgets.QLabel(self.MainWidget)
        self.SubTitleText.setGeometry(QtCore.QRect(40, 20, 171, 51))
        self.SubTitleText.setStyleSheet("font: 25pt \"Sans Serif\";
color:rgb(69, 69, 69);\n"
"background-color: rgb(239, 239, 239); padding: 5px;")
        self.SubTitleText.setObjectName("SubTitleText")
        self.MainText = QtWidgets.QLabel(self.MainWidget)

```

```

        self.MainText.setGeometry(QtCore.QRect(40, 80, 1251, 141))
        self.MainText.setStyleSheet("font: 13pt \"Sans Serif\";
            color:rgb(69, 69, 69);\n"
    "background-color: rgb(239, 239, 239); padding: 5px;")
        self.MainText.setWordWrap(True)
        self.MainText.setObjectName("MainText")
        self.NotesButton = QtWidgets.QPushButton(self.MainWidget)
        self.NotesButton.setGeometry(QtCore.QRect(570, 460, 200, 70))
        self.NotesButton.setCursor(QtGui.QCursor(Qt.PointingHandCursor))
        self.NotesButton.setStyleSheet("border: 2px solid;\n"
"border-radius: 20px;\n"
"border-color:rgb(69, 69, 69);\n"
"background-color: rgb(69, 69, 69);\n"
"font: 18pt \"Sans Serif\"; color:rgb(239, 239, 239);\n"
""")
        self.NotesButton.setObjectName("NotesButton")
        self.QuestionText = QtWidgets.QLabel(self.MainWidget)
        self.QuestionText.setGeometry(QtCore.QRect(420, 210, 501, 101))
        self.QuestionText.setStyleSheet("font: 25pt \"Sans Serif\";
            color:rgb(69, 69, 69);\n"
"background-color: rgb(239, 239, 239); padding: 5px;")
        self.QuestionText.setAlignment(QtCore.Qt.AlignBottom|QtCore.Qt.AlignHCenter)
        self.QuestionText.setWordWrap(True)
        self.QuestionText.setObjectName("QuestionText")
        self.QuestionInput = QtWidgets.QLineEdit(self.MainWidget)
        self.QuestionInput.setGeometry(QtCore.QRect(410, 330, 230, 60))
        self.QuestionInput.setStyleSheet("background-color: rgb(239,
            239, 239);\n"
"color: rgb(69, 69, 69);\n"
"font: 18pt \"Sans Serif\";\n"
"border: 2px solid;\n"
"border-radius: 20px;\n"
"border-color:rgb(69, 69, 69);")
        self.QuestionInput.setText("")
        self.QuestionInput.setCursorPosition(0)
        self.QuestionInput.setAlignment(QtCore.Qt.AlignCenter)
        self.QuestionInput.setObjectName("QuestionInput")
        self.SubmitButton = QtWidgets.QPushButton(self.MainWidget)
        self.SubmitButton.setGeometry(QtCore.QRect(700, 330, 121, 61))
        self.SubmitButton.setCursor(QtGui.QCursor(Qt.PointingHandCursor))
        self.SubmitButton.setStyleSheet("border: 2px solid;\n"
"border-radius: 20px;\n"
"border-color:rgb(69, 69, 69);\n"
"background-color: rgb(69, 69, 69);\n"
"font: 18pt \"Sans Serif\"; color:rgb(239, 239, 239);\n"
""")
        self.SubmitButton.setObjectName("SubmitButton")
        self.MessageLabel = QtWidgets.QLabel(self.MainWidget)
        self.MessageLabel.setGeometry(QtCore.QRect(410, 400, 530, 41))
        self.MessageLabel.setStyleSheet("color: rgb(0, 140, 0);\n"

```

```

"font: 18pt \\"Sans Serif\\\";")
    self.MessageLabel.setAlignment(QtCore.Qt.AlignBottom|QtCore.Qt.AlignHCenter)
    self.MessageLabel.setObjectName("MessageLabel")

    self.retranslateUi(SummaryScreen)
    QtCore.QMetaObject.connectSlotsByName(SummaryScreen)

def retranslateUi(self, SummaryScreen):
    _translate = QtCore.QCoreApplication.translate
    SummaryScreen.setWindowTitle(_translate("SummaryScreen",
        "Visualising the Riemann Hypothesis - Summary"))
    self.Title.setText(_translate("SummaryScreen", "Summary"))
    self.SummaryTab.setText(_translate("SummaryScreen", "Summary"))
    self.TheoryRecapTab.setText(_translate("SummaryScreen", "Theory
        Recap"))
    self.InvestigationResultsLabel.setText(_translate("SummaryScreen",
        "<html><head/><body><p
        align=\"center\\\">Investigation<br/>Results</p></body></html>"))
    self.ConclusionLabel.setText(_translate("SummaryScreen",
        "<html><head/><body><p align=\"center\\\">Conclusion &
        <br/>Evaluation</p></body></html>"))
    self.ImpactLabel.setText(_translate("SummaryScreen",
        "<html><head/><body><p align=\"center\\\">Impact of the
        <br/>Riemann Hypothesis</p></body></html>"))
    self.PrevButton.setText(_translate("SummaryScreen", "Prev"))
    self.NextButton.setText(_translate("SummaryScreen", "Next"))
    self.SubTitleText.setText(_translate("SummaryScreen",
        "<html><head/><body><p><span style=\"
        font-weight:600;\\\">Summary</span></p></body></html>"))
    self.MainText.setText(_translate("SummaryScreen",
        "<html><head/><body><p>The summary section is the final part
        of this program.</p><p><br/></p><p>Use this section to
        compare your results to the expected results, make any notes
        you need to, learn about the significance of the results
        that you have obtained, and answer the remaining
        questions.</p></body></html>"))
    self.NotesButton.setText(_translate("SummaryScreen", "Notes"))
    self.QuestionText.setText(_translate("SummaryScreen",
        "<html><head/><body><p align=\"center\\\"><span style=\"
        font-size:16pt;
        font-weight:600;\\\">Question</span></p></body></html>"))
    self.QuestionInput.setPlaceholderText(_translate("SummaryScreen",
        "Answer"))
    self.SubmitButton.setText(_translate("SummaryScreen", "Submit"))
    self.MessageLabel.setText(_translate("SummaryScreen",
        "<html><head/><body><p
        align=\"center\\\"><br/></p></body></html>"))

```

program/user_interface/summary.ui/theory_recap.py

```
"""
theory_recap.py
=====
A GUI for the theory recap page of the summary section
"""

from PyQt5 import QtCore, QtGui, QtWidgets

class Ui_TheoryRecapScreen(object):

    def setupUi(self, TheoryRecapScreen):
        TheoryRecapScreen.setObjectName("TheoryRecapScreen")
        TheoryRecapScreen.resize(1340, 723)
        TheoryRecapScreen.setSizeGripEnabled(False)
        self.widget = QtWidgets.QWidget(TheoryRecapScreen)
        self.widget.setGeometry(QtCore.QRect(0, 0, 1340, 720))
        self.widget.setStyleSheet("background-color: rgb(69, 69, 69);")
        self.widget.setObjectName("widget")
        self.Title = QtWidgets.QLabel(self.widget)
        self.Title.setGeometry(QtCore.QRect(565, 20, 211, 51))
        self.Title.setStyleSheet("font: 36pt \"Sans Serif\";\n"
                               "color:rgb(239, 239, 239);")
        self.Title.setObjectName("Title")
        self.TabBar = QtWidgets.QWidget(self.widget)
        self.TabBar.setGeometry(QtCore.QRect(0, 80, 1340, 80))
        self.TabBar.setStyleSheet("background-color: rgb(239, 239,\n"
                               "239);")
        self.TabBar.setObjectName("TabBar")
        self.SummaryTab = QtWidgets.QPushButton(self.TabBar)
        self.SummaryTab.setGeometry(QtCore.QRect(10, 5, 200, 70))
        self.SummaryTab.setCursor(QtGui.QCursor(QtCore.Qt.PointingHandCursor))
        self.SummaryTab.setStyleSheet("border: 2px solid;\n"
                                     "border-radius: 20px;\n"
                                     "border-color:rgb(69, 69, 69);\n"
                                     "background-color: rgb(69, 69, 69);\n"
                                     "font: 18pt \"Sans Serif\"; color:rgb(239, 239, 239);\n"
                                     "")
        self.SummaryTab.setObjectName("SummaryTab")
        self.TheoryRecapTab = QtWidgets.QPushButton(self.TabBar)
        self.TheoryRecapTab.setGeometry(QtCore.QRect(220, 5, 200, 70))
        self.TheoryRecapTab.setCursor(QtGui.QCursor(QtCore.Qt.PointingHandCursor))
        self.TheoryRecapTab.setStyleSheet("border: 2px solid;\n"
                                     "border-radius: 20px;\n"
                                     "border-color:rgb(69, 69, 69);\n"
                                     "background-color: rgb(239, 239, 239);\n"
                                     "font: 18pt \"Sans Serif\"; color:rgb(69, 69, 69);\n"
                                     "")
```

```

        self.TheoryRecapTab.setObjectName("TheoryRecapTab")
        self.InvestigationResultsLabel = QtWidgets.QLabel(self.TabBar)
        self.InvestigationResultsLabel.setGeometry(QtCore.QRect(430, 5,
            200, 70))
        self.InvestigationResultsLabel.setStyleSheet("border: 2px
            solid;\n"
"border-radius: 20px;\n"
"border-color:rgb(69, 69, 69);\n"
"background-color: rgb(69, 69, 69);\n"
"font: 18pt \"Sans Serif\"; color:rgb(239, 239, 239);\n"
""")
        self.InvestigationResultsLabel.setObjectName("InvestigationResultsLabel")
        self.InvestigationResultsTab = QtWidgets.QPushButton(self.TabBar)
        self.InvestigationResultsTab.setGeometry(QtCore.QRect(430, 5,
            200, 70))
        self.InvestigationResultsTab.setCursor(QtGui.QCursor(QtCore.Qt.PointingHandCursor))
        self.InvestigationResultsTab.setStyleSheet("border-radius:
            20px;\n"
"background-color: rgba(0, 0, 0, 0);\n"
"font: 18pt \"Sans Serif\";\n"
""")
        self.InvestigationResultsTab.setText("")
        self.InvestigationResultsTab.setObjectName("InvestigationResultsTab")
        self.ConclusionLabel = QtWidgets.QLabel(self.TabBar)
        self.ConclusionLabel.setGeometry(QtCore.QRect(640, 5, 200, 70))
        self.ConclusionLabel.setStyleSheet("border: 2px solid;\n"
"border-radius: 20px;\n"
"border-color:rgb(69, 69, 69);\n"
"background-color: rgb(69, 69, 69);\n"
"font: 18pt \"Sans Serif\"; color:rgb(239, 239, 239);\n"
""")
        self.ConclusionLabel.setObjectName("ConclusionLabel")
        self.ImpactLabel = QtWidgets.QLabel(self.TabBar)
        self.ImpactLabel.setGeometry(QtCore.QRect(850, 5, 241, 70))
        self.ImpactLabel.setStyleSheet("border: 2px solid;\n"
"border-radius: 20px;\n"
"border-color:rgb(69, 69, 69);\n"
"background-color: rgb(69, 69, 69);\n"
"font: 18pt \"Sans Serif\"; color:rgb(239, 239, 239);\n"
""")
        self.ImpactLabel.setObjectName("ImpactLabel")
        self.ConclusionTab = QtWidgets.QPushButton(self.TabBar)
        self.ConclusionTab.setGeometry(QtCore.QRect(640, 5, 200, 70))
        self.ConclusionTab.setCursor(QtGui.QCursor(QtCore.Qt.PointingHandCursor))
        self.ConclusionTab.setStyleSheet("border-radius: 20px;\n"
"background-color: rgba(0, 0, 0, 0);\n"
"font: 18pt \"Sans Serif\";\n"
""")
        self.ConclusionTab.setText("")
        self.ConclusionTab.setObjectName("ConclusionTab")

```

```

        self.ImpactTab = QtWidgets.QPushButton(self.TabBar)
        self.ImpactTab.setGeometry(QtCore.QRect(850, 5, 241, 70))
        self.ImpactTab.setCursor(QtGui.QCursor(QtCore.Qt.PointingHandCursor))
        self.ImpactTab.setStyleSheet("border-radius: 20px;\n"
"background-color: rgba(0, 0, 0, 0);\n"
"font: 18pt \"Sans Serif\";\n"
""")
        self.ImpactTab.setText("")
        self.ImpactTab.setObjectName("ImpactTab")
        self.MainWidget = QtWidgets.QWidget(self.widget)
        self.MainWidget.setGeometry(QtCore.QRect(10, 170, 1320, 540))
        self.MainWidget.setStyleSheet("background-color: rgb(239, 239,
239);\n"
"border-radius: 20px;\")
        self.MainWidget.setObjectName("MainWidget")
        self.PreviousButton = QtWidgets.QPushButton(self.MainWidget)
        self.PreviousButton.setGeometry(QtCore.QRect(10, 460, 200, 70))
        self.PreviousButton.setCursor(QtGui.QCursor(QtCore.Qt.PointingHandCursor))
        self.PreviousButton.setStyleSheet("border: 2px solid;\n"
"border-radius: 20px;\n"
"border-color:rgb(69, 69, 69);\n"
"background-color: rgb(69, 69, 69);\n"
"font: 18pt \"Sans Serif\"; color:rgb(239, 239, 239);\n"
""")
        self.PreviousButton.setObjectName("PreviousButton")
        self.NextButton = QtWidgets.QPushButton(self.MainWidget)
        self.NextButton.setGeometry(QtCore.QRect(1110, 460, 200, 70))
        self.NextButton.setCursor(QtGui.QCursor(QtCore.Qt.PointingHandCursor))
        self.NextButton.setStyleSheet("border: 2px solid;\n"
"border-radius: 20px;\n"
"border-color:rgb(69, 69, 69);\n"
"background-color: rgb(69, 69, 69);\n"
"font: 18pt \"Sans Serif\"; color:rgb(239, 239, 239);\n"
""")
        self.NextButton.setObjectName("NextButton")
        self.SubTitleText = QtWidgets.QLabel(self.MainWidget)
        self.SubTitleText.setGeometry(QtCore.QRect(40, 20, 251, 51))
        self.SubTitleText.setStyleSheet("font: 25pt \"Sans Serif\";
color:rgb(69, 69, 69);\n"
"background-color: rgb(239, 239, 239); padding: 5px;\")
        self.SubTitleText.setObjectName("SubTitleText")
        self.MainText = QtWidgets.QLabel(self.MainWidget)
        self.MainText.setGeometry(QtCore.QRect(40, 90, 1251, 341))
        self.MainText.setStyleSheet("font: 13pt \"Sans Serif\";
color:rgb(69, 69, 69);\n"
"background-color: rgb(239, 239, 239); padding: 5px;\")
        self.MainText.setAlignment(QtCore.Qt.AlignLeading|QtCore.Qt.AlignLeft|QtCore.Qt.AlignTop)
        self.MainText.setWordWrap(True)
        self.MainText.setObjectName("MainText")
        self.QuestionText = QtWidgets.QLabel(self.MainWidget)

```

```

        self.QuestionText.setGeometry(QtCore.QRect(420, 280, 501, 101))
        self.QuestionText.setStyleSheet("font: 25pt \"Sans Serif\";
                                       color:rgb(69, 69, 69);\n"
"background-color: rgb(239, 239, 239); padding: 5px;")
        self.QuestionText.setAlignment(QtCore.Qt.AlignBottom|QtCore.Qt.AlignHCenter)
        self.QuestionText.setWordWrap(True)
        self.QuestionText.setObjectName("QuestionText")
        self.QuestionInput = QtWidgets.QLineEdit(self.MainWidget)
        self.QuestionInput.setGeometry(QtCore.QRect(410, 400, 230, 60))
        self.QuestionInput.setStyleSheet("background-color: rgb(239,
                                         239, 239);\n"
"color: rgb(69, 69, 69);\n"
"font: 18pt \"Sans Serif\";\n"
"border: 2px solid;\n"
"border-radius: 20px;\n"
"border-color:rgb(69, 69, 69);")
        self.QuestionInput.setText("")
        self.QuestionInput.setCursorPosition(0)
        self.QuestionInput.setAlignment(QtCore.Qt.AlignCenter)
        self.QuestionInput.setObjectName("QuestionInput")
        self.SubmitButton = QtWidgets.QPushButton(self.MainWidget)
        self.SubmitButton.setGeometry(QtCore.QRect(700, 400, 121, 61))
        self.SubmitButton.setCursor(QtGui.QCursor(QtCore.Qt.PointingHandCursor))
        self.SubmitButton.setStyleSheet("border: 2px solid;\n"
"border-radius: 20px;\n"
"border-color:rgb(69, 69, 69);\n"
"background-color: rgb(69, 69, 69);\n"
"font: 18pt \"Sans Serif\"; color:rgb(239, 239, 239);\n"
""")
        self.SubmitButton.setObjectName("SubmitButton")
        self.MessageLabel = QtWidgets.QLabel(self.MainWidget)
        self.MessageLabel.setGeometry(QtCore.QRect(410, 470, 530, 41))
        self.MessageLabel.setStyleSheet("color: rgb(0, 140, 0);\n"
"font: 18pt \"Sans Serif\";")
        self.MessageLabel.setAlignment(QtCore.Qt.AlignBottom|QtCore.Qt.AlignHCenter)
        self.MessageLabel.setObjectName("MessageLabel")

        self.retranslateUi(TheoryRecapScreen)
        QtCore.QMetaObject.connectSlotsByName(TheoryRecapScreen)

    def retranslateUi(self, TheoryRecapScreen):
        _translate = QtCore.QCoreApplication.translate
        TheoryRecapScreen.setWindowTitle(_translate("TheoryRecapScreen",
                                                 "Visualising the Riemann Hypothesis - Summary"))
        self.Title.setText(_translate("TheoryRecapScreen", "Summary"))
        self.SummaryTab.setText(_translate("TheoryRecapScreen",
                                         "Summary"))
        self.TheoryRecapTab.setText(_translate("TheoryRecapScreen",
                                              "Theory Recap"))
        self.InvestigationResultsLabel.setText(_translate("TheoryRecapScreen",

```

```

        "<html><head/><body><p align=\"center\">Investigation<br/>Results</p></body></html>"))
    self.ConclusionLabel.setText(_translate("TheoryRecapScreen",
        "<html><head/><body><p align=\"center\">Conclusion &
        <br/>Evaluation</p></body></html>"))
    self.ImpactLabel.setText(_translate("TheoryRecapScreen",
        "<html><head/><body><p align=\"center\">Impact of the
        <br/>Riemann Hypothesis</p></body></html>"))
    self.PrevButton.setText(_translate("TheoryRecapScreen", "Prev"))
    self.NextButton.setText(_translate("TheoryRecapScreen", "Next"))
    self.SubTitleText.setText(_translate("TheoryRecapScreen",
        "<html><head/><body><p><span style=\"font-weight:600;\">Theory Recap</span></p></body></html>"))
    self.MainText.setText(_translate("TheoryRecapScreen",
        "<html><head/><body><p>The Riemann Hypothesis, originating
        from Bernhard Riemann's 1859 paper \'On the Number Of
        Primes Less Than a Given Magnitude\', states that \'the real
        part of every nontrivial zero of the Riemann zeta function
        is 0.5\'. </p><p>Hopefully, by using this program, you have
        been able to investigate this conjecture.</p><p>The Riemann
        zeta function, is a more developed version of a function
        first studied by Leonhard Euler back in 1737. This function
        is the sum from n=1 to infinity of 1 dividid by n to the
        power s, where s is a complex number. A complex number is
        any number of the form a+bi, where a and b are real numbers,
        and i is the imaginary unit (equal to the square root of
        -1).</p><p>If proven to be true, the Riemann Zeta Function
        could be used to generate prime numbers and find their
        distribution, which would have profound effects in
        cryptography and even quantum
        physics.</p><p><br/></p></body></html>"))
    self.QuestionText.setText(_translate("TheoryRecapScreen",
        "<html><head/><body><p align=\"center\"><span style=\"font-size:16pt;
        font-weight:600;\">Question</span></p></body></html>"))
    self.QuestionInput.setPlaceholderText(_translate("TheoryRecapScreen",
        "Answer"))
    self.SubmitButton.setText(_translate("TheoryRecapScreen",
        "Submit"))
    self.MessageLabel.setText(_translate("TheoryRecapScreen",
        "<html><head/><body><p align=\"center\"><br/></p></body></html>"))

```

program/user_interface/tutorial_ui/_init__.py

```

"""
__init__.py
=====
Imports for the tutorial_ui

```

```
"""
from .tutorial import Ui_TutorialScreen
from .program_structure_tutorial import Ui_ProgramStructureTutorialScreen
from .introduction_tutorial import Ui_IntroductionTutorialScreen
from .investigation_tutorial import Ui_InvestigationTutorialScreen
from .login_tutorial import Ui_LoginTutorialScreen
from .summary_tutorial import Ui_SummaryTutorialScreen
```

program/user_interface/tutorial_ui/introduction_tutorial.py

```
"""
introduction_tutorial.py
=====
A GUI for the introduction tutorial page of the tutorial section
"""


```

```
from PyQt5 import QtCore, QtGui, QtWidgets

class Ui_IntroductionTutorialScreen(object):

    def setupUi(self, IntroductionTutorialScreen):
        IntroductionTutorialScreen.setObjectName("IntroductionTutorialScreen")
        IntroductionTutorialScreen.resize(1340, 723)
        IntroductionTutorialScreen.setToolTipDuration(0)
        IntroductionTutorialScreen.setSizeGripEnabled(False)
        self.widget = QtWidgets.QWidget(IntroductionTutorialScreen)
        self.widget.setGeometry(QtCore.QRect(0, 0, 1340, 720))
        self.widget.setStyleSheet("background-color: rgb(69, 69, 69);")
        self.widget.setObjectName("widget")
        self.Title = QtWidgets.QLabel(self.widget)
        self.Title.setGeometry(QtCore.QRect(590, 20, 161, 51))
        self.Title.setStyleSheet("font: 36pt \\"Sans Serif\\";
                               color:rgb(239, 239, 239);")
        self.Title.setObjectName("Title")
        self.TabBar = QtWidgets.QWidget(self.widget)
        self.TabBar.setGeometry(QtCore.QRect(0, 80, 1340, 80))
        self.TabBar.setStyleSheet("background-color: rgb(239, 239,
                                         239);")
        self.TabBar.setObjectName("TabBar")
        self.TutorialTab = QtWidgets.QPushButton(self.TabBar)
        self.TutorialTab.setGeometry(QtCore.QRect(10, 5, 200, 70))
        self.TutorialTab.setCursor(QtGui.QCursor(QtCore.Qt.PointingHandCursor))
        self.TutorialTab.setStyleSheet("border: 2px solid;\n"
                                     "border-radius: 20px;\n"
                                     "border-color:rgb(69, 69, 69);")
```

```

"background-color: rgb(69, 69, 69);\n"
"font: 18pt \\"Sans Serif\\"; color:rgb(239, 239, 239);\n"
""")
    self.TutorialTab.setObjectName("TutorialTab")
    self.LoginTab = QtWidgets.QPushButton(self.TabBar)
    self.LoginTab.setGeometry(QtCore.QRect(430, 5, 221, 70))
    self.LoginTab.setCursor(QtGui.QCursor(QtCore.Qt.PointingHandCursor))
    self.LoginTab.setStyleSheet("border: 2px solid;\n"
"border-radius: 20px;\n"
"border-color:rgb(69, 69, 69);\n"
"background-color: rgb(69, 69, 69);\n"
"font: 18pt \\"Sans Serif\\"; color:rgb(239, 239, 239);\n"
""")
    self.LoginTab.setObjectName("LoginTab")
    self.IntroductionTab = QtWidgets.QPushButton(self.TabBar)
    self.IntroductionTab.setGeometry(QtCore.QRect(660, 5, 200, 70))
    self.IntroductionTab.setCursor(QtGui.QCursor(QtCore.Qt.PointingHandCursor))
    self.IntroductionTab.setStyleSheet("border: 2px solid;\n"
"border-radius: 20px;\n"
"border-color:rgb(69, 69, 69);\n"
"background-color: rgb(239, 239, 239);\n"
"font: 18pt \\"Sans Serif\\"; color:rgb(69, 69, 69);\n"
""")
    self.IntroductionTab.setObjectName("IntroductionTab")
    self.InvestigationTab = QtWidgets.QPushButton(self.TabBar)
    self.InvestigationTab.setGeometry(QtCore.QRect(870, 5, 200, 70))
    self.InvestigationTab.setCursor(QtGui.QCursor(QtCore.Qt.PointingHandCursor))
    self.InvestigationTab.setStyleSheet("border: 2px solid;\n"
"border-radius: 20px;\n"
"border-color:rgb(69, 69, 69);\n"
"background-color: rgb(69, 69, 69);\n"
"font: 18pt \\"Sans Serif\\"; color:rgb(239, 239, 239);\n"
""")
    self.InvestigationTab.setObjectName("InvestigationTab")
    self.SummaryTab = QtWidgets.QPushButton(self.TabBar)
    self.SummaryTab.setGeometry(QtCore.QRect(1080, 5, 200, 70))
    self.SummaryTab.setCursor(QtGui.QCursor(QtCore.Qt.PointingHandCursor))
    self.SummaryTab.setStyleSheet("border: 2px solid;\n"
"border-radius: 20px;\n"
"border-color:rgb(69, 69, 69);\n"
"background-color: rgb(69, 69, 69);\n"
"font: 18pt \\"Sans Serif\\"; color:rgb(239, 239, 239);\n"
""")
    self.SummaryTab.setObjectName("SummaryTab")
    self.ProgramStructureTab = QtWidgets.QPushButton(self.TabBar)
    self.ProgramStructureTab.setGeometry(QtCore.QRect(220, 5, 200,
70))
    self.ProgramStructureTab.setCursor(QtGui.QCursor(QtCore.Qt.PointingHandCursor))
    self.ProgramStructureTab.setStyleSheet("border-radius: 20px;\n"
"background-color: rgba(0, 0, 0, 0);\n"

```

```

"font: 18pt \\"Sans Serif\\\";\n"
""")
    self.ProgramStructureTab.setText("")
    self.ProgramStructureTab.setObjectName("ProgramStructureTab")
    self.ProgramStructureLabel = QtWidgets.QLabel(self.TabBar)
    self.ProgramStructureLabel.setGeometry(QtCore.QRect(220, 5, 200,
        70))
    self.ProgramStructureLabel.setStyleSheet("border: 2px solid;\n"
"border-radius: 20px;\n"
"border-color:rgb(69, 69, 69);\n"
"background-color: rgb(69, 69, 69);\n"
"font: 18pt \\"Sans Serif\\\"; color:rgb(239, 239, 239);\n"
""")
    self.ProgramStructureLabel.setObjectName("ProgramStructureLabel")
    self.TutorialTab.raise_()
    self.LoginTab.raise_()
    self.IntroductionTab.raise_()
    self.InvestigationTab.raise_()
    self.SummaryTab.raise_()
    self.ProgramStructureLabel.raise_()
    self.ProgramStructureTab.raise_()
    self.MainWidget = QtWidgets.QWidget(self.widget)
    self.MainWidget.setGeometry(QtCore.QRect(10, 170, 1320, 540))
    self.MainWidget.setStyleSheet("background-color: rgb(239, 239,
        239);\n"
"border-radius: 20px;")
    self.MainWidget.setObjectName("MainWidget")
    self.PrevButton = QtWidgets.QPushButton(self.MainWidget)
    self.PrevButton.setGeometry(QtCore.QRect(10, 460, 200, 70))
    self.PrevButton.setCursor(QtGui.QCursor(QtCore.Qt.PointingHandCursor))
    self.PrevButton.setStyleSheet("border: 2px solid;\n"
"border-radius: 20px;\n"
"border-color:rgb(69, 69, 69);\n"
"background-color: rgb(69, 69, 69);\n"
"font: 18pt \\"Sans Serif\\\"; color:rgb(239, 239, 239);\n"
""")
    self.PrevButton.setObjectName("PrevButton")
    self.NextButton = QtWidgets.QPushButton(self.MainWidget)
    self.NextButton.setGeometry(QtCore.QRect(1110, 460, 200, 70))
    self.NextButton.setCursor(QtGui.QCursor(QtCore.Qt.PointingHandCursor))
    self.NextButton.setStyleSheet("border: 2px solid;\n"
"border-radius: 20px;\n"
"border-color:rgb(69, 69, 69);\n"
"background-color: rgb(69, 69, 69);\n"
"font: 18pt \\"Sans Serif\\\"; color:rgb(239, 239, 239);\n"
""")
    self.NextButton.setObjectName("NextButton")
    self.SubTitleText = QtWidgets.QLabel(self.MainWidget)
    self.SubTitleText.setGeometry(QtCore.QRect(40, 20, 311, 41))
    self.SubTitleText.setStyleSheet("font: 25pt \\"Sans Serif\\";

```

```

        color:rgb(69, 69, 69);\n"
"background-color: rgb(239, 239, 239); padding: 5px;")
    self.SubTitleText.setObjectName("SubTitleText")
    self.MainText = QtWidgets.QLabel(self.MainWidget)
    self.MainText.setGeometry(QtCore.QRect(40, 60, 1251, 391))
    self.MainText.setStyleSheet("font: 13pt \"Sans Serif\";
        color:rgb(69, 69, 69);\n"
"background-color: rgb(239, 239, 239); padding: 5px;")
        self.MainText.setAlignment(QtCore.Qt.AlignLeading|QtCore.Qt.AlignLeft|QtCore.Qt.AlignTop)
        self.MainText.setWordWrap(True)
        self.MainText.setObjectName("MainText")
        self.QuestionInput = QtWidgets.QLineEdit(self.MainWidget)
        self.QuestionInput.setGeometry(QtCore.QRect(555, 410, 230, 60))
        self.QuestionInput.setStyleSheet("background-color: rgb(239,
            239, 239);\n"
"color: rgb(69, 69, 69);\n"
"font: 18pt \"Sans Serif\";\n"
"border: 2px solid;\n"
"border-radius: 20px;\n"
"border-color:rgb(69, 69, 69);")
            self.QuestionInput.setText("")
            self.QuestionInput.setCursorPosition(0)
            self.QuestionInput.setAlignment(QtCore.Qt.AlignCenter)
            self.QuestionInput.setObjectName("QuestionInput")
            self.QuestionText = QtWidgets.QLabel(self.MainWidget)
            self.QuestionText.setGeometry(QtCore.QRect(470, 330, 391, 71))
            self.QuestionText.setStyleSheet("font: 25pt \"Sans Serif\";
                color:rgb(69, 69, 69);\n"
"background-color: rgb(239, 239, 239); padding: 5px;")
                self.QuestionText.setWordWrap(True)
                self.QuestionText.setObjectName("QuestionText")
                self.MessageLabel = QtWidgets.QLabel(self.MainWidget)
                self.MessageLabel.setGeometry(QtCore.QRect(405, 480, 530, 41))
                self.MessageLabel.setStyleSheet("color: rgb(0, 140, 0);\n"
"font: 18pt \"Sans Serif\";")
                self.MessageLabel.setObjectName("MessageLabel")
                self.SubmitButton = QtWidgets.QPushButton(self.MainWidget)
                self.SubmitButton.setGeometry(QtCore.QRect(820, 415, 121, 51))
                self.SubmitButton.setCursor(QtGui.QCursor(QtCore.Qt.PointingHandCursor))
                self.SubmitButton.setStyleSheet("border: 2px solid;\n"
"border-radius: 20px;\n"
"border-color:rgb(69, 69, 69);\n"
"background-color: rgb(69, 69, 69);\n"
"font: 18pt \"Sans Serif\"; color:rgb(239, 239, 239);\n"
""")
                    self.SubmitButton.setObjectName("SubmitButton")
                    self.SubTitleText.raise_()
                    self.PrevButton.raise_()
                    self.NextButton.raise_()
                    self.MainText.raise_()

```

```

        self.QuestionText.raise_()
        self.QuestionInput.raise_()
        self.MessageLabel.raise_()
        self.SubmitButton.raise_()

        self.retranslateUi(IntroductionTutorialScreen)
        QtCore.QMetaObject.connectSlotsByName(IntroductionTutorialScreen)

    def retranslateUi(self, IntroductionTutorialScreen):
        _translate = QtCore.QCoreApplication.translate
        IntroductionTutorialScreen.setWindowTitle(_translate("IntroductionTutorialScreen",
            "Visualising the Riemann Hypothesis - Tutorial"))
        self.Title.setText(_translate("IntroductionTutorialScreen",
            "Tutorial"))
        self.TutorialTab.setText(_translate("IntroductionTutorialScreen",
            "Tutorial"))
        self.LoginTab.setText(_translate("IntroductionTutorialScreen",
            "Login"))
        self.IntroductionTab.setText(_translate("IntroductionTutorialScreen",
            "Introduction"))
        self.InvestigationTab.setText(_translate("IntroductionTutorialScreen",
            "Investigation"))
        self.SummaryTab.setText(_translate("IntroductionTutorialScreen",
            "Summary"))
        self.ProgramStructureLabel.setText(_translate("IntroductionTutorialScreen",
            "<html><head/><body><p>Program<br/>Structure</p></body></html>"))
        self.PrevButton.setText(_translate("IntroductionTutorialScreen",
            "Prev"))
        self.NextButton.setText(_translate("IntroductionTutorialScreen",
            "Next"))
        self.SubTitleText.setText(_translate("IntroductionTutorialScreen",
            "<html><head/><body><p><span style=\"font-weight:600;\">Introduction</span></p></body></html>"))
        self.MainText.setText(_translate("IntroductionTutorialScreen",
            "<html><head/><body><p>The introduction section of this
            program is designed to give you a sufficient amount of
            knowledge about the Riemann Hypothesis, such that you will
            be able to understand the complicated mathematics behind
            this program so that you will be able to fully utilise the
            functionality of this program.</p><p>This section will give
            you some Historical Background on the Riemann Hypothesis, it
            will explain what the Riemann Hypothesis actually is, and
            detail some Practical Applications of the Riemann
            Hypothesis.</p><p><br/>The introduction section will give
            you the basic knowledge you need to be able to understand
            this program, so it is strongly recommended to read this
            before started to use the program.</p><p>Throughout the
            Introduction Section, and the rest of the program, will be
            various questions. Answer these questions correctly to be
            correct.</p>"))

```

```

able to learn more about the Riemann Hypothesis! When you
answer the question correctly, it will say that you have it
correct. Otherwise, keep on trying to get the right
answer.</p><p>Here is an example
below:</p><p><br/></p><p><br/></p></body></html>))
self.QuestionInput.setPlaceholderText(_translate("IntroductionTutorialScreen",
"Answer"))
self.QuestionText.setText(_translate("IntroductionTutorialScreen",
"<html><head/><body><p align=\"center\"><span style=\""
font-size:16pt;
font-weight:600;\">Question</span></p></body></html>"))
self.MessageLabel.setText(_translate("IntroductionTutorialScreen",
"<html><head/><body><p align=\"center\"><br/></p></body></html>"))
self.SubmitButton.setText(_translate("IntroductionTutorialScreen",
"Submit"))

```

program/user_interface/tutorial_ui/investigation_tutorial.py

```

"""
investigation_tutorial.py
=====
A GUI for the investigation tutorial page of the tutorial section
"""

from PyQt5 import QtCore, QtGui, QtWidgets

class Ui_InvestigationTutorialScreen(object):

    def setupUi(self, InvestigationTutorialScreen):
        InvestigationTutorialScreen.setObjectName("InvestigationTutorialScreen")
        InvestigationTutorialScreen.resize(1340, 723)
        InvestigationTutorialScreen.setToolTipDuration(0)
        InvestigationTutorialScreen.setSizeGripEnabled(False)
        self.widget = QtWidgets.QWidget(InvestigationTutorialScreen)
        self.widget.setGeometry(QtCore.QRect(0, 0, 1340, 720))
        self.widget.setStyleSheet("background-color: rgb(69, 69, 69);")
        self.widget.setObjectName("widget")
        self.Title = QtWidgets.QLabel(self.widget)
        self.Title.setGeometry(QtCore.QRect(590, 20, 161, 51))
        self.Title.setStyleSheet("font: 36pt \"Sans Serif\";"
                               "color:rgb(239, 239, 239);")
        self.Title.setObjectName("Title")
        self.TabBar = QtWidgets.QWidget(self.widget)
        self.TabBar.setGeometry(QtCore.QRect(0, 80, 1340, 80))
        self.TabBar.setStyleSheet("background-color: rgb(239, 239,
239);")

```

```

        self.TabBar.setObjectName("TabBar")
        self.TutorialTab = QtWidgets.QPushButton(self.TabBar)
        self.TutorialTab.setGeometry(QtCore.QRect(10, 5, 200, 70))
        self.TutorialTab.setCursor(QtGui.QCursor(QtCore.Qt.PointingHandCursor))
        self.TutorialTab.setStyleSheet("border: 2px solid;\n"
"border-radius: 20px;\n"
"border-color:rgb(69, 69, 69);\n"
"background-color: rgb(69, 69, 69);\n"
"font: 18pt \"Sans Serif\"; color:rgb(239, 239, 239);\n"
""")
        self.TutorialTab.setObjectName("TutorialTab")
        self.LoginTab = QtWidgets.QPushButton(self.TabBar)
        self.LoginTab.setGeometry(QtCore.QRect(430, 5, 221, 70))
        self.LoginTab.setCursor(QtGui.QCursor(QtCore.Qt.PointingHandCursor))
        self.LoginTab.setStyleSheet("border: 2px solid;\n"
"border-radius: 20px;\n"
"border-color:rgb(69, 69, 69);\n"
"background-color: rgb(69, 69, 69);\n"
"font: 18pt \"Sans Serif\"; color:rgb(239, 239, 239);\n"
""")
        self.LoginTab.setObjectName("LoginTab")
        self.IntroductionTab = QtWidgets.QPushButton(self.TabBar)
        self.IntroductionTab.setGeometry(QtCore.QRect(660, 5, 200, 70))
        self.IntroductionTab.setCursor(QtGui.QCursor(QtCore.Qt.PointingHandCursor))
        self.IntroductionTab.setStyleSheet("border: 2px solid;\n"
"border-radius: 20px;\n"
"border-color:rgb(69, 69, 69);\n"
"background-color: rgb(69, 69, 69);\n"
"font: 18pt \"Sans Serif\"; color:rgb(239, 239, 239);\n"
""")
        self.IntroductionTab.setObjectName("IntroductionTab")
        self.InvestigationTab = QtWidgets.QPushButton(self.TabBar)
        self.InvestigationTab.setGeometry(QtCore.QRect(870, 5, 200, 70))
        self.InvestigationTab.setCursor(QtGui.QCursor(QtCore.Qt.PointingHandCursor))
        self.InvestigationTab.setStyleSheet("border: 2px solid;\n"
"border-radius: 20px;\n"
"border-color:rgb(69, 69, 69);\n"
"background-color: rgb(239, 239, 239);\n"
"font: 18pt \"Sans Serif\"; color:rgb(69, 69, 69);\n"
""")
        self.InvestigationTab.setObjectName("InvestigationTab")
        self.SummaryTab = QtWidgets.QPushButton(self.TabBar)
        self.SummaryTab.setGeometry(QtCore.QRect(1080, 5, 200, 70))
        self.SummaryTab.setCursor(QtGui.QCursor(QtCore.Qt.PointingHandCursor))
        self.SummaryTab.setStyleSheet("border: 2px solid;\n"
"border-radius: 20px;\n"
"border-color:rgb(69, 69, 69);\n"
"background-color: rgb(69, 69, 69);\n"
"font: 18pt \"Sans Serif\"; color:rgb(239, 239, 239);\n"
""")

```

```

        self.SummaryTab.setObjectName("SummaryTab")
        self.ProgramStructureTab = QtWidgets.QPushButton(self.TabBar)
        self.ProgramStructureTab.setGeometry(QtCore.QRect(220, 5, 200,
            70))
        self.ProgramStructureTab.setCursor(QtGui.QCursor(QtCore.Qt.PointingHandCursor))
        self.ProgramStructureTab.setStyleSheet("border-radius: 20px;\n"
"background-color: rgba(0, 0, 0, 0);\n"
"font: 18pt \\"Sans Serif\\";\n"
"")
        self.ProgramStructureTab.setText("")
        self.ProgramStructureTab.setObjectName("ProgramStructureTab")
        self.ProgramStructureLabel = QtWidgets.QLabel(self.TabBar)
        self.ProgramStructureLabel.setGeometry(QtCore.QRect(220, 5, 200,
            70))
        self.ProgramStructureLabel.setStyleSheet("border: 2px solid;\n"
"border-radius: 20px;\n"
"border-color:rgb(69, 69, 69);\n"
"background-color: rgb(69, 69, 69);\n"
"font: 18pt \\"Sans Serif\\"; color:rgb(239, 239, 239);\n"
"")
        self.ProgramStructureLabel.setObjectName("ProgramStructureLabel")
        self.TutorialTab.raise_()
        self.LoginTab.raise_()
        self.IntroductionTab.raise_()
        self.InvestigationTab.raise_()
        self.SummaryTab.raise_()
        self.ProgramStructureLabel.raise_()
        self.ProgramStructureTab.raise_()
        self.MainWidget = QtWidgets.QWidget(self.widget)
        self.MainWidget.setGeometry(QtCore.QRect(10, 170, 1320, 540))
        self.MainWidget.setStyleSheet("background-color: rgb(239, 239,
            239);\n"
"border-radius: 20px;")
        self.MainWidget.setObjectName("MainWidget")
        self.PrevButton = QtWidgets.QPushButton(self.MainWidget)
        self.PrevButton.setGeometry(QtCore.QRect(10, 460, 200, 70))
        self.PrevButton.setCursor(QtGui.QCursor(QtCore.Qt.PointingHandCursor))
        self.PrevButton.setStyleSheet("border: 2px solid;\n"
"border-radius: 20px;\n"
"border-color:rgb(69, 69, 69);\n"
"background-color: rgb(69, 69, 69);\n"
"font: 18pt \\"Sans Serif\\"; color:rgb(239, 239, 239);\n"
"")
        self.PrevButton.setObjectName("PrevButton")
        self.NextButton = QtWidgets.QPushButton(self.MainWidget)
        self.NextButton.setGeometry(QtCore.QRect(1110, 460, 200, 70))
        self.NextButton.setCursor(QtGui.QCursor(QtCore.Qt.PointingHandCursor))
        self.NextButton.setStyleSheet("border: 2px solid;\n"
"border-radius: 20px;\n"
"border-color:rgb(69, 69, 69);\n"

```

```

"background-color: rgb(69, 69, 69);\n"
"font: 18pt \\"Sans Serif\\"; color:rgb(239, 239, 239);\n"
""")
    self.NextButton.setObjectName("NextButton")
    self.SubTitleText = QtWidgets.QLabel(self.MainWidget)
    self.SubTitleText.setGeometry(QtCore.QRect(40, 20, 311, 51))
    self.SubTitleText.setStyleSheet("font: 25pt \\"Sans Serif\\";
                                    color:rgb(69, 69, 69);\n")
"background-color: rgb(239, 239, 239); padding: 5px;")
    self.SubTitleText.setObjectName("SubTitleText")
    self.MSlider = QtWidgets.QSlider(self.MainWidget)
    self.MSlider.setGeometry(QtCore.QRect(400, 250, 181, 31))
    self.MSlider.setMinimum(-10)
    self.MSlider.setMaximum(10)
    self.MSlider.setOrientation(QtCore.Qt.Horizontal)
    self.MSlider.setInvertedAppearance(False)
    self.MSlider.setInvertedControls(False)
    self.MSlider.setTickPosition(QtWidgets.QSlider.NoTicks)
    self.MSlider.setObjectName("MSlider")
    self.MainText = QtWidgets.QLabel(self.MainWidget)
    self.MainText.setGeometry(QtCore.QRect(40, 70, 1251, 111))
    self.MainText.setStyleSheet("font: 13pt \\"Sans Serif\\";
                               color:rgb(69, 69, 69);\n")
"background-color: rgb(239, 239, 239); padding: 5px;")
    self.MainText.setWordWrap(True)
    self.MainText.setObjectName("MainText")
    self.GraphText = QtWidgets.QLabel(self.MainWidget)
    self.GraphText.setGeometry(QtCore.QRect(600, 170, 151, 61))
    self.GraphText.setStyleSheet("font: 25pt \\"Sans Serif\\";
                                color:rgb(69, 69, 69);\n")
"background-color: rgb(239, 239, 239); padding: 5px;")
    self.GraphText.setObjectName("GraphText")
    self.CSlider = QtWidgets.QSlider(self.MainWidget)
    self.CSlider.setGeometry(QtCore.QRect(760, 250, 181, 31))
    self.CSlider.setMinimum(-10)
    self.CSlider.setMaximum(10)
    self.CSlider.setOrientation(QtCore.Qt.Horizontal)
    self.CSlider.setInvertedAppearance(False)
    self.CSlider.setInvertedControls(False)
    self.CSlider.setTickPosition(QtWidgets.QSlider.NoTicks)
    self.CSlider.setObjectName("CSlider")
    self.MText = QtWidgets.QLabel(self.MainWidget)
    self.MText.setGeometry(QtCore.QRect(330, 220, 61, 61))
    self.MText.setStyleSheet("font: 25pt \\"Sans Serif\\";
                           color:rgb(69, 69, 69);\n")
"background-color: rgb(239, 239, 239); padding: 5px;")
    self.MText.setObjectName("MText")
    self.CText = QtWidgets.QLabel(self.MainWidget)
    self.CText.setGeometry(QtCore.QRect(690, 220, 61, 61))
    self.CText.setStyleSheet("font: 25pt \\"Sans Serif\\";

```

```

        color:rgb(69, 69, 69);\n"
"background-color: rgb(239, 239, 239); padding: 5px;")
    self.CText.setObjectName("CText")
    self.GraphButton = QtWidgets.QPushButton(self.MainWidget)
    self.GraphButton.setGeometry(QtCore.QRect(610, 280, 131, 51))
    self.GraphButton.setCursor(QtGui.QCursor(QtCore.Qt.PointingHandCursor))
    self.GraphButton.setStyleSheet("border: 2px solid;\n"
"border-radius: 20px;\n"
"border-color:rgb(69, 69, 69);\n"
"background-color: rgb(69, 69, 69);\n"
"font: 18pt \\"Sans Serif\\"; color:rgb(239, 239, 239);\n"
""")
    self.GraphButton.setObjectName("GraphButton")
    self.MainText_2 = QtWidgets.QLabel(self.MainWidget)
    self.MainText_2.setGeometry(QtCore.QRect(20, 350, 861, 31))
    self.MainText_2.setStyleSheet("font: 13pt \\"Sans Serif\\";
color:rgb(69, 69, 69);\n"
"background-color: rgb(239, 239, 239); padding: 5px;")
    self.MainText_2.setWordWrap(True)
    self.MainText_2.setObjectName("MainText_2")
    self.QuestionInput = QtWidgets.QLineEdit(self.MainWidget)
    self.QuestionInput.setGeometry(QtCore.QRect(540, 420, 111, 60))
    self.QuestionInput.setStyleSheet("background-color: rgb(239,
239, 239);\n"
"color: rgb(69, 69, 69);\n"
"font: 18pt \\"Sans Serif\\";\n"
"border: 2px solid;\n"
"border-radius: 20px;\n"
"border-color:rgb(69, 69, 69);")
    self.QuestionInput.setText("")
    self.QuestionInput.setEchoMode(QtWidgets.QLineEdit.Normal)
    self.QuestionInput.setCursorPosition(0)
    self.QuestionInput.setAlignment(QtCore.Qt.AlignCenter)
    self.QuestionInput.setObjectName("QuestionInput")
    self.SubmitButton = QtWidgets.QPushButton(self.MainWidget)
    self.SubmitButton.setGeometry(QtCore.QRect(690, 420, 131, 60))
    self.SubmitButton.setCursor(QtGui.QCursor(QtCore.Qt.PointingHandCursor))
    self.SubmitButton.setStyleSheet("border: 2px solid;\n"
"border-radius: 20px;\n"
"border-color:rgb(69, 69, 69);\n"
"background-color: rgb(69, 69, 69);\n"
"font: 18pt \\"Sans Serif\\"; color:rgb(239, 239, 239);\n"
""")
    self.SubmitButton.setObjectName("SubmitButton")
    self.MessageLabel = QtWidgets.QLabel(self.MainWidget)
    self.MessageLabel.setGeometry(QtCore.QRect(440, 480, 461, 41))
    self.MessageLabel.setStyleSheet("color: rgb(255, 0, 0);\n"
"font: 18pt \\"Sans Serif\\\";")
    self.MessageLabel.setObjectName("MessageLabel")
    self.MDisplay = QtWidgets.QLabel(self.MainWidget)

```

```

        self.MDisplay.setGeometry(QtCore.QRect(430, 200, 120, 51))
        self.MDisplay.setStyleSheet("border: 2px solid;\n"
"border-radius: 20px;\n"
"border-color:rgb(69, 69, 69);\n"
"background-color: rgb(239, 239, 239);\n"
"font: 18pt \"Sans Serif\"; color:rgb(69, 69, 69);\n"
""")
        self.MDisplay.setObjectName("MDisplay")
        self.CDisplay = QtWidgets.QLabel(self.MainWidget)
        self.CDisplay.setGeometry(QtCore.QRect(790, 200, 120, 51))
        self.CDisplay.setStyleSheet("border: 2px solid;\n"
"border-radius: 20px;\n"
"border-color:rgb(69, 69, 69);\n"
"background-color: rgb(239, 239, 239);\n"
"font: 18pt \"Sans Serif\"; color:rgb(69, 69, 69);\n"
""")
        self.CDisplay.setObjectName("CDisplay")
        self.QuestionText = QtWidgets.QLabel(self.MainWidget)
        self.QuestionText.setGeometry(QtCore.QRect(590, 380, 161, 31))
        self.QuestionText.setStyleSheet("font: 13pt \"Sans Serif\";
color:rgb(69, 69, 69);\n"
"background-color: rgb(239, 239, 239); padding: 5px;")
        self.QuestionText.setWordWrap(True)
        self.QuestionText.setObjectName("QuestionText")
        self.SubTitleText.raise_()
        self.PrevButton.raise_()
        self.NextButton.raise_()
        self.MSlider.raise_()
        self.MainText.raise_()
        self.GraphText.raise_()
        self.CSlider.raise_()
        self.MText.raise_()
        self.CText.raise_()
        self.GraphButton.raise_()
        self.MainText_2.raise_()
        self.QuestionInput.raise_()
        self.SubmitButton.raise_()
        self.MessageLabel.raise_()
        self.MDisplay.raise_()
        self.CDisplay.raise_()
        self.QuestionText.raise_()

        self.retranslateUi(InvestigationTutorialScreen)
        QtCore.QMetaObject.connectSlotsByName(InvestigationTutorialScreen)

    def retranslateUi(self, InvestigationTutorialScreen):
        _translate = QtCore.QCoreApplication.translate
        InvestigationTutorialScreen.setWindowTitle(_translate("InvestigationTutorialScreen",
"Visualising the Riemann Hypothesis - Tutorial"))
        self.Title.setText(_translate("InvestigationTutorialScreen",

```

```

    "Tutorial"))
self.TutorialTab.setText(_translate("InvestigationTutorialScreen",
    "Tutorial"))
self.LoginTab.setText(_translate("InvestigationTutorialScreen",
    "Login"))
self.IntroductionTab.setText(_translate("InvestigationTutorialScreen",
    "Introduction"))
self.InvestigationTab.setText(_translate("InvestigationTutorialScreen",
    "Investigation"))
self.SummaryTab.setText(_translate("InvestigationTutorialScreen",
    "Summary"))
self.ProgramStructureLabel.setText(_translate("InvestigationTutorialScreen",
    "<html><head/><body><p>Program<br/>Structure</p></body></html>"))
self.PrevButton.setText(_translate("InvestigationTutorialScreen",
    "Prev"))
self.NextButton.setText(_translate("InvestigationTutorialScreen",
    "Next"))
self.SubTitleText.setText(_translate("InvestigationTutorialScreen",
    "<html><head/><body><p><span style=\"font-weight:600;\">Investigation</span></p></body></html>"))
self.MainText.setText(_translate("InvestigationTutorialScreen",
    "<html><head/><body><p>The Investigation Section is the main
part of this program. It will allow you to conduct your own
investigation into the Riemann Hypothesis and let you record
your results, while asking you questions along the
way</p><p>Lets get some practice with how this program will
work. Slide the slides to adjust the equation, then press
graph to display the graph. Change these values to see what
happens.</p></body></html>"))
self.GraphText.setText(_translate("InvestigationTutorialScreen",
    "<html><head/><body><p><span style=\"font-weight:600;\">y=mx+c</span></p></body></html>"))
self.MText.setText(_translate("InvestigationTutorialScreen",
    "<html><head/><body><p><span style=\"font-weight:600;\">M:</span></p></body></html>"))
self.CText.setText(_translate("InvestigationTutorialScreen",
    "<html><head/><body><p><span style=\"font-weight:600;\">C:</span></p></body></html>"))
self.GraphButton.setText(_translate("InvestigationTutorialScreen",
    "Graph"))
self.MainText_2.setText(_translate("InvestigationTutorialScreen",
    "<html><head/><body><p>There will also be many opportunities
to answer questions during this section. Have a go at the
one below!</p></body></html>"))
self.QuestionInput.setPlaceholderText(_translate("InvestigationTutorialScreen",
    "Answer"))
self.SubmitButton.setText(_translate("InvestigationTutorialScreen",
    "Submit"))
self.MessageLabel.setText(_translate("InvestigationTutorialScreen",
    "Message"))

```

```

    "<html><head/><body><p
        align=\"center\"><br/></p></body></html>"))
self.MDisplay.setText(_translate("InvestigationTutorialScreen",
    "<html><head/><body><p
        align=\"center\">0</p></body></html>"))
self.CDisplay.setText(_translate("InvestigationTutorialScreen",
    "<html><head/><body><p
        align=\"center\">0</p></body></html>"))
self.QuestionText.setText(_translate("InvestigationTutorialScreen",
    "<html><head/><body><p><span style=\" font-size:16pt;
        font-weight:600;\">Question</span></p></body></html>"))

```

`program/user_interface/tutorial.ui/loginTutorial.py`

```

"""
loginTutorial.py
=====
A GUI for the login tutorial page of the tutorial section
"""

from PyQt5 import QtCore, QtGui, QtWidgets

class Ui_LoginTutorialScreen(object):

    def setupUi(self, LoginTutorialScreen):
        LoginTutorialScreen.setObjectName("LoginTutorialScreen")
        LoginTutorialScreen.resize(1340, 723)
        LoginTutorialScreen.setToolTipDuration(0)
        LoginTutorialScreen.setSizeGripEnabled(False)
        self.widget = QtWidgets.QWidget(LoginTutorialScreen)
        self.widget.setGeometry(QtCore.QRect(0, 0, 1340, 720))
        self.widget.setStyleSheet("background-color: rgb(69, 69, 69);")
        self.widget.setObjectName("widget")
        self.Title = QtWidgets.QLabel(self.widget)
        self.Title.setGeometry(QtCore.QRect(590, 20, 161, 51))
        self.Title.setStyleSheet("font: 36pt \"Sans Serif\";
            color:rgb(239, 239, 239);")
        self.Title.setObjectName("Title")
        self.TabBar = QtWidgets.QWidget(self.widget)
        self.TabBar.setGeometry(QtCore.QRect(0, 80, 1340, 80))
        self.TabBar.setStyleSheet("background-color: rgb(239, 239,
            239);")
        self.TabBar.setObjectName("TabBar")
        self.TutorialTab = QtWidgets.QPushButton(self.TabBar)
        self.TutorialTab.setGeometry(QtCore.QRect(10, 5, 200, 70))
        self.TutorialTab.setCursor(QtGui.QCursor(QtCore.Qt.PointingHandCursor))
        self.TutorialTab.setStyleSheet("border: 2px solid;\n"

```

```

"border-radius: 20px;\n"
"border-color:rgb(69, 69, 69);\n"
"background-color: rgb(69, 69, 69);\n"
"font: 18pt \"Sans Serif\"; color:rgb(239, 239, 239);\n"
""")
    self.TutorialTab.setObjectName("TutorialTab")
    self.LoginTab = QtWidgets.QPushButton(self.TabBar)
    self.LoginTab.setGeometry(QtCore.QRect(430, 5, 221, 70))
    self.LoginTab.setCursor(QtGui.QCursor(QtCore.Qt.PointingHandCursor))
    self.LoginTab.setStyleSheet("border: 2px solid;\n"
"border-radius: 20px;\n"
"border-color:rgb(69, 69, 69);\n"
"background-color: rgb(239, 239, 239);\n"
"font: 18pt \"Sans Serif\"; color:rgb(69, 69, 69);\n"
""")
    self.LoginTab.setObjectName("LoginTab")
    self.IntroductionTab = QtWidgets.QPushButton(self.TabBar)
    self.IntroductionTab.setGeometry(QtCore.QRect(660, 5, 200, 70))
    self.IntroductionTab.setCursor(QtGui.QCursor(QtCore.Qt.PointingHandCursor))
    self.IntroductionTab.setStyleSheet("border: 2px solid;\n"
"border-radius: 20px;\n"
"border-color:rgb(69, 69, 69);\n"
"background-color: rgb(69, 69, 69);\n"
"font: 18pt \"Sans Serif\"; color:rgb(239, 239, 239);\n"
""")
    self.IntroductionTab.setObjectName("IntroductionTab")
    self.InvestigationTab = QtWidgets.QPushButton(self.TabBar)
    self.InvestigationTab.setGeometry(QtCore.QRect(870, 5, 200, 70))
    self.InvestigationTab.setCursor(QtGui.QCursor(QtCore.Qt.PointingHandCursor))
    self.InvestigationTab.setStyleSheet("border: 2px solid;\n"
"border-radius: 20px;\n"
"border-color:rgb(69, 69, 69);\n"
"background-color: rgb(69, 69, 69);\n"
"font: 18pt \"Sans Serif\"; color:rgb(239, 239, 239);\n"
""")
    self.InvestigationTab.setObjectName("InvestigationTab")
    self.SummaryTab = QtWidgets.QPushButton(self.TabBar)
    self.SummaryTab.setGeometry(QtCore.QRect(1080, 5, 200, 70))
    self.SummaryTab.setCursor(QtGui.QCursor(QtCore.Qt.PointingHandCursor))
    self.SummaryTab.setStyleSheet("border: 2px solid;\n"
"border-radius: 20px;\n"
"border-color:rgb(69, 69, 69);\n"
"background-color: rgb(69, 69, 69);\n"
"font: 18pt \"Sans Serif\"; color:rgb(239, 239, 239);\n"
""")
    self.SummaryTab.setObjectName("SummaryTab")
    self.ProgramStructureTab = QtWidgets.QPushButton(self.TabBar)
    self.ProgramStructureTab.setGeometry(QtCore.QRect(220, 5, 200,
70))
    self.ProgramStructureTab.setCursor(QtGui.QCursor(QtCore.Qt.PointingHandCursor))

```

```

        self.ProgramStructureTab.setStyleSheet("border-radius: 20px;\n"
"background-color: rgba(0, 0, 0, 0);\n"
"font: 18pt \"Sans Serif\";\n"
""")
        self.ProgramStructureTab.setText("")
        self.ProgramStructureTab.setObjectName("ProgramStructureTab")
        self.ProgramStructureLabel = QtWidgets.QLabel(self.TabBar)
        self.ProgramStructureLabel.setGeometry(QtCore.QRect(220, 5, 200,
70))
        self.ProgramStructureLabel.setStyleSheet("border: 2px solid;\n"
"border-radius: 20px;\n"
"border-color:rgb(69, 69, 69);\n"
"background-color: rgb(69, 69, 69);\n"
"font: 18pt \"Sans Serif\"; color:rgb(239, 239, 239);\n"
""")
        self.ProgramStructureLabel.setObjectName("ProgramStructureLabel")
        self.TutorialTab.raise_()
        self.LoginTab.raise_()
        self.IntroductionTab.raise_()
        self.InvestigationTab.raise_()
        self.SummaryTab.raise_()
        self.ProgramStructureLabel.raise_()
        self.ProgramStructureTab.raise_()
        self.MainWidget = QtWidgets.QWidget(self.widget)
        self.MainWidget.setGeometry(QtCore.QRect(10, 170, 1320, 540))
        self.MainWidget.setStyleSheet("background-color: rgb(239, 239,
239);\n"
"border-radius: 20px;")
        self.MainWidget.setObjectName("MainWidget")
        self.PrevButton = QtWidgets.QPushButton(self.MainWidget)
        self.PrevButton.setGeometry(QtCore.QRect(10, 460, 200, 70))
        self.PrevButton.setCursor(QtGui.QCursor(QtCore.Qt.PointingHandCursor))
        self.PrevButton.setStyleSheet("border: 2px solid;\n"
"border-radius: 20px;\n"
"border-color:rgb(69, 69, 69);\n"
"background-color: rgb(69, 69, 69);\n"
"font: 18pt \"Sans Serif\"; color:rgb(239, 239, 239);\n"
""")
        self.PrevButton.setObjectName("PrevButton")
        self.NextButton = QtWidgets.QPushButton(self.MainWidget)
        self.NextButton.setGeometry(QtCore.QRect(1110, 460, 200, 70))
        self.NextButton.setCursor(QtGui.QCursor(QtCore.Qt.PointingHandCursor))
        self.NextButton.setStyleSheet("border: 2px solid;\n"
"border-radius: 20px;\n"
"border-color:rgb(69, 69, 69);\n"
"background-color: rgb(69, 69, 69);\n"
"font: 18pt \"Sans Serif\"; color:rgb(239, 239, 239);\n"
""")
        self.NextButton.setObjectName("NextButton")
        self.SubTitleText = QtWidgets.QLabel(self.MainWidget)

```

```

        self.SubTitleText.setGeometry(QtCore.QRect(40, 20, 311, 41))
        self.SubTitleText.setStyleSheet("font: 25pt \"Sans Serif\";
                                      color:rgb(69, 69, 69);\n"
"background-color: rgb(239, 239, 239); padding: 5px;")
        self.SubTitleText.setObjectName("SubTitleText")
        self.MainText = QtWidgets.QLabel(self.MainWidget)
        self.MainText.setGeometry(QtCore.QRect(40, 60, 1251, 391))
        self.MainText.setStyleSheet("font: 13pt \"Sans Serif\";
                                      color:rgb(69, 69, 69);\n"
"background-color: rgb(239, 239, 239); padding: 5px;")
        self.MainText.setWordWrap(True)
        self.MainText.setObjectName("MainText")
        self.SubTitleText.raise_()
        self.PrevButton.raise_()
        self.NextButton.raise_()
        self.MainText.raise_()

        self.retranslateUi(LoginTutorialScreen)
        QtCore.QMetaObject.connectSlotsByName(LoginTutorialScreen)

    def retranslateUi(self, LoginTutorialScreen):
        _translate = QtCore.QCoreApplication.translate
        LoginTutorialScreen.setWindowTitle(_translate("LoginTutorialScreen",
                                                     "Visualising the Riemann Hypothesis - Tutorial"))
        self.Title.setText(_translate("LoginTutorialScreen", "Tutorial"))
        self.TutorialTab.setText(_translate("LoginTutorialScreen",
                                           "Tutorial"))
        self.LoginTab.setText(_translate("LoginTutorialScreen", "Login"))
        self.IntroductionTab.setText(_translate("LoginTutorialScreen",
                                              "Introduction"))
        self.InvestigationTab.setText(_translate("LoginTutorialScreen",
                                                "Investigation"))
        self.SummaryTab.setText(_translate("LoginTutorialScreen",
                                           "Summary"))
        self.ProgramStructureLabel.setText(_translate("LoginTutorialScreen",
                                                    "<html><head/><body><p>
                                                    align=\"center\">Program<br/>Structure</p></body></html>"))
        self.PrevButton.setText(_translate("LoginTutorialScreen",
                                         "Prev"))
        self.NextButton.setText(_translate("LoginTutorialScreen",
                                         "Next"))
        self.SubTitleText.setText(_translate("LoginTutorialScreen",
                                           "<html><head/><body><p><span style=\"
                                           font-weight:600;\">Login</span></p></body></html>"))
        self.MainText.setText(_translate("LoginTutorialScreen",
                                         "<html><head/><body><p>The Login section of this program
                                         allows you to sign in to an account.</p><p>The different
                                         options you have are: </p><p>Login In</p><p>Sign
                                         Up</p><p>Forgotten Password</p><p>Reset
                                         Password</p><p><br/></p><p>Although you can use this program
                                         </p></body></html>"))

```

without an account, once you create and sign in to an account you will be able to use this program to it's full extent. When signed into an account, you will be able to answer questions on the Riemann Hypothesis, make your own notes, and participate to the leaderboard</p></body></html>")

program/user_interface/tutorial_ui/program_structure_tutorial.py

```
"""
program_structure_tutorial.py
=====
A GUI for the program structure tutorial page of the tutorial section
"""

from PyQt5 import QtCore, QtGui, QtWidgets

class Ui_ProgramStructureTutorialScreen(object):

    def setupUi(self, ProgramStructureTutorialScreen):
        ProgramStructureTutorialScreen.setObjectName("ProgramStructureTutorialScreen")
        ProgramStructureTutorialScreen.resize(1340, 723)
        ProgramStructureTutorialScreen.setToolTipDuration(0)
        ProgramStructureTutorialScreen.setSizeGripEnabled(False)
        self.widget = QtWidgets.QWidget(ProgramStructureTutorialScreen)
        self.widget.setGeometry(QtCore.QRect(0, 0, 1340, 720))
        self.widget.setStyleSheet("background-color: rgb(69, 69, 69);")
        self.widget.setObjectName("widget")
        self.Title = QtWidgets.QLabel(self.widget)
        self.Title.setGeometry(QtCore.QRect(590, 20, 161, 51))
        self.Title.setStyleSheet("font: 36pt \"Sans Serif\";\n"
                               "color:rgb(239, 239, 239);")
        self.Title.setObjectName("Title")
        self.TabBar = QtWidgets.QWidget(self.widget)
        self.TabBar.setGeometry(QtCore.QRect(0, 80, 1340, 80))
        self.TabBar.setStyleSheet("background-color: rgb(239, 239,\n"
                               "239);")
        self.TabBar.setObjectName("TabBar")
        self.TutorialTab = QtWidgets.QPushButton(self.TabBar)
        self.TutorialTab.setGeometry(QtCore.QRect(10, 5, 200, 70))
        self.TutorialTab.setCursor(QtGui.QCursor(QtCore.Qt.PointingHandCursor))
        self.TutorialTab.setStyleSheet("border: 2px solid;\n"
                                     "border-radius: 20px;\n"
                                     "border-color:rgb(69, 69, 69);\n"
                                     "background-color: rgb(69, 69, 69);\n"
                                     "font: 18pt \"Sans Serif\"; color:rgb(239, 239, 239);\n"
                                     ""))

```

```

        self.TutorialTab.setObjectName("TutorialTab")
        self.LoginTab = QtWidgets.QPushButton(self.TabBar)
        self.LoginTab.setGeometry(QtCore.QRect(430, 5, 221, 70))
        self.LoginTab.setCursor(QtGui.QCursor(QtCore.Qt.PointingHandCursor))
        self.LoginTab.setStyleSheet("border: 2px solid;\n"
"border-radius: 20px;\n"
"border-color:rgb(69, 69, 69);\n"
"background-color: rgb(69, 69, 69);\n"
"font: 18pt \"Sans Serif\"; color:rgb(239, 239, 239);\n"
""")
        self.LoginTab.setObjectName("LoginTab")
        self.IntroductionTab = QtWidgets.QPushButton(self.TabBar)
        self.IntroductionTab.setGeometry(QtCore.QRect(660, 5, 200, 70))
        self.IntroductionTab.setCursor(QtGui.QCursor(QtCore.Qt.PointingHandCursor))
        self.IntroductionTab.setStyleSheet("border: 2px solid;\n"
"border-radius: 20px;\n"
"border-color:rgb(69, 69, 69);\n"
"background-color: rgb(69, 69, 69);\n"
"font: 18pt \"Sans Serif\"; color:rgb(239, 239, 239);\n"
""")
        self.IntroductionTab.setObjectName("IntroductionTab")
        self.InvestigationTab = QtWidgets.QPushButton(self.TabBar)
        self.InvestigationTab.setGeometry(QtCore.QRect(870, 5, 200, 70))
        self.InvestigationTab.setCursor(QtGui.QCursor(QtCore.Qt.PointingHandCursor))
        self.InvestigationTab.setStyleSheet("border: 2px solid;\n"
"border-radius: 20px;\n"
"border-color:rgb(69, 69, 69);\n"
"background-color: rgb(69, 69, 69);\n"
"font: 18pt \"Sans Serif\"; color:rgb(239, 239, 239);\n"
""")
        self.InvestigationTab.setObjectName("InvestigationTab")
        self.SummaryTab = QtWidgets.QPushButton(self.TabBar)
        self.SummaryTab.setGeometry(QtCore.QRect(1080, 5, 200, 70))
        self.SummaryTab.setCursor(QtGui.QCursor(QtCore.Qt.PointingHandCursor))
        self.SummaryTab.setStyleSheet("border: 2px solid;\n"
"border-radius: 20px;\n"
"border-color:rgb(69, 69, 69);\n"
"background-color: rgb(69, 69, 69);\n"
"font: 18pt \"Sans Serif\"; color:rgb(239, 239, 239);\n"
""")
        self.SummaryTab.setObjectName("SummaryTab")
        self.ProgramStructureTab = QtWidgets.QPushButton(self.TabBar)
        self.ProgramStructureTab.setGeometry(QtCore.QRect(220, 5, 200,
70))
        self.ProgramStructureTab.setCursor(QtGui.QCursor(QtCore.Qt.PointingHandCursor))
        self.ProgramStructureTab.setStyleSheet("border-radius: 20px;\n"
"background-color: rgba(0, 0, 0, 0);\n"
"font: 18pt \"Sans Serif\";\n"
""")
        self.ProgramStructureTab.setText("")

```

```

        self.ProgramStructureTab.setObjectName("ProgramStructureTab")
        self.ProgramStructureLabel = QtWidgets.QLabel(self.TabBar)
        self.ProgramStructureLabel.setGeometry(QtCore.QRect(220, 5, 200,
            70))
        self.ProgramStructureLabel.setStyleSheet("border: 2px solid;\n"
"border-radius: 20px;\n"
"border-color:rgb(69, 69, 69);\n"
"background-color: rgb(239, 239, 239);\n"
"font: 18pt \"Sans Serif\"; color:rgb(69, 69, 69);\n"
"")

        self.ProgramStructureLabel.setObjectName("ProgramStructureLabel")
        self.TutorialTab.raise_()
        self.LoginTab.raise_()
        self.IntroductionTab.raise_()
        self.InvestigationTab.raise_()
        self.SummaryTab.raise_()
        self.ProgramStructureLabel.raise_()
        self.ProgramStructureTab.raise_()
        self.MainWidget = QtWidgets.QWidget(self.widget)
        self.MainWidget.setGeometry(QtCore.QRect(10, 170, 1320, 540))
        self.MainWidget.setStyleSheet("background-color: rgb(239, 239,
            239);\n"
"border-radius: 20px;")
        self.MainWidget.setObjectName("MainWidget")
        self.PrevButton = QtWidgets.QPushButton(self.MainWidget)
        self.PrevButton.setGeometry(QtCore.QRect(10, 460, 200, 70))
        self.PrevButton.setCursor(QtGui.QCursor(QtCore.Qt.PointingHandCursor))
        self.PrevButton.setStyleSheet("border: 2px solid;\n"
"border-radius: 20px;\n"
"border-color:rgb(69, 69, 69);\n"
"background-color: rgb(69, 69, 69);\n"
"font: 18pt \"Sans Serif\"; color:rgb(239, 239, 239);\n"
"")

        self.PrevButton.setObjectName("PrevButton")
        self.NextButton = QtWidgets.QPushButton(self.MainWidget)
        self.NextButton.setGeometry(QtCore.QRect(1110, 460, 200, 70))
        self.NextButton.setCursor(QtGui.QCursor(QtCore.Qt.PointingHandCursor))
        self.NextButton.setStyleSheet("border: 2px solid;\n"
"border-radius: 20px;\n"
"border-color:rgb(69, 69, 69);\n"
"background-color: rgb(69, 69, 69);\n"
"font: 18pt \"Sans Serif\"; color:rgb(239, 239, 239);\n"
"")

        self.NextButton.setObjectName("NextButton")
        self.SubTitleText = QtWidgets.QLabel(self.MainWidget)
        self.SubTitleText.setGeometry(QtCore.QRect(40, 20, 341, 41))
        self.SubTitleText.setStyleSheet("font: 25pt \"Sans Serif\";
            color:rgb(69, 69, 69);\n"
"background-color: rgb(239, 239, 239); padding: 5px;")
        self.SubTitleText.setObjectName("SubTitleText")

```

```

        self.MainText = QtWidgets.QLabel(self.MainWidget)
        self.MainText.setGeometry(QtCore.QRect(40, 80, 1251, 61))
        self.MainText.setStyleSheet("font: 13pt \"Sans Serif\";
            color:rgb(69, 69, 69);\n"
    "background-color: rgb(239, 239, 239); padding: 5px;")
        self.MainText.setWordWrap(True)
        self.MainText.setObjectName("MainText")
        self.TemplateImage = QtWidgets.QLabel(self.MainWidget)
        self.TemplateImage.setGeometry(QtCore.QRect(200, 150, 941, 361))
        sizePolicy =
            QtWidgets.QSizePolicy(QtWidgets.QSizePolicy.Preferred,
            QtWidgets.QSizePolicy.Preferred)
        sizePolicy.setHorizontalStretch(0)
        sizePolicy.setVerticalStretch(0)
        sizePolicy.setHeightForWidth(self.TemplateImage.sizePolicy().hasHeightForWidth())
        self.TemplateImage.setSizePolicy(sizePolicy)
        self.TemplateImage.setText("")
        self.TemplateImage.setPixmap(QtGui.QPixmap("ui/tutorial_screens/../../media/annotated-template"))
        self.TemplateImage.setObjectName("TemplateImage")
        self.SubTitleText.raise_()
        self.MainText.raise_()
        self.TemplateImage.raise_()
        self.PrevButton.raise_()
        self.NextButton.raise_()

        self.retranslateUi(ProgramStructureTutorialScreen)
        QtCore.QMetaObject.connectSlotsByName(ProgramStructureTutorialScreen)

    def retranslateUi(self, ProgramStructureTutorialScreen):
        _translate = QtCore.QCoreApplication.translate
        ProgramStructureTutorialScreen.setWindowTitle(_translate("ProgramStructureTutorialScreen",
            "Visualising the Riemann Hypothesis - Tutorial"))
        self.Title.setText(_translate("ProgramStructureTutorialScreen",
            "Tutorial"))
        self.TutorialTab.setText(_translate("ProgramStructureTutorialScreen",
            "Tutorial"))
        self.LoginTab.setText(_translate("ProgramStructureTutorialScreen",
            "Login"))
        self.IntroductionTab.setText(_translate("ProgramStructureTutorialScreen",
            "Introduction"))
        self.InvestigationTab.setText(_translate("ProgramStructureTutorialScreen",
            "Investigation"))
        self.SummaryTab.setText(_translate("ProgramStructureTutorialScreen",
            "Summary"))
        self.ProgramStructureLabel.setText(_translate("ProgramStructureTutorialScreen",
            "<html><head/><body><p
                align=\"center\">Program<br/>Structure</p></body></html>"))
        self.PrevButton.setText(_translate("ProgramStructureTutorialScreen",
            "Prev"))
        self.NextButton.setText(_translate("ProgramStructureTutorialScreen",
            "Next"))

```

```
"Next"))
self.SubTitleText.setText(_translate("ProgramStructureTutorialScreen",
    "<html><head/><body><p><span style='"
    "font-weight:600;\'>Program
    Structure</span></p></body></html>"))
self.MainText.setText(_translate("ProgramStructureTutorialScreen",
    "<html><head/><body><p>This section of the tutorial aims to
    inform you how to navigate between each page in the
    program</p><p>Below is an image of an example screen design,
    and is labelled with how to navigate it</p></body></html>"))

```

program/user_interface/tutorial_ui/summary_tutorial.py

```

"border-color:rgb(69, 69, 69);\n"
"background-color: rgb(69, 69, 69);\n"
"font: 18pt \\"Sans Serif\\"; color:rgb(239, 239, 239);\n"
""")
    self.TutorialTab.setObjectName("TutorialTab")
    self.LoginTab = QtWidgets.QPushButton(self.TabBar)
    self.LoginTab.setGeometry(QtCore.QRect(430, 5, 221, 70))
    self.LoginTab.setCursor(QtGui.QCursor(QtCore.Qt.PointingHandCursor))
    self.LoginTab.setStyleSheet("border: 2px solid;\n"
"border-radius: 20px;\n"
"border-color:rgb(69, 69, 69);\n"
"background-color: rgb(69, 69, 69);\n"
"font: 18pt \\"Sans Serif\\"; color:rgb(239, 239, 239);\n"
""")
    self.LoginTab.setObjectName("LoginTab")
    self.IntroductionTab = QtWidgets.QPushButton(self.TabBar)
    self.IntroductionTab.setGeometry(QtCore.QRect(660, 5, 200, 70))
    self.IntroductionTab.setCursor(QtGui.QCursor(QtCore.Qt.PointingHandCursor))
    self.IntroductionTab.setStyleSheet("border: 2px solid;\n"
"border-radius: 20px;\n"
"border-color:rgb(69, 69, 69);\n"
"background-color: rgb(69, 69, 69);\n"
"font: 18pt \\"Sans Serif\\"; color:rgb(239, 239, 239);\n"
""")
    self.IntroductionTab.setObjectName("IntroductionTab")
    self.InvestigationTab = QtWidgets.QPushButton(self.TabBar)
    self.InvestigationTab.setGeometry(QtCore.QRect(870, 5, 200, 70))
    self.InvestigationTab.setCursor(QtGui.QCursor(QtCore.Qt.PointingHandCursor))
    self.InvestigationTab.setStyleSheet("border: 2px solid;\n"
"border-radius: 20px;\n"
"border-color:rgb(69, 69, 69);\n"
"background-color: rgb(69, 69, 69);\n"
"font: 18pt \\"Sans Serif\\"; color:rgb(239, 239, 239);\n"
""")
    self.InvestigationTab.setObjectName("InvestigationTab")
    self.SummaryTab = QtWidgets.QPushButton(self.TabBar)
    self.SummaryTab.setGeometry(QtCore.QRect(1080, 5, 200, 70))
    self.SummaryTab.setCursor(QtGui.QCursor(QtCore.Qt.PointingHandCursor))
    self.SummaryTab.setStyleSheet("border: 2px solid;\n"
"border-radius: 20px;\n"
"border-color:rgb(69, 69, 69);\n"
"background-color: rgb(239, 239, 239);\n"
"font: 18pt \\"Sans Serif\\"; color:rgb(69, 69, 69);\n"
""")
    self.SummaryTab.setObjectName("SummaryTab")
    self.ProgramStructureTab = QtWidgets.QPushButton(self.TabBar)
    self.ProgramStructureTab.setGeometry(QtCore.QRect(220, 5, 200,
70))
    self.ProgramStructureTab.setCursor(QtGui.QCursor(QtCore.Qt.PointingHandCursor))
    self.ProgramStructureTab.setStyleSheet("border-radius: 20px;\n"

```

```

"background-color: rgba(0, 0, 0, 0);\n"
"font: 18pt \"Sans Serif\";\n"
"""
    self.ProgramStructureTab.setText("")
    self.ProgramStructureTab.setObjectName("ProgramStructureTab")
    self.ProgramStructureLabel = QtWidgets.QLabel(self.TabBar)
    self.ProgramStructureLabel.setGeometry(QtCore.QRect(220, 5, 200,
        70))
    self.ProgramStructureLabel.setStyleSheet("border: 2px solid;\n"
"border-radius: 20px;\n"
"border-color:rgb(69, 69, 69);\n"
"background-color: rgb(69, 69, 69);\n"
"font: 18pt \"Sans Serif\"; color:rgb(239, 239, 239);\n"
"""
        self.ProgramStructureLabel.setObjectName("ProgramStructureLabel")
        self.TutorialTab.raise_()
        self.LoginTab.raise_()
        self.IntroductionTab.raise_()
        self.InvestigationTab.raise_()
        self.SummaryTab.raise_()
        self.ProgramStructureLabel.raise_()
        self.ProgramStructureTab.raise_()
        self.MainWidget = QtWidgets.QWidget(self.widget)
        self.MainWidget.setGeometry(QtCore.QRect(10, 170, 1320, 540))
        self.MainWidget.setStyleSheet("background-color: rgb(239, 239,
            239);\n"
"border-radius: 20px;")
        self.MainWidget.setObjectName("MainWidget")
        self.PrevButton = QtWidgets.QPushButton(self.MainWidget)
        self.PrevButton.setGeometry(QtCore.QRect(10, 460, 200, 70))
        self.PrevButton.setCursor(QtGui.QCursor(QtCore.Qt.PointingHandCursor))
        self.PrevButton.setStyleSheet("border: 2px solid;\n"
"border-radius: 20px;\n"
"border-color:rgb(69, 69, 69);\n"
"background-color: rgb(69, 69, 69);\n"
"font: 18pt \"Sans Serif\"; color:rgb(239, 239, 239);\n"
"""
        self.PrevButton.setObjectName("PrevButton")
        self.NextButton = QtWidgets.QPushButton(self.MainWidget)
        self.NextButton.setGeometry(QtCore.QRect(1110, 460, 200, 70))
        self.NextButton.setCursor(QtGui.QCursor(QtCore.Qt.PointingHandCursor))
        self.NextButton.setStyleSheet("border: 2px solid;\n"
"border-radius: 20px;\n"
"border-color:rgb(69, 69, 69);\n"
"background-color: rgb(69, 69, 69);\n"
"font: 18pt \"Sans Serif\"; color:rgb(239, 239, 239);\n"
"""
        self.NextButton.setObjectName("NextButton")
        self.SubTitleText = QtWidgets.QLabel(self.MainWidget)
        self.SubTitleText.setGeometry(QtCore.QRect(40, 20, 311, 41))

```

```

        self.SubTitleText.setStyleSheet("font: 25pt \"Sans Serif\";
                                      color:rgb(69, 69, 69);\n"
"background-color: rgb(239, 239, 239); padding: 5px;")
        self.SubTitleText.setObjectName("SubTitleText")
        self.MainText = QtWidgets.QLabel(self.MainWidget)
        self.MainText.setGeometry(QtCore.QRect(40, 60, 1251, 61))
        self.MainText.setStyleSheet("font: 13pt \"Sans Serif\";
                                      color:rgb(69, 69, 69);\n"
"background-color: rgb(239, 239, 239); padding: 5px;")
        self.MainText.setWordWrap(True)
        self.MainText.setObjectName("MainText")
        self.MainText_3 = QtWidgets.QLabel(self.MainWidget)
        self.MainText_2.setGeometry(QtCore.QRect(40, 130, 1251, 101))
        self.MainText_2.setStyleSheet("font: 13pt \"Sans Serif\";
                                      color:rgb(69, 69, 69);\n"
"background-color: rgb(239, 239, 239); padding: 5px;")
        self.MainText_2.setWordWrap(True)
        self.MainText_2.setObjectName("MainText_2")
        self.NotesButton = QtWidgets.QPushButton(self.MainWidget)
        self.NotesButton.setGeometry(QtCore.QRect(570, 240, 200, 70))
        self.NotesButton.setCursor(QtGui.QCursor(QtCore.Qt.PointingHandCursor))
        self.NotesButton.setStyleSheet("border: 2px solid;\n"
"border-radius: 20px;\n"
"border-color:rgb(69, 69, 69);\n"
"background-color: rgb(69, 69, 69);\n"
"font: 18pt \"Sans Serif\"; color:rgb(239, 239, 239);\n"
"")
        self.NotesButton.setObjectName("NotesButton")
        self.SubTitleText.raise_()
        self.PrevButton.raise_()
        self.NextButton.raise_()
        self.MainText.raise_()
        self.MainText_2.raise_()
        self.NotesButton.raise_()

        self.retranslateUi(SummaryTutorialScreen)
        QtCore.QMetaObject.connectSlotsByName(SummaryTutorialScreen)

    def retranslateUi(self, SummaryTutorialScreen):
        _translate = QtCore.QCoreApplication.translate
        SummaryTutorialScreen.setWindowTitle(_translate("SummaryTutorialScreen",
                                                       "Visualising the Riemann Hypothesis - Tutorial"))
        self.Title.setText(_translate("SummaryTutorialScreen",
                                    "Tutorial"))
        self.TutorialTab.setText(_translate("SummaryTutorialScreen",
                                           "Tutorial"))
        self.LoginTab.setText(_translate("SummaryTutorialScreen",
                                       "Login"))
        self.IntroductionTab.setText(_translate("SummaryTutorialScreen",
                                               "Introduction"))

```

```

        self.InvestigationTab.setText(_translate("SummaryTutorialScreen",
            "Investigation"))
        self.SummaryTab.setText(_translate("SummaryTutorialScreen",
            "Summary"))
        self.ProgramStructureLabel.setText(_translate("SummaryTutorialScreen",
            "<html><head/><body><p"
            align=\"center\">Program<br/>Structure</p></body></html>"))
        self.PrevButton.setText(_translate("SummaryTutorialScreen",
            "Prev"))
        self.NextButton.setText(_translate("SummaryTutorialScreen",
            "Next"))
        self.SubTitleText.setText(_translate("SummaryTutorialScreen",
            "<html><head/><body><p><span style=\""
            font-weight:600;\">Summary</span></p></body></html>"))
        self.MainText.setText(_translate("SummaryTutorialScreen",
            "<html><head/><body><p>The Summary Section will be the final
            section of this program. It will be a chance for you, as the
            user, to be able to reflect on your own results that you
            have found from this program, and comparing these results to
            what would have been expected for the Riemann Hypothesis to
            be true.</p></body></html>"))
        self.MainText_2.setText(_translate("SummaryTutorialScreen",
            "<html><head/><body><p>Throughout this section, and previous
            other sections in the program, there will be various buttons
            saying \'Notes\'. Clicking on these will allow you to write
            your own notes on what you have just learnt or found out
            from the program, for you to refer back to
            later.</p><p>Click on the notes button below to try it
            out!</p></body></html>"))
        self.NotesButton.setText(_translate("SummaryTutorialScreen",
            "Notes"))

```

program/user_interface/tutorial_ui/tutorial.py

```

"""
tutorial.py
=====
A GUI for the tutorial page of the tutorial section
"""

```

```

from PyQt5 import QtCore, QtGui, QtWidgets

class Ui_TutorialScreen(object):

    def setupUi(self, TutorialScreen):
        TutorialScreen.setObjectName("TutorialScreen")
        TutorialScreen.resize(1340, 723)

```

```

TutorialScreen.setSizeGripEnabled(False)
self.widget = QtWidgets.QWidget(TutorialScreen)
self.widget.setGeometry(QtCore.QRect(0, 0, 1340, 720))
self.widget.setStyleSheet("background-color: rgb(69, 69, 69);")
self.widget.setObjectName("widget")
self.Title = QtWidgets.QLabel(self.widget)
self.Title.setGeometry(QtCore.QRect(590, 20, 161, 51))
self.Title.setStyleSheet("font: 36pt \"Sans Serif\";
    color:rgb(239, 239, 239);")
self.Title.setObjectName("Title")
self.TabBar = QtWidgets.QWidget(self.widget)
self.TabBar.setGeometry(QtCore.QRect(0, 80, 1340, 80))
self.TabBar.setStyleSheet("background-color: rgb(239, 239,
    239);")
self.TabBar.setObjectName("TabBar")
self.TutorialTab = QtWidgets.QPushButton(self.TabBar)
self.TutorialTab.setGeometry(QtCore.QRect(10, 5, 200, 70))
self.TutorialTab.setCursor(QtGui.QCursor(QtCore.Qt.PointingHandCursor))
self.TutorialTab.setStyleSheet("border: 2px solid;\n"
"border-radius: 20px;\n"
"border-color:rgb(69, 69, 69);\n"
"background-color: rgb(239, 239, 239);\n"
"font: 18pt \"Sans Serif\"; color:rgb(69, 69, 69);\n"
"")
self.TutorialTab.setObjectName("TutorialTab")
self.LoginTab = QtWidgets.QPushButton(self.TabBar)
self.LoginTab.setGeometry(QtCore.QRect(430, 5, 221, 70))
self.LoginTab.setCursor(QtGui.QCursor(QtCore.Qt.PointingHandCursor))
self.LoginTab.setStyleSheet("border: 2px solid;\n"
"border-radius: 20px;\n"
"border-color:rgb(69, 69, 69);\n"
"background-color: rgb(69, 69, 69);\n"
"font: 18pt \"Sans Serif\"; color:rgb(239, 239, 239);\n"
"")
self.LoginTab.setObjectName("LoginTab")
self.IntroductionTab = QtWidgets.QPushButton(self.TabBar)
self.IntroductionTab.setGeometry(QtCore.QRect(660, 5, 200, 70))
self.IntroductionTab.setCursor(QtGui.QCursor(QtCore.Qt.PointingHandCursor))
self.IntroductionTab.setStyleSheet("border: 2px solid;\n"
"border-radius: 20px;\n"
"border-color:rgb(69, 69, 69);\n"
"background-color: rgb(69, 69, 69);\n"
"font: 18pt \"Sans Serif\"; color:rgb(239, 239, 239);\n"
"")
self.IntroductionTab.setObjectName("IntroductionTab")
self.InvestigationTab = QtWidgets.QPushButton(self.TabBar)
self.InvestigationTab.setGeometry(QtCore.QRect(870, 5, 200, 70))
self.InvestigationTab.setCursor(QtGui.QCursor(QtCore.Qt.PointingHandCursor))
self.InvestigationTab.setStyleSheet("border: 2px solid;\n"
"border-radius: 20px;\n"

```

```

"border-color:rgb(69, 69, 69);\n"
"background-color: rgb(69, 69, 69);\n"
"font: 18pt \\"Sans Serif\\"; color:rgb(239, 239, 239);\n"
""")
    self.InvestigationTab.setObjectName("InvestigationTab")
    self.SummaryTab = QtWidgets.QPushButton(self.TabBar)
    self.SummaryTab.setGeometry(QtCore.QRect(1080, 5, 200, 70))
    self.SummaryTab.setCursor(QtGui.QCursor(QtCore.Qt.PointingHandCursor))
    self.SummaryTab.setStyleSheet("border: 2px solid;\n"
"border-radius: 20px;\n"
"border-color:rgb(69, 69, 69);\n"
"background-color: rgb(69, 69, 69);\n"
"font: 18pt \\"Sans Serif\\"; color:rgb(239, 239, 239);\n"
""")
    self.SummaryTab.setObjectName("SummaryTab")
    self.ProgramStructureTab = QtWidgets.QPushButton(self.TabBar)
    self.ProgramStructureTab.setGeometry(QtCore.QRect(220, 5, 200,
    70))
    self.ProgramStructureTab.setCursor(QtGui.QCursor(QtCore.Qt.PointingHandCursor))
    self.ProgramStructureTab.setStyleSheet("border-radius: 20px;\n"
"background-color: rgba(0, 0, 0, 0);\n"
"font: 18pt \\"Sans Serif\\";\n"
""")
    self.ProgramStructureTab.setText("")
    self.ProgramStructureTab.setObjectName("ProgramStructureTab")
    self.ProgramStructureLabel = QtWidgets.QLabel(self.TabBar)
    self.ProgramStructureLabel.setGeometry(QtCore.QRect(220, 5, 200,
    70))
    self.ProgramStructureLabel.setStyleSheet("border: 2px solid;\n"
"border-radius: 20px;\n"
"border-color:rgb(69, 69, 69);\n"
"background-color: rgb(69, 69, 69);\n"
"font: 18pt \\"Sans Serif\\"; color:rgb(239, 239, 239);\n"
""")
    self.ProgramStructureLabel.setObjectName("ProgramStructureLabel")
    self.TutorialTab.raise_()
    self.LoginTab.raise_()
    self.IntroductionTab.raise_()
    self.InvestigationTab.raise_()
    self.SummaryTab.raise_()
    self.ProgramStructureLabel.raise_()
    self.ProgramStructureTab.raise_()
    self.MainWidget = QtWidgets.QWidget(self.widget)
    self.MainWidget.setGeometry(QtCore.QRect(10, 170, 1320, 540))
    self.MainWidget.setStyleSheet("background-color: rgb(239, 239,
    239);\n"
"border-radius: 20px;")
    self.MainWidget.setObjectName("MainWidget")
    self.PrevButton = QtWidgets.QPushButton(self.MainWidget)
    self.PrevButton.setGeometry(QtCore.QRect(10, 460, 200, 70))

```

```

        self.PrevButton.setCursor(QtGui.QCursor(QtCore.Qt.PointingHandCursor))
        self.PrevButton.setStyleSheet("border: 2px solid;\n"
"border-radius: 20px;\n"
"border-color:rgb(69, 69, 69);\n"
"background-color: rgb(69, 69, 69);\n"
"font: 18pt \"Sans Serif\"; color:rgb(239, 239, 239);\n"
""")
        self.PrevButton.setObjectName("PrevButton")
        self.NextButton = QtWidgets.QPushButton(self.MainWidget)
        self.NextButton.setGeometry(QtCore.QRect(1110, 460, 200, 70))
        self.NextButton.setCursor(QtGui.QCursor(QtCore.Qt.PointingHandCursor))
        self.NextButton.setStyleSheet("border: 2px solid;\n"
"border-radius: 20px;\n"
"border-color:rgb(69, 69, 69);\n"
"background-color: rgb(69, 69, 69);\n"
"font: 18pt \"Sans Serif\"; color:rgb(239, 239, 239);\n"
""")
        self.NextButton.setObjectName("NextButton")
        self.SubTitleText = QtWidgets.QLabel(self.MainWidget)
        self.SubTitleText.setGeometry(QtCore.QRect(40, 20, 681, 41))
        self.SubTitleText.setStyleSheet("font: 25pt \"Sans Serif\";
                                         color:rgb(69, 69, 69);\n"
"background-color: rgb(239, 239, 239); padding: 5px;")
        self.SubTitleText.setObjectName("SubTitleText")
        self.MainText = QtWidgets.QLabel(self.MainWidget)
        self.MainText.setGeometry(QtCore.QRect(40, 80, 1251, 201))
        self.MainText.setStyleSheet("font: 13pt \"Sans Serif\";
                                         color:rgb(69, 69, 69);\n"
"background-color: rgb(239, 239, 239); padding: 5px;")
        self.MainText.setAlignment(QtCore.Qt.AlignLeading|QtCore.Qt.AlignLeft|QtCore.Qt.AlignTop)
        self.MainText.setWordWrap(True)
        self.MainText.setObjectName("MainText")

        self.retranslateUi(TutorialScreen)
        QtCore.QMetaObject.connectSlotsByName(TutorialScreen)

    def retranslateUi(self, TutorialScreen):
        _translate = QtCore.QCoreApplication.translate
        TutorialScreen.setWindowTitle(_translate("TutorialScreen",
                                                "Visualising the Riemann Hypothesis - Tutorial"))
        self.Title.setText(_translate("TutorialScreen", "Tutorial"))
        self.TutorialTab.setText(_translate("TutorialScreen", "Tutorial"))
        self.LoginTab.setText(_translate("TutorialScreen", "Login"))
        self.IntroductionTab.setText(_translate("TutorialScreen",
                                               "Introduction"))
        self.InvestigationTab.setText(_translate("TutorialScreen",
                                                "Investigation"))
        self.SummaryTab.setText(_translate("TutorialScreen", "Summary"))
        self.ProgramStructureLabel.setText(_translate("TutorialScreen",
                                                     "Program Structure"))

```

```
"<html><head/><body><p align=\"center\">Program<br/>Structure</p></body></html>"))
self.PrevButton.setText(_translate("TutorialScreen", "Prev"))
self.NextButton.setText(_translate("TutorialScreen", "Next"))
self.SubTitleText.setText(_translate("TutorialScreen",
"<html><head/><body><p><span style=\"font-weight:600;\">Tutorial</span></p></body></html>"))
self.MainText.setText(_translate("TutorialScreen",
"<html><head/><body><p>Welcome to the Tutorial Section of this program.</p><p>The aim of this is to teach you how to be able to use this program.</p><p>In terms of controls for the program, avoid pressing the enter key to submit any text input - this can be done but make sure you're selecting the correct button. To avoid any confusion it may be simplest to just click on the desired button. Furthermore, to quit any pages that do not have a back button, simply press escape.</p><p>Click on any of the five other tabs above, or on the next button, to find out how to use this program to its full extent</p></body></html>"))
```

References

- 3Blue1Brown. *Visualizing the Riemann zeta function and analytic continuation.* Dec. 2016. URL: <https://www.youtube.com/watch?v=sD0NjbwqlYw&t=756s>.
- College, Westmont. *Writing a Fraction Class.* 2016. URL: http://djp3.westmont.edu/classes/2016_09_CS010/Lectures/Lecture_27.pdf.
- Franklin, James. *Tackling A Level Projects in Computer Science.* 1st ed. PG Online Limited, 2020.
- Kuntner, Nikolaj. *Understanding and computing the Riemann zeta function.* June 2020. URL: <https://gist.github.com/Nikolaj-K/996dba1ff1045d767b10d4d07b1b032f>.
- Magazine, Quanta. *The Riemann Hypothesis, Explained.* Jan. 2021. URL: <https://www.youtube.com/watch?v=zlm1aaJH6gY&t=606s>.
- Mathworld, Wolfram. Jan. 2022. URL: <https://mathworld.wolfram.com/RiemannZetaFunction.html>.
- Meurer, Aaron. *Verifying the Riemann Hypothesis with SymPy and mpmath.* Mar. 2020. URL: <https://www.asmeurer.com/blog/posts/verifying-the-riemann-hypothesis-with-sympy-and-mpmath/>.
- Numberphile. *Riemann Hypothesis - Numberphile.* Mar. 2014. URL: <https://www.youtube.com/watch?v=d6c6uIyieoo>.
- Riemann, Bernhard and David Wilkins. *On the Number of Prime Numbers less than a Given Quantity. (Ueber die Anzahl der Primzahlen unter einer gegebenen Grössse.)* 1998. URL: <https://www.claymath.org/sites/default/files/ezeta.pdf>.
- Shepherd, Markus. *Visualising the Riemann Hypothesis.* Apr. 2016. URL: <https://www.riemannhypothesis.info/2016/04/visualising-the-riemann-hypothesis/>.
- singingbanana. *The Riemann Hypothesis.* Jan. 2014. URL: <https://www.youtube.com/watch?v=rGo2hs0JSbo>.
- Sparks, Ben et al. *MEI A Level Further Mathematics Core Year 1.* 4th ed. Hodder Education, 2017.
- Sparks, Ben et al. *MEI A Level Further Mathematics Core Year 2.* 4th ed. Hodder Education, 2017.
- Wikipedia. *Bernhard riemann.* Nov. 2021. URL: https://en.wikipedia.org/wiki/Bernhard_riemann.
- *Binomial coefficient.* Jan. 2022. URL: https://en.wikipedia.org/wiki/Binomial_Coefficient.
 - *Complex analysis.* Dec. 2021. URL: https://en.wikipedia.org/wiki/Complex_analysis.
 - *Complex number.* Jan. 2022. URL: https://en.wikipedia.org/wiki/Complex_number.
 - *Complex number.* Jan. 2022. URL: https://en.wikipedia.org/wiki/Complex_number.
 - *Complex plane.* Sept. 2021. URL: https://en.wikipedia.org/wiki/Complex_plane.
 - *Dirichlet eta function.* Nov. 2021. URL: https://en.wikipedia.org/wiki/Dirichlet_eta_function.

- Wikipedia. *Domain coloring*. Oct. 2021. URL: https://en.wikipedia.org/wiki/Domain_coloring.
- *Euclidean Algorithm*. Dec. 2021. URL: https://en.wikipedia.org/wiki/Euclidean_algorithm.
 - *Gamma function*. Jan. 2022. URL: https://en.wikipedia.org/wiki/Gamma_function.
 - *Imaginary number*. Jan. 2022. URL: https://en.wikipedia.org/wiki/Imaginary_number.
 - *Imaginary unit*. Jan. 2022. URL: https://en.wikipedia.org/wiki/Imaginary_unit.
 - *Leonhard euler*. Jan. 2022. URL: https://en.wikipedia.org/wiki/Leonhard_euler.
 - *Logarithmic integral function*. Dec. 2021. URL: https://en.wikipedia.org/wiki/Logarithmic_integral_function.
 - *Mill's constant*. Jan. 2022. URL: https://en.wikipedia.org/wiki/Mills%27_constant.
 - *Proof of the Euler product formula for the Riemann zeta function*. Dec. 2021. URL: https://en.wikipedia.org/wiki/Proof_of_the_Euler_product_formula_for_the_Riemann_zeta_function.
 - *Riemann hypothesis*. Jan. 2022. URL: https://en.wikipedia.org/wiki/Riemann_hypothesis.
 - *Riemann zeta function*. Jan. 2022. URL: https://en.wikipedia.org/wiki/Riemann_zeta_function.
 - *Zero of a function*. Jan. 2022. URL: https://en.wikipedia.org/wiki/Zero_of_a_function.
- Wolfram Alpha*. 2022. URL: <https://www.wolframalpha.com/>.