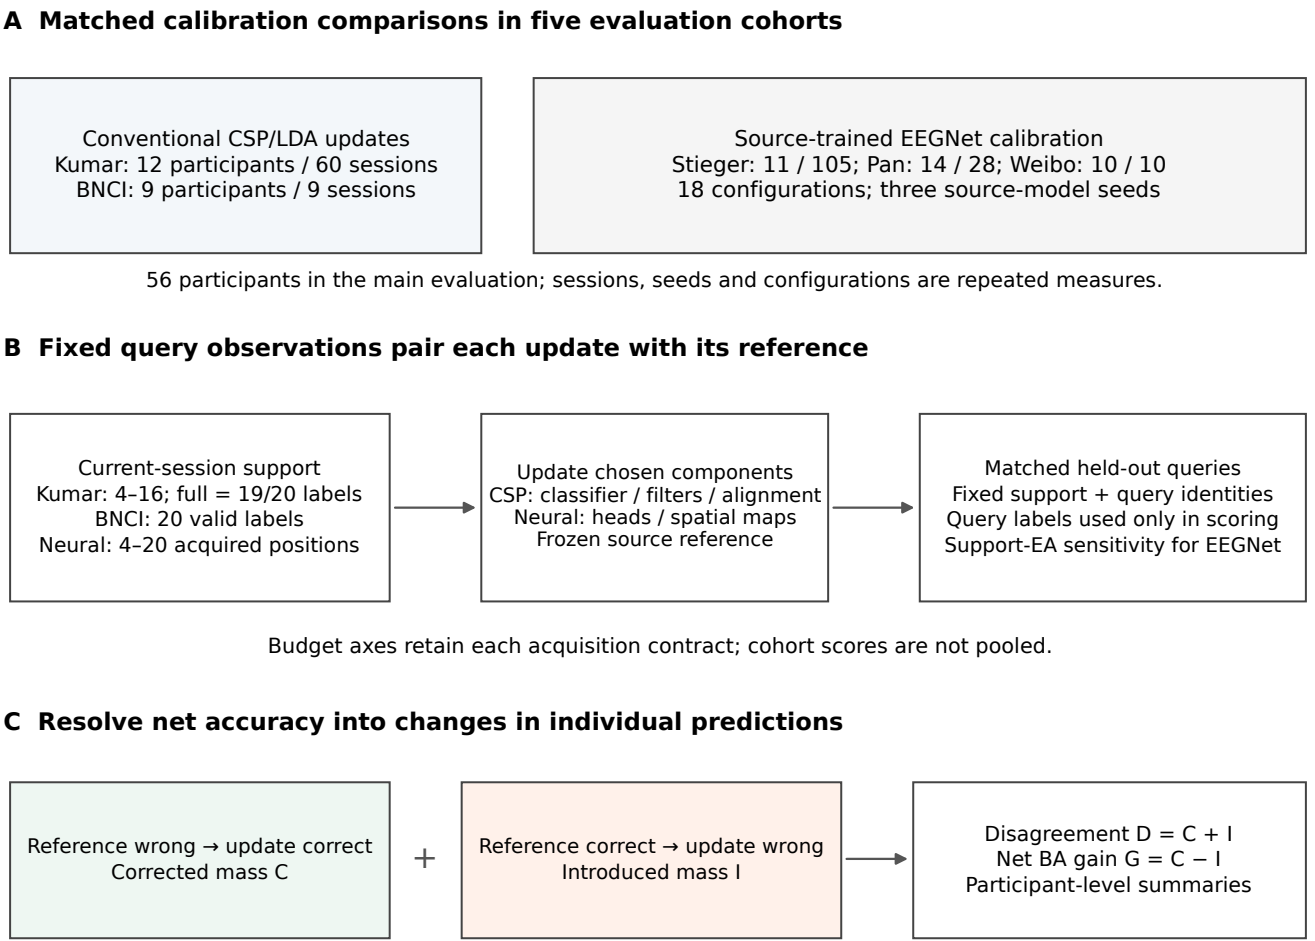
A Matched calibration comparisons in five evaluation cohorts
Conventional CSP/LDA updates
Kumar: 12 participants / 60 sessions
BNCI: 9 participants / 9 sessions
Source-trained EEGNet calibration
Stieger: 11 / 105; Pan: 14 / 28; Weibo: 10 / 10
18 configurations; three source-model seeds
56 participants in the main evaluation; sessions, seeds and configurations are repeated measures.
B Fixed query observations pair each update with its reference
Current-session support
Kumar: 4–16; full = 19/20 labels
BNCI: 20 valid labels
Neural: 4–20 acquired positions
Update chosen components
CSP: classifier / filters / alignment
Neural: heads / spatial maps
Frozen source reference
Matched held-out queries
Fixed support + query identities
Query labels used only in scoring
Support-EA sensitivity for EEGNet
Budget axes retain each acquisition contract; cohort scores are not pooled.
C Resolve net accuracy into changes in individual predictions
Reference wrong → update correct
Corrected mass C
+
Reference correct → update wrong
Introduced mass I
Disagreement D = C + I
Net BA gain G = C − I
Participant-level summaries
C and I use class-balanced query weights; all results are in percentage points.