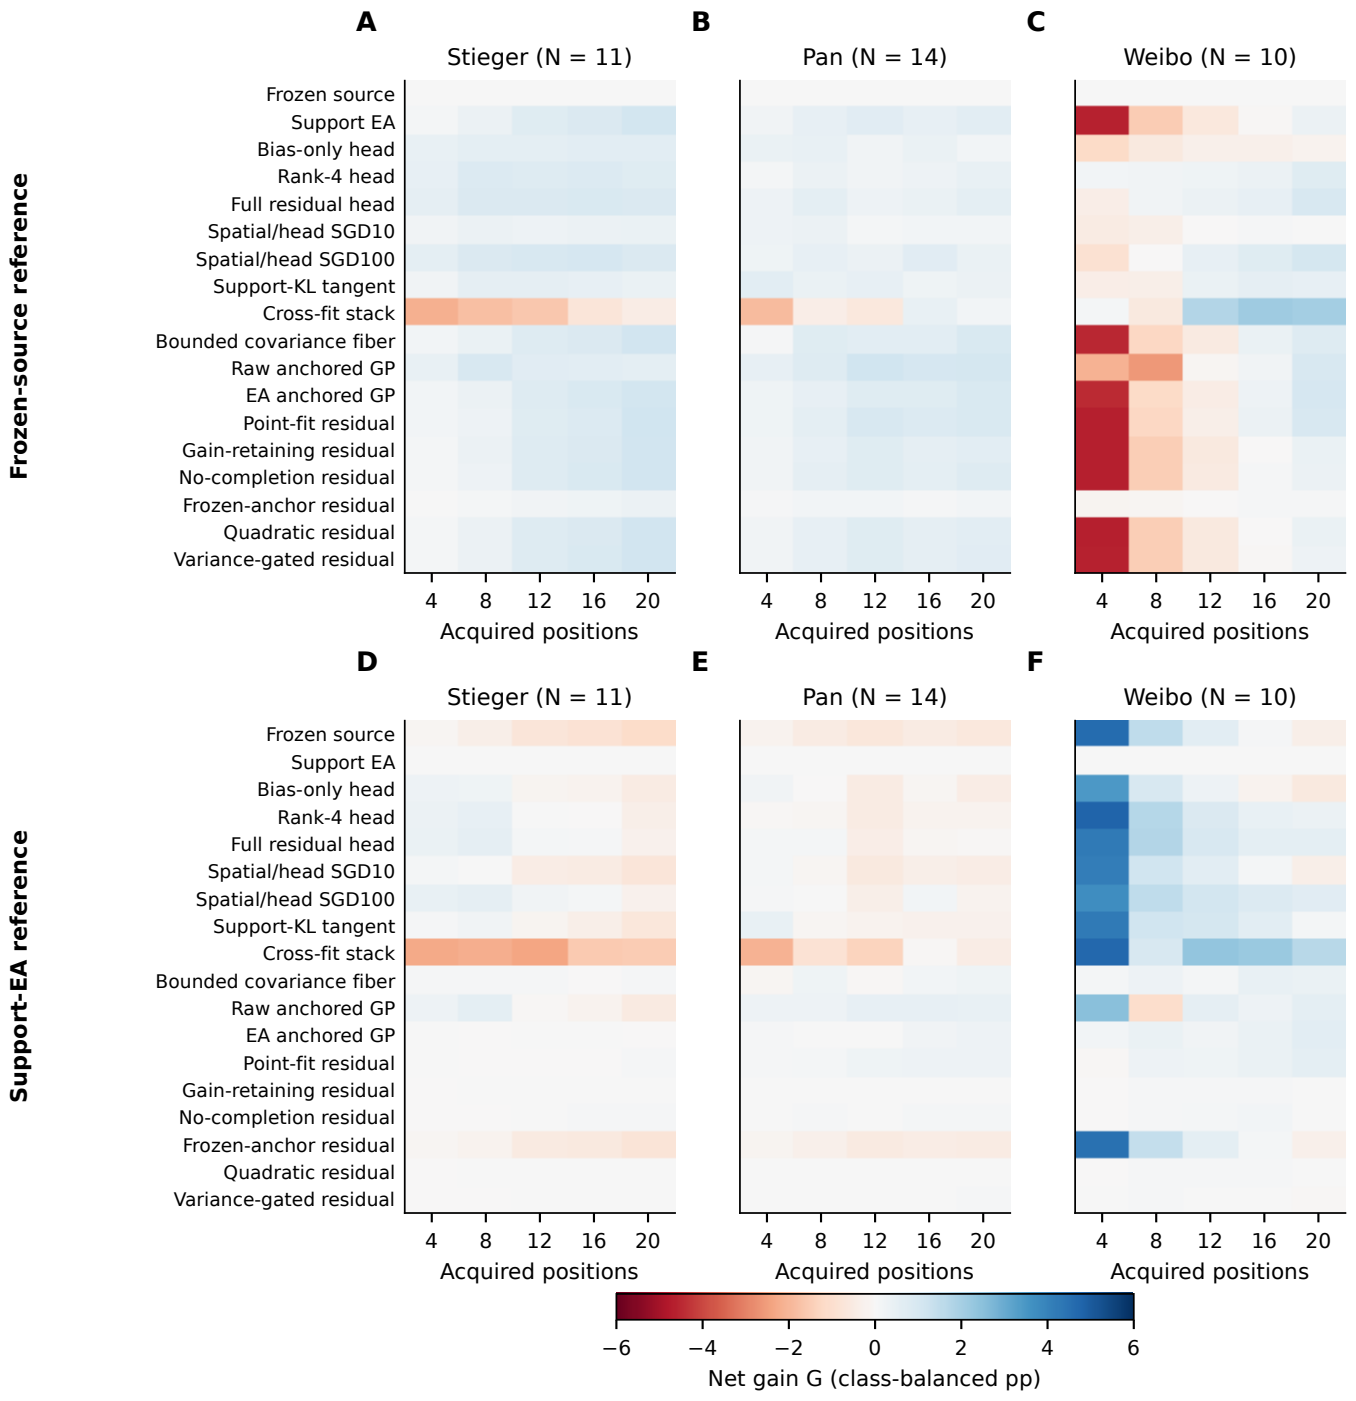
A
Stieger (N = 11)
B
Pan (N = 14)
C
Weibo (N = 10)
Frozen-source reference
Frozen source
Support EA
Bias-only head
Rank-4 head
Full residual head
Spatial/head SGD10
Spatial/head SGD100
Support-KL tangent
Cross-fit stack
Bounded covariance fiber
Raw anchored GP
EA anchored GP
Point-fit residual
Gain-retaining residual
No-completion residual
Frozen-anchor residual
Quadratic residual
Variance-gated residual
4
8
12
16
20
Acquired positions
D
Stieger (N = 11)
E
Pan (N = 14)
F
Weibo (N = 10)
Support-EA reference
Frozen source
Support EA
Bias-only head
Rank-4 head
Full residual head
Spatial/head SGD10
Spatial/head SGD100
Support-KL tangent
Cross-fit stack
Bounded covariance fiber
Raw anchored GP
EA anchored GP
Point-fit residual
Gain-retaining residual
No-completion residual
Frozen-anchor residual
Quadratic residual
Variance-gated residual
4
8
12
16
20
Acquired positions
−6
−4
−2
0
2
4
6
Net gain G (class-balanced pp)