Four staged nested-CV searches with a separate fixed MC anchor

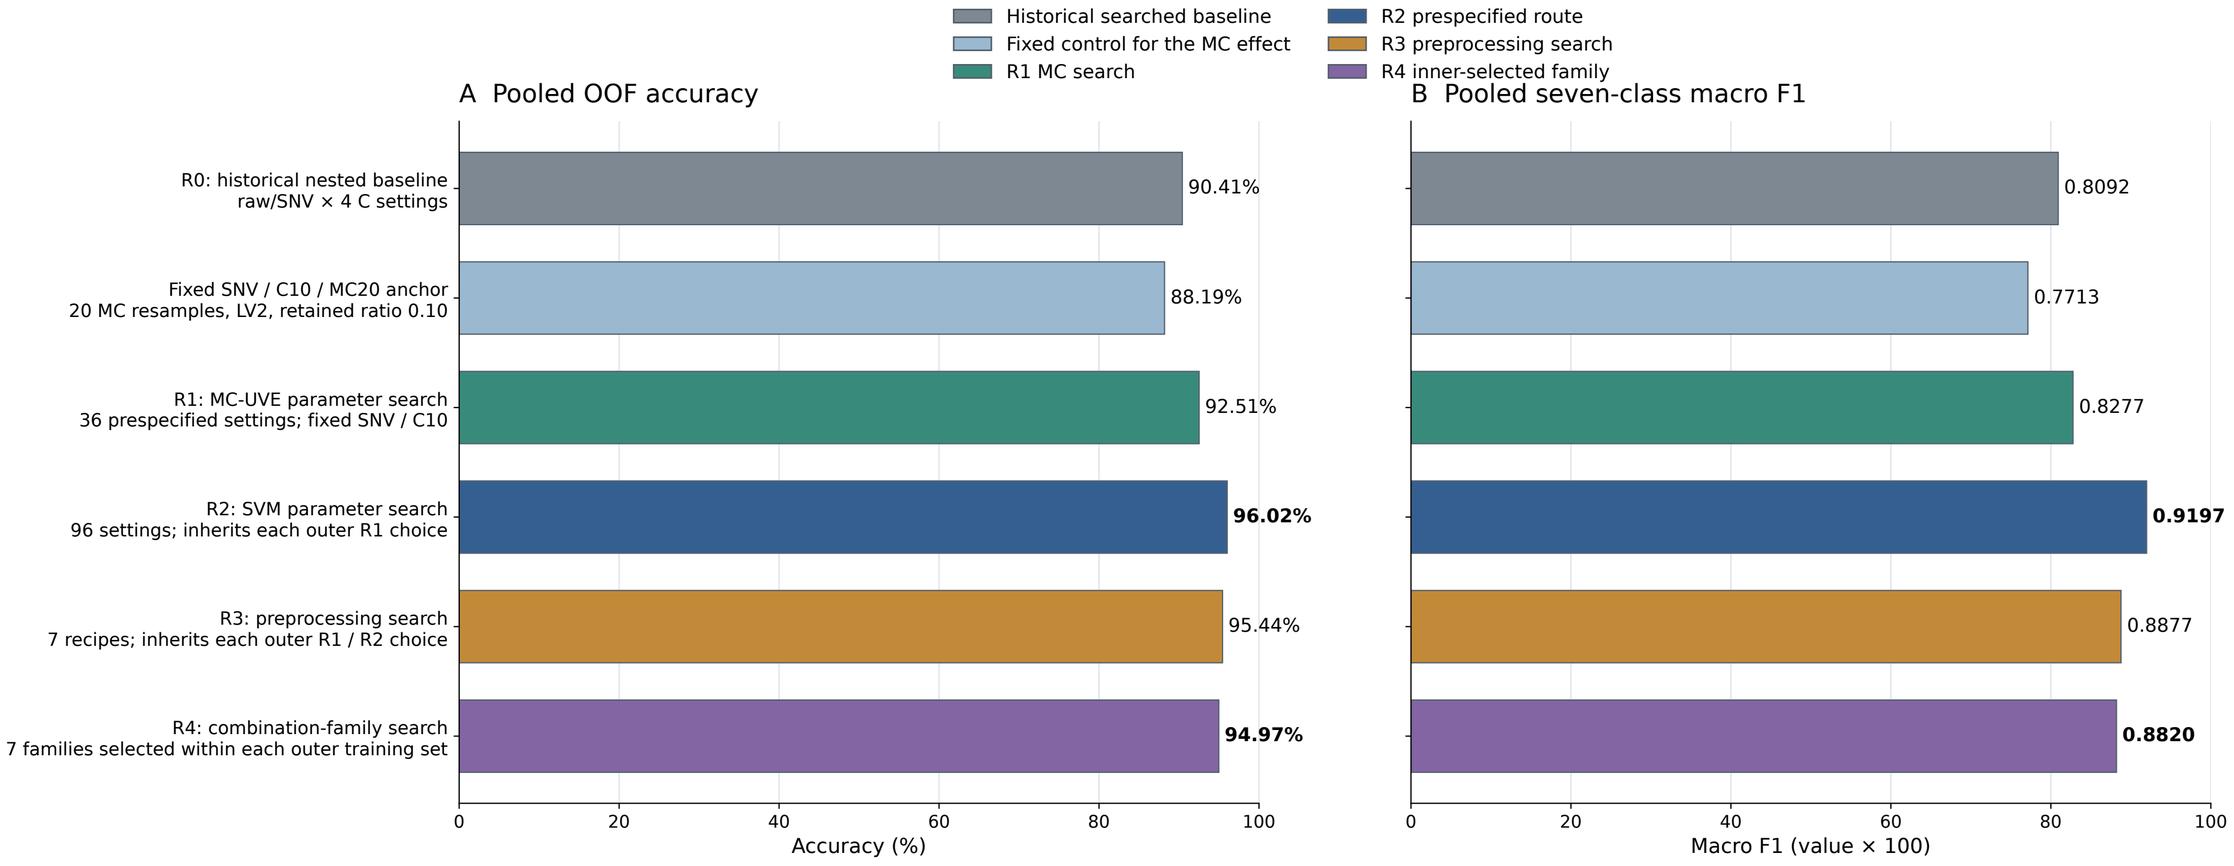

Controlled MC comparison: fixed SNV/C10/MC20 anchor 88.19% → R1 92.51%; R1−R0 is not a pure MC-only effect.

R2 has the highest pooled scores among the prespecified routes (96.02%; macro F1 0.9197); it is not a final-score winner substituted into later stages.

Standard SVC vote (break_ties=False), not OVR-score argmax; one OOF prediction per 855 specimens on matched 5 outer / 2 inner folds; inner-only choices.

Macro F1 is computed from the pooled 855 OOF predictions, not the arithmetic mean of five fold F1 values. No confidence intervals are shown.

One batch per anonymous origin group; historically used data. Five folds are not independent new batches; no cross-batch or algorithm-novelty claim.

This 855-specimen nested-CV comparison must not be ranked against the earlier 171-specimen holdout experiments; both axes start at zero.