

## Preview

- Process Control
  - What is process?
  - Process identifier
  - The fork() System Call
  - File Sharing
  - Race Condition

COSC350 System Software, Fall 2020  
Dr. Sang-Eon Park

1


## What is a Process

- A key concept in OS is the process
- Process – a program in execution
- Once a process is created, OS not only reserve space (in Memory) for the process but also need spaces (process table, page table ...)to keep tracking the process.
- Process associated with
  - **Address space** – where the executable program, program data and stack are allocated in a memory
  - **Set of registers** (Program counter, stack pointer, and other registers)
  - All other information for executing the process.

COSC350 System Software, Fall 2020  
Dr. Sang-Eon Park

2

## What is a Process

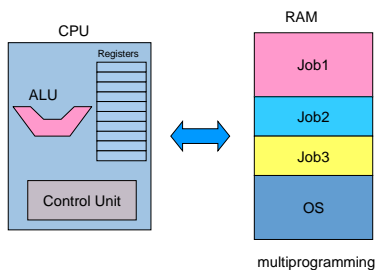


COSC350 System Software, Fall 2020  
Dr. Sang-Eon Park

3

## What is a Process

### Three States for a Process

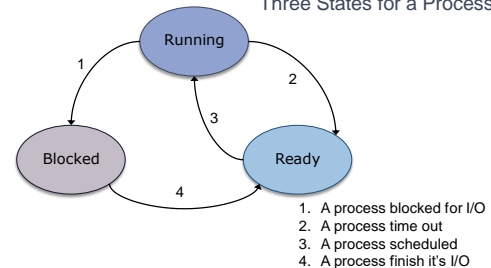

COSC350 System Software, Fall 2020  
Dr. Sang-Eon Park

4

## A Computer System

(Computer Structure: Von Newmann Bottleneck)


- In the von Neumann architecture, programs and data are held in memory; the processor and memory are separate and data moves between the two.
- The von Neumann bottleneck (memory stall) is a limitation on throughput caused by the standard personal computer architecture.
  - Throughput is a measure of how many units of information a system can process in a given amount of time.
- Since processor calculation speeds are much faster than data movement between memory and CPU, it cause bottleneck!

COSC350 System Software, Fall 2020  
Dr. Sang-Eon Park

5

## A Computer System

(Computer Structure: Von Newmann)

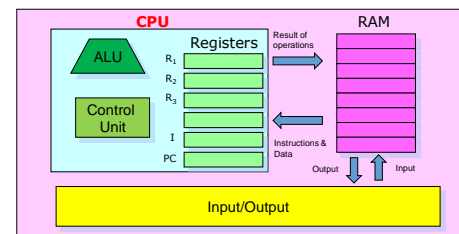

COSC350 System Software, Fall 2020  
Dr. Sang-Eon Park

6

## A Computer System

(Computer Structure: Von Neumann)




- John von Neumann was a Hungarian-American mathematician, physicist, computer scientist, and polymath.
- He made major contributions to a number of fields, including mathematics, physics, economics, computing, and statistics.
- Born: December 28, 1903, Budapest, Hungary
- Died: February 8, 1957,

COSC350 System Software, Fall 2020  
Dr. Sang-Eon Park

7

## Process Instruction Cycle

- The microprocessor's main task is to execute instructions.
- The **instruction cycle** is therefore at the heart of understanding the function and operation of the microprocessor.



COSC350 System Software, Fall 2020  
Dr. Sang-Eon Park

8

## Process Instruction Cycle


### Fetch cycle

1. Reading the address of the instruction in (PC) to be executed from the memory and
2. Loading it into the Instruction register (IR).
3. Program Counter register (PC) is modified to point at the next valid instruction.

COSC350 System Software, Fall 2020  
Dr. Sang-Eon Park

9

## Process Instruction Cycle

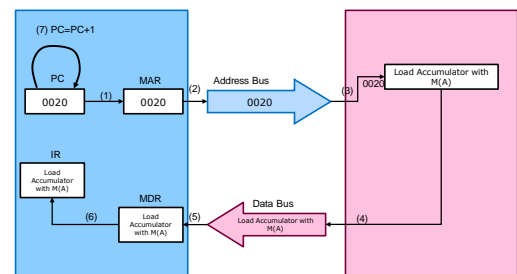

COSC350 System Software, Fall 2020  
Dr. Sang-Eon Park

10

## Process Instruction Cycle

### Execute cycle

- The contents of the IR are decoded and executed.
- The execution may result in a variety of actions depending on the type of instruction.
- It may be a self contained instruction, or it can involve interaction with memory and ALU.

COSC350 System Software, Fall 2020  
Dr. Sang-Eon Park

11

## What is a Process

- All information about each process is stored in an operating system table called **process table (process control block)**.
- If a process is suspended (ready or block state), information for the snapshot of the process are stored in its **process table**.
- Once the process resume a CPU time, all information for the process execution are copy back from its **process table**

COSC350 System Software, Fall 2020  
Dr. Sang-Eon Park

12

## Process Identifiers

- ❑ When a process is created, kernel provides unique process ID, a non-negative integer.
- ❑ When a process terminate, its ID becomes reusable for a newly created process.
- ❑ There are couple of process ID numbers which is used by system itself.
  - Process ID 0: a process scheduler
  - Process ID 1: the systemd in LINUX (init in UNIX)process

COSC350 System Software, Fall 2020  
Dr.Sang-Eon Park

13

## Process Identifiers

- ❑ The ps command show the process we are running, the another user is running, or all the process on the system.
  - To see every process on the system using standard syntax:
    - ❑ ps -e
    - ❑ ps -ef
    - ❑ ps -ely
  - To see every process on the system using BSD syntax:
    - ❑ ps ax
    - ❑ ps aux
  - To print a process tree:
    - ❑ ps -ejH
    - ❑ ps axjf
  - To get security info:
    - ❑ ps axZ
    - ❑ ps -eM

COSC350 System Software, Fall 2020  
Dr.Sang-Eon Park

14

## Process Identifiers

```
/* processid.c get a process information */
#include <stdio.h>
#include <stdlib.h>
#include <unistd.h>

int main()
{
    /* Process ID of calling process */
    printf ("Process ID = %d \n", getpid());
    /* Parent's ID of calling process */
    printf ("Parent's ProcessID = %d \n", getppid());
    /* Real user's ID of calling process */
    printf ("Real User's ID = %d \n", getuid());
    /* Effective user's ID of calling process */
    printf ("Effective User's ID = %d \n", geteuid());
    /* Real group ID */
    printf ("Real Group's ID = %d \n", getgid());
    /* Effective group ID of calling process */
    printf ("Effective Group ID = %d \n", getegid());
    return 0;
}
```

COSC350 System Software, Fall 2020  
Dr.Sang-Eon Park

15


## The fork() System Call

- ❑ An existing process can **create a new process** by calling the **fork system call**.
- ❑ The fork() **calls once but returns twice: a child returns 0 to its parent and a parent returns child's process ID number to the child**.
- ❑ The child process get a copy of the data space heap and stack and they **don't share the memory space**.
- ❑ They only **share the text segment**.

COSC350 System Software, Fall 2020  
Dr.Sang-Eon Park

16

## The fork() System Call

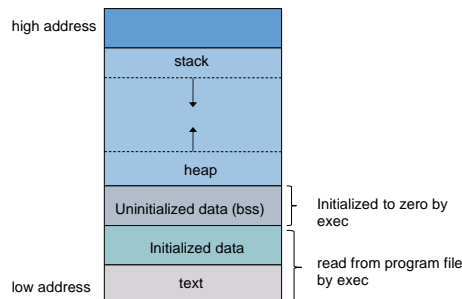

COSC350 System Software, Fall 2020  
Dr.Sang-Eon Park

17

```
/* fork.c demonstrate fork() system call */
#include <stdio.h>
#include <sys/types.h>
#define MAX_COUNT 1000

void ChildProcess(); /* child process prototype */
void ParentProcess(); /* parent process prototype */

void main(void)
{
    pid_t pid;
    ppid = getpid(); /* get parent process ID */
    pid = fork(); /* create a child */

    if (pid == 0) /* means a child process */
        ChildProcess();
    else
        ParentProcess();
}


void ChildProcess()
{
    int i;

    for (i = 1; i <= MAX_COUNT; i++)
        printf("This line is from child process value = %d\n", i);
    printf("*** Child process is done ***\n");
}

void ParentProcess()
{
    int i;

    for (i = 1; i <= MAX_COUNT; i++)
        printf("This line is from parent process value = %d\n", i);
    printf("*** Parent is done ***\n");
}
```


## The fork() System Call

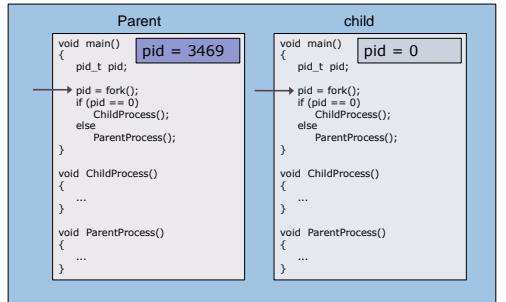

COSC350 System Software, Fall 2020  
Dr. Sang-Eon Park

19

## The fork() System Call

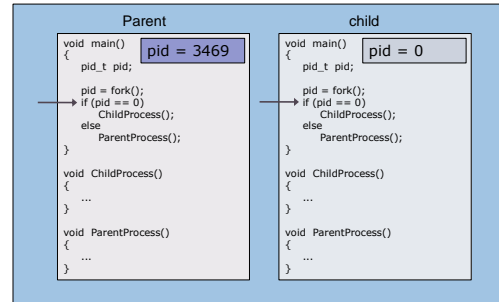

COSC350 System Software, Fall 2020  
Dr. Sang-Eon Park

20

```

/* fork2.c */
#include <stdio.h>
#include <string.h>
#include <sys/types.h>

#define MAX_COUNT 200
#define BUF_SIZE 100

int main(void)
{
    pid_t pid, ppid;
    int i;
    char buf[BUF_SIZE];
    ppid = getpid(); /* this is parent process ID */
    fork(); /* create a child */
    for (i = 1; i <= MAX_COUNT; i++)
    {
        pid = getpid();
        if (pid == ppid) /* parent works here */
        {
            sprintf(buf, "Parent(%d) process executed %d times\n", ppid, i);
            write(1, buf, strlen(buf));
        }
        else /* child work here */
        {
            sprintf(buf, "Child(%d) process executed %d times\n", pid, i);
            write(1, buf, strlen(buf));
        }
    }
    return 0;
}

```

COSC350 System Software, Fall 2020  
Dr. Sang-Eon Park

21


## File Sharing

- Consider a process that has two different files opened for input and output.
- On return from fork, parent and child process share file table, since a child copy all from its parent.
- Even offset of file will be shared with both processes.

COSC350 System Software, Fall 2020  
Dr. Sang-Eon Park

22


## File Sharing

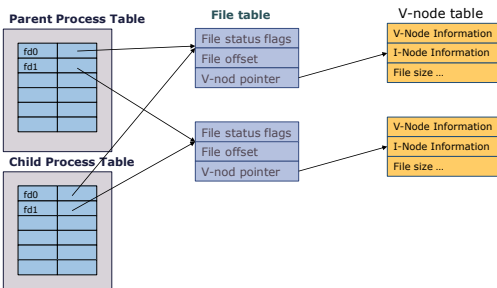

COSC350 System Software, Fall 2020  
Dr. Sang-Eon Park

23

## File Sharing

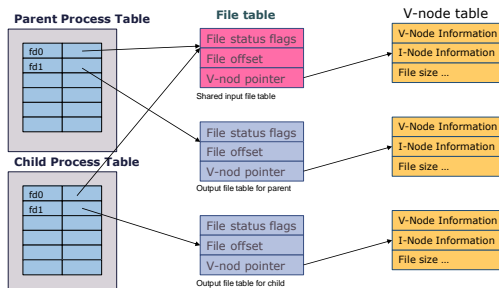

COSC350 System Software, Fall 2020  
Dr. Sang-Eon Park

24

```
//fileshare1.c
#include <unistd.h>
#include <fcntl.h>
#include <ctype.h>
#include <stdio.h>
#include <sys/types.h>
#include <sys/stat.h>
void error_exit(char *msg)
{
    printf("%s\n", msg);
    exit(1);
}

int main(int argc, char *argv[])
{
    int input, output, nbytes, pcount;
    int i;
    char buff[10];
    if (argc != 2)
        error_exit("Usage: Argument number error\n");

    input = open(argv[1], O_RDONLY);
    pid_t pid;
    pid = fork(); /* create a child */
    if (pid == 0) /* child process */
    {
        if (output = open("child.txt", O_WRONLY|O_CREAT, S_IRUSR|S_IWUSR) == -1)
            error_exit("Output File Create Error");
        while ((nbytes = read(input, buff, 1)) > 0)
        {
            if (write(output, buff, 1) != 1)
                error_exit("Write Error");
        }
    }
    else /* parent */
    {
        if (output = open("parent.txt", O_WRONLY|O_CREAT, S_IRUSR|S_IWUSR) == -1)
            error_exit("Output File Create Error");
        while ((nbytes = read(input, buff, 1)) > 0)
        {
            if (write(output, buff, 1) != 1)
                error_exit("Write Error");
        }
    }
    return 0;
}
```

## File Sharing

- If both parent and child write to the same file descriptor, without any form of synchronization what will be happen?
- The output will be intermixed between child and parent's works.
- Solution:
  - The parent waits for the child to complete
  - Both the parent and the child go their own ways

## File Sharing

- There are two uses for fork:
  - When a process want to duplicate itself so that parent and child can each execute different section of code at the same time – Network Server
  - When a process wants to execute a different program –the child does an exec right after it returns from the forks

## The vfork() System Call

- The semantics of vfork() differs from the system call fork().
  - vfork() function is used to create a new process when the purpose of the new process is to **exec a new program**.
  - vfork() function create a process without copying the address space of the parent.
  - A child runs in the address space of the parent.
  - vfork guarantees that the child runs first, until the child calls exec or \_exit – it might lead to deadlock.

```
/* fork3.c */
#include <stdio.h>
#include <stdlib.h>

int glob = 6; /*global variable */

int main()
{
    int local;
    pid_t pid;
    local = 88; /*local variable */
    printf("before vfork\n");
    if ((pid = vfork()) < 0) /* create a child */
    {
        printf("vfork error");
        exit(1);
    }
    else if (pid == 0) /* for child process */
    {
        glob++;
        local++;
        printf("Child pid = %d, global = %d, local = %d\n", getpid(), glob, local);
        _exit(0);
    }
    /* for parent process */
    printf("Parent pid = %d, global = %d, local = %d\n", getpid(), glob, local);
    exit(0);
}
```

```
/* fileshare1.c child process run different program
#include <unistd.h>
#include <fcntl.h>
#include <ctype.h>
#include <stdio.h>
#include <sys/types.h>
#include <sys/stat.h>
void error_exit(char *msg)
{
    printf("%s\n", msg);
    exit(1);
}

int main(int argc, char *argv[])
{
    int input, output, nbytes, pcount;
    int i;
    char buff[10];
    if (argc != 2)
        error_exit("Usage: Argument number error\n");

    input = open(argv[1], O_RDONLY);
    pid_t pid;

    pid = vfork(); /* create a child */
    if (pid == 0) /* child process */
    {
        execv("awmccm", argv); /* child process run different program
        _exit(0);
    }
    else /* parent */
    {
        if (output = open("parent.txt", O_WRONLY|O_CREAT, S_IRUSR|S_IWUSR) == -1)
            error_exit("Output File Create Error");
        while ((nbytes = read(input, buff, 1)) > 0)
        {
            if (write(output, buff, 1) != 1)
                error_exit("Write Error");
        }
    }
    return 0;
}
```

## Race Condition


### Race Condition

- A situation where two or more processes are reading or writing some shared data and the final result depends on who runs precisely when, are called race condition.

COSC350 System Software, Fall 2020  
Dr. Sang-Eon Park

31

## Race Condition




- When a process want to print a file, it enter a file name in a special spooler directory
- Printer daemon periodically check spooler directory any file need to be printed.

COSC350 System Software, Fall 2020  
Dr. Sang-Eon Park

32

## Race Condition

- Process A tried to send a job to spooler, Process A read  $in = 7$ , process A time out and go to ready state before updating  $in = in + 1$ .
- Process B tried to send a job to spooler. Process B read  $in = 7$ , load its job name in slot 7, update  $in = in + 1 = 8$  and then go to block state for waiting for job.
- Process A is rescheduled by scheduler. Process A already read  $in = 7$ , Process A load its job name in slot 7, update  $i = i + 1 = 9$  and then go to blocked state waiting for this job finish.



COSC350 System Software, Fall 2020  
Dr. Sang-Eon Park

33

```

/*race.c : shows example of race condition*/
#include <stdio.h>
#include <stdlib.h>
#include <string.h>
#include <sys/types.h>

static void charatime(char *);

int main()
{
    pid_t pid;
    /* create a child */
    if ( (pid = fork()) < 0 )
    {
        printf("fork error");
        exit (1);
    }

    /* a child and parent call same function */
    if (pid == 0)
        charatime("output from child\n");
    else
        charatime("output from parent\n");
    exit (0);
}

static void charatime(char *str)
{
    char *ptr; /* child and parent has its own buffer but using same stdout */
    int c;
    setbuf(stdout, NULL); /*set unbuffered */
    for (ptr =str; c = *ptr++;)
        putc(c, stdout);
}

```