

Inicializando o Appium Inspector pela primeira vez

Co-autores:

Abner Judá | [LinkedIn](#)

Hanrrison Oliveira | [LinkedIn](#)

Lucas Eduardo | [LinkedIn](#)


Rafael Bandeira | [LinkedIn](#)

Sara Queren | [LinkedIn](#)


1) Configurando o Remote Path

1.1) Na parte 2 da aula de Automação de Testes com JUnit e Appium, é mostrado como configurar o Appium Inspector. Na versão mais nova, é necessário informar o **Remote Path** para sua inicialização.

Caso não seja informado, apresentará um erro na inicialização.

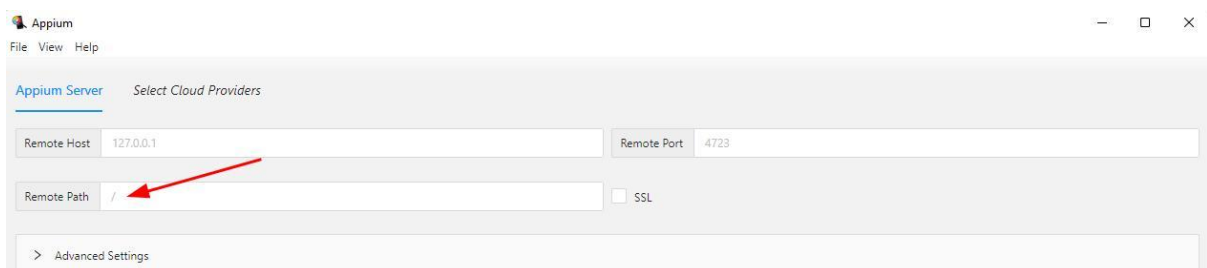

1.2) Devemos preencher o campo Remote Path com **/wd/hub**

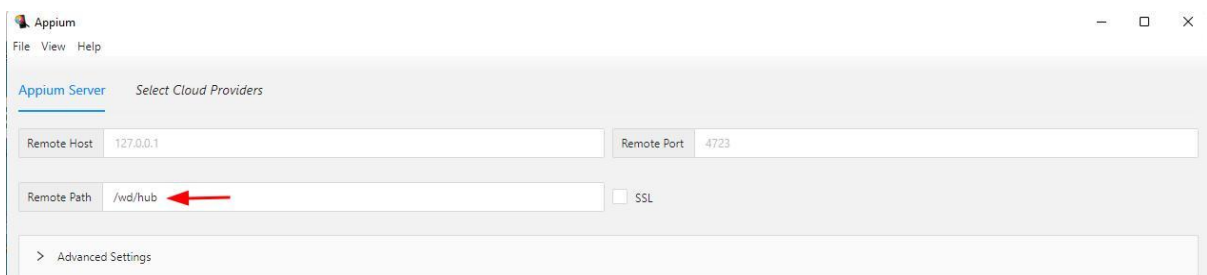

2) Configurando o Desired Capabilities

2.1) Após preencher o Remote Path, é necessário informar o **deviceName**, **platformName**, **udid** e também deixar marcado a opção **[x] Automatically add necessary Appium vendor prefixes on start** para ser preenchido automaticamente o prefixo "appium:"

Appium

FileViewHelp

Appium Server

Select Cloud Providers

Remote Host127.0.0.1

Remote Port4723

Remote Path/wd/hub

☐ SSL

> Advanced Settings

Desired Capabilities

Saved Capability Sets 0

Attach to Session...

deviceName	text	Google Pixel 3	🗑
platformName	text	Android	🗑
udid	text	192.168.185.101:5555	🗑
<input checked="" type="checkbox"/> Automatically add necessary Appium vendor prefixes on start			

JSON Representation

```
{  "deviceName": "Google Pixel 3",  "platformName": "Android",  "udid": "192.168.185.101:5555"}  
```